

2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) ORDER GUIDE



	Page
Model Index	1
Standard Equipment	2-4
Optional Equipment	5-12
Tire Sizes	13
Axle Ratios	14
Wheelbases and Frames	15-20
Cab - Wheelbase - Dimensional Data (Regular Cab)	
Frames (Regular Cab)	
Cab - Wheelbase - Dimensional Data (SuperCab)	
Frames (SuperCab)	
Cab - Wheelbase - Dimensional Data (Crew Cab)	
Frames (Crew Cab)	

Product Changes and Features Availability

Features, options and package content subject to change. Please check www.FMCDealer.com for the most current information.

2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

STD WB is 158"		STD
01 - FRAME		
537	10.75 SM, 80,000 PSI, 860,000/520,000 RBM, w/ Transition - 9.125" x 3.062" x 0.312" (231.8mm x 77.8mm x 8.0mm) w/transition to 6.500" x 3.062" x 0.312" (165.1mm x 77.8mm x 8.0mm)	x
766	Bumper Front - Black, full width	x
	Less Frame Extension Package	x
02 - AXLE, FRONT - SUSPENSION, FRONT		
43A	Axle, Front Non-Driving - Dana D-850F 8,500-lb. capacity (includes Integral Power Steering)	x
61B	Parabolic Taper-leaf Springs - 2-leaf, 8,500-lb. capacity, 62" x 3.15"	x
	Shock Absorbers, Front - Standard duty, dual, double acting	x
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals	x
03 - AXLE, REAR - SUSPENSION, REAR		
471	13,500-lb. Rear Axle Assembly	x
	Multi-leaf Springs - 10-leaf, 15,500-lb. capacity with 2,000-lb. auxiliary springs for load stabilization	x
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals	x
04 - BRAKES - BRAKE EQUIPMENT		
67J	Hydraulic Brake System - Bosch HydroMax®	x
05 - ENGINE - ENGINE EQUIPMENT		
99Y	6.8L 3V SEFI V10 GAS - 320 horsepower @ 3900 rpm, 460 lb.-ft. torque @ 3000 rpm	x
425	50-State Emissions Requirements	x
	Canada and U.S. Territories get Federal Emissions	x
ENGINE EQUIPMENT		
	Air Cleaner - Heavy-duty filter, dry type (Motorcraft FA-1883)	x
	Fan Clutch - Viscous screw-on type	x
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter	x
	Starting Motor - 12-volt, Denso	x
	Anti-Freeze - OAT, extended life coolant; to -40 degrees F/-40 degrees C freeze protection	x
06 - TRANSMISSION - DRIVELINE		
44P	Ford 6-Speed TorqShift® HD Automatic Transmission - Double overdrive, less PTO provision (PRNDM)	x
	Driveshaft - Dana Base	x
07 - EXHAUST		
91H	EXHAUST SYSTEM - Single horizontal muffler, catalytic converter, frame-mounted, RH, back of cab, downward facing, outlet tip	x
08 - ELECTRICAL - ALTERNATOR - BATTERY		
	Alternator - Extra heavy-duty 12-volt, 175-amp., Mitsubishi	x
	Battery - 12-Volt, Motorcraft® - Single, 900 CCA, R/H frame-mount, under cab	x
	Battery Box - RH frame-mount, under cab step	x
	Body Builder Wiring - Frame mount at back of cab. Includes sealed connectors for 2 ground circuits, with combined left/stop, combined right/stop, stop lamps, park lamps, backup lamps. Also includes 2 additional pass-through wires to cab	x
	Emergency Flasher - Four-way	x
	Fuses, SAE - Blade-type smart fuse box	x
Lights		
	Aero Headlamps - High series, includes side marker lights with reflectors (front)	x
	Taillamps , Two w/ integral stop, turn, backup and license plate bracket	x
	Side Repeat Flasher	x
09 - FUEL TANK		
65A	50-U.S. Gallon - Single, LH, steel	x

2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

STD WB is 158"		STD
10 - SEATS		
88A	30/0/30 - Fixed driver and fixed passenger with console - vinyl	x
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material (SuperCab)	x
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material (Crew Cab)	x
11 - CAB EQUIPMENT		
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel	x
CAB EQUIPMENT - EXTERIOR		
	Doors - Two (four with SuperCab or Crew Cab)	x
	Front End Tilting Fiberglass Hood & Fenders Assembly - Tilt-type, frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)	x
	Glass - Laminated windshield, solar tint all-around	x
86A	Painted Grille - Plastic, NA with Frame Extension	x
	Horn - Dual note electric - Level 2	x
	Lights - Roof marker/clearance - amber lenses, 5 lights	x
54H	Mirrors - Dual rectangular Velvac XL2020, integral spot mirrors, sail type, 96" width, manual fold, solid black finish	x
	Tow Hooks, Front (2) - Frame-mounted, painted black	x
	Window, Rear - Fixed	x
	Windshield Wiper Control - Two-speed electric intermittent w/ windshield washers	x
CAB EQUIPMENT - INTERIOR		
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant	x
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim	x
	Assist Handles, Interior A Pillars - Driver and passenger; all cabs	x
	Assist Handles, Interior B Pillars - Grab handle, driver and passenger; Crew Cab only	x
	Auxiliary Power Point - In instrument panel (2)	x
	Back Panel Trim Cover	x
	Coat Hook - RH/LH color-keyed	x
	Cruise Control - Steering Wheel-Mounted Controls	x
	Demisters - LH & RH side windows	x
	Dome Lamp - Rear-mounted with integral map reading lights. (Regular and Crew Cab only)	x
	Door Trim - Color-coordinated molded w/ grab handle	x
	Armrest/grab handle	x
	Soft armrest, grab handle upper and lower map pockets	x
	Floor Covering - Black vinyl	x
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center	x
	Glove Box - Instrument panel, RH	x
	Headliner - Color-coordinated, molded, cloth	x
	Instrument Panel - Color-coordinated with color-coordinated accents	x
	Intelligent Oil-Life Monitor®	x
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock	x

2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME)



FORD
CODE

MAJOR STANDARD EQUIPMENT

PEP Code:
600A

STD WB is 158"		STD
CAB EQUIPMENT - INTERIOR (CONTINUED)		
	Safety Belts - Belt-Minder® (chime and flashing warning light on instrument panel if belts not buckled)	x
	Safety Belts - Color-coordinated, all-position, includes fixed D-rings (Regular Cab)	x
	Safety Belts - Color-coordinated, all-position, includes front seat adjustable D-rings (SuperCab or Crew Cab)	x
	Scuff Plates	x
	Steering Column - Tilt	x
	Steering Wheel - Black PVC, with integral cruise control switches	x
	Sunvisor, Single Driver - Vinyl	x
	Sunvisor, Single Passenger - Vinyl with mirror	x
	Tachometer - Electric	x
	Turn Signal Switch, Self Canceling - Multifunction switch	x
12 - FRONT WHEEL - TIRES		
	Wheels, Front	
645	19.5x6.75 8-hole steel disc, powder-coated white	x
	Tires, Front	
TEA	245/70R 19.5 G (14PR) Hankook AH11	x
13 - REAR WHEEL - TIRES		
	Wheels, Rear	
665	19.5x6.75 8-hole steel disc, powder-coated white	x
	Tires, Rear	
REA	245/70R 19.5 G (14PR) Hankook AH11	x
14 - PAINT		
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	x
	Chassis Color - Black	x
	Paint Type - Environmentally friendly, "3-wet system"	x

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT			PEP Code: 600A
	COMPONENT DESCRIPTION			STD
Body Code		Regular Cab	Super Cab	Crew Cab
	01 - FRAME			
	SINGLE CHANNEL - STRAIGHT "C"			
537	10.75 SM, 80,000 PSI, 860,000/520,000 RBM, w/ Transition - 9.125" x 3.062" x 0.312" (231.8mm x 77.8mm x 8.0mm) w/ transition to 6.500" x 3.062" x 0.312" (165.1mm x 77.8mm x 8.0mm)			S
766	Bumper, Front, Full Width - Black			S
765	Bumper, Front, Full Width - Chrome-plated steel. Included with Exterior Appearance Group (90A)			O/I
76X	Bumper, Front Delete - Also deletes the Mounting Brackets			O
	Tow Hooks, Front - Inside rail, frame-mounted (2)			S
76Y	Tow Hooks Delete			O
	Square Cut Frame Ends			S
	02 - AXLE, FRONT - SUSPENSION, FRONT			
43A	Axle, Front Non-Driving - Dana D-850F 8,500-lb. capacity (includes Integral Power Steering)			S
	TAPER-LEAF SPRINGS			
61B	Parabolic Taper-leaf - 2-leaf, 8,500-lb. capacity, 62" x 3.15"			S
61C	Parabolic Taper-leaf - 2-leaf, 10,000-lb. capacity, 62" x 3.15"			O
	Shock Absorbers, Front - Double acting			S
15S	Stabilizer Bar, Front			O
	Wheel Seals, Front - Oil lubricated, SKF ScotSeal® PlusXL seals			S
60A	Lube, Front Axle - EmGard® 50W, synthetic oil			O
	03 - AXLE, REAR - SUSPENSION, REAR			
	NOTE: When specifying an axle ratio, check performance guidelines for startability and gradeability			
471	13,500-lb. Rear Axle Assembly			S
472	Axle, Rear Single - Dana S17-140 single-reduction, 17,500-lb. capacity, with GenTech quiet gears, synthetic lube and 190 wheel ends			O
	Driveshaft - Dana base			S
	MULTI-LEAF SPRINGS			
68K	10-Leaf, 15,500-lb. Capacity - Available with 13,500-lb. rear axle and 17,500-lb. rear axle, includes 2,000-lb. auxiliary springs for load stabilization			S
68M	11-Leaf, 19,000-lb. Capacity - For 17,500-lb. rear axle, includes 2,000-lb. auxiliary springs for load stabilization			O
961	Shock Absorbers, Rear - Double acting			O
	Wheel Seals, Rear - Oil lubricated, SKF ScotSeal® PlusXL seals			S
607	Lube, Rear Axle - EmGard® 75W-90, synthetic oil			O
	04 - BRAKES - BRAKE EQUIPMENT			
67J	Hydraulic Brake System - Bosch HydroMax®			S
674	Hydraulic Brake System w/Traction Control - Bosch HydroMax®			O

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT		PEP Code: 600A
	BRAKE EQUIPMENT		
152	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Combined trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck) Requires (Standard) Back of Cab Body Builder Wiring or (59C) End of Frame Body Builder Wiring.		O
154	Trailer Connection Socket, 7-way - Mounted at rear of frame, for Separate trailer stop, tail, turn, marker light circuits; includes Electric Trailer Brake Accommodation Package with cab connections for mounting customer installed electric brake unit (available for Hydraulic Brake Straight Truck) Requires (59D) Back of Cab Body Builder Wiring or (59E) End of Frame Body Builder Wiring.		O
	05 - ENGINE - ENGINE EQUIPMENT		
99Y	6.8L 3V SEFI V10 GAS - 320 horsepower @ 3900 rpm, 460 lb.-ft. torque @ 3000 rpm		S
	ENGINE EQUIPMENT		
41H	Engine Block Heater - Phillips; 120-volt, 750-watt		O
98G	Gaseous Fuel Prep Pack		O
	Radiator - Aluminum w/ in-tank transmission cooler, PremAir® ozone converter		S
916	Speed Limiter - 65 mph		O
917	Speed Limiter - 70 mph		O
	06 - TRANSMISSION		
44P	Ford 6-Speed TorqShift® HD Automatic Transmission - Double overdrive, less PTO provision (PRNDM)		S
41B	Transmission Power Takeoff Provision		O
	07 - EXHAUST		
91H	Exhaust System - Single horizontal muffler, catalytic converter, frame-mounted, right-hand, back of cab, downward facing, outlet tip		S
	08 - ELECTRICAL - ALTERNATOR - BATTERY		
	ALTERNATOR (12-VOLT)		
	Alternator - Extra heavy duty 12-volt, 175-amp., Mitsubishi		S
17E	Alternator - Extra/Extra heavy duty 12-volt, 240-amp. (N/A with 57L, Air Conditioner Delete)		O
55M	Jump Start Stud - Remote mounted		O

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT		PEP Code: 600A
	BATTERY, 12-VOLT (INCLUDES STEEL BATTERY BOX)		
	Motorcraft® - Single, 900 CCA		S
63B	Motorcraft® - Two, 900 CCA (1800 CCA total)		O
	Emergency Flasher		S
	Fuses, SAE, Blade type		S
	Aero Headlamps - High series, includes side marker lights with reflectors (front)		S
163	Lights - Roof Marker/Clearance - Amber lenses, 5 lights		S
164	Roof Marker/Clearance Lights - Clear lenses, 5 lights		O
16X	Roof Marker/Clearance Lights Delete - For airport or applications that receive modified roof coverings		O
	Taillamps - Two w/ integral stop, turn, backup and license plate bracket		S
	Turn Signal Switch, Self Canceling - Multifunction switch with windshield wiper (1-7 variable speed, hi, low), windshield washer, L/R turn signal; self cancel, L/R lane change, hazard, flash-to-pass, high beam		S
	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, stop lamps, park lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (154) Hydraulic Brake Trailer Connection		S
59C	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Combined left/stop, Combined right/stop, stop lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (154) Hydraulic Brake Trailer Connection		O
59D	Body Builder Wiring - At Back of Cab (includes sealed connectors for 2 ground circuits, with Seperate left/stop, Seperate right/stop, stop lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection		O
59E	Body Builder Wiring - At End of Frame (includes sealed connectors for 2 ground circuits, with Seperate left/stop, Seperate right/stop, stop lamps, backup lamps) (also includes 2 additional pass through wires to cab) Not Available with (19B) Beverage Package, Not Available with (152) Hydraulic Brake Trailer Connection		O
17M	Back-up Alarm - Electric, 102 dBA (NA w/ Taillights Delete, Code 55X)		O
962	Daytime Running Lamps		O
55X	Tail Lights Delete - Deletes stop, turn, tail and backup lights (does not omit cable to end of frame)		O

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT		PEP Code: 600A
	09 - FUEL TANKS (For Clean CA installations with other cabs refer to the Body Builders site)		
65A	Fuel Tank, 50-U.S. Gallon - Single, left-hand, steel (Regular Cab and SuperCab only)		S
65D	Fuel Tank, 60-U.S. Gallon - Single, left-hand, steel (Standard on Crew Cab)		O
	10 - SEATS Seats are color coordinated to cab trim level. All seats include seat belts. Rear Seats of SuperCab or Crew Cab must be selected from this same grouping. Seat Delete options are available at the end of this list.		
88A	30/0/30 - Fixed driver and fixed passenger with consolette - vinyl		S
88B	30/0/30 - Fixed driver and fixed passenger with consolette - cloth		O
881	30/70 - Fixed driver and fixed 2-passenger bench - vinyl		O
882	30/70 - Fixed driver and fixed 2-passenger bench - cloth		O
88C	30/0/0 - Fixed driver only - vinyl		O
88D	30/0/0 - Fixed driver only - cloth		O
88R	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88S	30/0/30 - Air ride driver (integral air pump) and fixed passenger with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88L	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88M	30/70 - Air ride driver (integral air pump) and fixed 2-passenger bench - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88J	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88K	30/0/30 - Air ride driver (integral air pump) and air ride passenger (integral air pump) with consolette - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88W	30/0/0 - Air ride driver only (integral air pump) - vinyl (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88X	30/0/0 - Air ride driver only (integral air pump) - cloth (NA with SuperCab; NA with Air Ride, Air Brakes or Compressor 62G)		O
88Y	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - vinyl		O
88Z	40/20/40 - Fixed driver and fixed passenger with unique 20% fold-down console - cloth		O
	SUPERCAB - REAR SEAT		
87B	60/40 - Rear bench seat with bolster and flip-up cushion - trim will match selected driver seat material		S
87X	Rear Seat Delete		O
	CREW CAB - REAR SEAT		
87C	60/40 - Rear bench seat with flip-up cushion and fold-down back - trim will match selected driver seat material		S
87X	Rear Seat Delete		O
	11 - CAB EQUIPMENT		
	Regular Cab, SuperCab or Crew Cab - Ford conventional, steel		S/O
	INTERIOR APPEARANCE GROUP		
90A	Appearance Group - Front-mounted overhead console with dual sunglass bins and integral front map reading lights, door trim panel, chrome air registers, second-row bench seat (Crew Cab) or two-row high series flip-up seats with cushion and bolster (SuperCab). Includes Power Equipment Group (90P)		O
90P	Power Equipment Group - Power front side windows, power rear side windows (Crew Cab) power door locks and door trim panel. Includes manual rear side windows with SuperCab. Included in Appearance Group (90A)		O/I

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT		PEP Code: 600A
	EXTERIOR FEATURES		
90E	Exterior Appearance Group - Includes full-width chrome-plated front bumper (765), chromed fender badge and chrome grille surround (86C)		O
85A	Anti-Theft System		O
	Front End Tilting Fiberglass Hood and Fenders Assembly - Frame-mounted, torsion bar assist (includes integral noise and inner splash shields and mud flaps)		S
	Glass - Laminated windshield		S
	Glass - Solar tint complete		S
86A	Painted Grille - Plastic		S
86C	Grille - Chrome surround		O/I
86B	Grille, Fixed - Black/grey		O
	Horn, Electric - Dual		S
54H	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish		S
54M	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, solid black finish		O
54P	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)		O
54B	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap		O
54N	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 96" width, manual fold, chrome cap		O
54A	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 96" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)		O
54J	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail Type, 102" width, manual fold, solid black finish		O
54C	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, solid black finish		O
54R	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, solid black finish (requires Power Equipment Group, 90P)		O
54D	Mirrors - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap		O
54E	Mirrors, Heated - Dual Rectangular XL2020 Integral Spot Mirror Sail type, 102" width, manual fold, chrome cap		O
54K	Mirrors - Dual Rectangular XL2020 With Integral Spot Mirror Sail type, 102" width, heated and motorized, chrome cap (requires Power Equipment Group, 90P)		O
54F	Mirrors, Trailer Tow, Powered - Power telescoping, power folding w/ power heated glass, heated convex spotter and integrated clearance lights / turn signals (sail mount) (requires Power Equipment Group, 90P) (heat controls dash mounted)		O
63F	Mirrors - Front Fender Mounted - (2) Driver Side and Passenger Side - (Late Availability)		O
63G	Mirror - Front Fender Mounted - (1) Passenger Side Only (Late Availability)		O
165	Mud Flaps Holder w/o Flaps		O
	Window, Rear - Fixed		S
92S	Window, Rear - Sliding		O
	Windshield Wiper - Intermittent variable w/ windshield washers		S

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT		PEP Code: 600A
	INTERIOR FEATURES		
572	Air Conditioning, Manual - Includes integral heater and defroster; radiator-mounted compressor; R-134A refrigerant		S
57N	Air Conditioning, Delete - Fresh air heater and defroster only (NA with heated or motorized mirrors)		O
	Air Registers - Molded-in-color with positive shut-off, color-coordinated trim		S
	Air Registers - With positive shut-off, chrome-trimmed, included in Appearance Group		I
	ASSIST HANDLE		
	Interior A Pillars - Driver and passenger; all cabs		S
	Interior B Pillars - Grab handle, driver and passenger; Crew Cab only		S
	Auxiliary Power Point - In instrument panel (2)		S
59F	4 Body Builder Switches - Mounted in center instrument panel with connector access located in engine compartment; amperages vary by switch: 10, 15, 25, 25		O
	Back Panel Trim Cover		S
	Cruise Control - Steering wheel-mounted controls		S
96C	Cup Holder - Instrument Panel Mounted, Pull out Cup Holder for two cups. (Not Available with Air Brakes) (Not Available with (55P) 110A/C Outlet)		O
	Demisters - LH & RH side windows		S
	Dome Lamp - Rear mounted with integral map reading lights. (Regular and Crew Cab only)		S
90C	Fleet Telematics Modem - For Data Communication (Late Availability)		O
	Overhead Console - Front mounted with dual sunglass bins and integral front map reading lights (all cabs, included in Appearance Group)		I
	Floor Covering, Black - Full, vinyl floor		S
	Gauge Cluster, English - With English electronic speedometer (MPH/KPH) includes oil pressure, coolant temperature, DEF gauge, fuel gauge, tachometer and indicator lights. Also includes enhanced 3-button Message Center with odometer, trip odometer, distance-to-empty for fuel, average fuel economy hour meter and warning messages. Trans Temp in message center		S
16V	Volt Meter - Available in Message Center		O
55P	110 A/C Outlet - In lower center finish panel (requires 59F 4 Body Builders Switches)		O
	Glove Box		S
	Instrument Panel - Color-coordinated with color-coordinated accents		S
58P	Radio Prep Package - Deletes radio and dash-mounted auxiliary input jack. Includes radio/speaker wiring, 2 speakers, antenna, radio instrument panel cover and dash-mounted auxiliary audio input jack instrument panel cover		O
58B	Radio Delete Package - Deletes radio, speakers, antenna and antenna cable. Includes radio instrument panel cover and auxiliary audio jack cover and speaker locations for future radio upfit if owner desires		O
588	Radio AM/FM Stereo - With 2 speakers, includes auxiliary audio input jack and clock		S
586	Radio, Electronic Premium AM/FM Stereo, Disc - With 4 speakers, dash-mounted auxiliary audio input jack and clock and redundant steering wheel audio controls		O
21D	SYNC® Media System - Includes dash-mounted USB 2.0 port and redundant steering wheel SYNC® controls. Requires Radio 586		O

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT 	PEP Code: 600A
	ASSIST HANDLE (CONTINUED)	
85B	Keyed Alike - NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85L	Keyed Alike - Option #1 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85M	Keyed Alike - Option #2 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85N	Keyed Alike - Option #3 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85P	Keyed Alike - Option #4 NA with Anti-Theft System (85A); requires multiple-unit order (NA with 85K)	O
85K	Remote Keyless Entry - Requires Power Equipment Group, includes two key fobs; also requires 85A Anti Theft System	O
	SAFETY BELTS	
	Includes fixed D-rings (Regular Cab)	S
	Includes adjustable D-rings (SuperCab or Crew Cab)	S
	INTERIOR FEATURES (CONTINUED)	
	Steering Wheel, Tilt with Cruise Controls - Black PVC	S
	Sunvisor, Single Driver - Vinyl	S
	Sunvisor, Single Passenger - Vinyl with mirror	S
90M	Interior Rear View Mirror	O
94A	Timer - Engine idle shutdown, 5 minutes	O
94B	Timer - Engine idle shutdown, 10 minutes	O
94C	Timer - Engine idle shutdown, 15 minutes	O
94D	Timer - Engine idle shutdown, 20 minutes	O
	12 - FRONT WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, FRONT (HUB PILOT MOUNT)	
645	19.5x6.75, white powder-coated steel, 8-hole	S
648	19.5" X 6.75" Aluminum wheels, 8-hole Alcoa® Clean Buff both sides w/Dura-Bright® seal. Requires 668.	O
TEA	245/70R 19.5 G (14PR) Hankook AH11	S
	13 - REAR WHEELS - TIRES Order codes of optional tires are listed in the Tire tab.	
	WHEELS, REAR (HUB PILOT MOUNT)	
665	19.5x6.75, white powder-coated steel, 8-hole	S
668	19.5" X 6.75" Aluminum wheels, 8-hole Alcoa® Clean Buff both sides w/Dura-Bright® seal—outside mount, with white steel wheels inside mount. Requires (648).	O
REA	245/70R 19.5 G (14PR) Hankook AH11	S
	13A - SPARE WHEEL - One Only	
60W	19.5x6.75, white powder-coated steel, 8-hole	O
	14 - PAINT	
	Body Color Available - Agate Black (UM), Oxford White (YZ), Ingot Silver (UX), Magnetic (J7), Race Red (PQ), Blue Jeans (N1), Green Gem (W6), Tangier Orange (J8), Bold Yellow (LE), School Bus Yellow (B1), Stone Gray (D1)	O
	Chassis Color - Black	S
	Paint Type - Environmentally friendly, "3-wet system"	S

Order Code	2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) OPTIONAL EQUIPMENT		PEP Code: 600A
	15 - MISCELLANEOUS		
21A	Pre-Delivery Inspection - Selection requires that you also choose either (314) or (31F) or (31V) to have the Pre-Delivery Inspection performed		O
314	Ship-Thru: Manning <u>MAY</u> be selected w/o adding (21A.) For <u>MODIFICATIONS ONLY</u> , Dealer must make arrangements directly with Manning (please use CVT Resources for add. Info).		O
31F	Ship-Thru: NFS National Fleet Services <u>MAY</u> be selected w/o adding (21A.) For <u>MODIFICATIONS ONLY</u> , Dealer must make arrangements directly with NFS (please use CVT Resources for add. Info).		O
31V	Ship-Thru: Fontaine Vocational Services for Tractors <u>MAY</u> be selected w/o adding (21A.) For <u>MODIFICATIONS ONLY</u> , Dealer must make arrangements directly with Fontaine (please use CVT Resources for add. Info).(If 21A Pre-Delivery Inspection is also selected it will be performed by NFS)		O
79V	Send a paper Certificate of Origin for a Vehicle (COV) for those states that file electronically (CA or MI)		O

2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) TIRES



Order Code		Description	Rev/Mile	
Front	Rear			
OPTIONAL TIRES for 19.5" Wheel Configuration				
		Tubeless Radial Tires	Ply Rating	
		245/70R19.5G (14PR)		--
TEA	REA	Hankook AH11	14	618
--	REB	Hankook DH01	14	618
		245/70R19.5H (16PR)		--
TGK	RGK	Michelin XZE	16	621
TGA	RGA	Continental HSR1	16	621
--	RGB	Continental HDR	16	621
		265/70R19.5G (14 PR)		--
TPA	RPA	Hankook AH11	14	604
--	RPB	Hankook DH01	14	604



2019 F-650 SUPER DUTY GAS PRO LOADER (KICK-UP FRAME) AXLE RATIOS

Manufacturer:		Dana / Spicer	Dana / Spicer
Model:		S11-140	S14-140
Capacity (lbs.):		13,500	17,500
Differential:		Open	Open
Drive Gear:		Hypoid	GenTech
Order Code:		471	472
F650 Pro Loader Gas		Std.	Opt.


5.29	X5B	X-5.29	X-5.29
5.57	X5D	X-5.57	X-5.57

2019 F-650 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA GAS REGULAR CAB - Pro Loader



Model Code: F6B
PEP Code: 600A

Std. GVWR	22,000 lbs.
Max. GVWR	26,000 lbs.

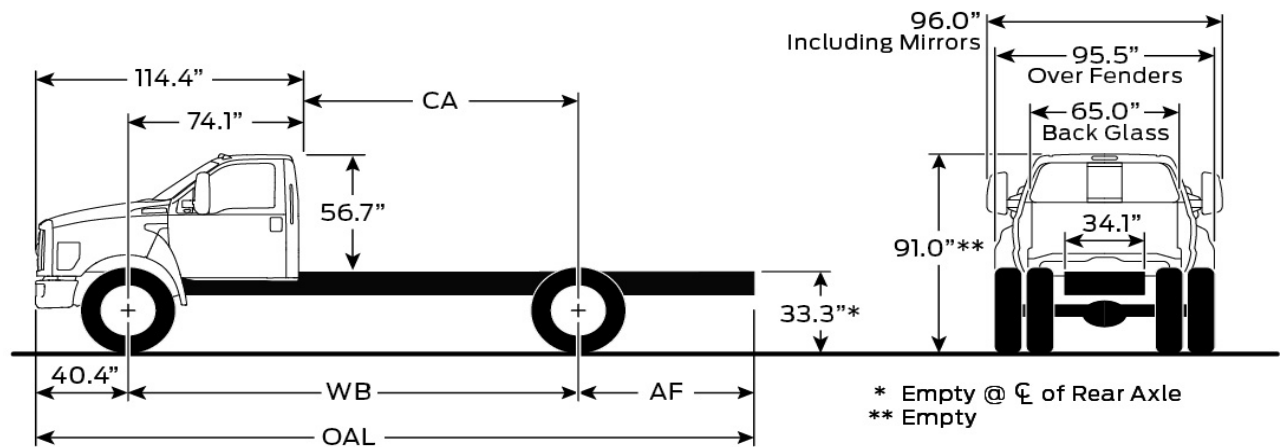

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
158	5458	3290	8748	84	63	260	22 ft. 3 in.	23 ft. 10 in.
182	5508	3344	8852	108	75	296	25 ft. 2 in.	26 ft. 9 in.
194	5525	3362	8886	120	75	308	26 ft. 8 in.	28 ft. 3 in.
218	5563	3407	8969	144	81	338	28 ft. 10 in.	30 ft. 6 in.
242	5653	3501	9154	168	100	381	31 ft. 8 in.	33 ft. 4 in.


**2019 F-650 SUPER DUTY
GAS REGULAR CAB - Pro Loader
FRAMES
F6B**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail							
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum
S	537	Straight Channel Side Rail							
		9.125	3.062	0.312	80,000	10.75	11.47	860,000	917,600

FRAME RAIL CROSS SECTION

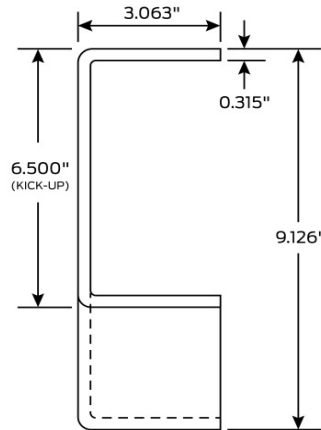

FRAME 537


2019 F-650 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA GAS SUPERCAB - Pro Loader



Model Code: X6B

PEP Code: 600A

Std. GVWR	22,000 lbs.
Max. GVWR	26,000 lbs.

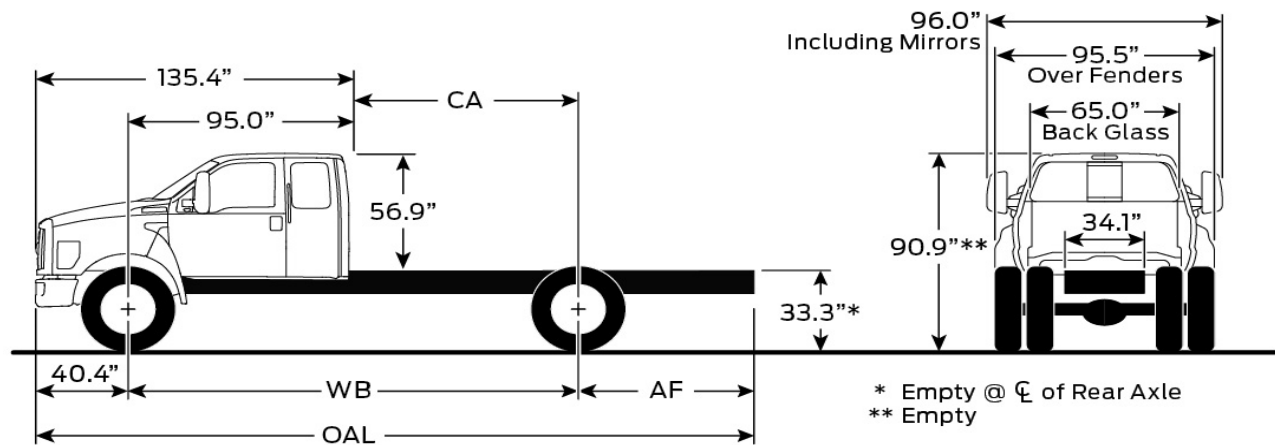

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
179	5668	3357	9024	84	63	281	24 ft. 10 in.	26 ft. 5 in.
203	5710	3399	9108	108	75	317	27 ft. 1 in.	28 ft. 8 in.
239	5775	3470	9242	144	81	359	31 ft. 4 in.	33 ft. 0 in.


**2019 F-650 SUPER DUTY
GAS SUPERCAB - Pro Loader
FRAMES
X6B**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail							
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum
S	537	Straight Channel Side Rail							
		9.125	3.062	0.312	80,000	10.75	11.47	860,000	917,600

FRAME RAIL CROSS SECTION

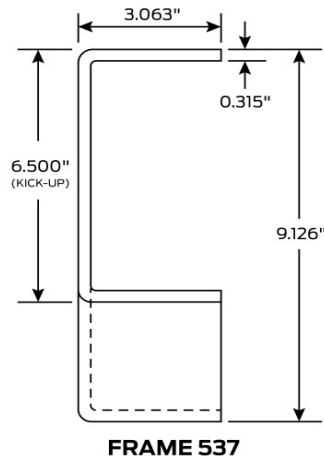


2019 F-650 SUPER DUTY CAB-WHEELBASE-DIMENSIONAL DATA GAS CREW CAB - Pro Loader



Model Code: W6B
PEP Code: 600A

Std. GVWR	22,000 lbs.
Max. GVWR	26,000 lbs.

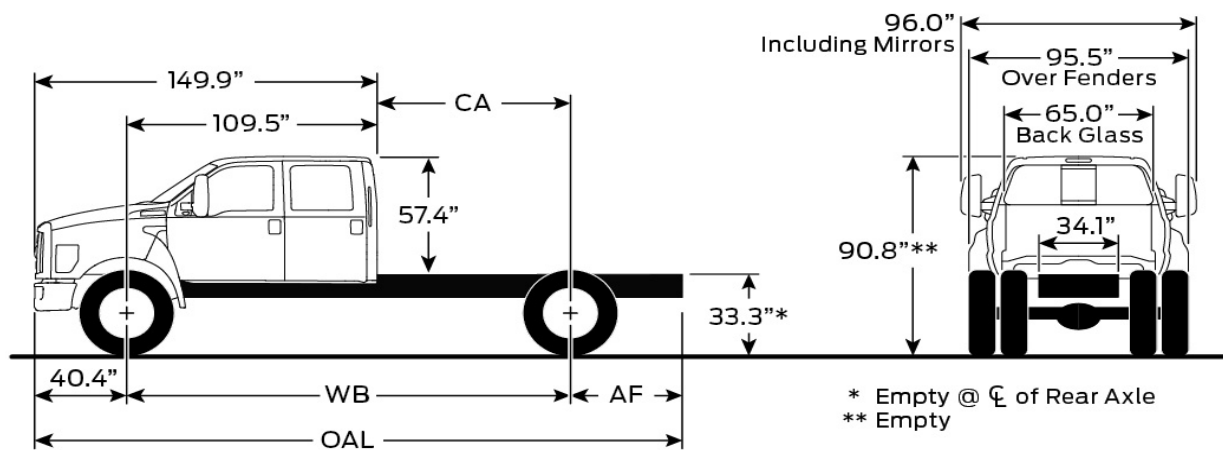

Wheelbase (in.)	Chassis Weights (lbs.)*			Dimensions (in.)			Turning Radius	
	Front	Rear	Total	CA	AF	OAL	To Curb	W/Bumper Clearance
194	5837	3393	9230	84	63	296	26 ft. 8 in.	28 ft. 3 in.
218	5872	3431	9303	108	75	332	28 ft. 10 in.	30 ft. 6 in.
254	5982	3545	9527	144	96	389	33 ft. 2 in.	34 ft. 9 in.


**2019 F-650 SUPER DUTY
GAS CREW CAB - Pro Loader
FRAMES
W6B**



FRAME RAIL SPECIFICATIONS

	CODE	Side Rail							
		DIMENSIONS (Inches)			YIELD STRENGTH Min.(psi)	SECTION MODULUS (inches ³)		RESISTING BENDING MOMENT (In.-Lbs.)	
		Depth	Width	Thickness		Nominal	Maximum	Nominal	Maximum
S	537	Straight Channel Side Rail							
		9.125	3.062	0.312	80,000	10.75	11.47	860,000	917,600

FRAME RAIL CROSS SECTION

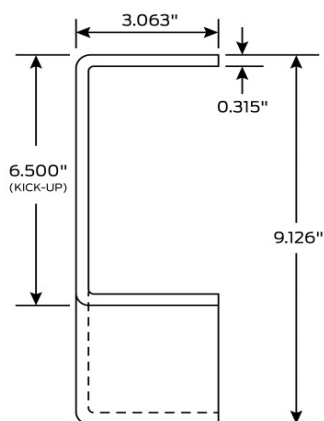

FRAME 537