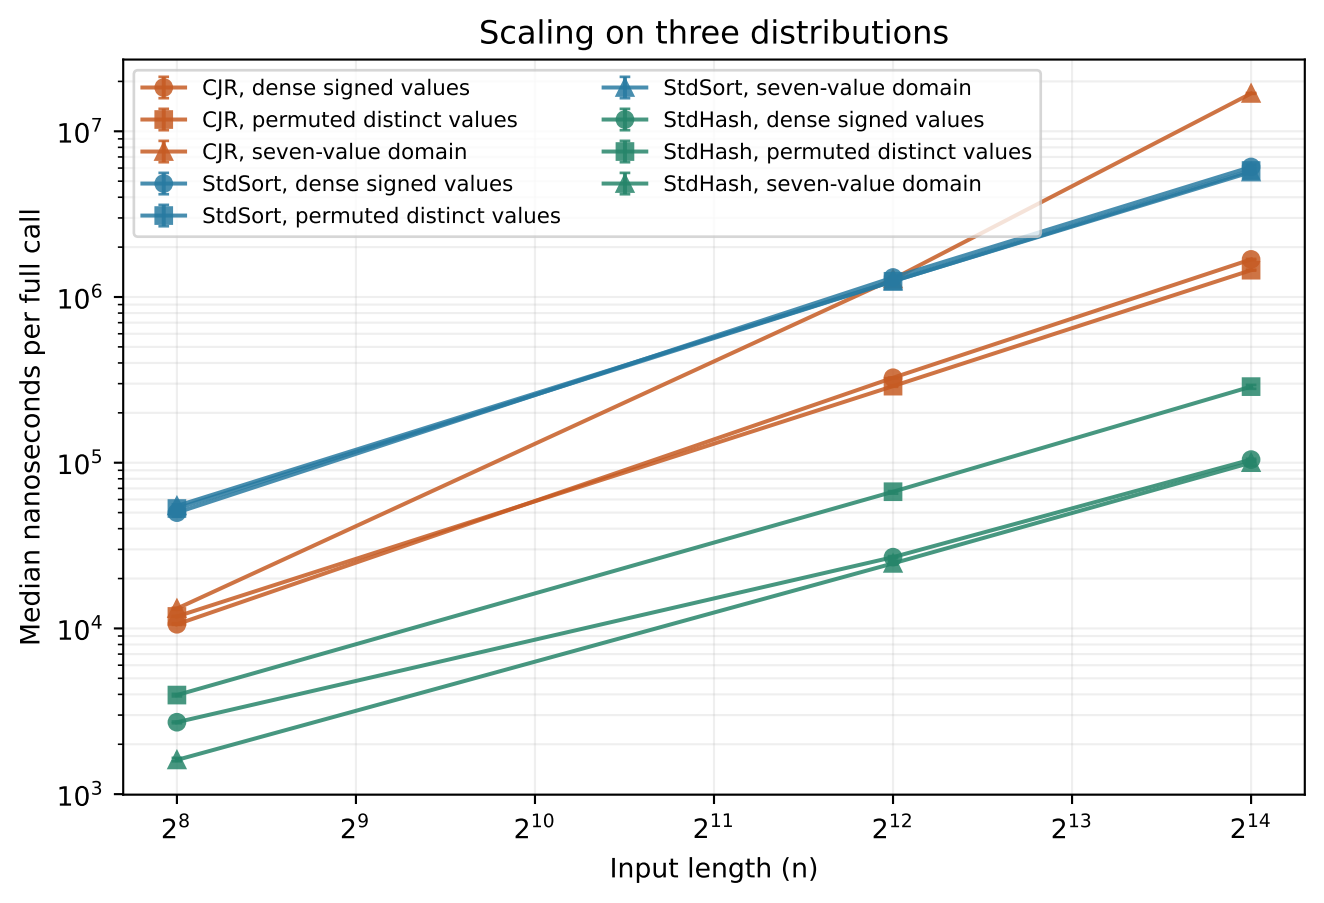
Scaling on three distributions
CJR, dense signed values
CJR, permuted distinct values
CJR, seven-value domain
StdSort, dense signed values
StdSort, permuted distinct values
StdSort, seven-value domain
StdHash, dense signed values
StdHash, permuted distinct values
StdHash, seven-value domain
Median nanoseconds per full call
Input length (n)
10^3
10^4
10^5
10^6
10^7
2^8
2^9
2^{10}
2^{11}
2^{12}
2^{13}
2^{14}