

Getting Started with MongoDB



Estimated time needed: **30** minutes

Objectives

After completing this lab you will be able to:

- Access the MongoDB server using the command-line interface
- Describe the process of listing and creating collections, which contain documents, and databases, which contain one or more collections
- Perform basic operations on a collection such as inserting, counting and listing documents

About Skills Network Cloud IDE


Skills Network Cloud IDE (based on Theia and Docker) provides an environment for hands on labs for course and project related labs. Theia is an open source IDE (Integrated Development Environment), that can be run on desktop or on the cloud. to complete this lab, we will be using the Cloud IDE based on Theia and MongoDB running in a Docker container.

Important Notice about this lab environment


Please be aware that sessions for this lab environment are not persisted. Every time you connect to this lab, a new environment is created for you. Any data you may have saved in the earlier session would get lost. Plan to complete these labs in a single session, to avoid losing your data.

Exercise 1 - Start mongod server

Open a new terminal, by clicking on the menu bar and selecting **Terminal->New Terminal**, as in the image below.

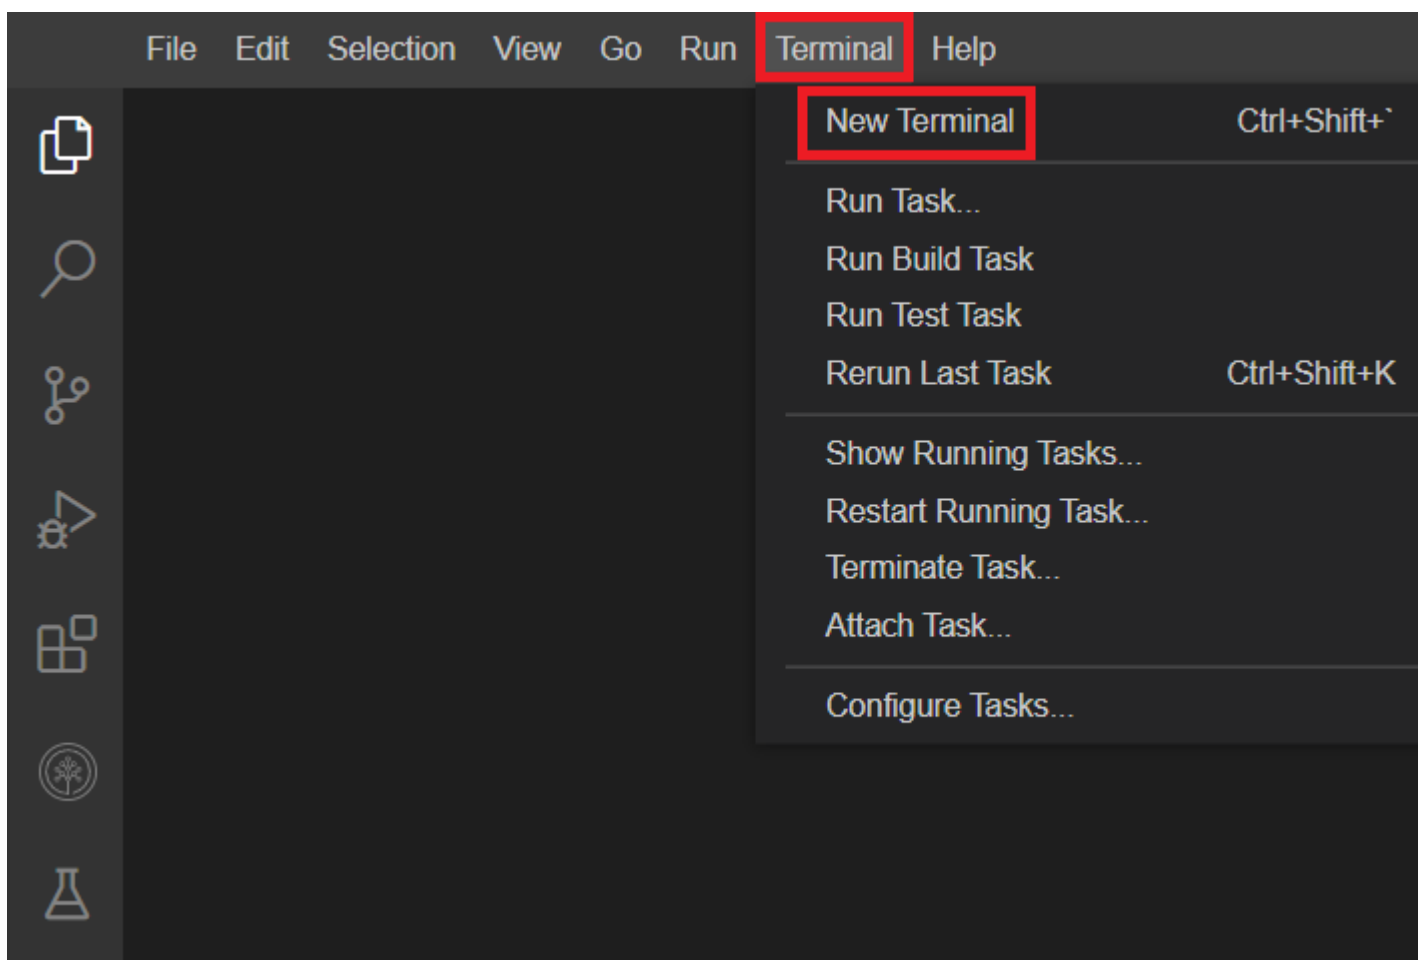

This will open a new terminal at the bottom of the screen as in the image below.

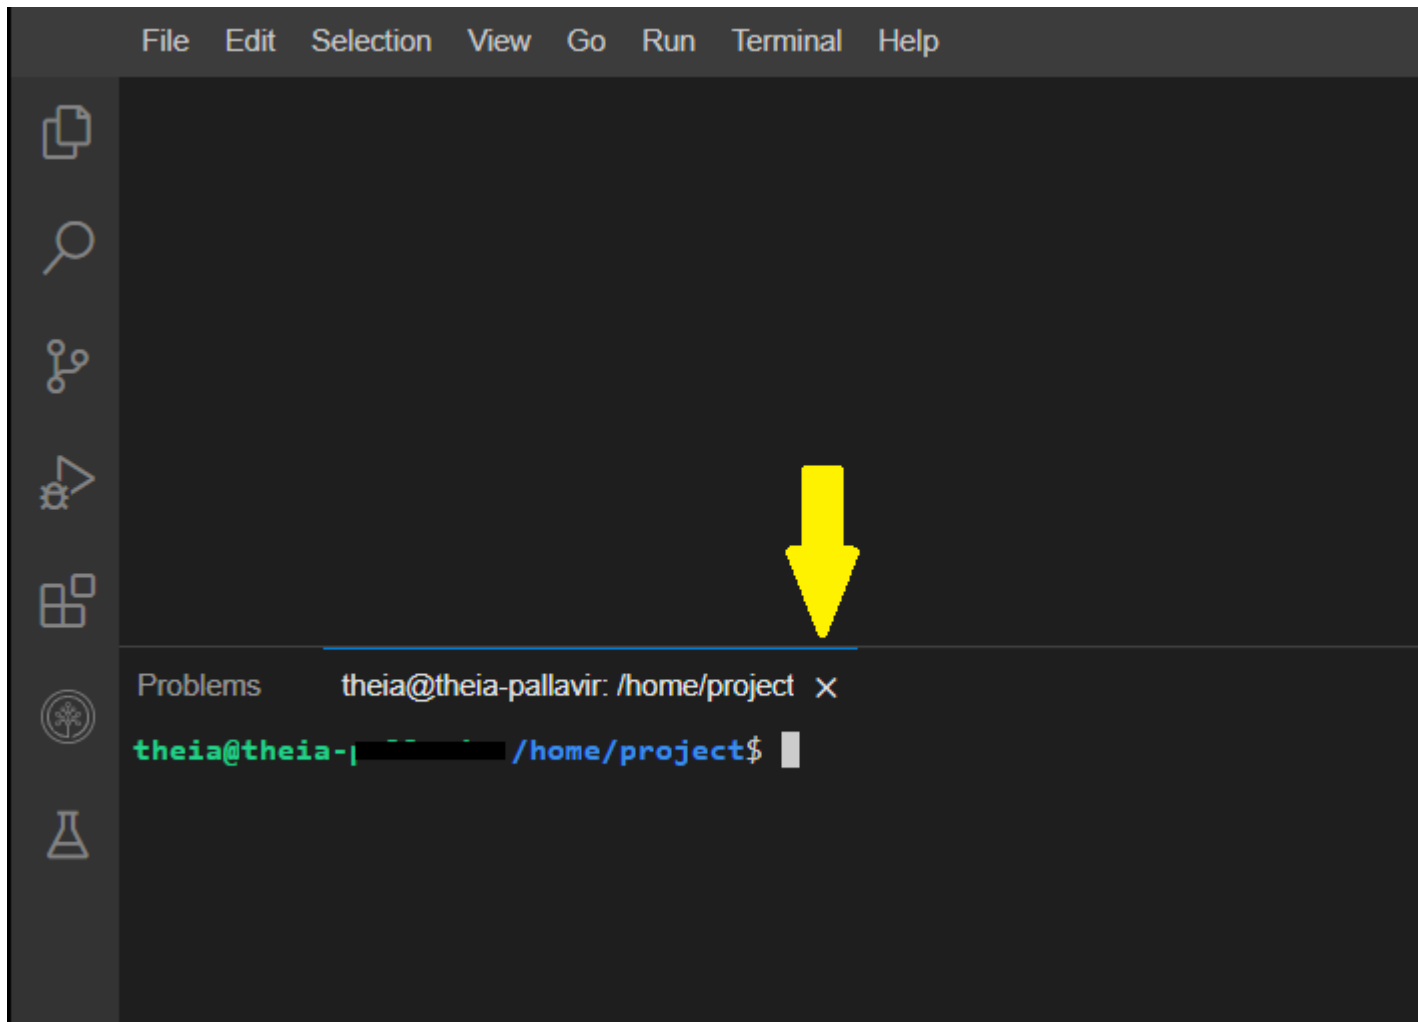


Run the below command on the newly opened terminal. (You can copy the code by clicking on the little copy button on the bottom right of the codeblock below and then paste it, wherever you wish.)

1. 1

1. start_mongo

Copied!

This will start the mongodb server. It will also give you the command to connect to your instance of mongodb, as in the image below.

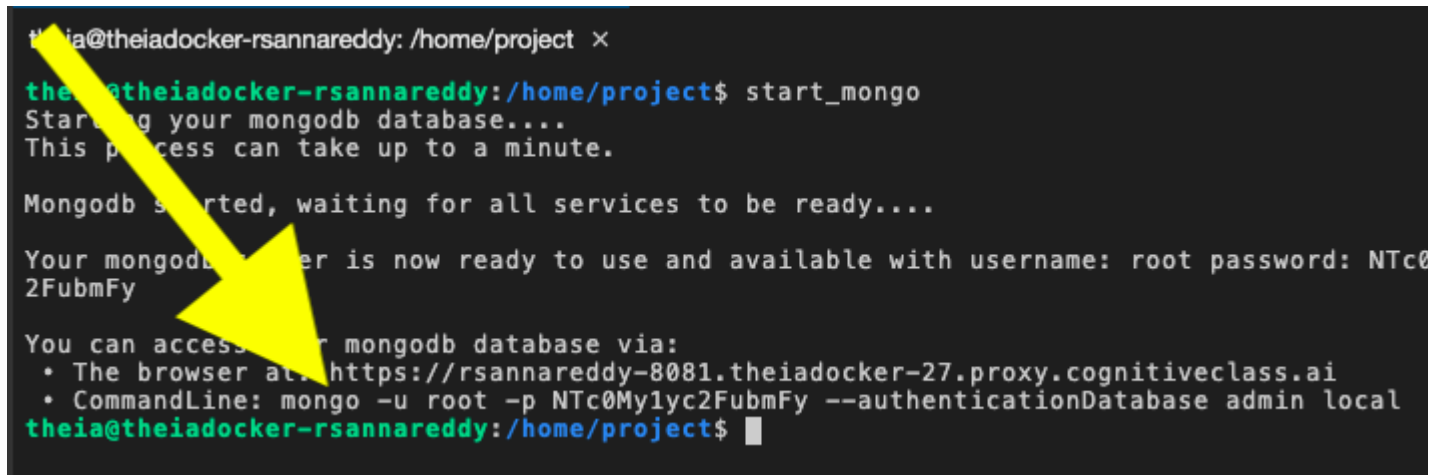

```
theia@theiadocker-rsannareddy: /home/project ×
theia@theiadocker-rsannareddy:/home/project$ start_mongo
Starting your mongodb database....
This process can take up to a minute.

Mongodb started, waiting for all services to be ready....

Your mongodb server is now ready to use and available with username: root password: NTc0My1yc2FubmFy

You can access your mongodb database via:
• The browser at: https://rsannareddy-8081.theiadocker-27.proxy.cognitiveclass.ai
• CommandLine: mongo -u root -p NTc0My1yc2FubmFy --authenticationDatabase admin local
theia@theiadocker-rsannareddy:/home/project$
```

The command will look similar to the one given below.

1. 1


1. mongo -u root -p NTc0My1yc2FubmFy --authenticationDatabase admin local

Copied!

The command contains the username and password to connect to mongodb server (the text after the -p option is the password). Your output would be different from the one shown above. Copy the command given to you, and keep it handy. You will need it in the next step.

Exercise 2 - Connect to mongodb server

On the terminal, paste or type the command you copied in the previous step, as in the image below.

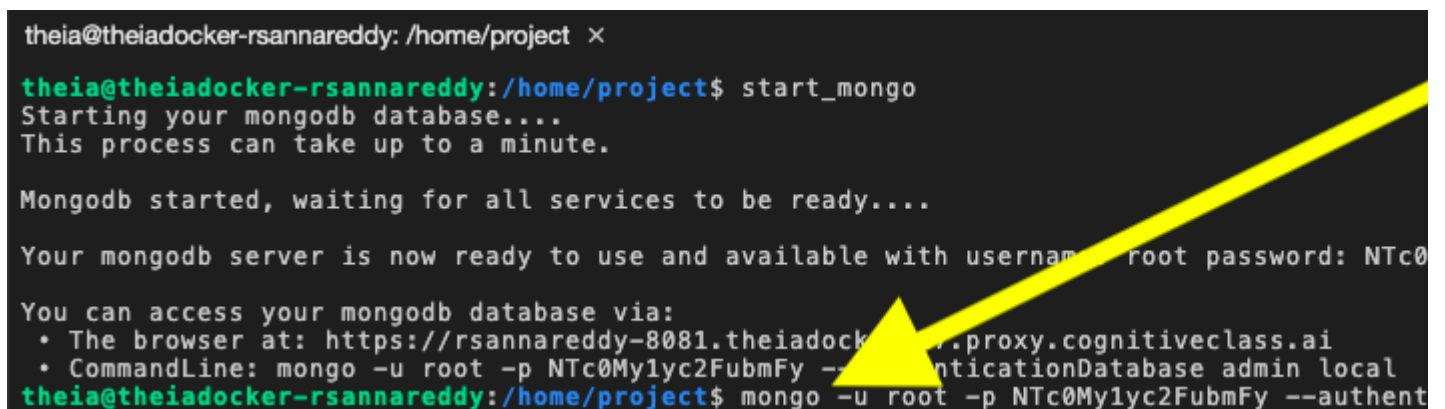


```
theia@theiadocker-rsannareddy: /home/project ×
theia@theiadocker-rsannareddy:/home/project$ start_mongo
Starting your mongodb database....
This process can take up to a minute.

Mongodb started, waiting for all services to be ready....

Your mongodb server is now ready to use and available with username: root password: NTc0My1yc2FubmFy

You can access your mongodb database via:
• The browser at: https://rsannareddy-8081.theiadocker-27.proxy.cognitiveclass.ai
• CommandLine: mongo -u root -p NTc0My1yc2FubmFy --authenticationDatabase admin local
theia@theiadocker-rsannareddy:/home/project$ mongo -u root -p NTc0My1yc2FubmFy --authent
```

You should now get connected to the mongodb database, and see an output as in the figure below.

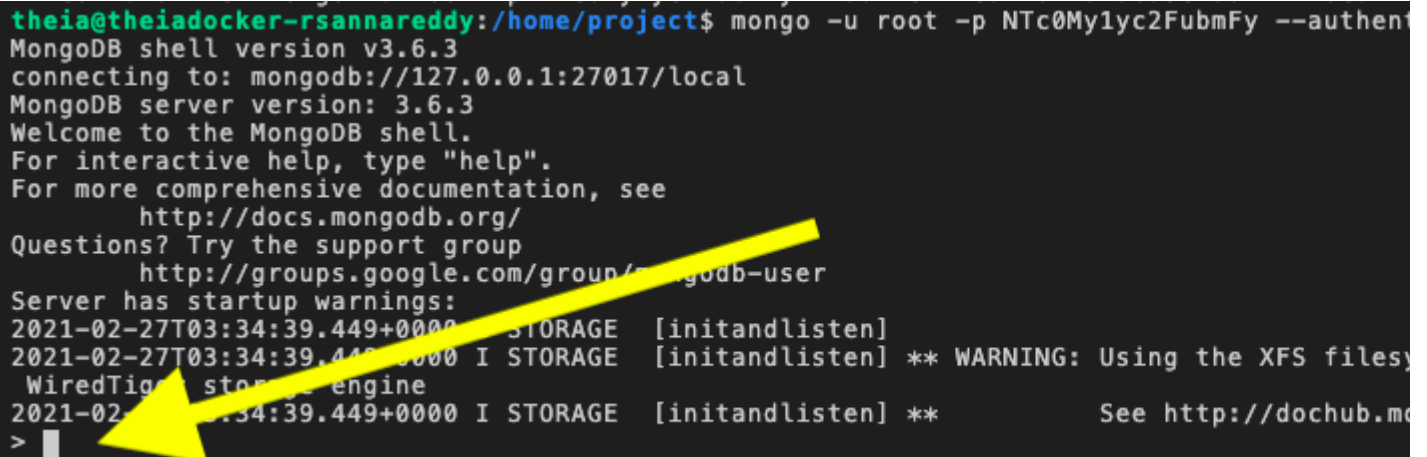

```
theia@theiadocker-rsannareddy:/home/project$ mongo -u root -p NTc0My1yc2FubmFy --authent
MongoDB shell version v3.6.3
connecting to: mongodb://127.0.0.1:27017/local
MongoDB server version: 3.6.3
Welcome to the MongoDB shell.
For interactive help, type "help".
For more comprehensive documentation, see
  http://docs.mongodb.org/
Questions? Try the support group
  http://groups.google.com/group/mongodb-user
Server has startup warnings:
2021-02-27T03:34:39.449+0000 I STORAGE [initandlisten]
2021-02-27T03:34:39.449+0000 I STORAGE [initandlisten] ** WARNING: Using the XFS file system
WiredTiger: storage engine
2021-02-27T03:34:39.449+0000 I STORAGE [initandlisten] ** See http://dochub.mongodb.org/stor
> █
```

Exercise 3 - Find the version of the server

On the mongo client run the below command.

- 1
1. db.version()

Copied!

This will show the version of the mongodb server.

Exercise 4 - List databases

On the mongo client run the below command.

- 1
1. show dbs

Copied!

This will print a list of the databases present on the server.

Exercise 5 - Create database

On the mongo client run the below command.

- 1
1. use training

Copied!

This will create a new database named **training**. If a database named training already exists, it will start using it.

Exercise 6 - Create collecton

On the mongo client run the below command.

```
1. 1  
1. db.createCollection("mycollection")
```

Copied!

This will create a collection name **mycollection** inside the **training** database.

Exercise 7 - List collections

On the mongo client run the below command.

```
1. 1  
1. show collections
```

Copied!

This will print the list of collections in your current database.

Exercise 8 - Insert documents into a collection

On the mongo client run the below command.

```
1. 1  
1. db.mycollection.insert({"color":"white","example":"milk"})
```

Copied!

The above command inserts the json document `{“color”:”white”,”example”:”milk”}` into the collection.

Let us insert one more document.

```
1. 1  
1. db.mycollection.insert({"color":"blue","example":"sky"})
```

Copied!

The above command inserts the json document `{“color”:”blue”,”example”:”sky”}` into the collection.

Insert 3 more documents of your choice.

Exercise 9 - Count the number of documents in a collection

On the mongo client run the below command.

```
1. 1  
1. db.mycollection.count()
```

Copied!

This command gives you the number of documents in the collection.

Exercise 10 - List all documents in a collection

On the mongo client run the below command.

- 1
1. `db.mycollection.find()`

Copied!

This command lists all the documents in the collection **mycollection**

Notice that mongodb automatically adds an ‘_id’ field to every document in order to uniquely identify the document.

Exercise 11 - Disconnect from mongodb server

On the mongo client run the below command.

- 1
1. `exit`

Copied!

Practice exercises

1. Problem:

Connect to mongodb server.

▼ Click here for Hint

Use the ‘mongo’ command with correct username and password.

▼ Click here for Solution

Use the below command with the user name and password generated on your terminal window, when you started the mongodb server using `start_mongo` command.

- 1
1. `mongo -u root -p NTc0My1yc2FubmFy --authenticationDatabase admin local`

Copied!

2. Problem:

List databases.

▼ Click here for Hint

Use the ‘show’ command with `dbs` option.

▼ Click here for Solution

- 1
1. `show dbs`

Copied!

3. Problem:

*Create a database named **mydatabase**.*

▼ Click here for Hint

Use the 'use' command with the database name.

▼ Click here for Solution

1. 1

1. use mydatabase

Copied!

4. Problem:

*Create a collection named **landmarks** in the database **mydatabase**.*

▼ Click here for Hint

Use the 'createCollection' command.

▼ Click here for Solution

1. 1

1. db.createCollection("landmarks")

Copied!

5. Problem:

List collections

▼ Click here for Hint

Use the 'show' command with collections_ option.

▼ Click here for Solution

1. 1

1. show collections

Copied!

6. Problem:

Insert details of five landmarks including name, city, and country. Example: Eiffel Tower, Paris, France.

▼ Click here for Hint

Use the 'db.collection.insert()' command with the correct options.

▼ Click here for Solution

1. 1

2. 2

3. 3

4. 4
5. 5

```
1. db.landmarks.insert({"name":"Statue of Liberty","city":"New York","country":"USA"})
2. db.landmarks.insert({"name":"Big Ben","city":"London","country":"UK"})
3. db.landmarks.insert({"name":"Taj Mahal","city":"Agra","country":"India"})
4. db.landmarks.insert({"name":"Pyramids","country":"Egypt"})
5. db.landmarks.insert({"name":"Great Wall of China","country":"China"})
```

Copied!

7. Problem:

Count the number of documents you have inserted.

▼ Click here for Hint

Use the ‘count’ command on your collections.

▼ Click here for Solution

1. 1
1. `db.landmarks.count()`

Copied!

8. Problem:

List the documents.

▼ Click here for Hint

Use the ‘db.collection.find()’ command.

▼ Click here for Solution

1. 1
1. `db.landmarks.find()`

Copied!

9. Problem:

Disconnect from the server.

▼ Click here for Hint

Use the ‘exit’ command.

▼ Click here for Solution

1. 1
1. `exit`

Copied!

Authors

Ramesh Sannareddy

Other Contributors

Rav Ahuja

Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2021-10-19	0.4	Kathy An	Updated learning objectives
2021-04-19	0.3	Steve Ryan	Review pass
2021-03-16	0.2	Ramesh Sannareddy	Added Hints/Solutions to Practise exercises
2021-02-24	0.1	Ramesh Sannareddy	Created initial version of the lab

Copyright (c) 2021 IBM Corporation. All rights reserved.