

Using HTTP API to create and query Cloudant databases



Estimated time needed: **30** minutes

Objectives

After completing this lab you will be able to use HTTP API with curl, the command-line tool, to:

- Create, query and drop databases
- Perform basic commands such as inserting, updating and deleting documents
- Create an index to optimize query time

Prerequisites

In order to complete this lab, you will need to create an instance of Cloudant on IBM Cloud. If you haven't yet created one, you can create one by referring to the [Create an Instance of IBM Cloudant](#) lab.

Before starting this lab, it'll also be helpful to have an understanding of basic operations with Cloudant. If you're unfamiliar with Cloudant, feel free to take a look at the [Working with Databases in Cloudant](#) lab!

About This SN Labs Cloud IDE

This Skills Network Labs Cloud IDE provides a hands-on environment for course and project related labs. It utilizes Theia, an open-source IDE (Integrated Development Environment) platform, that can be run on desktop or on the cloud. To complete this lab, we will be using the Cloud IDE based on Theia and Cassandra running in a Docker container.

Important Notice about this lab environment

Please be aware that sessions for this lab environment are not persisted. Every time you connect to this lab, a new environment is created for you. Any data you may have saved in the earlier session would get lost. Plan to complete these labs in a single session, to avoid losing your data.

Note: While working on this lab, you may be prompted to login when ever your session expires. Use your credentials to authenticate. This may happen when you step out or leave your Cloudant session unattended.

Exercise 1 - Getting the environment ready

Before you start working with the HTTP API to access the Cloudant, you need to collect the below details of your Cloudant instance.

1. Your Cloudant username
2. Your Cloudant password
3. Your Cloudant url

You can get all these details from the Service Credentials.

▼ Click here for Hint

Step 1: Go to cloud.ibm.com/resources.

Step 2: Under Services click on your instance of Cloudant.

Step 3: On the Cloudant instance page, click on Service Credentials.

Step 5: Click on the chevron of your Service Credentials. You should see your Service Credentials

The screenshot shows the IBM Cloud console interface. At the top, there's a dark header with the IBM Cloud logo and a search bar. Below the header, the main content area is divided into a left sidebar and a right pane. The sidebar has a 'Resource list' section with 'mycloudant' listed as 'Active'. Under 'mycloudant', there are links for 'Manage', 'Service credentials' (which is highlighted), 'Plan', and 'Connections'. The right pane is titled 'Service credentials' and contains a search bar and a list of credentials. One credential, 'Service credentials-1', is expanded, showing a JSON object with fields like 'apikey', 'host', 'iam_apikey_description', 'iam_apikey_name', 'iam_role_crn', 'iam_serviceid_crn', 'password', 'port', 'url', and 'username'. The 'url' field is highlighted in blue.

```
{
  "apikey": "M5_LAn8A0d13NK2Y7HcZ-X6f1SfX2o",
  "host": "4646e655-6aee-42d8-8b93-d2bde6e9",
  "iam_apikey_description": "Auto-generated",
  "iam_apikey_name": "Service credentials-1",
  "iam_role_crn": "crn:v1:bluemix:public:ia",
  "iam_serviceid_crn": "crn:v1:bluemix:publ",
  "addaa-8111-4cb7-bbd4-3a6982702639",
  "password": "6b3dc2399426437b2397e08ac9cf",
  "port": 443,
  "url": "https://apikey-v2-1ktn8d6fuuo6kjo",
  "-42d8-8b93-d2bde6e9a6ca-bluemix.cloudantnos",
  "username": "apikey-v2-1ktn8d6fuuo6kjoz14"
}
```

Step 5: Copy the url without the double quotes on either side.

Note: If you do not see the password field in your credentials, it is because you have not selected “IAM and legacy credentials” in Exercise 2, Step 5 of the lab [Sign Up for an IBM Cloudant Instance](#). You can fix it by deleting your current Cloudant instance and following the instructions from the beginning to create a new instance of Cloudant.

End of hint.

Replace the value of CLOUDANTURL given below with yours.

DO NOT use the values given below. They are all expired credentials.


After replacing with your credentials, copy and paste the below command on the terminal.

This url contains your Cloudant username and password. DO NOT MAKE IT PUBLIC OR SHARE IT WITH ANYONE.

1. 1
2. 2

- 1.
2. `export CLOUDANTURL="https://apikey-v2-1ktn8d6fuu06kjoz145fris5ccx24fhmirsku7o3q7bh:6b3dc239942`

Copied!

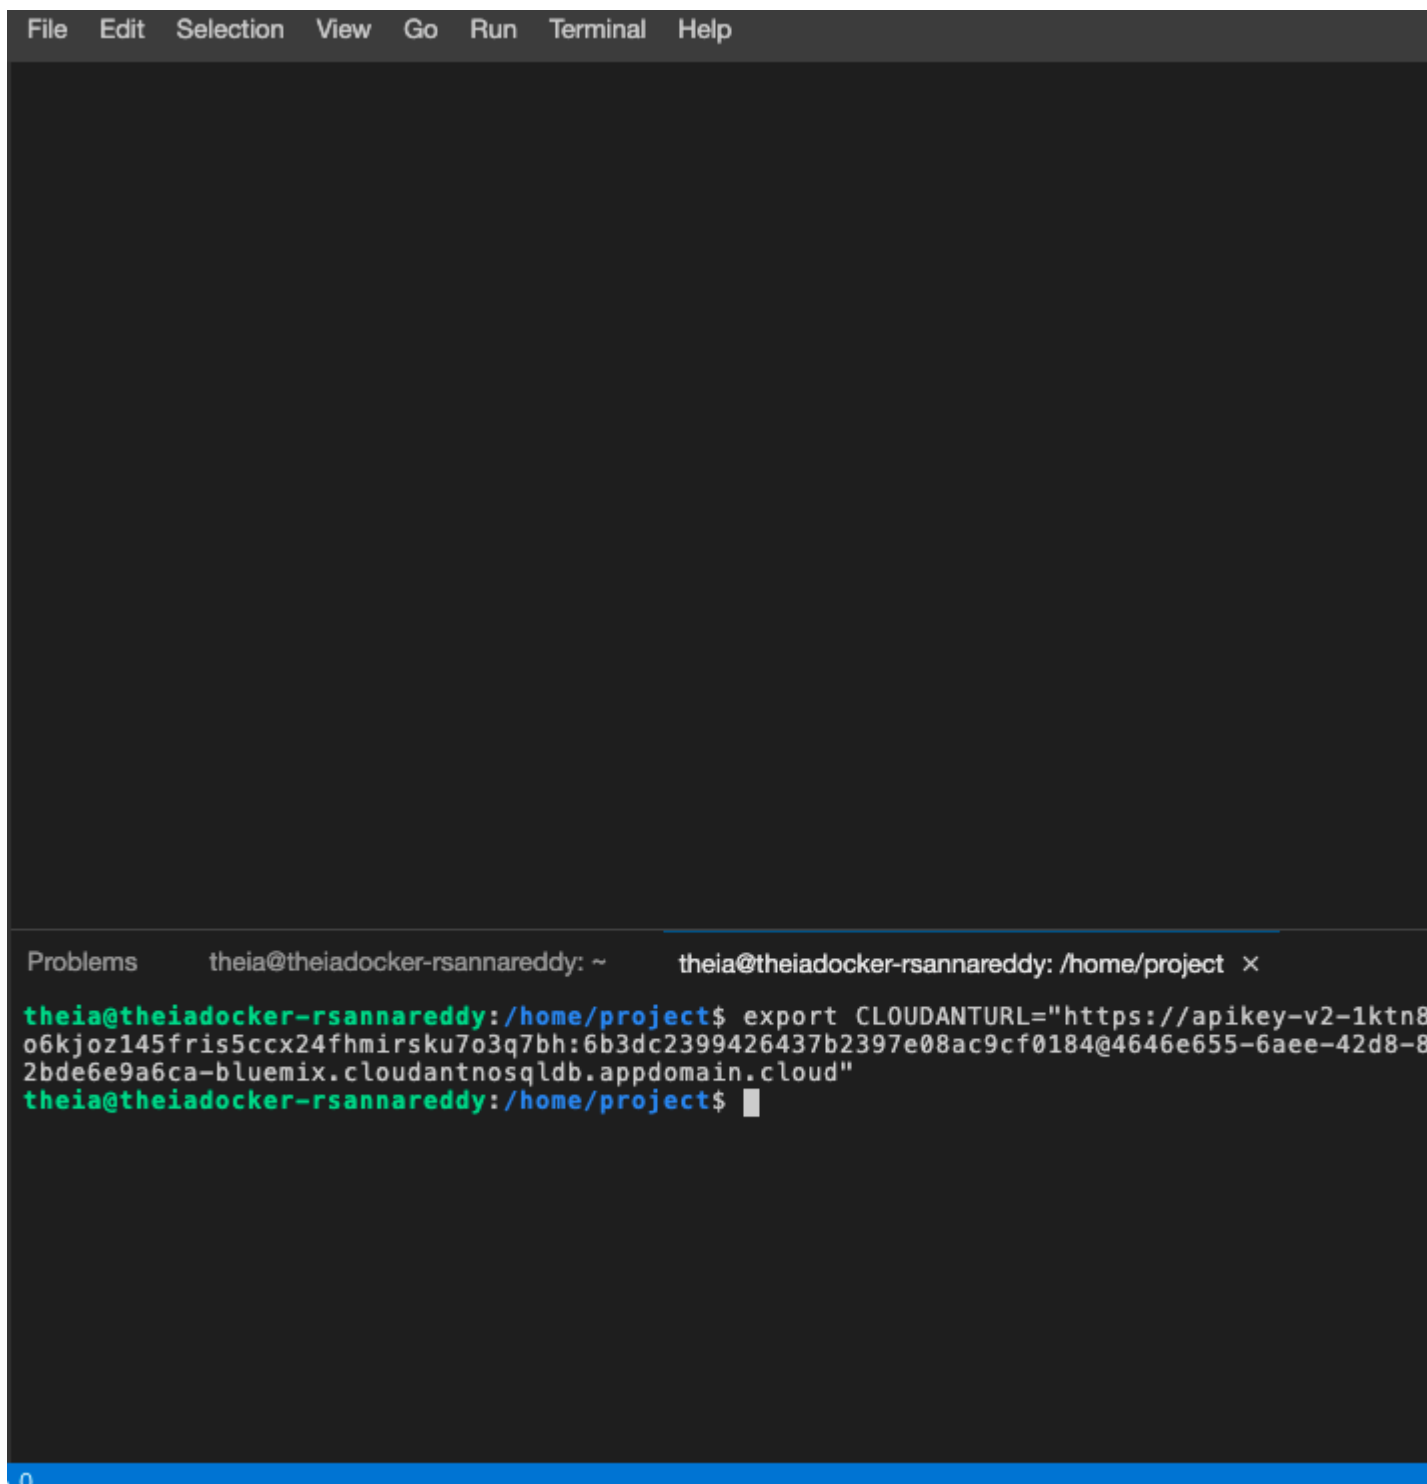

The screenshot shows a terminal window within a dark-themed IDE. The menu bar at the top includes File, Edit, Selection, View, Go, Run, Terminal, and Help. The terminal has a title bar with 'Problems', 'theia@theiadocker-rsannareddy: ~', and 'theia@theiadocker-rsannareddy: /home/project'. The command prompt is 'theia@theiadocker-rsannareddy:/home/project\$'. The command entered is 'export CLOUDANTURL="https://apikey-v2-1ktn8o6kjoz145fris5ccx24fhmirsku7o3q7bh:6b3dc2399426437b2397e08ac9cf0184@4646e655-6aee-42d8-82bde6e9a6ca-bluemix.cloudantnosqldb.appdomain.cloud"'. The cursor is at the end of the command line.

```
File Edit Selection View Go Run Terminal Help

theia@theiadocker-rsannareddy: ~ theia@theiadocker-rsannareddy: /home/project x

theia@theiadocker-rsannareddy:/home/project$ export CLOUDANTURL="https://apikey-v2-1ktn8
o6kjoz145fris5ccx24fhmirsku7o3q7bh:6b3dc2399426437b2397e08ac9cf0184@4646e655-6aee-42d8-8
2bde6e9a6ca-bluemix.cloudantnosqldb.appdomain.cloud"
theia@theiadocker-rsannareddy:/home/project$
```

Test if you can reach your Cloudant server from the lab environment.

Run the below command on the terminal.

1. 1
1. `curl $CLOUDANTURL`

Copied!

If you get an output similar to the one below, it means you are able to reach your Cloudant server.

```
Problems theia@theiadocker-rsannareddy: /home/project x
theia@theiadocker-rsannareddy:/home/project$ curl $CLOUDANTURL
{"couchdb":"Welcome","version":"2.1.1","vendor":{"name":"IBM Cloudant","version":"816
ant":"paas"},"features":["geo","access-ready","iam","partitioned","pluggable-storage-
","scheduler"],"features_flags":["partitioned"]}
```

Test your credentials.

1. 1

1. curl \$CLOUDANTURL/_all_dbs

Copied!

```
Problems theia@theiadocker-rsannareddy: /home/project x
theia@theiadocker-rsannareddy:/home/project$ curl $CLOUDANTURL/_all_dbs
["_replicator","diamonds","planets","training","training_replica"]
theia@theiadocker-rsannareddy:/home/project$
```

If you get a list of your databases, it indicates that your credentials are correct. Now we can proceed with the rest of the lab.

Exercise 2 - Create a database

Run the below command on the terminal to create a database named animals.

1. 1

2. 2

1.

2. curl -X PUT \$CLOUDANTURL/animals

Copied!

A response of {"ok":true} indicates that the database is successfully created.

Verify by listing all databases.

1. 1

2. 2

1.

2. curl \$CLOUDANTURL/_all_dbs

Copied!

Exercise 3 - Drop a database

Run the below command to delete the database named animals.

1. 1

2. 2

1.

2. curl -X DELETE \$CLOUDANTURL/animals

Copied!

A response of `{"ok":true}` indicates that the database is successfully deleted.

Verify that the database is deleted by listing all databases.

- 1.
 - 2.
-
- 1.
 2. `curl $CLOUDANTURL/_all_dbs`

Copied!

Exercise 4 - Insert a document

Create a database named planets.

▼ Click here for Hint

use curl command with PUT option and send the database name in the url.

▼ Click here for Solution

- 1.
-
1. `curl -X PUT $CLOUDANTURL/planets`

Copied!

Run the below command to insert a document in the planets database with `_id` of “1”.

- 1.
 - 2.
 - 3.
 - 4.
 - 5.
-
- 1.
 2. `curl -X PUT $CLOUDANTURL/planets/"1" -d '{`
 3. `"name" : "Mercury" ,`
 4. `"position_from_sun" :1`
 5. `}'`

Copied!

If you see `{"ok":true}` in the response, it means the document is successfully inserted.

Note: You can also create a document using POST. When you use POST to create a document, you do not have to mention the id. Cloudant will use an auto generated id for the document.

Verify by listing the document with the `_id` “1”.

- 1.
 - 2.
-
- 1.
 2. `curl -X GET $CLOUDANTURL/planets/1`

Copied!

Make a note of the value for the ‘`_rev`’ key. You will need it later.

Exercise 5 - Update a document

To update a document you need its revision id.

Replace the “_rev” below with the one you noted earlier.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7

1.
2. curl -X PUT $CLOUDANTURL/planets/1 -d '{
3.     "name" : "Mercury" ,
4.     "position_from_sun" :1,
5.     "revolution_time":"88 days",
6.     "_rev":"1-3fb3ccfe80573e1ae334f0cfa7304f6c"
7. }'
```

Copied!

Verify by listing the document with the _id “1”.

```
1. 1
2. 2

1.
2. curl -X GET $CLOUDANTURL/planets/1
```

Copied!

Make a note of the changed value for the ‘_rev’ key. You will need it later.

Let us add another key “rotation_time” with a value of “59 days” to the existing document.

Run the below command to update the document in the planets database with _id of “1”.

REPLACE the value of “_rev” with what you have copied in the previous step.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8

1.
2. curl -X PUT $CLOUDANTURL/planets/1 -d '{
3.     "name": "Mercury",
4.     "position_from_sun": 1,
5.     "revolution_time": "88 days",
6.     "rotation_time": "59 days",
7.     "_rev": "1-3fb3ccfe80573e1ae334f0cfa7304f6c"
8. }'
```

Copied!

If you see {"ok":true} in the response, it means the document is successfully updated.

Verify by listing the document with the _id “1”.

1. 1
 2. 2
-
- 1.
 2. `curl -X GET $CLOUDANTURL/planets/1`

Copied!

Make a note of the ‘`_rev`’ key. You will need it in the next step.

Exercise 6 - Delete a document

To delete a document you need its revision id.

REPLACE the value of “`_rev`” with what you have noted earlier and run the command.

1. 1
 2. 2
-
- 1.
 2. `curl -X DELETE $CLOUDANTURL/planets/1?rev=2-de9fdd2d971e377c5db2d6425cb38ff1`

Copied!

If you see `{"ok":true}` in the response, it means the document is successfully deleted.

Verify by listing the document with the `_id` “1”.

1. 1
 2. 2
-
- 1.
 2. `curl -X GET $CLOUDANTURL/planets/1`

Copied!

Exercise 7 - Query a database

For this exercise, we’ll be using a database called **diamonds**. If you don’t have this database, you can create and populate it with the following code:

1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14
15. 15
16. 16
17. 17
18. 18
19. 19
20. 20
21. 21

22. 22
23. 23
24. 24
25. 25
26. 26
27. 27
28. 28
29. 29
30. 30
31. 31
32. 32
33. 33
34. 34
35. 35
36. 36
37. 37
38. 38
39. 39
40. 40
41. 41
42. 42
43. 43
44. 44
45. 45
46. 46
47. 47
48. 48
49. 49
50. 50
51. 51
52. 52
53. 53
54. 54
55. 55
56. 56
57. 57
58. 58
59. 59
60. 60
61. 61
62. 62
63. 63
64. 64
65. 65
66. 66
67. 67
68. 68
69. 69
70. 70
71. 71
72. 72
73. 73
74. 74
75. 75
76. 76
77. 77
78. 78
79. 79
80. 80
81. 81
82. 82
83. 83
84. 84
85. 85
86. 86
87. 87
88. 88
89. 89
90. 90

91. 91
92. 92
93. 93
94. 94
95. 95
96. 96
97. 97
98. 98
99. 99
100. 100
101. 101
102. 102
103. 103
104. 104
105. 105
106. 106
107. 107

```
1. curl -X DELETE $CLOUDANTURL/diamonds
2. curl -X PUT $CLOUDANTURL/diamonds
3.
4. curl -X PUT $CLOUDANTURL/diamonds/1 -d '{
5.     "carat": 0.31,
6.     "cut": "Ideal",
7.     "color": "J",
8.     "clarity": "SI2",
9.     "depth": 62.2,
10.    "table": 54,
11.    "price": 339
12. }'
```

```
13.
14. curl -X PUT $CLOUDANTURL/diamonds/2 -d '{
15.     "carat": 0.2,
16.     "cut": "Premium",
17.     "color": "E",
18.     "clarity": "SI2",
19.     "depth": 60.2,
20.     "table": 62,
21.     "price": 351
22. }'
```

```
23.
24.
25. curl -X PUT $CLOUDANTURL/diamonds/3 -d '{
26.     "carat": 0.32,
27.     "cut": "Premium",
28.     "color": "E",
29.     "clarity": "I1",
30.     "depth": 60.9,
31.     "table": 58,
32.     "price": 342
33. }'
```

```
34.
35.
36.
37. curl -X PUT $CLOUDANTURL/diamonds/4 -d '{
38.     "carat": 0.3,
39.     "cut": "Good",
40.     "color": "J",
41.     "clarity": "SI1",
42.     "depth": 63.4,
43.     "table": 54,
44.     "price": 349
45. }'
```

```
46.
47.
48. curl -X PUT $CLOUDANTURL/diamonds/5 -d '{
49.     "carat": 0.3,
50.     "cut": "Good",
51.     "color": "J",
52.     "clarity": "SI1",
```

```
53.     "depth": 63.8,
54.     "table": 56,
55.     "price": 347
56.
57.   }'
58.
59. curl -X PUT $CLOUDANTURL/diamonds/6 -d '{
60.     "carat": 0.3,
61.     "cut": "Very Good",
62.     "color": "J",
63.     "clarity": "SI1",
64.     "depth": 62.7,
65.     "table": 59,
66.     "price": 349
67.   }'
68.
69. curl -X PUT $CLOUDANTURL/diamonds/7 -d '{
70.     "carat": 0.3,
71.     "cut": "Good",
72.     "color": "I",
73.     "clarity": "SI2",
74.     "depth": 63.3,
75.     "table": 56,
76.     "price": 343
77.   }'
78.
79. curl -X PUT $CLOUDANTURL/diamonds/8 -d '{
80.     "carat": 0.23,
81.     "cut": "Very Good",
82.     "color": "E",
83.     "clarity": "VS2",
84.     "depth": 63.8,
85.     "table": 55,
86.     "price": 339
87.   }'
88.
89. curl -X PUT $CLOUDANTURL/diamonds/9 -d '{
90.     "carat": 0.23,
91.     "cut": "Very Good",
92.     "color": "H",
93.     "clarity": "VS1",
94.     "depth": 61,
95.     "table": 57,
96.     "price": 323
97.   }'
98.
99. curl -X PUT $CLOUDANTURL/diamonds/10 -d '{
100.    "carat": 0.31,
101.    "cut": "Very Good",
102.    "color": "J",
103.    "clarity": "SI1",
104.    "depth": 59.4,
105.    "table": 62,
106.    "price": 346
107.   }'
```

Copied!

Now you can start querying the diamond database.

Query for diamond with `_id 1`

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
```

```
8. 8
9. 9

1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{
5.     "selector":
6.     {
7.         "_id":"1"
8.     }
9. }'
```

Copied!

Query for diamonds with carat size of 0.3

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8

1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{ "selector":
5.     {
6.         "carat":0.3
7.     }
8. }'
```

Copied!

Query for diamonds with price more than 345

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11

1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{ "selector":
5.     {
6.         "price":
7.         {
8.             "$gt":345
9.         }
10.     }
11. }'
```

Copied!

Exercise 8 - Create an index

You would have noticed a ‘Warning’: “No matching index found, create an index to optimize query time.” in the output of previous queries. That is Cloudant telling you that, you are running a query on a field that is not indexed.

Let us create an index on the key “price”.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
```

```
1.
2. curl -X POST $CLOUDANTURL/diamonds/_index \
3. -H"Content-Type: application/json" \
4. -d'{
5.     "index": {
6.         "fields": ["price"]
7.     }
8. }'
```

Copied!

Now let us run the earlier query and you should not see the warning, and the query also runs faster.

Query for diamonds with price more than 345

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
```

```
1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{ "selector":
5.     {
6.         "price":
7.             {
8.                 "$gt":345
9.             }
10.    }
11. }'
```

Copied!

Practice exercises

1. Problem:

Set the price of the diamond with id 2 to 352.

▼ [Click here for Hint](#)

find the revision number for the document with id 2. Use it to send a PUT command using curl.

▼ Click here for Solution

Set the rev as per your database before running this command.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14

1.
2. curl -X PUT $CLOUDANTURL/diamonds/2 -d '{
3.
4.     "_id": "2",
5.     "_rev": "1-bb99032cde872d889f41bb4069e23675",
6.     "carat": 0.2,
7.     "cut": "Premium",
8.     "color": "E",
9.     "clarity": "SI2",
10.    "depth": 60.2,
11.    "table": 62,
12.    "price": 352
13.
14.    }'
```

Copied!

2. Problem:

Create an index on the key “carat”.

▼ Click here for Hint

use curl command with the POST and use the index key in the JSON document.

▼ Click here for Solution

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8

1.
2. curl -X POST $CLOUDANTURL/diamonds/_index \
3. -H"Content-Type: application/json" \
4. -d'{
5.     "index": {
6.         "fields": ["carat"]
7.     }
8. }'
```

Copied!

3. Problem:

Find all diamonds that are more than 0.3 carats.

▼ Click here for Hint

use curl command with the POST and use the \$gt operator in the query JSON document.

▼ Click here for Solution

1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11

```
1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{ "selector":
5.     {
6.         "carat":
7.         {
8.             "$gt":0.3
9.         }
10.    }
11.  }'
```

Copied!

4. Problem:

Find all diamonds that have a premium cut.

▼ Click here for Hint

use curl command with the POST and include the field cut in the query JSON document.

▼ Click here for Solution

1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9

```
1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{ "selector":
5.     {
6.         "cut":"Premium"
7.     }
8.  }
9.  }'
```

Copied!

5. Problem:

Find all diamonds that are of color 'E'.

▼ Click here for Hint

use curl command with the POST and include the field color in the query JSON document.

▼ Click here for Solution

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9

1.
2. curl -X POST $CLOUDANTURL/diamonds/_find \
3. -H"Content-Type: application/json" \
4. -d'{ "selector":
5.      {
6.          "color":"E"
7.      }
8.      }'
9.      }
```

Copied!

Authors

Ramesh Sannareddy

Other Contributors

Rav Ahuja

Change Log

Date (YYYY-MM-DD)	Version	Changed By	Change Description
2023-01-18	0.6	Lavanya Rajalingam	Updated correct link for Creating Cloudant Instance
2021-11-01	0.5	Kathy An	Updated lab instructions
2021-04-28	0.4	Steve Ryan	Changed IBM cloud links to markdown format
2021-04-14	0.3	Steve Ryan	Review pass
2021-04-13	0.2	Ramesh Sannareddy	Made updates to the lab
2021-03-24	0.1	Ramesh Sannareddy	Created initial version of the lab

Copyright (c) 2021 IBM Corporation. All rights reserved.