

O X F O R D A B L E C A R E E R S

WEEK 2 OF 3 · PARTICIPANT WORKBOOK **v2.2**

Design & Build Part 1

Data, Automation and Code

Name: _____

Cohort: _____

Date: _____

Salesforce Developer Introductory Programme · Labs 2, 3 and 4 · **Version 2.2 — Extension Pack update + full-stack AI Build Prompts (B.1–B.10)**

Read the solution design (Sections 1–2) before the session. We build from it, we do not re-explain it.

Welcome to Week 2

Last week you learnt what the job is. This week you do it: a designed data model, working automation, and your first Apex trigger — written by you, understood by you.

WHAT CHANGED IN VERSION 2.0 OF THIS WORKBOOK

The features listed as *out of scope* in Section 1 are no longer a dead end. After Week 3, the same project continues into the **CareerLaunch Extension Pack** — payments, invoicing, certificates, multi-currency/multi-language, error logging and a student portal — documented in the **Complete Build Guide** and the three Extension Workbooks (Parts A–C). Nothing you build today is throwaway: the Enrolment trigger you write in Lab 4 is the exact one the Extension Pack later extends by a single line.

Read before the session

Sections 1 and 2 of this workbook are the **requirements and solution design**. On a real project this is the document a developer receives before writing anything. Please read it before we meet — we will walk through it in the first 25 minutes rather than reading it aloud from cold.

Before you arrive — checklist

- ☐ My Developer Edition org opens and still contains the **Course** object and both Course records from Lab 1.
- ☐ VS Code is installed with the **Salesforce Extension Pack**.
- ☐ Running `sf --version` in a terminal returns a version number.
- ☐ Git is installed and I have a GitHub account.
- ☐ I have completed the Trailhead **Platform Basics** and **Data Modeling** modules.
- ☐ I have read Sections 1–2 of this workbook.

IF ANYTHING ABOVE IS NOT TICKED

Message the group **before** the session, not during it. Lab 2 is the foundation for everything in Weeks 2 and 3 — nobody is left behind on the data model, but we can only fix a broken install in advance.

What today covers

TIME	BLOCK	WHAT YOU WILL DO
0:00–0:10	Recap & homework check	Org health check, blockers
0:10–0:35	Solution design walkthrough	Architecture, the data model, why each relationship was chosen
0:35–1:15	Lab 2 — Build the data model	Cohort, Enrolment, relationships, roll-up, formulas, validation rules
1:15–1:25	Break	—
1:25–2:00	Lab 3 — Declarative automation	A record-triggered Flow and a screen Flow
2:00–2:50	Lab 4 — Apex	Trigger, handler, bulkification, Queueable, invocable Apex
2:50–3:00	Wrap-up & Homework 2	What breaks without tests — which sets up Week 3

BY THE END OF TODAY YOU WILL BE ABLE TO SAY

“I designed and built a three-object data model with the right relationships. I automated a business process with Flow. I wrote a bulkified Apex trigger with a handler class that enforces a capacity rule and blocks duplicates — and I can explain why each of those was the correct tool.”

1 — The Requirements Backlog

Here is the official backlog for the CareerLaunch project. Compare it with the stories you wrote in pairs last week. Each story has an ID used throughout this workbook, in the code comments, and in the Week 3 acceptance test script.

Scope — version 1 (Weeks 2–3)

IN SCOPE — WHAT WE BUILD NOW	EXTENSION SCOPE — DEFERRED, THEN DELIVERED
• Course, Cohort and Enrolment data model, with Contact as the Student • Seat capacity tracking and automatic prevention of overbooking • Automated welcome task and confirmation email • Automatic cohort status change to Full • A “Quick Enrol” screen-flow wizard • A scheduled reminder three days before the cohort starts • An Enrolment Console built from two custom LWCs • An Agentforce agent answering availability and status questions • Apex unit tests at 75% coverage or better • A permission set and a CLI deployment to a second org	• Payment gateway integration and invoicing • An Experience Cloud student portal • Certificate PDF generation • Multi-currency and multi-language • Org-wide error logging • Real external system integration — stubbed, with the pattern explained New in v2.0: every one of these is now built after Week 3 as the CareerLaunch Extension Pack — see the <i>Complete Build Guide</i> (Chapters 7–12) and Extension Workbooks Parts A–C.

SCOPE CONTROL IS STILL THE LESSON

Being able to explain *why* something is out of a two-week version 1 is itself part of the job. The client got a working v1 on time **because** the right-hand column waited. Deferred is not deleted — it is sequenced.

User stories

ID	USER STORY	ACCEPTANCE CRITERIA	PRIORITY
US-01	As an admissions officer, I want to record courses and the cohorts that run them, so that our catalogue lives in one place.	Course and Cohort objects exist; a Cohort must belong to a Course; a Cohort has start date, delivery mode, capacity and status.	Must
US-02	As an admissions officer, I want to enrol a student onto a cohort, so that attendance and payment can be tracked.	An Enrolment links one Contact to one Cohort; enrolment date defaults to today; status defaults to Applied.	Must
US-03	As an operations manager, I want to see how many seats remain on a cohort, so that I know what we can still sell.	Cohort shows Enrolled Count (excluding cancelled) and Seats Remaining = Capacity – Enrolled Count, both without manual entry.	Must

US-04	As an operations manager, I want the system to stop us overselling a cohort, so that we never promise a seat we do not have.	Saving an enrolment that would exceed capacity fails with a clear error; the rule holds when 200 records are loaded at once.	Must
US-05	As an admissions officer, I want a student to be prevented from being enrolled twice on the same cohort, so that our numbers are accurate.	A second enrolment for the same Contact and Cohort is rejected.	Must
US-06	As a student, I want a welcome message and next steps when my place is confirmed, so that I know what to do.	When Status changes to Confirmed: an email is sent to the student and a follow-up Task is created for the cohort owner.	Must
US-07	As an operations manager, I want a cohort marked Full automatically when the last seat is taken, so that it stops appearing as available.	When Seats Remaining reaches 0, Cohort Status becomes Full without manual intervention.	Must
US-08	As an admissions officer, I want a guided wizard to enrol a student in a few clicks, so that I do not have to create records manually.	A screen flow collects course → cohort → student and creates the enrolment, showing an error if the cohort is full.	Should
US-09	As a student, I want a reminder shortly before my cohort starts, so that I do not miss the first session.	A scheduled job creates a reminder three days before Start Date, for confirmed enrolments only.	Should
US-13	As an operations manager, I want each Contact to show how many active enrolments they hold, so that I can spot repeat students.	Contact shows a Total Enrolments count, updated automatically after enrolment changes.	Could

US-10 to US-12 (the Enrolment Console and the AI agent) and US-14 (testing and deployment) are delivered in Session 3 and appear in your Week 3 workbook. The Extension Pack continues the numbering with invoicing, payments, certificates, error logging and the portal.

Non-functional requirements

ID	REQUIREMENT
NFR-01	All Apex must be bulk-safe: correct behaviour for 1 record and for 200 records in a single transaction.
NFR-02	No SOQL queries or DML statements inside loops.
NFR-03	Apex code coverage of 75% or more (our target is 90%), with meaningful assertions — not coverage padding.
NFR-04	Errors surfaced to users must be human-readable, never a raw stack trace.
NFR-05	Access granted by permission set, never by editing the System Administrator profile.
NFR-06	All metadata must be retrievable and deployable via Salesforce CLI.


Assumptions

- The Student is a standard **Contact**. We do not build a custom Student object — reusing standard objects is good practice.
- One student holds at most one active enrolment per cohort.
- Payment is recorded as an amount only in **version 1**; the full gateway integration, invoicing and a Pay-now portal arrive in the Extension Pack (Build Guide Chapters 8–10 and 12).
- Email uses standard Salesforce email; deliverability is set to *All Email* in the Developer org.

2 — Solution Design

This is the design document you would hand to a client. We design first and build second — that is the habit this programme is trying to install.

Solution overview

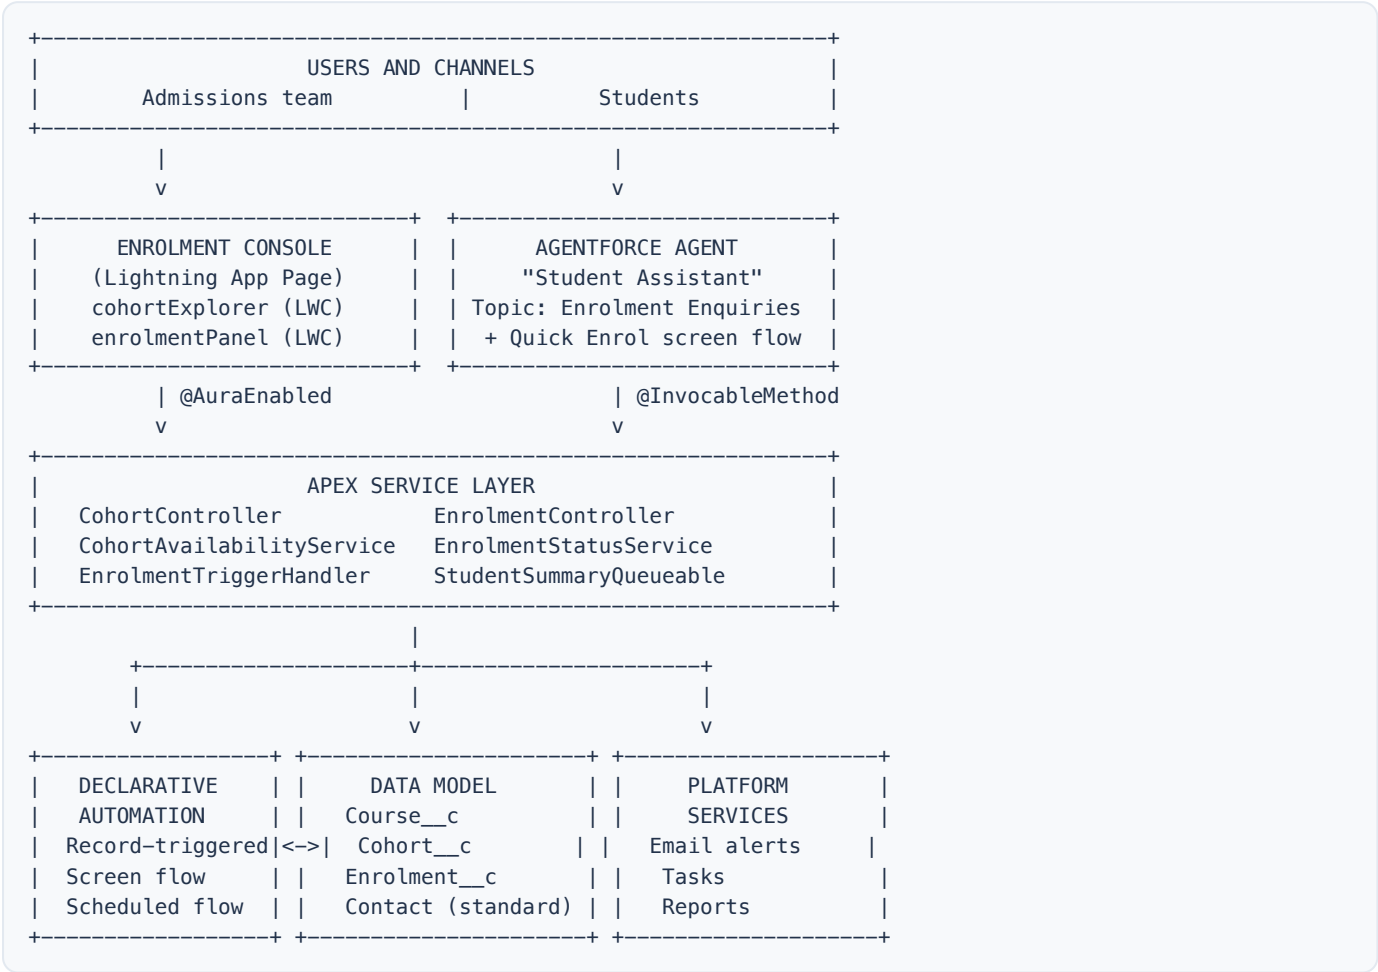

THE LAYERING PRINCIPLE

The Lightning Web Component and the AI agent are only **channels**. Both call the same Apex service layer, which sits over the same data model, which is protected by the same automation. **Build the core once; expose it many times.** This one idea is worth more in an interview than any single piece of syntax — and it is why the Extension Pack can later add a whole student portal without touching this core.

2.1 The data model



RELATIONSHIP	TYPE	WHY
Cohort → Course	Lookup	A cohort should survive independently. We do not want cohorts deleted with a course, and we do not need a roll-up here.
Enrolment → Cohort	Master-Detail	We <i>do</i> want a roll-up summary of enrolments on the cohort, and an enrolment is meaningless without its cohort. Cascade delete is desirable.

Enrolment →
Contact

Lookup

A contact may exist with no enrolments and must not be deleted when one is.

BE READY TO ANSWER THIS OUT LOUD

“Why master-detail here and lookup there?” — the single most examined design decision in PD1, asked in almost every junior interview. Have your answer before the session starts.

Object: Course__c — you built this in Lab 1

FIELD LABEL	API NAME	TYPE	NOTES
Course Name	Name	Text	Standard name field
Course Level	Course_Level__c	Picklist	Introductory, Advanced
Duration (Weeks)	Duration_Weeks__c	Number(2,0)	
Fee	Fee__c	Currency(10,2)	
Active	Active__c	Checkbox	Default: true
Description	Description__c	Long Text Area(1000)	

Object: Cohort__c — built in Lab 2

FIELD LABEL	API NAME	TYPE	NOTES
Cohort Number	Name	Auto Number	Format C0-{0000}
Course	Course__c	Lookup(Course__c)	Required
Start Date	Start_Date__c	Date	Required
End Date	End_Date__c	Date	
Delivery Mode	Delivery_Mode__c	Picklist	Online, In-Person, Hybrid
Capacity	Capacity__c	Number(3,0)	Required, default 20
Status	Status__c	Picklist	Planned, Open, Full, Running, Completed, Cancelled
Enrolled Count	Enrolled_Count__c	Roll-Up Summary	COUNT of Enrolment__c where Status ≠ Cancelled
Seats Remaining	Seats_Remaining__c	Formula (Number)	Capacity__c - Enrolled_Count__c
Cohort Label	Cohort_Label__c	Formula (Text)	Course__r.Name & " - " & TEXT(Start_Date__c)

Validation rule — End_Date_After_Start_Date

```
AND(  
  NOT(ISBLANK(End_Date__c)),  
  End_Date__c < Start_Date__c  
)
```

Error message: *End Date cannot be earlier than Start Date.*

Object: Enrolment__c — built in Lab 2

FIELD LABEL	API NAME	TYPE	NOTES
Enrolment Number	Name	Auto Number	Format ENR-{00000}
Cohort	Cohort__c	Master-Detail(Cohort__c)	Required
Student	Student__c	Lookup(Contact)	Required
Status	Status__c	Picklist	Applied, Confirmed, Waitlisted, Cancelled, Completed. Default: Applied
Enrolment Date	Enrolment_Date__c	Date	Defaulted by Apex to today
Amount Paid	Amount_Paid__c	Currency(10,2)	Default 0 · the Extension Pack later writes this on payment
Enrolment Key	Enrolment_Key__c	Text(64) — External ID, Unique	Set by Apex to CohortId-StudentId. This is how we enforce US-05.
Attendance %	Attendance_Percent__c	Percent(3,0)	
Certificate Issued	Certificate_Issued__c	Checkbox	Ticked automatically by the Extension Pack's certificate job

Validation rule — Payment_Not_Above_Fee

Amount_Paid__c > Cohort__r.Course__r.Fee__c

Error message: *Amount Paid cannot exceed the course fee.*

NOTICE WHAT THAT RULE DOES

It reaches across **two relationships** in a single formula: Enrolment → Cohort → Course. This is a cross-object formula; Salesforce allows up to five levels.

Standard object: Contact (the Student)

FIELD LABEL	API NAME	TYPE	NOTES
Total Enrolments	Total_Enrolments__c	Number(3,0)	Maintained by the Queueable Apex job (US-13)

2.2 Automation design — which tool, and why

This is the most valuable table in the programme. You must be able to justify every choice in it — in the exam, and in an interview.

#	REQUIREMENT	TOOL CHOSEN	WHY NOT THE ALTERNATIVE
A1	Seat count on a cohort (US-03)	Roll-up summary + formula field	No automation needed at all. Always ask “can a field do this?” first.
A2	Welcome email and follow-up task on confirmation (US-06)	Record-triggered Flow (after save)	Declarative, no test class required, easily changed by an admin. Apex would be over-engineering.

A3	Set Cohort to Full when seats hit zero (US-07)	Record-triggered Flow (after save) updating the parent	Same reasoning as A2. Also demonstrates updating a related record from Flow.
A4	Prevent overbooking (US-04)	Apex trigger (before insert/update)	A validation rule cannot count sibling records. Flow cannot reliably block a bulk load with a clean per-record error. This needs cross-record logic and <code>addError()</code> .
A5	Prevent duplicate enrolment (US-05)	Apex trigger populating a unique external ID field	Elegant, database-enforced, bulk-safe and free at runtime. A great interview answer.
A6	Guided enrolment wizard (US-08)	Screen Flow calling invocable Apex	Screens are a Flow strength; the seat-availability lookup is reused from Apex.
A7	Pre-start reminder (US-09)	Scheduled-triggered Flow	Runs daily on a filtered set. A Schedulable Apex class would be needless code.
A10	Keep the Contact enrolment count fresh (US-13)	Queueable Apex called from the trigger	Aggregation is best done after the transaction commits. Also demonstrates asynchronous Apex and why we use it.

THE RULE OF THUMB TO MEMORISE

Field → **Validation Rule** → **Flow** → **Apex**. Move down the list only when the level above genuinely cannot do the job. Reaching for Apex first is the most common junior mistake. (The Extension Pack obeys the same rule: invoicing is Apex only because it needs idempotent cross-record logic; the certificate *trigger* is a Flow because a Flow is enough.)

Lab 2 — Build the Data Model

LAB 2 · 40 MINUTES · HANDS-ON

Build the Data Model

Create Cohort and Enrolment, wire up the relationships, add the calculated fields and validation rules, and load sample data.

NOBODY MOVES ON UNTIL THIS LAB IS FINISHED

Everything in the rest of the programme depends on this data model being correct. If you fall behind, say so — we will wait. Two spellings matter enormously: it is `Enrolment__c` with one `l` (British spelling) throughout, and field API names must match this workbook exactly or the Apex in Lab 4 will not compile.

- 1 **Create the Cohort object.** Setup → Object Manager → Create ▾ → Custom Object. Label/Plural `Cohort / Cohorts` · Record Name `Cohort Number` · Auto Number · format `C0-{0000}` · starting number 1 · tick Allow Reports, Allow Activities, **Launch New Custom Tab Wizard**.
- 2 **Add the Cohort fields** (Fields & Relationships → New). Leave *Enrolled Count*, *Seats Remaining*, *Cohort Label* until step 5 — they cannot be built yet.

FIELD	TYPE	SETTINGS
Course	Lookup Relationship	Related To: Course ; tick Required
Start Date	Date	Tick Required
End Date	Date	—
Delivery Mode	Picklist	Online, In-Person, Hybrid
Capacity	Number	Length 3, Decimals 0, Default <code>20</code> , tick Required
Status	Picklist	Planned, Open, Full, Running, Completed, Cancelled

- 3 **Create the Enrolment object.** Same route. Label/Plural `Enrolment / Enrolments` · Record Name `Enrolment Number` · Auto Number `ENR-{00000}` · tick Allow Reports, Allow Activities, tab wizard.

- 4 **Add the Enrolment fields — in this order.** The master-detail must exist before the roll-up can be built.

FIELD	TYPE	SETTINGS
Cohort	Master-Detail Relationship	Related To: Cohort . Accept the sharing defaults.
Student	Lookup Relationship	Related To: Contact ; tick Required
Status	Picklist	Applied, Confirmed, Waitlisted, Cancelled, Completed. Default Applied .
Enrolment Date	Date	—
Amount Paid	Currency	Length 10, Decimals 2, Default 0
Enrolment Key	Text	Length 64; tick External ID and Unique ; case-sensitive unticked
Attendance %	Percent	Length 3, Decimals 0
Certificate Issued	Checkbox	Default: Unchecked

PAUSE HERE — WHAT JUST HAPPENED

Creating that master-detail changed four things at once: the Cohort now **owns** the Enrolment; deleting a Cohort will **cascade delete** its Enrolments; **roll-up summaries** become possible on Cohort; and who can see an Enrolment is now **controlled by the parent** Cohort.

- 5 **Back on Cohort — add the three calculated fields.**

FIELD	TYPE	SETTINGS
Enrolled Count	Roll-Up Summary	Summarised object Enrolments · COUNT · filter: Status <i>not equal to</i> Cancelled
Seats Remaining	Formula → Number, 0 dp	Capacity__c - Enrolled_Count__c
Cohort Label	Formula → Text	Course__r.Name & " - " & TEXT(Start_Date__c)

- 6 **Add the Contact field.** Object Manager → Contact → Fields & Relationships → New → Number, Length 3, Decimals 0, Label **Total Enrolments**.

- 7 **Add the two validation rules** — copy the formulas and messages from Section 2.1 exactly. On Cohort: **End_Date_After_Start_Date**. On Enrolment: **Payment_Not_Above_Fee**.

- 8 **Tidy the page layouts.** Cohort layout: drag Enrolled Count, Seats Remaining, Cohort Label on; confirm the Enrolments related list. Confirm the Cohorts and Enrolments tabs appear in the App Launcher.

- 9 **Create the sample data.** Every later lab depends on this — do not skip.

OBJECT	RECORDS
Contact	Three students with real-looking email addresses — Week 3's agent searches on them.
Cohort	CO-0001 — Introductory course · today + 14 · Capacity 3 · Open CO-0002 — Advanced course · today + 30 · Capacity 10 · Open

The capacity of 3 on CO-0001 is deliberate — it makes the overbooking test in Lab 4 fast.

CHECKPOINT

Create **one** Enrolment linking a Contact to CO-0001, then open CO-0001: **Enrolled Count = 1** and **Seats Remaining = 2** — without anybody typing a number. That is US-03 delivered, with no automation at all.

Lab 3 — Declarative Automation with Flow

LAB 3 · 35 MINUTES · HANDS-ON

Declarative Automation with Flow

A record-triggered Flow that welcomes a confirmed student and closes a full cohort, then a screen Flow that guides an admissions officer through enrolling somebody.

3a — Record-triggered Flow: `Enrolment_Confirmed_Actions` (US-06, US-07)

Setup → search **Flows** → New Flow → **Record-Triggered Flow**.

SETTING	VALUE
Object / Trigger	<code>Enrolment__c</code> · A record is created or updated
Entry conditions	<code>Status__c</code> Equals <code>Confirmed</code>
When to run	Only when a record is updated to meet the condition requirements
Optimise for	Actions and Related Records (after-save)

- 1 **Get Records** — label `Get_Cohort` . Object `Cohort__c` , condition Id Equals `{!$Record.Cohort__c}` . Store only the first record; fields `Seats_Remaining__c` , `Status__c` , `Start_Date__c` .
- 2 **Action** → **Send Email**. Recipient `{!$Record.Student__r.Email}` · Subject `Your place is confirmed - {!$Record.Cohort__r.Cohort_Label__c}` · Body: welcome text, start date, joining instructions.
- 3 **Create Records** — a Task. Subject — build a **Text Template** resource (not a plain string) with text `Send welcome pack to {!$Record.Student__r.FirstName} {!$Record.Student__r.LastName}` , then reference that resource in the Subject field · `WhatId = {!$Record.Id}` · `OwnerId = {!$Record.OwnerId}` · `ActivityDate = {!$Flow.CurrentDate}` · Priority High.

TWO THINGS THAT TRIP EVERYONE UP HERE

1) A plain text field with `{!...}` typed into it is **not** merged at runtime — only a genuine **Text Template** resource is. 2) `Contact.Name` is a compound field and will not merge through a relationship even inside a Text Template — use `FirstName` and `LastName` separately, exactly as the Subject above does. Both mistakes silently produce a blank instead of an error, so they are easy to miss - check the Task after your first test.

- 4 **Decision** — `Is_Cohort_Now_Full` . Outcome “Yes”: `{!Get_Cohort.Seats_Remaining__c}` less than or equal to 0.
- 5 **Update Records** on Yes — update the Cohort from `Get_Cohort` , set `Status__c = Full` .
- 6 **Save as** `Enrolment Confirmed Actions` , then **Activate**. A saved flow that is not activated does nothing at all.

WHY AFTER-SAVE, NOT BEFORE-SAVE

We touch *other* records — an email, a Task, the parent Cohort. A before-save flow is faster but can only change fields on the triggering record. Classic PD1 question; you now own a concrete example.

TEST IT

Change an existing Enrolment's Status to **Confirmed**: a Task appears, the email arrives, and filling the final seat on CO-0001 flips the Cohort to **Full**.

3b — Screen Flow: Quick_Enrol_Student (US-08)

SCREEN / ELEMENT	CONTENT
Screen 1	Picklist choice set from active <code>Course__c</code> records — “Which course?”
Get Records	<code>Cohort__c</code> where Course = <code>{!selectedCourse}</code> AND Status = Open, sorted by Start Date, all records
Screen 2	Radio buttons from the cohort collection — display Cohort Label, seats remaining in help text
Screen 3	Lookup component for Contact — “Which student?”
Action	Apex Action → Find Available Cohorts (from <code>CohortAvailabilityService</code>) to re-check seats before writing
Decision / Create	Seats available? → Create <code>Enrolment__c</code> (Cohort, Student, Status = Confirmed)
Screen 4 (Yes / No)	Confirmation with the enrolment number / “Sorry — that cohort just filled up”, with Back
Fault paths	Every Get and Create gets a Fault connector to an error screen showing <code>{!\$Flow.FaultMessage}</code> . (The Extension Pack later adds a “Log Flow Error” action on these same paths.)

Save, activate, and surface it with a **Quick Enrol** button on the Cohort page or from the App Launcher.

SEQUENCING NOTE

The Apex Action needs the class you write in Lab 4. If we are short of time we build screens 1–3 and the Create element live; the Apex Action and fault handling become Homework 2, item 3.

3c — Scheduled Flow: Cohort_Start_Reminder (US-09) — demonstration, then homework

SETTING	VALUE
Trigger	Schedule-Triggered · daily at 07:00
Object	<code>Enrolment__c</code>
Entry conditions	<code>Status__c = Confirmed</code> AND <code>Cohort__r.Start_Date__c</code> equals today + 3 (build a formula resource)
Action	Send a reminder email and create a Task

Lab 4 — Apex: Trigger, Handler, Async and Invocable

LAB 4 · 50 MINUTES · HANDS-ON

Apex: Trigger, Handler, Async and Invocable

Write the code that enforces the seat capacity rule, blocks duplicate enrolments, updates the Contact asynchronously, and exposes a service that both Flow and an AI agent can call.

HOW THIS LAB RUNS

We **type the code together**, line by line. Please do not paste it in from Appendix A beforehand — watching code appear character by character is what demystifies it, and the errors you make while typing are the most useful part of the exercise. Appendix A is for catching up and revising.

4a — Apex in ten minutes

Developer Console → **Debug** → **Open Execute Anonymous Window**. We type and run this together:

```
// Variables, collections, loops, SOQL and DML in one page
String greeting = 'Hello Salesforce';
Integer capacity = 20;

List<String> levels = new List<String>{ 'Introductory', 'Advanced' };

Map<Id, Cohort__c> cohortsById = new Map<Id, Cohort__c>({
    [SELECT Id, Name, Capacity__c FROM Cohort__c WHERE Status__c = 'Open']
});

for (Cohort__c c : cohortsById.values()) {
    System.debug(greeting + ' - ' + c.Name + ' has capacity ' + c.Capacity__c);
}

Course__c newCourse = new Course__c(Name = 'Data Cloud Fundamentals',
                                     Course_Level__c = 'Introductory');
insert newCourse;
```

CONCEPT	WHAT TO TAKE AWAY
Strongly typed	Every variable declares its type. The compiler catches mistakes before your users do.
List, Set, Map	The three collections you will use constantly. A Map is a lookup table — keys to values — and the key to efficient Apex.
SOQL / DML	SOQL reads data (in square brackets); DML (<code>insert</code> , <code>update</code> , <code>delete</code> , <code>upsert</code>) writes it.
Governor limits	100 SOQL queries, 150 DML statements per transaction. This is <i>why</i> we bulkify.

4b — The trigger and the handler (US-04, US-05)

Two files: a **trigger** that does nothing but route (Appendix A.1), and a **handler class** that holds all the logic (Appendix A.2).

BEAT	THE POINT BEING MADE
One trigger per object	With more than one, the order they run in is unpredictable.

No logic in the trigger	Handler classes can be unit tested, reused and read. Triggers cannot be called from anywhere else.
<code>Trigger.new</code> , <code>Trigger.oldMap</code>	Context variables — the records as they will be, and as they were.
Collect IDs → one query → loop in memory	The bulkification pattern. Learn this shape; it is most of what separates working Apex from Apex that fails in production.
<code>addError()</code>	Blocks the individual record with a readable message, rather than failing the whole batch.
Unique External ID field	Duplicate prevention enforced by the database itself, at no runtime cost.

Methods we build inside `EnrolmentTriggerHandler` : `setDefaults` (US-02) · `buildUniqueKey` (US-05) · `preventOverbooking` (US-04, NFR-01) · `enqueueStudentSummary` (US-13).

4c — Asynchronous Apex: `StudentSummaryQueueable` (US-13)

Aggregating a Contact's enrolments is best done **after** the transaction commits — and an asynchronous job gets its own fresh set of governor limits. That is the whole argument for asynchronous Apex, in one sentence. (Appendix A.3.)

4d — Invocable Apex: `CohortAvailabilityService` (US-08, US-11)

The bridge class: **one method, three consumers** — the screen flow from Lab 3, the Agentforce agent in Week 3, and (with a wrapper) any external system. (Appendix A.4.)

```
@InvocableMethod(label='Find Available Cohorts' ...)
```

SAY THIS ONE OUT LOUD

That single annotation is what makes an AI agent able to use your code — arguably the most commercially valuable line in the whole project. In Week 3 you watch an agent call it; in the Extension Pack the same idea (invocable Apex) powers flow-driven certificates and error logging.

CHECKPOINT — TWO ACCEPTANCE CRITERIA PROVEN LIVE

- ☐ Enrol a fourth student onto CO-0001 (capacity 3): the save must fail with *your* message.
 - ☐ Enrol an existing student onto the same cohort twice: that must fail too.
- US-04 and US-05, demonstrably delivered.

Homework 2 — due before Session 3

Roughly 2 hours 30 minutes. Session 3 assumes the data model, the flows and the Apex from today are all working in your org.

#	TASK	ESTIMATE
1	Finish anything unfinished from Labs 2, 3 and 4. Use Appendix A to catch up.	30 min
2	Build the scheduled flow <code>Cohort_Start_Reminder</code> (Lab 3c)	20 min
3	Add the Apex Action and the fault paths to <code>Quick_Enrol_Student</code>	20 min
4	Trailhead: complete the Apex Basics & Database module	45 min
5	Write one test method for <code>EnrolmentTriggerHandler</code> — any method, however rough. Do not look up how first. Just try.	20 min
6	Push your work to GitHub: <code>sf project retrieve start</code> , then commit	15 min

ABOUT TASK 5

You have deliberately been asked to write a test before anybody has taught you testing. Struggling with it for twenty minutes is the point — you will arrive at Session 3 having already felt the problem, which is what makes the lesson land. Bring whatever you produce, working or not.

Troubleshooting — this week's greatest hits

PROBLEM	CAUSE	FIX
Roll-Up Summary is not offered as a field type	The child is related by Lookup, not Master-Detail	Recreate the relationship on <code>Enrolment__c</code> as Master-Detail
I cannot change a Lookup to Master-Detail	Some child records have a blank parent	Populate the parent on every child record first
“field integrity exception” on a formula	Referencing a relationship that does not exist	Check the relationship name: <code>Course__r.Name</code> , not <code>Course__c.Name</code>
My trigger does not fire	Inactive, or the event is missing from the signature	Check <code>(before insert, before update, ...)</code> and that it is Active
Flow saved but nothing happens	Flows do nothing until activated	Open the flow and click Activate
The welcome email never arrives	Deliverability is “System email only”	Setup → Deliverability → Access level: All Email
Too many SOQL queries: 101	A query inside a loop	Collect the IDs first, then query once
Compile error on a field name	<code>Enrollment__c</code> vs <code>Enrolment__c</code>	British spelling, one l , everywhere

Key terms from this session

TERM	MEANING
------	---------

Lookup	A loose relationship; the child survives the parent.
Master-Detail	Tight parent-child: cascade delete, inherited sharing, roll-up summaries.
Roll-Up Summary	A master-record field that counts, sums, or takes min/max of its details.
Validation rule	A formula that blocks a save when it evaluates to true.
External ID	An outside-system identifier field; can be unique and used for upsert.
Flow	Declarative automation: record-triggered, screen, scheduled, autolaunched.
Apex / Trigger	Salesforce's Java-like server language / Apex that runs before or after saves.
Bulkification	Correct, efficient behaviour when processing many records at once.
Governor limit	Per-transaction caps that keep a multi-tenant platform fair.
SOQL / DML	How Apex reads data / writes data.
Queueable Apex	An asynchronous job with fresh limits, enqueued with <code>System.enqueueJob</code> .
Invocable method	<code>@InvocableMethod</code> Apex that Flow, Agentforce and REST can call.

SEE YOU NEXT WEEK — AND AFTER THAT

Session 3 — Build (Part 2), Test, Deploy & Demo: two Lightning Web Components, an Agentforce agent calling today's Apex, a test suite, a deployment and a demo. **Then the Extension Pack:** payments & invoicing, certificates, error logging, multi-currency/multi-language and the Experience Cloud student portal — the entire right-hand column of Section 1, built on the exact core you finished today. Reserve a place on the Advanced Course — WhatsApp +44 7448 717334 · +234 704 916 5925.

Appendix A — Apex Source Code

PLEASE READ THIS FIRST

This appendix is for **catching up and revising**, not for reading ahead. In Lab 4 you type this code with the instructor. If you paste it in beforehand you will get a working org and learn considerably less. If you fall behind during the lab, copy from here and rejoin the group. All classes use the British spelling `Enrolment__c` consistently. Copy exactly.

A.1 EnrolmentTrigger

```
trigger EnrolmentTrigger on Enrolment__c (before insert, before update, after insert, after update) {
    if (Trigger.isBefore) {
        if (Trigger.isInsert) {
            EnrolmentTriggerHandler.onBeforeInsert(Trigger.new);
        } else if (Trigger.isUpdate) {
            EnrolmentTriggerHandler.onBeforeUpdate(Trigger.new, Trigger.oldMap);
        }
    }
    if (Trigger.isAfter && (Trigger.isInsert || Trigger.isUpdate)) {
        EnrolmentTriggerHandler.onAfterChange(Trigger.new);
    }
}
```

The trigger contains routing only. All logic lives in a class that can be unit tested, reused and read.

A.2 EnrolmentTriggerHandler

```
public with sharing class EnrolmentTriggerHandler {

    @TestVisible
    private static final String ERR_FULL =
        'This cohort is full. Please choose another cohort or add the student to the waiting list.';

    // ----- Entry points -----
    public static void onBeforeInsert(List<Enrolment__c> newEnrolments) {
        setDefaults(newEnrolments);
        buildUniqueKey(newEnrolments);
        preventOverbooking(newEnrolments, null);
    }

    public static void onBeforeUpdate(List<Enrolment__c> newEnrolments,
                                      Map<Id, Enrolment__c> oldMap) {
        buildUniqueKey(newEnrolments);
        preventOverbooking(newEnrolments, oldMap);
    }

    public static void onAfterChange(List<Enrolment__c> newEnrolments) {
        enqueueStudentSummary(newEnrolments);
    }

    // ----- US-02: sensible defaults -----
    private static void setDefaults(List<Enrolment__c> newEnrolments) {
        for (Enrolment__c enr : newEnrolments) {
            if (enr.Enrolment_Date__c == null) {
                enr.Enrolment_Date__c = Date.today();
            }
            if (String.isBlank(enr.Status__c)) {
                enr.Status__c = 'Applied';
            }
            if (enr.Amount_Paid__c == null) {

```

```

        enr.Amount_Paid__c = 0;
    }
}

// ----- US-05: duplicate prevention via a unique External ID -----
private static void buildUniqueKey(List<Enrolment__c> newEnrolments) {
    for (Enrolment__c enr : newEnrolments) {
        if (enr.Cohort__c != null && enr.Student__c != null) {
            enr.Enrolment_Key__c =
                String.valueOf(enr.Cohort__c).left(15) + '-' +
                String.valueOf(enr.Student__c).left(15);
        }
    }
}

// ----- US-04: capacity enforcement, bulk safe -----
private static void preventOverbooking(List<Enrolment__c> newEnrolments,
                                       Map<Id, Enrolment__c> oldMap) {

    // 1. Work out which enrolments newly consume a seat, and how many per cohort.
    Map<Id, Integer> incomingSeatsByCohort = new Map<Id, Integer>();

    for (Enrolment__c enr : newEnrolments) {
        if (enr.Cohort__c == null) {
            continue;
        }
        Boolean consumesSeat = enr.Status__c != 'Cancelled';
        Boolean isNewlyConsuming;

        if (oldMap == null) {
            isNewlyConsuming = consumesSeat;           // insert
        } else {
            Enrolment__c older = oldMap.get(enr.Id);
            Boolean wasConsuming = older.Status__c != 'Cancelled'
                && older.Cohort__c == enr.Cohort__c;
            isNewlyConsuming = consumesSeat && !wasConsuming; // update
        }

        if (isNewlyConsuming) {
            Integer running = incomingSeatsByCohort.containsKey(enr.Cohort__c)
                ? incomingSeatsByCohort.get(enr.Cohort__c) : 0;
            incomingSeatsByCohort.put(enr.Cohort__c, running + 1);
        }
    }

    if (incomingSeatsByCohort.isEmpty()) {
        return;
    }

    // 2. ONE query for every cohort involved - never inside the loop.
    Map<Id, Cohort__c> cohortsById = new Map<Id, Cohort__c>([
        SELECT Id, Name, Capacity__c, Enrolled_Count__c
        FROM Cohort__c
        WHERE Id IN :incomingSeatsByCohort.keySet()
    ]);

    // 3. Allocate seats in order and error on the ones that do not fit.
    Map<Id, Integer> allocated = new Map<Id, Integer>();

    for (Enrolment__c enr : newEnrolments) {
        if (enr.Cohort__c == null || !incomingSeatsByCohort.containsKey(enr.Cohort__c)) {
            continue;
        }
        Cohort__c cohort = cohortsById.get(enr.Cohort__c);
        if (cohort == null) {
            continue;
        }
    }
}

```

```

    }

    Decimal capacity = cohort.Capacity__c == null ? 0 : cohort.Capacity__c;
    Decimal committed = cohort.Enrolled_Count__c == null ? 0 : cohort.Enrolled_Count__c;
    Integer used = allocated.containsKey(enr.Cohort__c)
        ? allocated.get(enr.Cohort__c) : 0;

    if (committed + used + 1 > capacity) {
        enr.addError(ERR_FULL);
    } else {
        allocated.put(enr.Cohort__c, used + 1);
    }
}
}

// ----- US-13: asynchronous aggregation onto the Contact -----
private static void enqueueStudentSummary(List<Enrolment__c> newEnrolments) {
    Set<Id> studentIds = new Set<Id>();
    for (Enrolment__c enr : newEnrolments) {
        if (enr.Student__c != null) {
            studentIds.add(enr.Student__c);
        }
    }
    if (studentIds.isEmpty()) {
        return;
    }
    // Respect the asynchronous job limit for the transaction.
    if (Limits.getQueueableJobs() < Limits.getLimitQueueableJobs()) {
        System.enqueueJob(new StudentSummaryQueueable(studentIds));
    }
}
}

```

VERSION 2.0 NOTE

In the Extension Pack, `onAfterChange` gains exactly **one more line** — a call to `InvoiceService.createForConfirmedEnrolments(newEnrolments)` that raises an invoice whenever an enrolment is confirmed. Do **not** add it this week (the class does not exist yet); see the Complete Build Guide, Chapter 10.

A.3 StudentSummaryQueueable

```

public with sharing class StudentSummaryQueueable implements Queueable {

    private final Set<Id> studentIds;

    public StudentSummaryQueueable(Set<Id> studentIds) {
        this.studentIds = studentIds;
    }

    public void execute(QueueableContext context) {
        Map<Id, Contact> contactsToUpdate = new Map<Id, Contact>();

        // Start everyone at zero so cancellations are reflected too.
        for (Id studentId : studentIds) {
            contactsToUpdate.put(studentId, new Contact(Id = studentId, Total_Enrolments__c = 0));
        }

        for (AggregateResult ar : [
            SELECT Student__c studentId, COUNT(Id) total
            FROM Enrolment__c
            WHERE Student__c IN :studentIds
            AND Status__c != 'Cancelled'
            GROUP BY Student__c

```

```

    }) {
        Id studentId = (Id) ar.get('studentId');
        Integer total = (Integer) ar.get('total');
        contactsToUpdate.put(studentId, new Contact(Id = studentId, Total_Enrolments__c = total));
    }

    if (!contactsToUpdate.isEmpty()) {
        try {
            update contactsToUpdate.values();
        } catch (DmlException e) {
            System.debug(LoggingLevel.ERROR, 'Student summary update failed: ' + e.getMessage());
        }
    }
}
}

```

A.4 CohortAvailabilityService — invocable; used by Flow and Agentforce

```

public with sharing class CohortAvailabilityService {

    public class Request {
        @InvocableVariable(
            label='Course Name'
            description='All or part of the course name, for example "Advanced" or "Salesforce Developer".'
            required=true)
        public String courseName;
    }

    public class Result {
        @InvocableVariable(
            label='Answer'
            description='A short, human-readable summary of the cohorts that still have seats.')
        public String answer;

        @InvocableVariable(
            label='Available Cohorts'
            description='The matching cohort records that still have seats available.')
        public List<Cohort__c> cohorts;

        @InvocableVariable(label='Seats Available' description='True if at least one seat was found.')
        public Boolean seatsAvailable;
    }

    @InvocableMethod(
        label='Find Available Cohorts'
        description='Returns open cohorts that still have seats for a given course name.'
        category='Oxfordable CareerLaunch')
    public static List<Result> findAvailableCohorts(List<Request> requests) {

        List<Result> results = new List<Result>();

        for (Request req : requests) {
            String searchTerm = '%' + (String.isBlank(req.courseName) ? '' : req.courseName.trim()) +
            '%';

            List<Cohort__c> candidates = [
                SELECT Id, Name, Cohort_Label__c, Course__r.Name, Start_Date__c,
                    Delivery_Mode__c, Capacity__c, Enrolled_Count__c, Seats_Remaining__c
                FROM Cohort__c
                WHERE Status__c = 'Open'
                    AND Start_Date__c >= TODAY
                    AND Course__r.Name LIKE :searchTerm
                ORDER BY Start_Date__c ASC
                LIMIT 20
            ];
        }
    }
}

```

```

    };

    List<Cohort__c> withSeats = new List<Cohort__c>();
    for (Cohort__c c : candidates) {
        if (c.Seats_Remaining__c != null && c.Seats_Remaining__c > 0) {
            withSeats.add(c);
        }
    }

    Result res = new Result();
    res.cohorts = withSeats;
    res.seatsAvailable = !withSeats.isEmpty();
    res.answer = buildAnswer(req.courseName, withSeats);
    results.add(res);
}
return results;
}

private static String buildAnswer(String courseName, List<Cohort__c> cohorts) {
    if (cohorts.isEmpty()) {
        return 'There are currently no cohorts with available seats matching "'
            + courseName + '". Please ask about another course or a later date.';
    }
    List<String> lines = new List<String>();
    for (Cohort__c c : cohorts) {
        lines.add(c.Course__r.Name + ' starting ' + c.Start_Date__c.format()
            + ' (' + c.Delivery_Mode__c + ') - '
            + String.valueOf(c.Seats_Remaining__c.intValue()) + ' seat(s) remaining');
    }
    return 'Cohorts with availability: ' + String.join(lines, '; ') + '.';
}
}

```

Appendix B — AI Build Prompts: the complete ordered series

Pasted into an AI coding assistant (Claude Code, Agentforce for Developers, or similar) running **inside a careerlaunch SFDX project connected to a Developer org**, these twelve prompts rebuild the entire CareerLaunch system — core and Extension Pack — and finish by seeding demo data. They are designed to be **copy-pasted one at a time, strictly in order P1 → P12**: each layer depends on the one before it. Before every prompt, a short note tells you what it will do and what you should see when it worked.

READ THIS BEFORE USING ANY PROMPT

The labs come first. You learn by typing, breaking and fixing — not by generating. Use this series for three purposes only: catching up after a session, verifying your hand-built org, or rebuilding fast in a fresh org. Whatever the AI produces: read the diff before deploying, deploy with the CLI yourself, and run the matching checkpoints. If you cannot explain a line the AI wrote, you are not finished with it. Never put real passwords or personal email addresses inside a prompt — where one is needed, the prompts use a **<placeholder>** for you to substitute.

SETUP, ONCE

1. Terminal in your `careerlaunch` project folder · 2. `sf org list` shows your org as default · 3. Start the assistant there · 4. Paste P1, review the diff, let it deploy, run the checkpoint · 5. Continue to P2, and so on.

Coverage map — every metadata type and the prompt that builds it

METADATA TYPE	PROMPT(S)
Custom objects, fields, validation rules, tabs	P1 (core) · P6 (extension + platform event)
Custom Metadata Types + records · Named Credential	P6
Custom Labels · translations	P7
Apex classes, triggers, Visualforce, tests	P2 (core) · P8 (extension)
Flows	P4 (core) · P9 (extension + automation wiring)
Lightning Web Components	P3 (console) · P10 (portal, incl. header/logout/profile)
Permission sets · FlexiPage (App Page) · the Tab that exposes it	P5 (core) · P10 (portal)
Experience Cloud site (clicks)	P11 checklist
Demo & test data, portal logins	P12

P1 — Core objects and fields

What this prompt does: creates the three-object data model from Section 2 — Course, Cohort and Enrolment with every field, the roll-up and formulas, both validation rules, the Contact field and the three tabs — and deploys it.

When it worked: creating one enrolment on a capacity-3 cohort shows Enrolled Count 1 / Seats Remaining 2 with nothing typed by hand.

You are working in a Salesforce DX project connected to my Developer org. Create the metadata (source format, under force-app/main/default) for the CareerLaunch data model, then deploy it. Use these EXACT API names and settings – do not improvise names. British spelling: Enrolment, one "l".

- 1) Custom object Course__c (may already exist from Lab 1 – if so, verify and complete it):
label Course/Courses, Name field = text "Course Name", enable reports and activities.
Fields: Course_Level__c Picklist restricted (Introductory, Advanced);
Duration_Weeks__c Number(2,0); Fee__c Currency(10,2); Active__c Checkbox default true;
Description__c LongTextArea(1000).
- 2) Custom object Cohort__c: label Cohort/Cohorts, Name = AutoNumber "CO-{0000}", reports+activities.
Fields: Course__c Lookup(Course__c) required; Start_Date__c Date required; End_Date__c Date;
Delivery_Mode__c Picklist (Online, In-Person, Hybrid); Capacity__c Number(3,0) required default 20;
Status__c Picklist (Planned, Open, Full, Running, Completed, Cancelled);
Enrolled_Count__c Roll-Up Summary COUNT of Enrolment__c filtered Status__c != Cancelled;
Seats_Remaining__c Formula Number(0dp) = Capacity__c - Enrolled_Count__c;
Cohort_Label__c Formula Text = Course__r.Name & " - " & TEXT(Start_Date__c).
Validation rule End_Date_After_Start_Date:
AND(NOT(ISBLANK(End_Date__c)), End_Date__c < Start_Date__c)
message "End Date cannot be earlier than Start Date."
- 3) Custom object Enrolment__c: label Enrolment/Enrolments, Name = AutoNumber "ENR-{00000}".
Fields in this order: Cohort__c MasterDetail(Cohort__c); Student__c Lookup(Contact) required,
relationship name Enrolments; Status__c Picklist restricted (Applied default, Confirmed,
Waitlisted, Cancelled, Completed); Enrolment_Date__c Date; Amount_Paid__c Currency(10,2) default 0;
Enrolment_Key__c Text(64) External ID + Unique (case-insensitive);
Attendance_Percent__c Percent(3,0); Certificate_Issued__c Checkbox default false.
Validation rule Payment_Not_Above_Fee: Amount_Paid__c > Cohort__r.Course__r.Fee__c
message "Amount Paid cannot exceed the course fee."
- 4) On standard Contact: field Total_Enrolments__c Number(3,0), label "Total Enrolments".
- 5) Custom tabs for Course__c, Cohort__c and Enrolment__c (any motif).

Deploy with sf project deploy start, report any errors, list every file you created.
Do NOT create any Apex, flows, LWCs or records in this step.

P2 – Core Apex, trigger and tests

What this prompt does: writes the trigger + handler (capacity rule, duplicate key, defaults), the async roll-up job, the two invocable services, the two LWC controllers, and the core test classes — then runs the tests. **When it worked:** a 4th enrolment on a full cohort fails with your message, a duplicate fails on the unique key, and the test run is green.

In the same project (P1 deployed), create these Apex files exactly as specified by the Oxfordable workbooks, deploy, then run all tests and show the results. API 62.0, with sharing unless stated.

- 1) trigger EnrolmentTrigger on Enrolment__c (before insert, before update, after insert, after update)
– routing only: before insert -> EnrolmentTriggerHandler.onBeforeInsert(Triiger.new); before update
-> onBeforeUpdate(Triiger.new, Triiger.oldMap); after insert/update -> onAfterChange(Triiger.new).
- 2) class EnrolmentTriggerHandler: setDefaults (date=today, status='Applied', amount=0 when blank);
buildUniqueKey (Enrolment_Key__c = 15-char Cohort id + '-' + 15-char Student id);
preventOverbooking (bulk-safe: count newly-consuming rows per cohort where Status != 'Cancelled',
ONE query of Capacity__c/Enrolled_Count__c, allocate in memory, addError("This cohort is full.
Please choose another cohort or add the student to the waiting list.") on overflow);
enqueueStudentSummary (collect Student__c ids, enqueue StudentSummaryQueueable within limits).
- 3) class StudentSummaryQueueable implements Queueable: zero every passed Contact's
Total_Enrolments__c, one aggregate COUNT grouped by Student__c where Status != 'Cancelled',
update Contacts, swallow DmlException with a debug log.
- 4) class CohortAvailabilityService: @InvocableMethod 'Find Available Cohorts' (category
'Oxfordable CareerLaunch'); Request.courseName; Result answer/cohorts/seatsAvailable; query Open
future cohorts matching the name, keep Seats_Remaining__c > 0, build a readable answer.
- 5) class EnrolmentStatusService: @InvocableMethod 'Check Enrolment Status'; Request.studentEmail;
Result answer/found summarising each enrolment (cohort label, start date, status).
- 6) class CohortController: @AuraEnabled(cacheable=true) getActiveCourses() and getOpenCohorts(Id
courseId) – Open future cohorts, WITH SECURITY_ENFORCED, optional course filter.
- 7) class EnrolmentController: @AuraEnabled createEnrolment(cohortId, studentId, status) – validate,
insert (default 'Confirmed'), catch DmlException -> AuraHandledException with a friendly message
("That student is already enrolled on this cohort." for duplicates), return the record with names.
- 8) Tests: TestDataFactory (@isTest: createCourse, createCohort, createStudents bypassing duplicate

rules, buildEnrolments NOT inserted, createStudent(String email)); EnrolmentTriggerTest (defaults, overbooking negative, 200-record bulk, duplicate blocked, queueable via startTest/stopTest); CohortServicesTest (controllers + both services incl. error paths). 90% coverage, real assertions.

P3 – Core Lightning Web Components (the Enrolment Console)

What this prompt does: builds the three console components and wires them together with the data-down/events-up pattern. **When it worked:** after P5 puts them on a page, enrolling from the console shows a toast and the seat count drops without a refresh.

Same project; P2 deployed. Create three LWCs under force-app/main/default/lwc (html, js, js-meta.xml each; apiVersion 62.0; isExposed true; targets lightning__AppPage, lightning__HomePage, lightning__RecordPage). Then deploy.

- 1) cohortExplorer: combobox "Filter by course" fed by @wire CohortController.getActiveCourses (prepend "All courses"); lightning-datatable of @wire getOpenCohorts(courseId: '\$selectedCourseId') with columns Cohort, Course (flattened Course__r.Name), Starts (date), Mode, Capacity, Seats left; single row selection dispatches CustomEvent 'cohortselected' (bubbles, composed); store the whole wire result; expose @api refresh() calling refreshApex.
- 2) enrolmentPanel: @api cohort; badge "<n> seat(s) remaining"; lightning-record-picker for Contact; Enrol button (disabled until chosen) -> imperative EnrolmentController.createEnrolment status 'Confirmed'; success: ShowToastEvent + dispatch 'enrolled' + NavigationMixin to the record; error: error.body.message in a toast, never a stack trace; spinner while working.
- 3) enrolmentConsole: wrapper grid - cohortExplorer (2/3) with oncohortselected setting selectedCohort; enrolmentPanel (1/3) with cohort={selectedCohort} and onenrolled calling the explorer's refresh().

P4 – Core flows

What this prompt does: builds the three declarative automations — confirmation actions, the Quick Enrol wizard and the scheduled reminder — as deployable flow metadata. **When it worked:** confirming an enrolment sends the email + task, and filling the last seat flips the cohort to Full by itself.

Same project. Create three flows as flow-meta.xml files (API 62.0, status Active) and deploy. If any element is easier in Flow Builder, generate the closest valid metadata and tell me what to verify there.

- 1) Enrolment_Confirmed_Actions - record-triggered on Enrolment__c, create-or-update, entry Status__c='Confirmed', only when updated to meet the condition, after-save: Get_Cohort (first Cohort__c where Id = \$Record.Cohort__c); Send Email to \$Record.Student__r.Email, subject via a Text Template resource "Your place is confirmed - {!\$Record.Cohort__r.Cohort_Label__c}"; Create Task with Subject via a SEPARATE Text Template resource "Send welcome pack to {!\$Record.Student__r.FirstName} {!\$Record.Student__r.LastName}" - use FirstName/LastName, NOT Student__r.Name (Contact.Name is a compound field and silently renders blank when merged through a relationship - this is a real bug we hit and fixed), WhatId=\$Record.Id, OwnerId=\$Record.OwnerId, due today, High; Decision Seats_Remaining <= 0 -> Update cohort Status__c='Full'.
- 2) Quick_Enrol_Student - screen flow: course picklist choice set (active courses); get open cohorts of the choice sorted by start date; cohort radio choice (label + seats in help text); Contact lookup; Apex action Find Available Cohorts re-checking seats; Decision; Create Enrolment__c (Status 'Confirmed'); success screen with the enrolment Name; "just filled up" screen otherwise; every Get/Create has a Fault connector to an error screen showing \$Flow.FaultMessage.
- 3) Cohort_Start_Reminder - schedule-triggered daily 07:00 on Enrolment__c where Status__c='Confirmed' and Cohort__r.Start_Date__c = today + 3 (formula); reminder email + Task. After deploying, confirm all three show State = Active.

P5 – Core permission set, App Page and validation

What this prompt does: packages the core for delivery — the staff permission set (NFR-05: never edit profiles), the Enrolment Console FlexiPage and the Tab that makes it findable, and a validate-only deploy proving everything

ships. **When it worked:** searching `Enrolment Console` in the App Launcher returns it under *Items*, and the dry-run deploy passes with tests.

THE STEP ALMOST EVERYONE MISSES

Activating an App Page does not create a Tab. They are two separate things. An App Page with no Tab pointing at it exists in the org but has no address the App Launcher can search for — like a room with no door. This prompt builds the door as step 2 below; do not skip it.

Same project. Finish the core delivery layer:

- 1) Permission set `Enrolment_Console_User` (label "Enrolment Console User"): Read/Create/Edit on `Course__c`, `Cohort__c`, `Enrolment__c`; Read on `Contact`; field permissions on all custom fields (formulas and roll-ups read-only); Apex class access `CohortController`, `EnrolmentController`, `CohortAvailabilityService`, `EnrolmentStatusService`; flow access `Quick_Enrol_Student`; tab visibility `Courses/Cohorts/Enrolments/Enrolment_Console` (all four – see step 2). Deploy and assign it to the current user with `sf org assign permset -n Enrolment_Console_User`
- 2) FlexiPage `Enrolment_Console` ("Enrolment Console"), App Page, two regions, containing the `enrolmentConsole` LWC. THEN create `force-app/main/default/tabs/Enrolment_Console.tab-meta.xml` – a `CustomTab` with `<flexiPage>Enrolment_Console</flexiPage>` and a `<motif>` icon – this is what actually makes the page appear in the App Launcher. Deploy both together and tell me how to activate the page and pin it to an app's navigation bar (optional – the Tab alone is enough for App Launcher search).
- 3) Verify: run all local tests with coverage; then a validate-only deploy:
`sf project deploy start --source-dir force-app --dry-run -l RunLocalTests`
- 4) Print the manual steps metadata cannot do: activate the app page; Setup -> Deliverability = All Email.

P6 — Extension data layer (objects, platform event, custom metadata, named credential)

What this prompt does: creates everything the Extension Pack stores or configures: the Error Log object + its publish-immediately platform event, the Invoice object with the frozen-rate design, both Custom Metadata Types with their records, the payment Named Credential, and the two new tabs. **When it worked:** a hand-made invoice shows Amount (Invoice Currency) computing itself, and marking it Paid without a reference is blocked.

Same project, core deployed. Create and deploy the Extension Pack data layer. Exact API names.

- 1) Custom object `Error_Log__c`: Name = AutoNumber "ERR-{00000}", reports on. Fields: `Source_Type__c` Picklist restricted (Apex default, Trigger, Flow, Integration); `Source_Name__c` Text(255); `Error_Message__c` LongTextArea(32768,5); `Stack_Trace__c` LongTextArea(32768,10); `Record_Id__c` Text(18); `Severity__c` Picklist restricted (Info, Warning, Error default, Critical). Custom tab.
 - 2) Platform event `Error_Log_Event__e`, publish behavior PUBLISH IMMEDIATELY, fields: `Source_Type__c` Text(50); `Source_Name__c` Text(255); `Error_Message__c` LongTextArea(32768); `Stack_Trace__c` LongTextArea(32768); `Record_Id__c` Text(18); `Severity__c` Text(20).
 - 3) Custom object `Invoice__c`: Name = AutoNumber "INV-{00000}", reports + activities. Fields in order: `Enrolment__c` MasterDetail(`Enrolment__c`, related list "Invoices"); `Amount__c` Currency(12,2) required; `Currency_Code__c` Picklist restricted (GBP default, USD, EUR); `Exchange_Rate__c` Number(12,6) default 1; `Amount_In_Currency__c` Formula Number(2dp) = `Amount__c * Exchange_Rate__c` (blanks as zero); `Status__c` Picklist restricted (Draft default, Sent, Paid, Cancelled); `Due_Date__c` Date; `Paid_Date__c` Date; `Payment_Reference__c` Text(100). Custom tab. Validation rule `Paid_Requires_Reference`:
`AND(ISPICKVAL(Status__c, "Paid"), ISBLANK(Payment_Reference__c))`
message "An invoice cannot be marked Paid without the gateway payment reference."
 - 4) Custom Metadata Type `Exchange_Rate__mdt` with `Rate_From_GBP__c` Number(12,6) required and `Symbol__c` Text(5); records GBP=1.0/£, USD=1.27/\$, EUR=1.17/€.
 - 5) Custom Metadata Type `Integration_Setting__mdt` with `Implementation_Class__c` Text(255) required; record `Payment_Gateway` = "PaymentGatewayStub".
 - 6) Legacy Named Credential `Payment_Gateway`: label "Payment Gateway",
URL `https://api.payments.example.com`, Anonymous, No Authentication.
- Deploy and list the files. No Apex yet.

P7 — Custom Labels and French translations

What this prompt does: creates every piece of user-facing text as labels (P8's certificate and P10's portal import them **by name**) plus the French translation file. Runs before the extension Apex so everything referencing a label compiles first time. **When it worked:** the labels list in Setup shows all thirteen, and the translation deploy succeeds after French is enabled.

```
Same project. Create labels/CustomLabels.labels-meta.xml with these labels (category CareerLaunch, language en_US, protected false) - names EXACT:
Certificate_Title="Certificate of Completion" · Certificate_Awarded_To="This certificate is proudly awarded to" · Certificate_Completion_Text="for successfully completing" · Certificate_Issued_On="Issued on" · Portal_My_Enrolments="My Enrolments" · Portal_My_Invoices="My Invoices" · Portal_My_Profile="My Profile" · Portal_Pay_Now="Pay now" · Portal_No_Records="Nothing to show here yet." · Portal_Payment_Success="Payment received - thank you!" · Portal_Download_Certificate="Download certificate" · Portal_Log_Out="Log out" · Portal_Log_In="Log in"
```

```
Also create translations/fr.translation-meta.xml with the French:
Certificat de réussite · Ce certificat est fièrement décerné à · pour avoir terminé avec succès · Délivré le · Mes inscriptions · Mes factures · Mon profil · Payer maintenant · Rien à afficher pour le moment. · Paiement reçu - merci ! · Télécharger le certificat · Se déconnecter · Se connecter
```

```
Deploy the labels first. Then REMIND ME to enable French (Setup -> Translation Language Settings) before deploying the translation file - deploying translations for a disabled language fails.
```

P8 — Extension Apex, triggers and the certificate page

What this prompt does: writes the whole extension code layer: the rollback-proof error logger and its event trigger, the currency service, the complete payment stack behind the interface/factory seam, invoicing, the certificate controller + PDF page + queueable (which also **emails the PDF to the student**), the paid-invoice portal-access provisioner, the one-line trigger-handler edit, and the extension test classes. **When it worked:** the full test run is green and confirming an enrolment raises exactly one invoice.

```
Same project; P6 and P7 deployed. Create per the CareerLaunch Complete Build Guide, deploy, then run ALL tests and show the summary. Every service that can fail must log via ErrorLogger.
```

```
Error logging: class ErrorLogger (without sharing; overloads log(e, source[, recordId]) and log(type, source, msg, stack, recordId, severity); @InvocableMethod "Log Flow Error" (flowName/errorMessage/recordId); every path publishes Error_Log_Event__e via EventBus, never insert) + trigger ErrorLogEventTrigger on Error_Log_Event__e after insert copying events into Error_Log__c.
```

```
Currency: class CurrencyService over Exchange_Rate__mdt.getInstance (no SOQL): getRate, getSymbol, convertFromGBP (2dp half-up), format; UnknownCurrencyException.
```

```
Payments (in order): PaymentRequest (DT0: invoiceId, invoiceNumber, amount, currencyCode, studentEmail, idempotencyKey); PaymentResult (@AuraEnabled success/transactionId/errorMessage + ok()/fail()); interface IPaymentGateway { PaymentResult charge(PaymentRequest) }; PaymentGatewayStub (amount <= 0 fails; email containing "declined" fails; else ok("STUB-"+invoiceNumber+"-"+currency)); PaymentGatewayFactory (reads Integration_Setting__mdt Payment_Gateway, Type.forName, interface check, @TestVisible gatewayOverride); PaymentGatewayHttpClient (POST callout:Payment_Gateway/v1/charges, Idempotency-Key header, 20s timeout, CalloutException -> ErrorLogger Critical + fail; wire format in private inner classes); InvoiceService (inherited sharing; createForConfirmedEnrolments: one Sent invoice per Confirmed enrolment at the course fee, due +14 days, GBP rate stamped, skip fee <= 0 and enrolments with a live non-Cancelled invoice - idempotent and bulk-safe); PaymentService (without sharing + comment why; payInvoice: load, refuse Paid/Cancelled, idempotencyKey = invoiceId+"-"+Name, callout BEFORE DML, on success mark Paid with reference + date and add the GBP amount to Amount_Paid__c).
```

```
Certificates: class CertificateController (?id= param -> enrolment with student/cohort/course); Visualforce page CertificatePdf (renderAs="pdf", A4 landscape, $Label.Certificate_* merge fields); class CertificateService (@InvocableMethod "Issue Completion Certificate"; inner IssueJob Queueable + Database.AllowsCallouts: only Certificate_Issued__c=false, render via Page.CertificatePdf getContent (Test.isRunningTest() -> placeholder blob), insert ContentVersion
```

with FirstPublishLocationId, tick the flag, AND email the student: SingleEmailMessage with setTargetObjectId(contact), congratulations body naming the course, the PDF attached as Messaging.EmailFileAttachment; whole job try/catch -> ErrorLogger).

Portal access on payment: class PortalAccessService (without sharing; @InvocableMethod "Grant Portal Access" taking invoiceId; enqueues an inner Queueable because User creation is setup DML – the mixed-DML rule: for each PAID invoice's student (must have Email + Account), if no active User exists for that ContactId, create one on profile "Customer Community User" (username = contact email with "@" replaced by "." + "@careerlaunch.portal", nickname/alias derived from the Contact id), assign permission set Student_Portal_User, System.resetPassword(id, true) outside tests; then email every student their username + the site login URL via Network.getLoginUrl; failures -> ErrorLogger).

Trigger wiring: in EnrolmentTriggerHandler.onAfterChange, after enqueueStudentSummary, add: InvoiceService.createForConfirmedEnrolments(newEnrolments);

Tests: ErrorLoggerTest (Test.getEventBus().deliver()), CurrencyServiceTest, InvoicePaymentServicesTest (auto-invoice + idempotency; stub happy/declined/double-pay; HttpCalloutMock asserting the callout: endpoint and the Idempotency-Key header; factory + override), CertificateServiceTest, PortalAccessServiceTest (provisions user + permission set on a paid invoice; never duplicates; ignores unpaid). Real assertions, 85%+ coverage.

P9 – Extension flows and automation wiring

What this prompt does: wires the extension automations: certificates on completion, portal access on payment, and error logging on every Quick Enrol fault path. **When it worked:** setting an enrolment to Completed produces the PDF + email within seconds, and paying an invoice provisions the student's login.

Same project; P8 deployed. Three flow changes, then deploy and confirm all are Active:

- 1) New record-triggered flow Issue_Certificate_On_Completion on Enrolment__c: create-or-update, entry Status__c='Completed', ONLY when updated to meet the condition, after-save; one Apex action "Issue Completion Certificate" passing enrolmentId = \$Record.Id.
- 2) New record-triggered flow Grant_Portal_Access_On_Payment on Invoice__c: same pattern with entry Status__c='Paid'; one Apex action "Grant Portal Access" passing invoiceId = \$Record.Id.
- 3) Update Quick_Enrol_Student: insert an Apex action "Log Flow Error" before the error screen (flowName = "Quick_Enrol_Student" literal, errorMessage = \$Flow.FaultMessage) and repoint every faultConnector to it; its connector continues to the error screen. New active version.

Note in your summary: record-triggered flows never act retroactively – records already in the matching state before deployment need a status nudge (away and back) to fire.

P10 – Portal code: controller, five LWCs, permission sets

What this prompt does: builds everything the student portal runs on – the contact-scoped controller (enrolments, invoices, profile, ownership-checked payment), the five portal components (branded header, enrolments with certificate download, invoices with Pay now, profile card, logout link), the read-only student permission set, and the staff permission-set update for invoices. **When it worked:** the automated tests prove a student sees only their own records and cannot pay someone else's invoice.

Same project; P8–P9 deployed. Build the portal layer and deploy:

- 1) Class StudentPortalController (without sharing WITH the explanatory comment: Enrolment__c is a master-detail child so Experience Cloud sharing sets cannot reach it; privacy = contact-scoped queries): resolveContactId() from UserInfo -> User.ContactId (@TestVisible contactIdOverride; friendly AuraHandledException when null); @AuraEnabled(cacheable=true) getMyEnrolments() (view wrappers: course, cohort label, status, start date, certificateIssued, certificateUrl = "/sfc/servlet.shepherd/document/download/" + docId found via ContentDocumentLink Title LIKE 'Certificate%'); getMyInvoices() (number, course, amountDisplay = CurrencyService symbol + Amount_In_Currency + code, status, dueDate, payable = Sent/Draft); getMyProfile() (name, email, username, account name, member-since, count of active enrolments and of certificates); @AuraEnabled payInvoice(Id): COUNT() ownership check against the caller's contact BEFORE delegating to PaymentService; PaymentStateException -> AuraHandledException.
- 2) Five LWCs (isExposed, targets lightningCommunity__Page + lightningCommunity__Default; LWR has


```

no SLDS so style custom components yourself; all text from the P7 labels):
portalHeader – branded gradient hero ("CareerLaunch", tagline) with a built-in link:
basePath+"/secur/logout.jsp" for authenticated users, basePath+"/login" for guests
(@salesforce/community/basePath, @salesforce/user/isGuest);
portalLogout – the same auth link as a small standalone button;
studentEnrolments – card listing enrolments with status badges and the certificate download
link when present;
studentInvoices – card with amount/due/status, Pay now button -> imperative payInvoice,
success toast with Portal_Payment_Success + the reference, refreshApex;
studentProfile – card showing the getMyProfile() fields in a tidy grid.
3) Permission set Student_Portal_User: READ-ONLY objects + fields on Course__c, Cohort__c,
Enrolment__c, Invoice__c; Apex class access StudentPortalController ONLY. Update
Enrolment_Console_User: Read/Create/Edit on Invoice__c, its fields, and the Invoices +
Error Logs tabs.
4) Add a test class covering getMyProfile and re-run StudentPortalControllerTest requirements:
only-own-records, pay-own-invoice, reject someone else's invoice.

```

P11 – Experience Cloud site (the clicks no prompt can do)

What this prompt does: nothing in the org by itself — it makes the assistant print the exact click checklist for the parts of Experience Cloud that are configuration, not metadata. Follow the checklist by hand. **When it worked:** a private-window login as a portal user shows the branded header, both cards and the profile.

```

Print (do not attempt to execute) a numbered click checklist for standing up the CareerLaunch
portal in this org, covering exactly:
1) Setup -> Digital Experiences -> Settings: enable Digital Experiences AND tick "Allow using
standard external profiles for self-registration, user creation, and login".
2) All Sites -> New -> Build Your Own (LWR) -> name "CareerLaunch Portal" -> Builder.
3) Delete the template placeholder content; layout: portalHeader full-width, then
studentEnrolments and studentInvoices side by side (6/6), then studentProfile full-width.
4) Publish (also activates the site).
5) Give the running admin a role (Setup -> Roles) – portal account owners must have one.
6) Experience Builder -> Administration -> Members: add profile "Customer Community User".
7) Create a test student: Contact WITH an Account and a real email you control -> Enable
Customer User -> profile Customer Community User -> username like
<something-unique>@careerlaunch.portal -> assign permission set Student_Portal_User ->
set the password from the emailed link.
8) Test in a private window: login, both cards, profile, Pay now, certificate download, Log out.
Include the two classic failure messages and their fixes: FIELD_INTEGRITY "standard external
profiles" (step 1 skipped) and "account owner must have a role" (step 5 skipped).

```

P12 – Seed demo and test data

What this prompt does: fills the org with repeatable demo data — courses, cohorts sized for the capacity demos, students (including the special `declined@` student for the failed-card demo), and optional portal logins — using an idempotent script it saves into the project. Uses placeholders, never real personal credentials. **When it worked:** the debug summary prints the counts, and re-running changes nothing.

```

Same project, everything deployed. Write scripts/apex/seed_demo.apex – an IDEMPOTENT anonymous
Apex script (safe to re-run: check-before-create on every record) that creates:
1) Courses: "Salesforce Developer – Introductory" (Introductory, 3 wks, fee 500, active) and
"Salesforce Developer – Advanced" (Advanced, 10 wks, fee 1500, active), plus "Free Taster"
(Introductory, 1 wk, fee 0, active).
2) Cohorts: on the Introductory course – capacity 3 starting today+14 (the overbooking demo) and
capacity 200 starting today+30 (the bulk demo); on the Free Taster – capacity 10 today+14.
All Online, Status Open, End Date = Start + 35.
3) An Account "Demo Students" and Contacts under it: five students with emails
student1..student5@example.com, plus one "declined.card@example.com" (the word "declined"
drives the payment stub's failure path). Bypass duplicate rules with DMLOptions.
4) NO enrolments or invoices – the automation creates those when we demo.
Then run it with: sf apex run -f scripts/apex/seed_demo.apex
and print the record counts. Finally, remind me (do not do it) that portal logins for demo
students are created automatically when their invoice is PAID, or manually via Enable Customer

```

User – and that any password I set must be typed by me in Setup, never stored in a script or prompt.

HOW TO RUN THE FULL REBUILD

Fresh org, whole system: P1 → P12, one at a time, deploying and running the matching checkpoint between each. Resist merging them into one mega-prompt — layer-by-layer surfaces errors where they happen, and reviewing twelve small diffs teaches you more than approving one huge one. The Complete Build Guide remains the source of truth: its Code Pack items are the reference implementation your generated code should match.