

Bayesian Hierarchical MPT Models

Application and Practice with TreeBUGS

Daniel W. Heck



2019-04-30

TreeBUGS: Bayesian Hierarchical MPT Modeling

- 1) The R package TreeBUGS
- 2) Basic modeling
 - Model fitting
 - Convergence
 - Plots
 - Model fit
- 3) Advanced modeling
 - Within-subject comparisons
 - Between-subject comparisons
 - Covariates
- 4) Sensitivity/robustness analysis
 - Priors
 - Predictive distributions
 - Simulation

Software for Hierarchical MPTs


- Implementation of MCMC sampling in R/C/Fortran (Klauer 2010)
- General-purpose software: WinBUGS/JAGS/Stan (Matzke et al. 2015)
- Requires re-implementation of summaries, statistics, plots

TreeBUGS: A user-friendly R package (Heck, Arnold, and Arnold 2018)

- Easy-to-use, open source, free
- Fitting and testing MPT models
 - Posterior sampling, summary statistics, and plots
 - Data generation, robustness simulations
 - Change priors, add predictors, etc.
 - Current limitation: Crossed random effects (persons + items)

Functionality of TreeBUGS

- Input: R objects or text/csv files (minimal R knowledge required)
- Priors and other details can be changed in R
- TreeBUGS translates the model to JAGS (Plummer, 2003) to draw posterior samples
- Functions for post-processing, summaries and plots

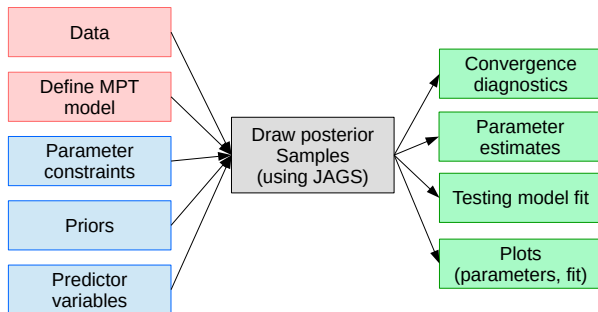

TreeBUGS Paper

Behav Res
DOI 10.3758/s13428-017-0869-7



TreeBUGS: An R package for hierarchical multinomial-processing-tree modeling

Daniel W. Heck¹ · Nina R. Arnold¹ · Denis Arnold^{2,3}

© The Author(s) 2017. This article is published with open access at Springerlink.com

Abstract Multinomial processing tree (MPT) models are a class of measurement models that account for categorical data by assuming a finite number of underlying cognitive processes. Traditionally, data are aggregated across participants and

estimates, fit statistics, and within- and between-subjects comparisons, as well as goodness-of-fit and summary plots. We also propose and implement novel statistical extensions to include continuous and discrete predictors (as either fixed or

Basic Modeling

(corresponding R script: 07-ApplicationIII-TreeBUGS.R)

MPT Model Specification

- MPT structure is defined in an EQN model file
 - Simple: copy from multiTree :-)
- Difference: the symbol # allows to add comments


Two-high threshold model (file: 2htm.eqn)

Targets

```
target hit do
target hit (1-do)*g
target miss (1-do)* (1-g)
```

Lures

```
lure cr dn
lure fa (1-dn)*g
lure cr (1-dn)*(1-g)
```



- Data: Response frequencies in wide format
 - One line per person
 - One category per column
 - Column names must be identical to the EQN categories!
- Either supplied in .csv-file or as data.frame / matrix in R

Example: 2htm.csv


```
# set working directory:  
# setwd("D:/R/MPT-workshop/")  
frequencies <- read.csv("2htm.csv")  
head(frequencies, 5)
```

```
##   cr fa hit miss  
## 1 26 24  32   18  
## 2 46  4  45    5  
## 3 36 14  38   12  
## 4 46  4  38   12  
## 5 49  1  49    1
```



Heterogeneity

- Load TreeBUGS and plot heterogeneity
- If response frequencies are homogeneous, standard (fixed-effects) MPT models are statistically more efficient

```
library("TreeBUGS")  
plotFreq(frequencies, eqnfile = "2htm.eqn")
```

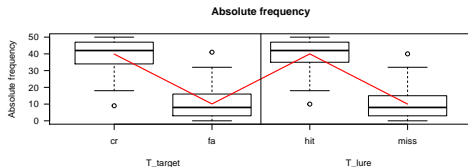

```
plotFreq(frequencies, boxplot = FALSE, eqnfile = "2htm.eqn")
```

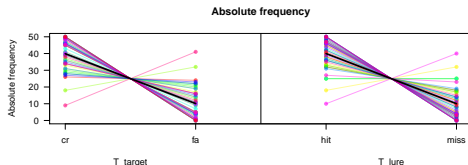

Fitting MPT Models

- Fitting an MPT model in TreeBUGS
 - Model: Text file in EQN syntax (with model equations)
 - Data: .csvfile
 - Constraints: text file with equality constraints

```
fit <- traitMPT(eqnfile = "htm.txt",  
               data = "responses.csv",  
               restrictions = "2htm_constraints.txt")  
  
# beta-MPT: different function, but identical arguments  
fit_beta <- betaMPT(eqnfile = "htm.txt",  
                   data = "responses.csv",  
                   restrictions = "2htm_constraints.txt")
```

Fitting an MPT Model in R

- Alternative: define everything directly in R
 - Model: Text string (character in apostrophes)
 - Data: Matrix or data frame
 - Constraints: A list

```
htm <- "  
target hit do  
target hit (1-do)*g  
target miss (1-do)* (1-g)  
  
lure cr dn  
lure fa (1-dn)*g  
lure cr (1-dn)*(1-g)  
"  
fit <- traitMPT(eqnfile = htm,  
               data = frequencies,  
               restrictions = list("dn=do", "g=.50"))
```

Parameter Constraints

Equality constraints

(A) use a general model file and constrain parameters:

```
fit <- traitMPT(eqnfile = htm,  
               data = frequencies,  
               restrictions = list("dn=do", "g=.50"))
```





(B) hard-coding of constraints in the EQN file:

```
htm_constr <- "  
target hit d  
target hit (1-d)*.50  
target miss (1-d)*.50  
  
lure cr d  
lure fa (1-d)*.50  
lure cr (1-d)*.50  
"  
fit <- traitMPT(eqnfile = htm_constr,  
               data = frequencies)
```

Convergence

- Convergence check
 - Posterior/ MCMC samples should look unsystematic (like a hairy caterpillar)
 - For more options, see: `?plot.traitMPT`


```
plot(fit, parameter = "mean", type = "default")
```




Convergence

■ Interpreting MCMC plots

Good convergence: 'hairy caterpillar'

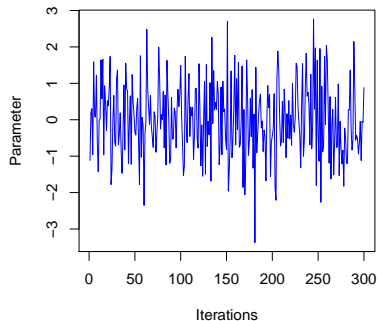


Bad convergence: slow movement

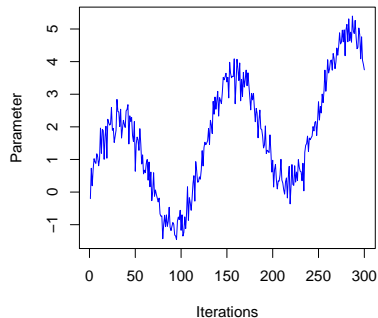


Convergence

- Gelman-Rubin statistic (\hat{R})
 - Also known as: “potential scale reduction factor” or “R hat”
 - Similar to ANOVA: Compares between-chain and within-chain variances (large differences between these variances indicate nonconvergence)
 - Statistic should be close to 1 (standard criterion: $\hat{R} < 1.05$)

Good convergence: all chains similar

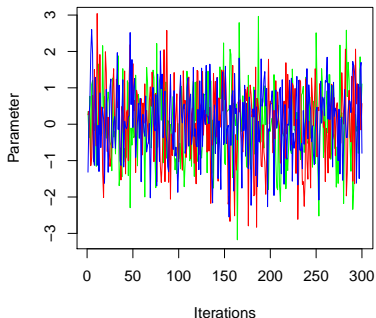

Bad convergence: chains differ

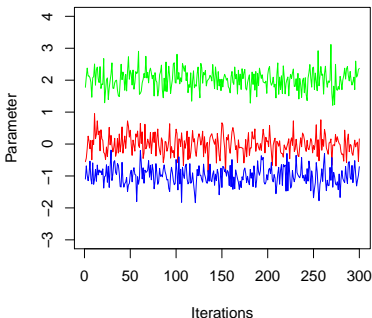

Convergence

- Gelman-Rubin statistic (\hat{R})
 - Columns Rhat and R_95% in the summary output

```
summary(fit)
```

```
## Call:
## traitMPT(eqnfile = htm, data = frequencies, restrictions = list("dn=do"),
##       ppp = 1000)
##
## Group-level medians of MPT parameters (probability scale):
##           Mean    SD  2.5%   50% 97.5% Time-series SE n.eff  Rhat R_95%
## mean_dn 0.627 0.061 0.504 0.628 0.745          0.004   239 1.018 1.053
## mean_g  0.498 0.041 0.419 0.498 0.581          0.002   449 1.021 1.073
##
## Mean/Median of latent-trait values (probit-scale) across individuals:
##           Mean    SD  2.5%   50% 97.5% Time-series SE n.eff  Rhat
## latent_mu_dn 0.328 0.163 0.011 0.325 0.658          0.011   237 1.017
## latent_mu_g  -0.005 0.104 -0.205 -0.006 0.204          0.005   450 1.021
##           R_95%
## latent_mu_dn 1.053
## latent_mu_g  1.073
##
## Standard deviation of latent-trait values (probit scale) across individuals:
##           Mean    SD  2.5%   50% 97.5% Time-series SE n.eff  Rhat
## latent_sigma_dn 1.120 0.146 0.872 1.107 1.442          0.003  2534 1.005
## latent_sigma_g  0.625 0.096 0.462 0.616 0.836          0.002  2434 1.002
##           R_95%
## latent_sigma_dn 1.019
## latent_sigma_g  1.008
```


Options for MCMC Sampling

- If the model has not converged, it must be fitted with more conservative settings:

```
fit <- traitMPT(  
  eqnfile = htm, data = frequencies,  
  restrictions = list("dn=do"),  
  
  n.adapt = 5000, # longer adaption of JAGS increases efficiency of sampling  
  n.burnin = 5000, # longer burnin avoids issues due to bad starting values  
  n.iter = 30000, # drawing more MCMC samples leads to higher precision  
  n.thin = 10,    # ommitting every 10th sample reduces memory load  
  n.chains = 4)  # more MCMC chains increase precision  
  
## MCMC sampling started at 2019-04-30 09:36:44  
## Calling 4 simulations using the parallel method...  
## Following the progress of chain 1 (the program will wait for all  
## chains to finish before continuing):  
## Welcome to JAGS 4.3.0 on Tue Apr 30 09:36:48 2019  
## JAGS is free software and comes with ABSOLUTELY NO WARRANTY  
## Loading module: basemod: ok  
## Loading module: bugs: ok  
## . Loading module: dic: ok  
## . Loading module: glm: ok  
## . . Reading data file data.txt  
## . Compiling data graph  
##  
## Resolving undeclared variables
```

Extend MCMC Sampling

- If the MCMC samples are OK but higher precision is needed:
 - Extend sampling and add new MCMC samples to the fitted JAGS object

```
fit2 <- extendMPT(fit,           # fitted MPT model
                 n.adapt = 2000, # JAGS need to restart and adapt again
                 n.burnin = 0,   # burnin not needed if previous samples are OK
                 n.iter = 10000) # how many additional iterations?
```


```
## Calling 4 simulations using the parallel method...
## Following the progress of chain 1 (the program will wait for all
## chains to finish before continuing):
## Welcome to JAGS 4.3.0 on Tue Apr 30 09:37:28 2019
## JAGS is free software and comes with ABSOLUTELY NO WARRANTY
## Loading module: basemod: ok
## Loading module: bugs: ok
## . Loading module: dic: ok
## . Loading module: glm: ok
## . . Reading data file data.txt
## . Compiling data graph
##   Resolving undeclared variables
##   Allocating nodes
##   Initializing
##   Reading data back into data table
## Compiling model graph
##   Resolving undeclared variables
##   Allocating nodes
## Graph information:
##   Observed stochastic nodes: 100
##   Unobserved stochastic nodes: 55
##   Total graph size: 1004
```

Convergence for Second Fit


- Check convergence again:

```
plot(fit2, parameter = "mean", type = "default")
```


Trace of mean[dn]




Density of mean[dn]

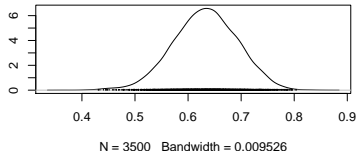

Trace of mean[g]



Density of mean[g]

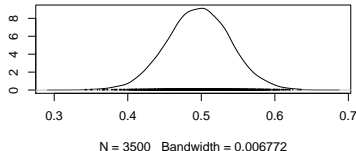

Parameter Estimates

- Summary statistics for posterior distribution:
 - Posterior mean and median (50% quantile)
 - Posterior standard deviation (SD, similar to standard error)
 - Bayesian credibility interval (2.5% and 97.5% quantiles)

```
summary(fit2)
```


```
## Call:
## [[1]]
## traitMPT(eqnfile = htm, data = frequencies, restrictions = list("dn=do"),
##   n.iter = 30000, n.adapt = 5000, n.burnin = 5000, n.thin = 10,
##   n.chains = 4)
##
## [[2]]
## extendMPT(fittedModel = fit, n.iter = 10000, n.adapt = 2000,
##   n.burnin = 0)
##
##
## Group-level medians of MPT parameters (probability scale):
##      Mean    SD  2.5%   50%  97.5% Time-series SE n.eff  Rhat R_95%
## mean_dn 0.633 0.061 0.512 0.633 0.748      0.002   675 1.002 1.004
## mean_g  0.496 0.043 0.410 0.497 0.582      0.001  1288 1.003 1.009
##
## Mean/Median of latent-trait values (probit-scale) across individuals:
##      Mean    SD  2.5%   50%  97.5% Time-series SE n.eff  Rhat
## latent_mu_dn 0.343 0.163 0.029 0.341 0.668      0.006   672 1.002
## latent_mu_g -0.010 0.110 -0.227 -0.008 0.207      0.003  1288 1.003
##
##      R_95%
## latent_mu_dn 1.005
## latent_mu_g  1.009
##
## Standard deviation of latent-trait values (probit scale) across individuals:
```

Plot Parameter Estimates

- Estimates for group-level parameters
 - Overall mean μ : Posterior mean and Bayesian credibility interval
 - Individual parameters θ_i : Posterior mean

```
plotParam(fit)
```

group-level means + 95% CI (red) and individual means

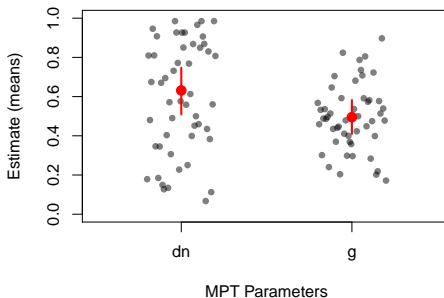


Plot Parameter Estimates

- Plot parameter profiles
 - E.g., assess test-retest reliability of a parameter (Michalkiewicz & Erdfelder, 2016)
- For more options, see: `?plotParam`

```
plotParam(fit, addLines = TRUE, select = c("dn", "g"))
```

roup-level means + 95% CI (red) and individual means

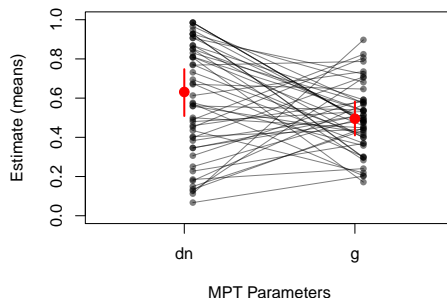



Compare Prior and Posterior

How much did we learn about the parameters?

- Graphical assessment: Plot prior (blue) and posterior (black) densities

```
plotPriorPost(fit)
```

```
## Press <Enter> to show the next plot.
```

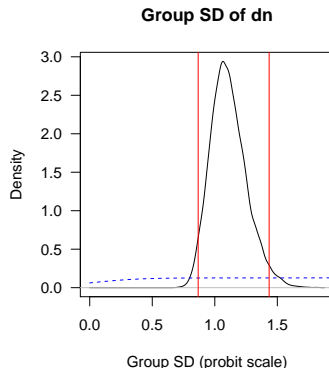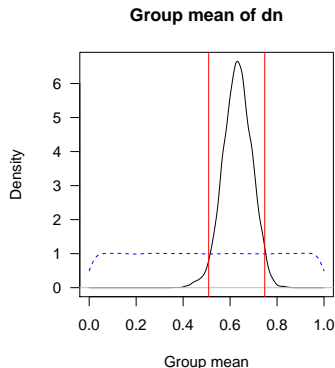


Group-Level Distribution

Distribution of individual estimates

- Histogram: Distribution of θ estimates (posterior mean per person)
- Red density: Estimated group-level distribution

```
plotDistribution(fit)  # graphical test
```

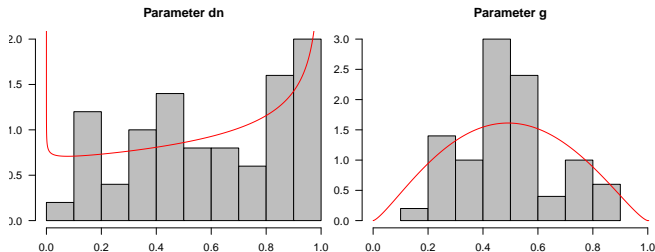

Model Fit: Predicted vs. Observed Data


Graphical test of model fit

- Plot means of observed frequencies
- Compare against posterior-predicted frequencies (boxplots)

```
colMeans(frequencies)  # observed group means that are tested
```

```
##      cr      fa    hit  miss  
## 39.90 10.10 39.98 10.02
```

```
plotFit(fit)           # graphical test
```

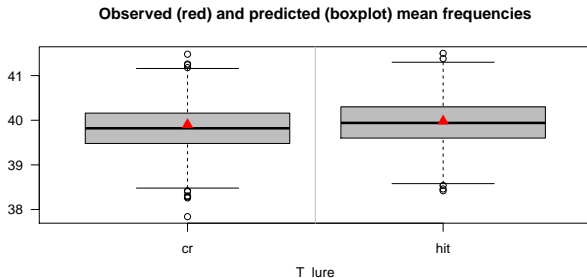


Model Fit: Predicted vs. Observed Data

■ Model fit for *covariance* of observed frequencies

```
cov(frequencies)           # observed covariance matrix that is tested
```

```
##           cr          fa          hit          miss
## cr      84.29592 -84.29592  26.63061 -26.63061
## fa     -84.29592  84.29592 -26.63061  26.63061
## hit     26.63061 -26.63061  83.32612 -83.32612
## miss   -26.63061  26.63061 -83.32612  83.32612
```

```
plotFit(fit, stat = "cov") # graphical test
```

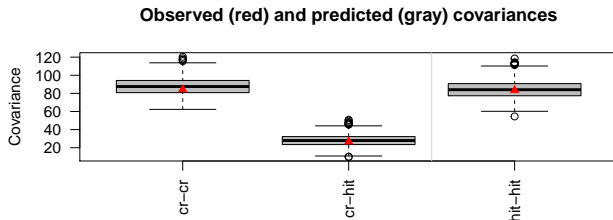

Model Fit: Predicted vs. Observed Data

Testing model fit

- The statistics T1 and T2 quantify the discrepancy between observed and expected means/covariances (similar to Pearson's X^2)
- Posterior predictive p-values
 - Values around .50 indicate good model fit
 - Values close to 0 (or close to 1) indicate misfit
 - In contrast to frequentist p -values, PPP values are *not* uniformly distributed when generating data from the correct model

```
PPP(fit, M = 2000, nCPU = 4)
```

```
## ## Mean structure (T1):  
## Observed = 0.03225169 ; Predicted = 0.03227619 ; p-value = 0.495  
##  
## ## Covariance structure (T2):  
## Observed = 6.777547 ; Predicted = 6.895092 ; p-value = 0.504  
##  
## ## Individual fit (T1):  
##      1      2      3      4      5      6      7      8      9     10     11     12  
## 0.509 0.524 0.517 0.518 0.567 0.543 0.497 0.552 0.461 0.516 0.492 0.537  
##     13     14     15     16     17     18     19     20     21     22     23     24  
## 0.526 0.515 0.479 0.536 0.458 0.528 0.446 0.510 0.256 0.338 0.524 0.516  
##     25     26     27     28     29     30     31     32     33     34     35     36  
## 0.516 0.324 0.534 0.330 0.514 0.520 0.410 0.482 0.495 0.502 0.464 0.490  
##     37     38     39     40     41     42     43     44     45     46     47     48  
## 0.402 0.502 0.442 0.237 0.334 0.526 0.484 0.483 0.534 0.500 0.448 0.532  
##     49     50
```

Modeling with TreeBUGS is simple

- 1 Define model and clean data
- 2 Draw MCMC samples
- 3 Check convergence
- 4 Check model fit
- 5 Interpret/plot parameters

Note that these are the usual steps in any Bayesian analysis. . .

Advanced Modeling

Within-Subject Comparisons

Assessing within-subject differences in parameters

- 1 Data: Additional columns for separate within-subject conditions
- 2 Model: Write EQN file for within-subject design
- 3 MCMC sampling (as usual)
- 4 Comparison: Compute differences of parameters (transformed parameters)

(1) Data structure for within-subject design

```
freq_within <- read.csv("2htm_within.csv")  
head(freq_within, 3)
```

##	high_cr	high_fa	high_hit	high_miss	low_cr	low_fa	low_hit	low_miss
## 1	44	6	36	14	41	9	40	10
## 2	38	12	39	11	45	5	38	12
## 3	43	7	45	5	34	16	30	20

Within-Subject Comparisons

(2) Model: Function for writing within-subject EQN files

- TreeBUGS has a function extends a standard MPT model to multiple within-subject conditions
- Essentially, model equations are copied and each parameter gets a new label (e.g., d_condition1)

```
# create EQN file for within-subject manipulations
withinSubjectEQN(htm_d,
                 labels = c("high", "low"), # factor labels
                 constant=c("g"))          # constant parameters
```

```
##      Tree  Category      Equation
## 1 high_target high_hit      d_high
## 2 high_target high_hit (1-d_high)*g
## 3 high_target high_miss (1-d_high)*(1-g)
## 4  high_lure  high_cr      d_high
## 5  high_lure  high_fa      (1-d_high)*g
## 6  high_lure  high_cr (1-d_high)*(1-g)
## 7 low_target  low_hit      d_low
## 8 low_target  low_hit      (1-d_low)*g
## 9 low_target  low_miss (1-d_low)*(1-g)
## 10 low_lure   low_cr      d_low
## 11 low_lure   low_fa      (1-d_low)*g
## 12 low_lure   low_cr      (1-d_low)*(1-g)
```

(4) Transformed parameters

- Often the interest is in the difference of a parameter across conditions
 - Example: Difference in memory strength $\Delta_d = d_{\text{high}} - d_{\text{low}}$
- Based on the MCMC samples, we can simply compute any function of interest
 - We get a new set of posterior samples that can be summarized as usual

```
# fit to all conditions:
fit_within <- traitMPT("2htm_within.eqn", "2htm_within.csv")

# compute difference in d:
diff_d <- transformedParameters(
  fit_within,
  transformedParameters = list("diff_d = d_high - d_low"),
  level = "group")
summary(diff_d)$statistics
```

```
##           Mean           SD      Naive SE Time-series SE
## 0.3212361182 0.0345022709 0.0003319983 0.0010837807
```


Comparisons in between-subject designs

- 1) Fit MPT model to each condition separately
 - Separate group-level parameters μ and Σ per group
- 2) Compute differences in group-level parameters across conditions/models

```
fit1 <- traitMPT(htm_d, "2htm.csv")
fit2 <- traitMPT(htm_d, "2htm_group2.csv")

diff_between <- betweenSubjectMPT(
  fit1, fit2,                # fitted MPT models
  par1 = "d",               # parameter to test
  stat = c("x-y", "x>y"))  # transformed parameters)

diff_between
```

	##	Mean	SD	2.5%	50%	97.5%	Time-series SE	n.eff	Rhat	R_95%
	## d.m1-d.m2	0.259	0.088	0.085	0.259	0.431	0.005	313	1.013	1.038
	## d.m1>d.m2	0.999	0.029	1.000	1.000	1.000	0.000	4967	1.227	1.264

Correlation of MPT parameters with external covariates

- New argument `covData`: A data frame or file name with values of the covariate(s)
- TreeBUGS computes the correlation of these covariates with the latent person parameters θ (probit values)

```
fit_cor <- traitMPT(htm_d, data = "2htm.csv",  
                  covData = "covariates.csv")    # data with covariate(s)
```



```
# uncertainty with respect to the MPT parameter estimates:  
round(fit_cor$summary$group$cor[, -6], 2)
```

##		Mean	SD	2.5%	50%	97.5%	n.eff	Rhat	R_95%
##	cor_d_continuous	0.35	0.04	0.28	0.36	0.43	4425	1	1
##	cor_g_continuous	0.04	0.10	-0.15	0.03	0.23	2523	1	1

Covariates: Correlations

- Note that the posterior samples of the (descriptive) correlations only reflect uncertainty with respect to the MPT parameters
- We also need to consider the number of participants (sample size)!
- Solution: Use an analytical solution or the posterior distribution of the correlation (Ly et al., 2018)

```
correlationPosterior(fit_cor)
```



```
##           2.5%   50% 97.5%  
## cor_d_continuous 0.06 0.335 0.57  
## cor_g_continuous -0.29 0.035 0.36
```

Regression of MPT parameters on covariates

- Example: Predict memory performance d as a function of age
- Statistically, this requires an regression extension to the model
- The latent probit values θ'_i are predicted by a design matrix X :

$$\theta'_i = \mu + X_i\beta + \delta_i$$

Implementation in TreeBUGS

- Requires only two new arguments to provide the data (age of persons) and the regression structure (predict parameter D_n by age)

```
fit_regression <- traitMPT(htm_d, data = "2htm.csv",  
                           covData = "covariates.csv",  
                           predStructure = list("d ; continuous"))  
  
round(fit_regression$summary$group$slope[,-6], 2)
```


##	Mean	SD	2.5%	50%	97.5%	n.eff	Rhat	R_95%
##	0.18	0.07	0.04	0.18	0.31	301.00	1.02	1.06

Bayes Factor for Covariate

Compute a Bayes factor

- H0: Slope parameter $\beta = 0$
- H1: Slope parameter $\beta \sim \text{Cauchy}(0, r)$ (with scale parameter r)
- Method: Savage-Dickey density ratio (Wagenmakers, 2010)
 - Bayes factor H1 vs. H0: prior divided by posterior density (at $\beta = 0$)
 - Only works for simple regression with 1 predictor (Heck 2019)

```
BayesFactorSlope(fit_regression,  
  parameter = "slope_d_continuous",  
  direction = ">",      # H1: positive slope parameter  
  plot = TRUE)          # plot Savage-Dickey density ratio
```

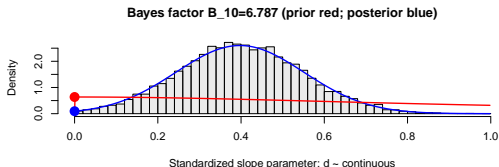

```
##                               BF_0>    BF_>0  
## slope_d_continuous 0.1473361 6.787201
```

Between-Subject Comparisons: Similar to ANOVA

Between-subject designs: Assumptions about the covariance matrix Σ

- A) Separate covariance matrix per condition: $\Sigma_1, \Sigma_2, \dots$
 - See previous slides: `betweenSubjectMPT(fit1, fit2)`
- B) Identical covariance matrix Σ across conditions
 - Similar to ANOVA: “pooled variance” (Rouder & Morey; 2012)
 - Manipulation only affects the mean parameters μ

```
# fit all between-conditions jointly:
fit_between <- traitMPT(
  htm_d, "2htm.csv",
  covData = "covariates.csv",
  predStructure = list("d ; discrete"), # discrete predictor
  predType = c("c", "f")) # "c" =continuous; "f"=fixed-effects
```

```
# get estimates for the group-specific MPT parameters
gmeans <- getGroupMeans(fit_between)
round(gmeans, 2)
```

	Mean	SD	2.5%	50%	97.5%	p(one-sided vs. overall)
## d_discrete[group_a]	0.63	0.09	0.46	0.63	0.79	0.47
## d_discrete[group_b]	0.65	0.08	0.48	0.65	0.80	0.47

Sensitivity/robustness analysis

Define different priors

- Prior distributions in the latent-trait MPT necessary for:
 - Latent (probit-) mean μ
 - Latent (probit-) covariance matrix Σ : scaled inverse Wishart with
 - Prior matrix V
 - Degrees of freedom df
 - Scaling parameter ξ
- Example: We assume that guessing probabilities are around 50%

```
fit <- traitMPT(eqnfile="htm.txt", data="responses.csv",
               restrictions=list("dn=do"),

               mu = c(dn = "dnorm(0,1)",      # default prior
                      g = "dnorm(0,5)"),      # prior focused around 50% guessing
               xi = "dunif(0,2)",             # less dispersion of MPT parameters
               V = diag(2),                   # default
               df = 2 + 1)                     # default
```



Understanding Priors

What do the priors actually mean?


- Draw samples from the prior
- Plot mean/SD of MPT parameters

```
plotPrior(prior =  
  list(mu = c(dn = "dnorm(0,1)", # default prior  
            g = "dnorm(0,5)", # prior focused around 50%  
            xi="dunif(0,2)", # smaller scale for group SD  
            V= diag(2), df = 3)) # default Wishart prior
```


Prior on group mean: mu=dnorm(0,1)




Prior on group mean: mu=dnorm(0,5)



Prior on group SD: xi=dunif(0,2)



Prior on group SD: xi=dunif(0,2)




Prior Predictive Sampling

Prior predictive distribution


- 1 Draw samples from the prior
- 2 Draw new data (response frequencies)
- 3 Assess predicted data (e.g., plots or descriptive statistics)

```
pp <- priorPredictive(prior = list(mu = "dnorm(0,1)", xi="dunif(0,10)",  
                                V=diag(2), df=2+1),  
                    eqnfile = htm, restrictions = list("dn=do"),  
                    numItems = c(target = 50, lure = 50),  
                    N = 50, M = 500)      # number of participants/samples  
  
# compute and plot predicted values for the average hit/FA rates (in ROC space)  
mean_freq <- sapply(pp, colMeans)  
par(mar=c(4,5,.1, .1))  
plot(mean_freq["fa",]/50, mean_freq["hit",]/50, asp = 1, xlim = 0:1, ylim=0:1)  
polygon(c(0,1,1), c(0,0,1), col = "gray")  
abline(0, 1)
```



Excursion: Different default priors for the scale parameter ξ

- 1 TreeBUGS (Heck et al., 2018): $\xi \sim \text{Uniform}(0, 10)$
- 2 Klauer (2010) and Matzke et al. (2015): $\xi \sim \text{Uniform}(0, 100)$

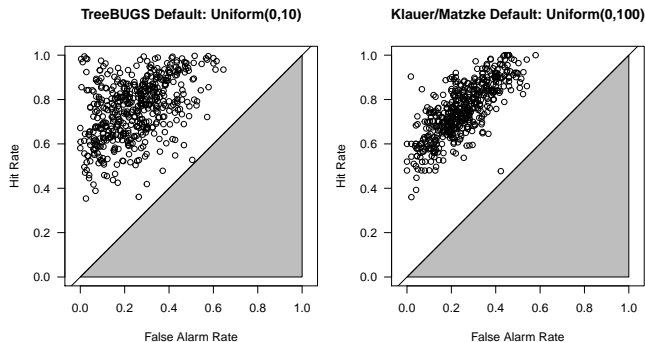


Posterior Predictive

Posterior Predictive Distribution

- What data does the fitted model predict?
- Use posterior samples of the *parameters* to draw new samples of the *data* (i.e., predicted response frequencies)
 - Note: These are the basis of posterior-predictive checks (T1 and T2 statistics)

```
postpred <- posteriorPredictive(fit, M = 100, nCPU = 4)
```



Sensitivity and robustness analysis

- Assessing the impact of priors, estimate necessary sample size for specific analysis etc.
 - 1 Generate data from (correct or wrong) model
 - 2 Fit model
 - 3 If necessary: Replicate with a for-loop

```
# standard, fixed-effects MPT (generate data for one person)
```

```
sim <- genMPT(theta = c(d = .7, g = .5),  
             numItems = c(target = 50, lure = 50),  
             eqnfile = htm_d)
```

```
# hierarchical MPT (generate a complete table of frequencies)
```

```
sim2 <- genTraitMPT(N = 100, eqnfile = htm_d,  
                   mean = c(d = .7, g = .5),  
                   sigma = c(d = .4, g = .2),  
                   rho = diag(2))
```

Appendix

Appendix: Testing for Heterogeneity

■ Test by Smith and Batchelder (2008)

A Test person heterogeneity assuming items homogeneity (χ^2)

B Test person heterogeneity under item heterogeneity (permutation bootstrap)

```
# A)  $\chi^2$  test
test <- testHetChi(freq = frequencies,
                  tree = c(cr="lure", fa="lure",
                          hit="target", miss="target"))
data.frame(test)
```

```
##      chisq df      prob
## 1 1022.09 98 1.02515e-153
```


```
# B) requires data in long format (variables: person / item / response)
# testHetPerm(data, tree, source = "person")
```

Appendix: Convergence

Autocorrelation function

- How strongly are the MCMC samples correlated between iteration t and iteration $t + \text{Lag}$?
- Ideally, these curves should rapidly decrease towards zero.



```
plot(fit, parameter = "mean", type = "acf")
```

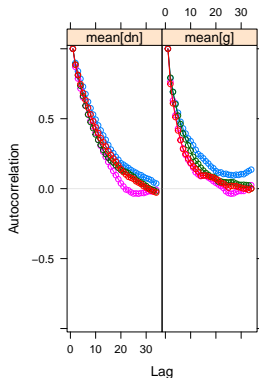

Appendix: Convergence

- Plot evolution of Gelman-Rubin statistic
 - Also known as: “potential scale reduction factor” or “R hat”
 - Similar to ANOVA: Compares between-chain and within-chain variances (large differences between these variances indicate nonconvergence)
 - Statistic should be close to 1

```
plot(fit, parameter = "mean", type = "gelman")
```

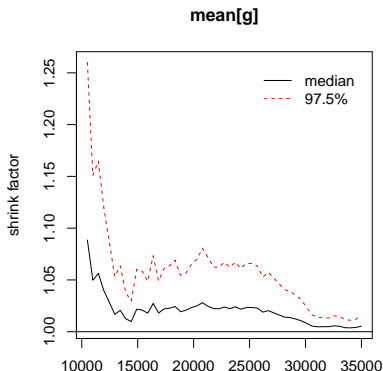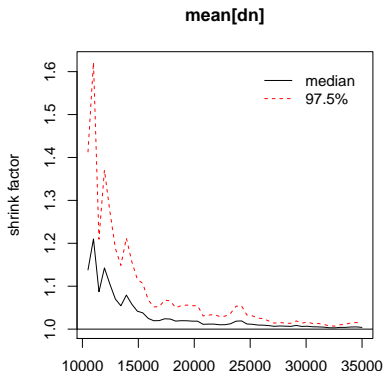

MCMC samplers available in TreeBUGS

- Fixed-effects (“standard”) MPT: Gibbs sampler in C++
- Beta-MPT: JAGS and C++
- Latent-trait with extensions: JAGS
 - Combination of random- and fixed-effects parameters
 - Continuous and categorical covariates
 - Group-level structure: Independent normal distributions

References I

- Heck, Daniel W. 2019. "A Caveat on the Savage-Dickey Density Ratio: The Case of Computing Bayes Factors for Regression Parameters." *British Journal of Mathematical and Statistical Psychology* 72: 316–33.
<https://doi.org/10.1111/bmsp.12150>.
- Heck, Daniel W, Nina R. Arnold, and Denis Arnold. 2018. "TreeBUGS: An R Package for Hierarchical Multinomial-Processing-Tree Modeling." *Behavior Research Methods* 50: 264–84. <https://doi.org/10.3758/s13428-017-0869-7>.
- Klauer, K. C. 2010. "Hierarchical Multinomial Processing Tree Models: A Latent-Trait Approach." *Psychometrika* 75: 70–98.
<https://doi.org/10.1007/s11336-009-9141-0>.
- Matzke, Dora, Conor V. Dolan, William H. Batchelder, and Eric-Jan Wagenmakers. 2015. "Bayesian Estimation of Multinomial Processing Tree Models with Heterogeneity in Participants and Items." *Psychometrika* 80: 205–35. <https://doi.org/10.1007/s11336-013-9374-9>.
- Smith, J. B., and W. H. Batchelder. 2008. "Assessing Individual Differences in Categorical Data." *Psychonomic Bulletin & Review* 15: 713–31.
<https://doi.org/10.3758/PBR.15.4.713>.