


countries	
PK	<u>country_id</u> int NOT NULL
	country_name char(50) NOT NULL

students	
PK	<u>student_id</u> int NOT NULL
	student_name char(50) NOT NULL
	surname char(50) NOT NULL
	email char(50) NOT NULL
	phone_1 char(50) NOT NULL
	phone_2 char(50) NOT NULL
	direction char(50) NOT NULL
	location char(50) NOT NULL
	city char(50) NOT NULL
	postalcode char(50) NOT NULL
FK1	country_id char(50) NOT NULL
	publicidad boolean NOT NULL
	offert_work boolean NOT NULL



teachers	
PK	<u>teacher_id</u> int NOT NULL
	teacher_name char(50) NOT NULL
	surname char(50) NOT NULL
	email char(50) NOT NULL
	phone_1 char(50) NOT NULL
	phone_2 char(50) NOT NULL
	direction char(50) NOT NULL
	location char(50) NOT NULL
	city char(50) NOT NULL
	postalcode char(50) NOT NULL
FK1	country_id char(50) NOT NULL
	nif char(15) NOT NULL
FK2	employee_id char(10) NOT NULL

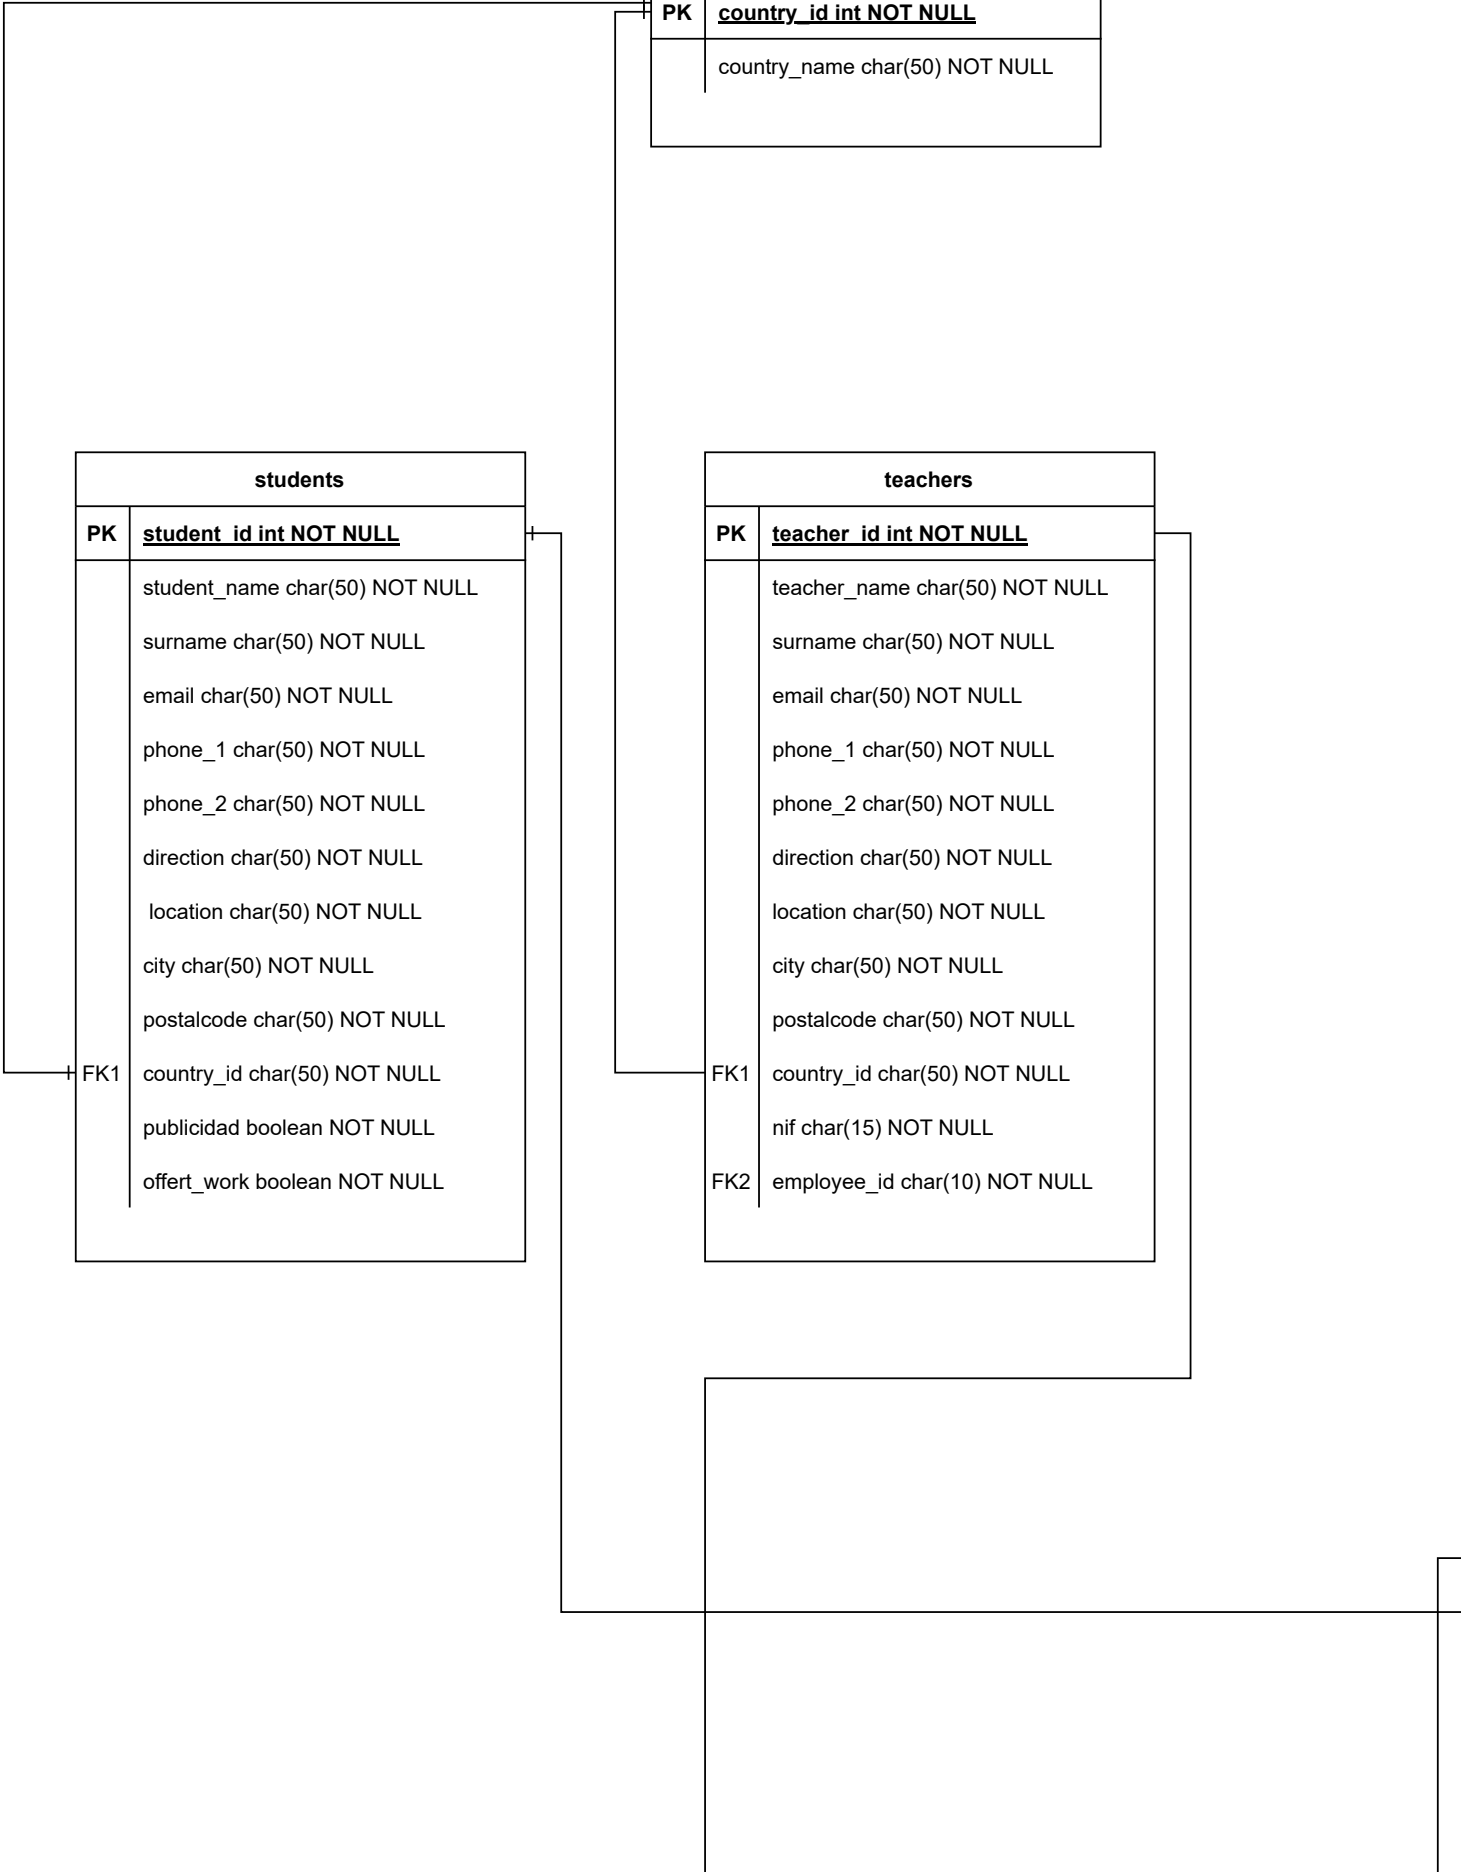

registration_courses	
PK	<u>regostration_id</u> int NOT NULL
FK1	ofert_courses_id (50) NOT NULL
FK2	student_id (50) NOT NULL
	discount numeric(5, 2) NOT NULL

courses	
PK	<u>course_id int NOT NULL</u>
	course_name char(50) NOT NULL
	duration numeric(5) NOT NULL
	type char(20) NOT NULL
	modality char(20) NOT NULL

ofert_courses	
PK	<u>ofert_courses_id int NOT NULL</u>
FK1	courser_id int NOT NULL
	start_date date NOT NULL
	end_date date NOT NULL
FK2	teacher_id char(50) NOT NULL
	ofert_courses_name char(50) NOT NULL
	price numeric(10, 2) NOT NULL



ofert_bootca	
PK	<u>ofert_bootcamp_id</u> int 1
	ofert_bootcamps_name c
	star_date char(50) NOT N
	teacher_id char(50) NOT
	modality char(50) NOT N

amps
<u>NOT NULL</u>
char(50) NOT NULL
NULL
NULL
NULL