

```
1 import numpy as np
2 import pandas as pd
3 import matplotlib.pyplot as plt
4 from sklearn import linear_model
```

```
1 df= pd.read_csv("/content/drive/MyDrive/Car Sales Price Prediction/house_price.csv")
2 df
```



	area	rooms	price	
0	2104	3	399900	
1	1600	3	329900	
2	2400	3	369000	
3	1416	2	232000	
4	3000	4	539900	
5	1985	4	299900	
6	1534	3	314900	
7	1427	3	198999	
8	1380	3	212000	
9	1494	3	242500	
10	1940	4	239999	
11	2000	3	347000	
12	1890	3	329999	
13	4478	5	699900	
14	1268	3	259900	
15	2300	4	449900	
16	1320	2	299900	
17	1236	3	199900	
18	2609	4	499998	
19	3031	4	599000	
20	1767	3	252900	
21	1888	2	255000	
22	1604	3	212000	

22 1004 3 242900

23 1962 4 259900

24 3890 3 573900

25 1100 3 249900

26 1458 3 464500

27 2526 3 469000

28 2200 3 475000

Next steps: [Generate code with df](#)

[New interactive sheet](#)

30 1839 2 349900

31 1000 1 169900

32 2040 4 314900

33 3137 3 579900

34 1811 4 285900

35 1437 3 249900

36 1239 3 229900

37 2132 4 345000

38 4215 4 549000

39 2162 4 287000

40 1664 2 368500

41 2238 3 329900

42 2567 4 314000


43 1200 3 299000

44 852 2 179900

45 1852 4 299900

```
1 plt.xlabel("price", color = "red")
2 plt.ylabel("area", color = "red")
3 plt.scatter(df.price,df.area)
```

<matplotlib.collections.PathCollection at 0x784f18341bd0>

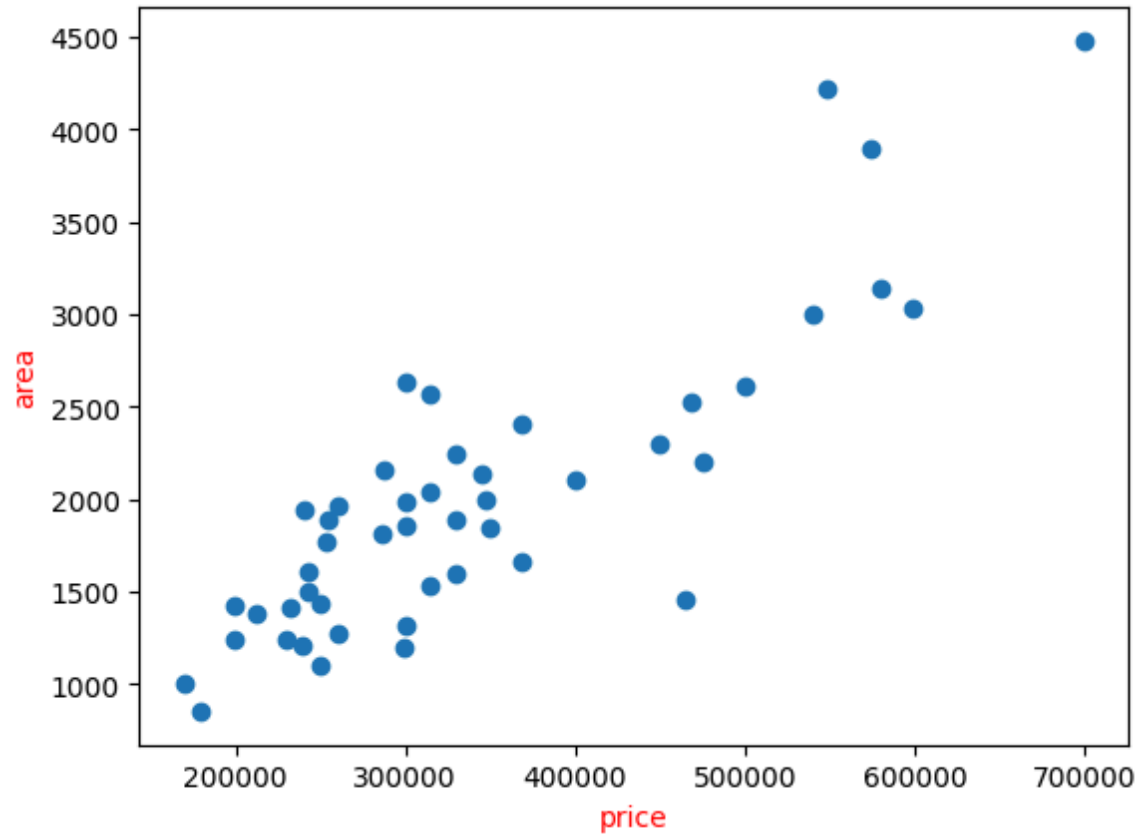

```
1 lr= linear_model.LinearRegression()
2 lr.fit(df[['area']],df.price)
```

▼ LinearRegression ⓘ ?
LinearRegression()

```
1 lr.score(df[['area']],df.price)
0.7310037839755306
```

```
1 predidicted= lr.predict(df[['area']])
2 print(predidicted)
```

```
[354311.69781212 286510.95280112 394131.18297731 261758.29986059]
```