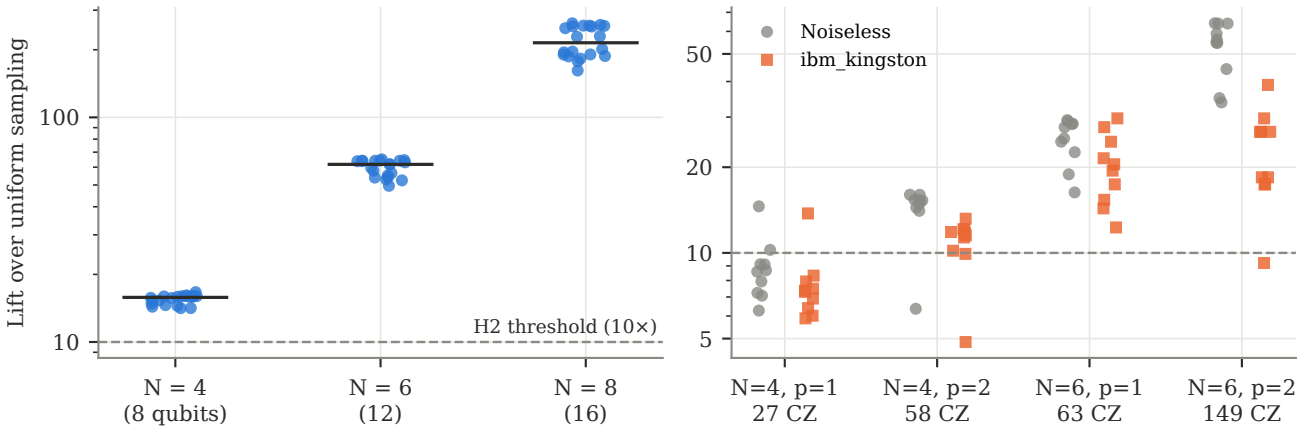
(a) Noiseless, depth 3, 20 instances per N
Lift over uniform sampling
100
10
H2 threshold (10×)
N = 4
(8 qubits)
N = 6
(12)
N = 8
(16)
(b) Hardware, 10 instances per cell
Noiseless
ibm_kingston
50
20
10
5
N=4, p=1
27 CZ
N=4, p=2
58 CZ
N=6, p=1
63 CZ
N=6, p=2
149 CZ