



NetApp Storage in Hyperscaler Clouds

NetApp Solutions

NetApp
August 05, 2022

This PDF was generated from <https://docs.netapp.com/us-en/netapp-solutions/ehc/aws/aws-guest.html> on August 05, 2022. Always check docs.netapp.com for the latest.

Table of Contents

- NetApp Storage options for Public Cloud Providers 1
 - NetApp Guest Connected Storage Options for AWS 1
 - Overview of ANF Datastore Solutions 35
 - NetApp Guest Connected Storage Options for Azure 37
 - NetApp Storage Options for GCP 58
 - Region Availability for NFS datastores on AWS / VMC, Azure / AVS, and GCP / GCVE 92

NetApp Storage options for Public Cloud Providers

Explore the options for NetApp as storage in the three major hyperscalers.

AWS / VMC

AWS supports NetApp storage in the following configurations:

- FSx ONTAP as guest connected storage
- Cloud Volumes ONTAP (CVO) as guest connected storage
- FSx ONTAP as a native datastore¹

View the detailed [guest connect storage options for VMC](#).



1 - FSxN for VMC is currently in IA (Initial Availability). Contact your NetApp sales representative for more information.

Azure / AVS

Azure supports NetApp storage in the following configurations:

- Azure NetApp Files (ANF) as guest connected storage
- Cloud Volumes ONTAP (CVO) as guest connected storage
- Azure NetApp Files (ANF) as a native datastore¹

View the detailed [guest connect storage options for AVS](#).



1 - ANF as a native datastore for AVS is currently in Public Preview. Read more about it [here](#).

GCP / GCVE

Google Cloud supports NetApp storage in the following configurations:

- Cloud Volumes ONTAP (CVO) as guest connected storage
- Cloud Volumes Service (CVS) as guest connected storage
- Cloud Volumes Service (CVS) as a native datastore¹

View the detailed [guest connect storage options for GCVE](#).

Read more about [Cloud Volumes Service \(CVS\) as a native datastore¹](#).



1 - Currently in Private Preview

NetApp Guest Connected Storage Options for AWS

AWS supports guest connected NetApp storage with the native FSx service (FSx

ONTAP) or with Cloud Volumes ONTAP (CVO).

FSx ONTAP

Amazon FSx for NetApp ONTAP is a fully managed service that provides highly reliable, scalable, high-performing, and feature-rich file storage built on NetApp's popular ONTAP file system. FSx for ONTAP combines the familiar features, performance, capabilities, and API operations of NetApp file systems with the agility, scalability, and simplicity of a fully managed AWS service.

FSx for ONTAP provides feature-rich, fast, and flexible shared file storage that's broadly accessible from Linux, Windows, and macOS compute instances running in AWS or on premises. FSx for ONTAP offers high-performance solid state drive (SSD) storage with submillisecond latencies. With FSx for ONTAP, you can achieve SSD levels of performance for your workload while paying for SSD storage for only a small fraction of your data.

Managing your data with FSx for ONTAP is easier because you can snapshot, clone, and replicate your files with the click of a button. In addition, FSx for ONTAP automatically tiers your data to lower-cost, elastic storage, lessening the need for you to provision or manage capacity.

FSx for ONTAP also provides highly available and durable storage with fully managed backups and support for cross-Region disaster recovery. To make it easier to protect and secure your data, FSx for ONTAP supports popular data security and antivirus applications.

FSx ONTAP as guest connected storage

Configure Amazon FSx for NetApp ONTAP with VMware Cloud on AWS

Amazon FSx for NetApp ONTAP file shares and LUNs can be mounted from VMs that are created within the VMware SDDC environment at VMware Cloud on AWS. The volumes can also be mounted on the Linux client and mapped on the Windows client using the NFS or SMB protocol, and LUNS can be accessed on Linux or Windows clients as block devices when mounted over iSCSI. Amazon FSx for the NetApp ONTAP file system can be set up quickly with the following steps.



Amazon FSx for NetApp ONTAP and VMware Cloud on AWS must be in the same availability zone to achieve better performance and avoid data transfer charges between availability zones.



Create and mount Amazon FSx for ONTAP volumes

To create and mount Amazon FSx for NetApp ONTAP file system, complete the following steps:

1. Open the [Amazon FSx console](#) and choose Create file system to start the file system creation wizard.
2. On the Select File System Type page, choose Amazon FSx for NetApp ONTAP, and then choose Next. The Create File System page appears.



3. In the Networking section, for Virtual Private Cloud (VPC), choose the appropriate VPC and preferred subnets along with the route table. In this case, vmcfsx2.vpc is selected from the dropdown.

Create file system

Creation method

☐ Quick create
Use recommended best-practice configurations. Most configuration options can be changed after the file system is created.

☒ Standard create
You set all of the configuration options, including specifying performance, networking, security, backups, and maintenance.

4. For the creation method, choose Standard Create. You can also choose Quick Create, but this document uses the Standard create option.

File system details

File system name - optional [Info](#)

vmcfsxval2

Maximum of 256 Unicode letters, whitespace, and numbers, plus + - = . _ : /

SSD storage capacity [Info](#)

1024

Minimum 1024 GB; Maximum 192 TB.

Provisioned SSD IOPS

Amazon FSx provides 3 IOPS per GB of storage capacity. You can also provision additional SSD IOPS as needed.

☒ Automatic (3 IOPS per GB of SSD storage)

☐ User-provisioned

Throughput capacity [Info](#)

The sustained speed at which the file server hosting your file system can serve data. The file server can also burst to higher speeds for periods of time.

512 MB/s (Recommended)

5. In the Networking section, for Virtual Private Cloud (VPC), choose the appropriate VPC and preferred subnets along with the route table. In this case, vmcfsx2.vpc is selected from the dropdown.

Network & security

Virtual Private Cloud (VPC) [Info](#)

Specify the VPC from which your file system is accessible.

vmcfsx2.vpc | vpc-0d1c764bcc495e805

VPC Security Groups [Info](#)

Specify VPC Security Groups to associate with your file system's network interface.

Choose VPC security group(s)

sg-018896ea218164ccb (default) X

Preferred subnet [Info](#)

Specify the preferred subnet for your file system.

subnet02.sn | subnet-013675849a5b99b3c (us-west-2b)

Standby subnet

subnet01.sn | subnet-0ef956cebf539f970 (us-west-2a)

VPC route tables

Specify the VPC route tables associated with your file system.

☒ VPC's default route table

☐ Select one or more VPC route tables

Endpoint IP address range

Specify the IP address range in which the endpoints to access your file system will be created.

☒ No preference

☐ Select an IP address range



In the Networking section, for Virtual Private Cloud (VPC), choose the appropriate VPC and preferred subnets along with the route table. In this case, vmcfsx2.vpc is selected from the dropdown.

6. In the Security & Encryption section, for the Encryption Key, choose the AWS Key Management Service (AWS KMS) encryption key that protects the file system's data at rest. For the File System Administrative Password, enter a secure password for the fsxadmin user.

Security & encryption

Encryption key [Info](#)
AWS Key Management Service (KMS) encryption key that protects your file system data at rest.

aws/fsx (default) ▼

Description	Account	KMS key ID
Default master key that protects my FSx resources when no other key is defined	139763910815	72745367-7bb0-499c-acc0-4f2c0a80e7c5

File system administrative password
Password for this file system's "fsxadmin" user, which you can use to access the ONTAP CLI or REST API.

☐ Don't specify a password

☒ Specify a password

Password

Confirm password

7. In virtual machine and specify the password to use with vsadmin for administering ONTAP using REST APIs or the CLI. If no password is specified, a fsxadmin user can be used for administering the SVM. In the Active Directory section, make sure to join Active Directory to the SVM for provisioning SMB shares. In the Default Storage Virtual Machine Configuration section, provide a name for the storage in this validation, SMB shares are provisioned using a self-managed Active Directory domain.

Default storage virtual machine configuration

Storage virtual machine name

vmcfsxval2svm

SVM administrative password

Password for this SVM's "vsadmin" user, which you can use to access the ONTAP CLI or REST API.

☐ Don't specify a password

☒ Specify a password

Password

••••••••

Confirm password

••••••••

Active Directory

Joining an Active Directory enables access from Windows and MacOS clients over the SMB protocol.

☒ Do not join an Active Directory

☐ Join an Active Directory

8. In the Default Volume Configuration section, specify the volume name and size. This is an NFS volume. For Storage Efficiency, choose Enabled to turn on the ONTAP storage efficiency features (compression, deduplication, and compaction) or Disabled to turn them off.

Default volume configuration

Volume name

vol1

Maximum of 203 alphanumeric characters, plus _ .

Junction path

/vol1

The location within your file system where your volume will be mounted.

Volume size

1024

Minimum 20 MiB; Maximum 104857600 MiB

Storage efficiency

Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.

☐ Enabled (recommended)

☒ Disabled

Capacity pool tiering policy

You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.

Auto

9. Review the file system configuration shown on the Create File System page.
10. Click Create File System.

aws Services Search for services, features, marketplace products, and docs [Alt+S] nimo @ cloudheroes Oregon Support

Amazon FSx

File systems (3)

File system name	File system ID	File system type	Status	Deployment type	Storage type	Size
fsxntapcifs	fs-014c28399be9c1f9f	ONTAP	Available	Multi-AZ	SSD	1,024 GiB
vmcfsxval2	fs-040eacc5d0ac31017	ONTAP	Available	Multi-AZ	SSD	1,024 GiB
fsxntapsql	fs-0ab4b447ebd6082aa	ONTAP	Available	Multi-AZ	SSD	2,048 GiB

Network & security Administration **Storage virtual machines** Volumes Backups Tags

Storage virtual machines (SVMs) (2)

Find storage virtual machines

SVM name	SVM ID	Status	Creation time	Active Directory
fsxsmbtesting01	svm-075dcfbe2cfa2ece9	Created	2021-10-19 15:17:08 UTC +01:00	FSXTESTING.LOCAL
vmcfsxval2svm	svm-095db076341561212	Created	2021-10-15 15:16:54 UTC +01:00	-

FSx > Storage virtual machines > svm-075dcfbe2cfa2ece9

fsxsmbtesting01 (svm-075dcfbe2cfa2ece9) Delete Update

Summary

SVM ID svm-075dcfbe2cfa2ece9	Creation time 2021-10-19T15:17:08+01:00	Active Directory FSXTESTING.LOCAL
SVM name fsxsmbtesting01	Lifecycle state Created	Net BIOS name FSXSMBTESTING01
UUID 4a50e659-30e7-11ec-ac4f-f3ad92a6a735	Subtype DEFAULT	Fully qualified domain name FSXTESTING.LOCAL
File system ID fs-040eacc5d0ac31017		Service account username administrator
		Organizational unit distinguished name CN=Computers

For more detailed information, see [Getting started with Amazon FSx for NetApp ONTAP](#).

After the file system is created as above, create the volume with the required size and protocol.

1. Open the [Amazon FSx console](#).
2. In the left navigation pane, choose File systems, and then choose the ONTAP file system that you want to create a volume for.
3. Select the Volumes tab.

4. Select the Create Volume tab.
5. The Create Volume dialog box appears.

For demo purposes, an NFS volume is created in this section that can be easily mounted on VMs running on VMware cloud on AWS. nfsdemo01 is created as depicted below:

Create volume [X]

File system
fs-040eacc5d0ac31017 | vmcfsxval2 ▼

Storage virtual machine
svm-095db076341561212 | vmcfsxval2svm ▼

Volume name
nfsdemo01

Maximum of 205 alphanumeric characters, plus _ and -.

Junction path
/nfsdemo01

The location within your file system where your volume will be mounted.

Volume size
1024 [MiB]

Minimum 20 MiB; Maximum 104857600 MiB

Storage efficiency
Select whether you would like to enable ONTAP storage efficiencies on your volume: deduplication, compression, and compaction.
☐ Enabled (recommended)
☒ Disabled

Capacity pool tiering policy
You can optionally enable automatic tiering of your data to lower-cost capacity pool storage.
Auto ▼

Cancel Confirm

Mount FSx ONTAP volume on Linux client

To mount the FSx ONTAP volume created in the previous step, from the Linux VMs within VMC on AWS SDDC, complete the following steps:

1. Connect to the designated Linux instance.
2. Open a terminal on the instance using Secure Shell (SSH) and log in with the appropriate credentials.
3. Make a directory for the volume's mount point with the following command:

```
$ sudo mkdir /fsx/nfsdemovol01
```

4. Mount the Amazon FSx for NetApp ONTAP NFS volume to the directory that is created in the previous step.

```
sudo mount -t nfs nfsvers=4.1,198.19.254.239:/nfsdemovol01 /fsx/nfsdemovol01
```

```
root@ubuntu01:/fsx/nfsdemovol01# mount -t nfs 198.19.254.239:/nfsdemovol01 /fsx/nfsdemovol01
```

5. Once executed, run the df command to validate the mount.



```
root@ubuntu01:/fsx/nfsdemovol01# df
Filesystem            1K-blocks    Used Available Use% Mounted on
tmpfs                  814396      1176    813220   1% /run
/dev/mapper/ubuntu--vg-ubuntu--lv 15412168 3666428 10943132 25% /
tmpfs                  4071960         0   4071960   0% /dev/shm
tmpfs                   5120         0     5120   0% /run/lock
tmpfs                   4096         0     4096   0% /sys/fs/cgroup
/dev/sda2              999320 254396  675312 28% /boot
tmpfs                  814392         4    814388   1% /run/user/1000
172.16.0.2:/nfsdemovol01 9961472 4241732 5719680 43% /fsx/votest/ing01/nfsdemovol01
198.19.254.239:/nfsdemovol01 996160    512   995648   1% /fsx/nfsdemovol01
root@ubuntu01:/fsx/nfsdemovol01# cd /fsx/nfsdemovol01/
root@ubuntu01:/fsx/nfsdemovol01# ls
nfsdemo11.txt
root@ubuntu01:/fsx/nfsdemovol01#
```

► https://docs.netapp.com/us-en/netapp-solutions/media/vmc_linux_vm_nfs.mp4 (video)

Attach FSx ONTAP volumes to Microsoft Windows clients

To manage and map file shares on an Amazon FSx file system, the Shared Folders GUI must be used.

1. Open the Start menu and run fsmgmt.msc using Run As Administrator. Doing this opens the Shared Folders GUI tool.
2. Click Action > All tasks and choose Connect to Another Computer.
3. For Another Computer, enter the DNS name for the storage virtual machine (SVM). For example, FSXSMBTESTING01.FSXTESTING.LOCAL is used in this example.



To find the SVM's DNS name on the Amazon FSx console, choose Storage Virtual Machines, choose SVM, and then scroll down to Endpoints to find the SMB DNS name. Click OK. The Amazon FSx file system appears in the list for the Shared Folders.

Endpoints

Management DNS name

svm-075dcfbe2cfa2ece9.fs-040eacc5d0ac31017.fsx.us-west-2.amazonaws.com

NFS DNS name

svm-075dcfbe2cfa2ece9.fs-040eacc5d0ac31017.fsx.us-west-2.amazonaws.com

SMB DNS name

FSXSMBTESTING01.FSXTESTING.LOCAL

iSCSI DNS name

iscsi.svm-075dcfbe2cfa2ece9.fs-040eacc5d0ac31017.fsx.us-west-2.amazonaws.com

Management IP address

198.19.254.9

NFS IP address

198.19.254.9

SMB IP address

198.19.254.9

iSCSI IP addresses

10.222.2.224, 10.222.1.94



4. In the Shared Folders tool, choose Shares in the left pane to see the active shares for the Amazon FSx file system.



5. Now choose a new share and complete the Create a Shared Folder wizard.





To learn more about creating and managing SMB shares on an Amazon FSx file system, see [Creating SMB Shares](#).

6. After connectivity is in place, the SMB share can be attached and used for application data. To accomplish this, Copy the share path and use the Map Network Drive option to mount the volume on the VM running on VMware Cloud on the AWS SDDC.



Connect a FSx for NetApp ONTAP LUN to a host using iSCSI

► https://docs.netapp.com/us-en/netapp-solutions/media/vmc_windows_vm_iscsi.mp4 (video)

iSCSI traffic for FSx traverses the VMware Transit Connect/AWS Transit Gateway via the routes provided in the previous section. To configure a LUN in Amazon FSx for NetApp ONTAP, follow the documentation found [here](#).

On Linux clients, make sure that the iSCSI daemon is running. After the LUNs are provisioned, refer to the detailed guidance on iSCSI configuration with Ubuntu (as an example) [here](#).

In this paper, connecting the iSCSI LUN to a Windows host is depicted:



Provision a LUN in FSx for NetApp ONTAP:

1. Access the NetApp ONTAP CLI using the management port of the FSx for the ONTAP file system.
2. Create the LUNs with the required size as indicated by the sizing output.

```
FsxId040eacc5d0ac31017::> lun create -vserver vmcfssxval2svm  
-volume nimfssxscsivol -lun nimofssxlun01 -size 5gb -ostype  
windows -space-reserve enabled
```

In this example, we created a LUN of size 5g (5368709120).

3. Create the necessary igroups to control which hosts have access to specific LUNs.

```
FsxId040eacc5d0ac31017::> igroup create -vserver vmcfssxval2svm  
-igroup winIG -protocol iscsi -ostype windows -initiator  
iqn.1991-05.com.microsoft:vmcdc01.fsxtesting.local
```

```
FsxId040eacc5d0ac31017::> igroup show
```

Vserver	Igroup	Protocol	OS	Type	Initiators
---------	--------	----------	----	------	------------

-----	-----	-----	-----		
-----	-----	-----	-----		

vmcfssxval2svm

	ubuntu01	iscsi	linux		iqn.2021-10.com.ubuntu:01:initiator01
--	----------	-------	-------	--	---------------------------------------

vmcfssxval2svm

	winIG	iscsi	windows		iqn.1991-05.com.microsoft:vmcdc01.fsxtesting.local
--	-------	-------	---------	--	--

Two entries were displayed.

4. Map the LUNs to igroups using the following command:

```
FsxId040eacc5d0ac31017::> lun map -vserver vmcfjsxval2svm -path
/vol/nimfsxscsivol/nimofsxln01 -igroup winIG

FsxId040eacc5d0ac31017::> lun show
```

Vserver	Path	State	Mapped	Type	Size

vmcfjsxval2svm					
	/vol/blocktest01/lun01	online	mapped	linux	5GB
vmcfjsxval2svm					
	/vol/nimfsxscsivol/nimofsxln01	online	mapped	windows	5GB

Two entries were displayed.


5. Connect the newly provisioned LUN to a Windows VM:

To connect the new LUN for a Windows host residing on VMware cloud on AWS SDDC, complete the following steps:

- RDP to the Windows VM hosted on the VMware Cloud on AWS SDDC.
- Navigate to Server Manager > Dashboard > Tools > iSCSI Initiator to open the iSCSI Initiator Properties dialog box.
- From the Discovery tab, click Discover Portal or Add Portal and then enter the IP address of the iSCSI target port.
- From the Targets tab, select the target discovered and then click Log On or Connect.
- Select Enable Multipath, and then select “Automatically Restore This Connection When the Computer Starts” or “Add This Connection to the List of Favorite Targets”. Click Advanced.




The Windows host must have an iSCSI connection to each node in the cluster. The native DSM selects the best paths to use.

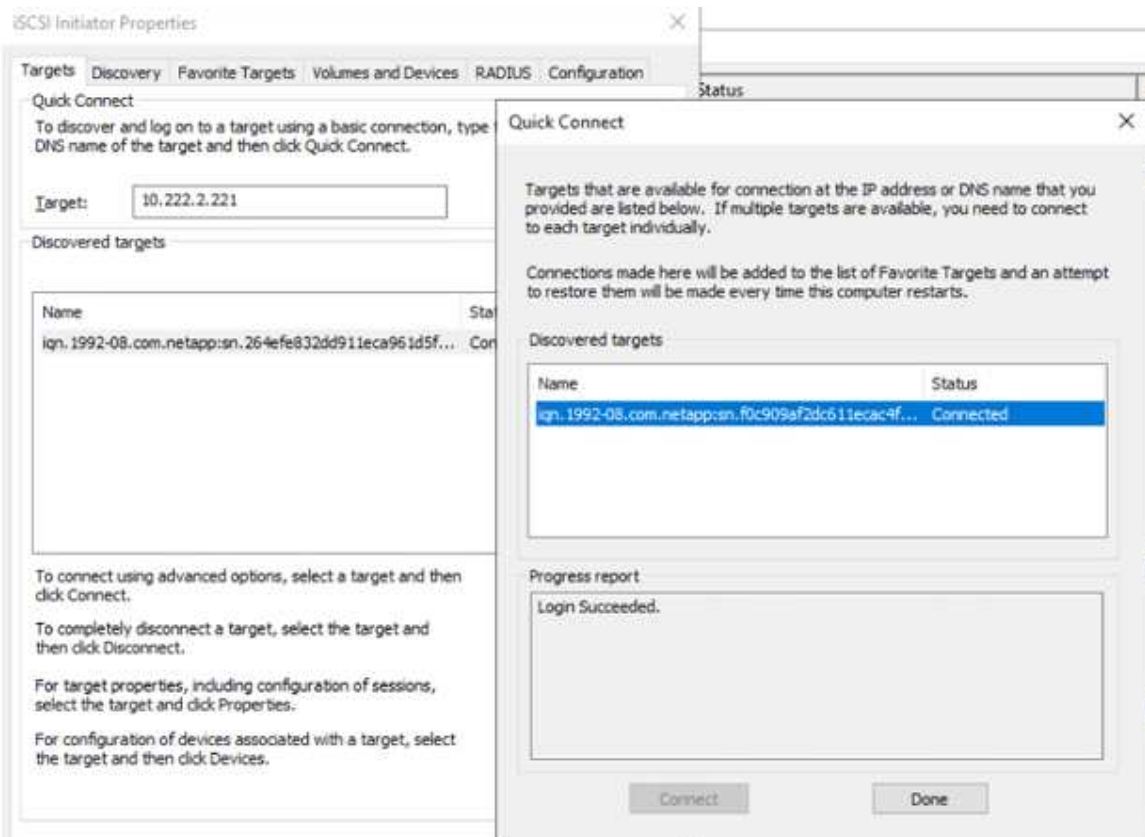

LUNs on the storage virtual machine (SVM) appear as disks to the Windows host. Any new disks that are added are not automatically discovered by the host. Trigger a manual rescan to discover the disks by completing the following steps:

1. Open the Windows Computer Management utility: Start > Administrative Tools > Computer Management.
2. Expand the Storage node in the navigation tree.
3. Click Disk Management.
4. Click Action > Rescan Disks.

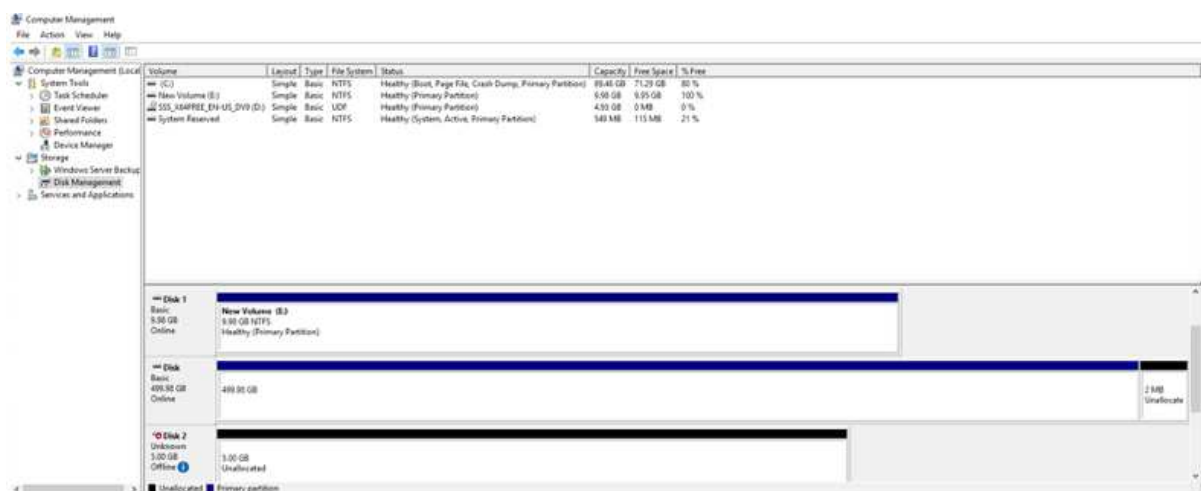

When a new LUN is first accessed by the Windows host, it has no partition or file system. Initialize the LUN and, optionally, format the LUN with a file system by completing the following steps:

1. Start Windows Disk Management.
2. Right-click the LUN, and then select the required disk or partition type.
3. Follow the instructions in the wizard. In this example, drive F: is mounted.

Cloud Volumes ONTAP (CVO)

It is a software-defined version of ONTAP that consumes cloud-native storage, allowing you to have the same storage software in the cloud and on-premises, reducing the need to retrain you IT staff in all-new methods to manage your data.

By design, CVO delivers extreme performance and advanced data management capabilities to satisfy even your most demanding applications in the cloud



Deploy new Cloud Volumes ONTAP instance in AWS (do it yourself)

Cloud Volumes ONTAP shares and LUNs can be mounted from VMs that are created in the VMware Cloud on AWS SDDC environment. The volumes can also be mounted on native AWS VM Linux Windows clients, and LUNS can be accessed on Linux or Windows clients as block devices when mounted over iSCSI because Cloud Volumes ONTAP supports iSCSI, SMB, and NFS protocols. Cloud Volumes ONTAP volumes can be set up in a few simple steps.

To replicate volumes from an on-premises environment to the cloud for disaster recovery or migration purposes, establish network connectivity to AWS, either using a site-to-site VPN or DirectConnect. Replicating data from on-premises to Cloud Volumes ONTAP is outside the scope of this document. To replicate data between on-premises and Cloud Volumes ONTAP systems, see [Setting up data replication between systems](#).



Use the [Cloud Volumes ONTAP sizer](#) to accurately size the Cloud Volumes ONTAP instances. Also, monitor on-premises performance to use as inputs in the Cloud Volumes ONTAP sizer.

1. Log into NetApp Cloud Central; the Fabric View screen is displayed. Locate the Cloud Volumes ONTAP tab and select Go to Cloud Manager. After you are logged in, the Canvas screen is displayed.



2. On the Cloud Manager home page, click Add a Working Environment and then select AWS as the cloud and the type of the system configuration.



3. Provide the details of the environment to be created including the environment name and admin credentials. Click Continue.

Create a New Working Environment Details and Credentials

↑ Previous Step

Instance Profile	139763910815	netapp.com-cloud-volumes-...	Edit Credentials
Credential Name	Account ID	Marketplace Subscription	

Details

Working Environment Name (Cluster Name)

[Add Tags](#) Optional Field | Up to four tags

Credentials

User Name


Password


Confirm Password


[Continue](#)

- Select the add-on services for Cloud Volumes ONTAP deployment, including Cloud Data Sense, Cloud Backup, and Cloud Insights. Click Continue.

Create a New Working Environment Services

 Data Sense & Compliance

 Backup to Cloud

 Monitoring




[Continue](#)

- On the HA Deployment Models page, choose the Multiple Availability Zones configuration.

Create a New Working Environment HA Deployment Models




↑ Previous Step

Multiple Availability Zones

-  Provides maximum protection against AZ failures.
-  Enables selection of 3 availability zones.
-  An HA node serves data if its partner goes offline.

[Extended Info](#)

Single Availability Zone

-  Protects against failures within a single AZ.
-  Single availability zone. HA nodes are in a placement group, spread across distinct underlying hardware.
-  An HA node serves data if its partner goes offline.

[Extended Info](#)

- On the Region & VPC page, enter the network information and then click Continue.

↑ Previous Step

AWS Region: **US West | Oregon**

VPC: **vpc-0d1c764bcc495e805 - 10.222.0.0/16**

Security group: **Use a generated security group**

Node 1:

Availability Zone: **us-west-2a**

Subnet: **10.222.1.0/24**

Node 2:

Availability Zone: **us-west-2b**

Subnet: **10.222.2.0/24**

Mediator:

Availability Zone: **us-west-2c**

Subnet: **10.222.3.0/24**

Continue

7. On the Connectivity and SSH Authentication page, choose connection methods for the HA pair and the mediator.

↑ Previous Step

Nodes

SSH Authentication Method: **Password**

Mediator

Security Group: **Use a generated security group**

Key Pair Name: **nimokey**

Internet Connection Method: **Public IP address**

Continue

8. Specify the floating IP addresses and then click Continue.

↑ Previous Step

Floating IP addresses are required for cluster and SVM access and for NFS and CIFS data access. These floating IPs can migrate between HA nodes if failures occur. To access the data from outside the VPC, [you can set up an AWS transit gateway](#).

You must specify IP addresses that are outside of the CIDR blocks for all VPCs in the selected AWS region.

Floating IP address for cluster management: **172.16.0.1**

Floating IP address 1 for NFS and CIFS data: **172.16.0.2**

Floating IP address 2 for NFS and CIFS data: **172.16.0.3**

Floating IP address for SVM management (Optional): **172.16.0.4**

Continue

9. Select the appropriate route tables to include routes to the floating IP addresses and then click Continue.

[Create a New Working Environment](#)[Route Tables](#)

[↑ Previous Step](#)

Select the route tables that should include routes to the floating IP addresses. This enables client access to the Cloud Volumes ONTAP HA pair. If you leave a route table unselected, clients that are associated with the route table cannot access the HA pair.

Additional information ⓘ

Name	Main	ID	Associate with Subnet	Tags
<input checked="" type="checkbox"/>	Yes	rtb-00b2d30c3f68fdbdd	0 Subnets	1 Tags

1 Route Tables | The main route table is the default for the VPC

[Continue](#)

10. On the Data Encryption page, choose AWS-managed encryption.

[Create a New Working Environment](#)[Data Encryption](#)

[↑ Previous Step](#)

 **AWS Managed Encryption**

AWS is responsible for data encryption and decryption operations. Key management is handled by AWS key management services.

Default Master Key: **aws/ebs** [Change Key](#)

[Continue](#)

11. Select the license option: Pay-As-You-Go or BYOL for using an existing license. In this example, the Pay-As-You-Go option is used.

Create a New Working EnvironmentCloud Volumes ONTAP Charging Methods & NSS Account

Cloud Volumes ONTAP Charging Methods

[Learn more about our charging methods](#)

☒ Pay-As-You-Go by the hour

☐ Bring your own license

NetApp Support Site Account *(Optional)*

[Learn more about NetApp Support Site \(NSS\) accounts](#)

To register this Cloud Volumes ONTAP to support, you should add NetApp Support Site Account.

Don't have a NetApp Support Site account? Select go to finish deploying this system. After it's created, use the [Support Registration option](#) to create an NSS account.

Continue

12. Select between several preconfigured packages available based on the type of workload to be deployed on the VMs running on the VMware cloud on AWS SDDC.

Create a New Working Environment

Preconfigured Packages

×

Select a preconfigured Cloud Volumes ONTAP system that best matches your needs, or create your own configuration. Preconfigured settings can be modified at a later time.

Change Configuration



POC and small workloads
Up to 500GB of storage



Database and application data
production workloads



Cost effective DR
Up to 500GB of storage



Highest performance production
workloads

Continue

13. On the Review & Approve page, review and confirm the selections. To create the Cloud Volumes ONTAP instance, click Go.

Create a New Working Environment

Review & Approve

↑ Previous Step

tsxcvotesting

Show API request

aws

us-west-2

HA

This Cloud Volumes ONTAP instance will be registered with NetApp support under the NSS Account **mchad**.

☒ I understand that Cloud Manager will allocate the appropriate AWS resources to comply with my above requirements. [More information >](#)

Overview

Networking

Storage

Storage System:

Cloud Volumes ONTAP HA

HA Deployment Model:

Multiple Availability Zones

License Type:

Cloud Volumes ONTAP Explore

Encryption:

AWS Managed

Capacity Limit:

2TB

Customer Master Key:

aws/ebs

Go

14. After Cloud Volumes ONTAP is provisioned, it is listed in the working environments on the Canvas page.

Canvas

Go to Tabular View

Add Working Environment



fsxcvotesting01 On

DETAILS

Cloud Volumes ONTAP® | AWS | HA

SERVICES

Replication
OFF

Backup & Restore
Loading...



Additional configurations for SMB volumes

1. After the working environment is ready, make sure the CIFS server is configured with the appropriate DNS and Active Directory configuration parameters. This step is required before you can create the SMB volume.

The screenshot shows the AWS Management Console interface for the instance 'fsxcvotesting01' (Multiple AZs). The 'Volumes' tab is selected. Below the navigation bar, there's a 'Create a CIFS server' button and a '+ Advanced' link. The configuration form includes fields for 'DNS Primary IP Address' (192.168.1.3), 'DNS Secondary IP Address (Optional)' (Example: 127.0.0.1), 'Active Directory Domain to join' (foctesting.local), and 'Credentials authorized to join the domain' (Username and Password fields). 'Save' and 'Cancel' buttons are at the bottom.

2. Select the CVO instance to create the volume and click the Create Volume option. Choose the appropriate size and cloud manager chooses the containing aggregate or use advanced allocation mechanism to place on a specific aggregate. For this demo, SMB is selected as the protocol.

The screenshot shows the 'Volume Details, Protection & Protocol' configuration page. The 'Details & Protection' section has fields for 'Volume Name' (smbdemovol01), 'Size (GB)' (100), and 'Snapshot Policy' (default). The 'Protocol' section has tabs for 'NFS', 'CIFS' (selected), and 'iSCSI'. Under 'CIFS', there are fields for 'Share name' (smbdemovol01_share), 'Permissions' (Full Control), and 'Users / Groups' (Everyone;). A 'Continue' button is at the bottom.

3. After the volume is provisioned, it is available under the Volumes pane. Because a CIFS share is provisioned, you should give your users or groups permission to the files and folders and verify that those users can access the share and create a file.

smbdemov01 ONLINE

INFO		CAPACITY	
Disk Type	GP2	10 GB Allocated	1.67 MB EBS Used
Tiering Policy	None		
Backup	OFF		

- After the volume is created, use the mount command to connect to the share from the VM running on the VMware Cloud in AWS SDDC hosts.
- Copy the following path and use the Map Network Drive option to mount the volume on the VM running on the VMware Cloud in AWS SDDC.

fsxcvotesting01 (Multiple AZs) AWS

Volumes HA Status Cost Replications

Mount Volume smbdemov01

Access from inside the VPC using Floating IP

Auto failover between nodes
The IP address automatically migrates between nodes if failures occur

Go to your machine and enter this command

```
\\172.16.0.2\smbdemov01_share
```

Copy

Access from outside the VPC using AWS Private IP

No auto failover between nodes
The IP address does not migrate between nodes if failures occur

To avoid traffic between nodes, mount the volume by using the primary node's IP address:

```
\\10.222.1.100\smbdemov01_share
```

Copy

If the primary node goes offline, mount the volume by using the HA partner's IP address:

VMware Cloud - ntap-fsx-demo x vSphere - vmcdc01 - Summary x vmcdc01 x NetApp Cloud Manager

https://vcenter.sddc-52-37-127-104.vmwarevmc.com/ui/webconsole.html?vmid=vm-1005&vmName=vmcdc01

Getting Started EC2 Management Con... New Tab

vmcdc01 Enforce US Keyboard Layout View Fullscreen Send Ctrl+Alt+Delete

Server Manager • Dashboard

WELCOME TO SERVER M

QUICK LINKS

AD DS

ROLES AND SERVER GRO

AD DS

Manageability

Events

Services

Performance

BPA results

File Explorer: smbdemov01_share (\\172.16.0.2)

Home

Desktop

Documents

Pictures

This PC

DVD Drive (D:) ISO_9

Network

File Explorer: smbdemov01_share (\\172.16.0.2)

Home

Share

View

Drive Tools

File

Name

Date modified

Type

Size

subdir01

subdir02

subdir03

subdir04

subdir05

subdir06

subdir07

subdir08

subdir09

subdir10

subdir11

subdir12

subdir13

subdir14

subdir15

subdir16

subdir17

subdir18

subdir19

subdir20

subdir21

subdir22

subdir23

subdir24

subdir25

subdir26

subdir27

subdir28

subdir29

subdir30

subdir31

subdir32

subdir33

subdir34

subdir35

subdir36

subdir37

subdir38

subdir39

subdir40

subdir41

subdir42

subdir43

subdir44

subdir45

subdir46

subdir47

subdir48

subdir49

subdir50

subdir51

subdir52

subdir53

subdir54

subdir55

subdir56

subdir57

subdir58

subdir59

subdir60

subdir61

subdir62

subdir63

subdir64

subdir65

subdir66

subdir67

subdir68

subdir69

subdir70

subdir71

subdir72

subdir73

subdir74

subdir75

subdir76

subdir77

subdir78

subdir79

subdir80

subdir81

subdir82

subdir83

subdir84

subdir85

subdir86

subdir87

subdir88

subdir89

subdir90

subdir91

subdir92

subdir93

subdir94

subdir95

subdir96

subdir97

subdir98

subdir99

subdir100

subdir101

subdir102

subdir103

subdir104

subdir105

subdir106

subdir107

subdir108

subdir109

subdir110

subdir111

subdir112

subdir113

subdir114

subdir115

subdir116

subdir117

subdir118

subdir119

subdir120

subdir121

subdir122

subdir123

subdir124

subdir125

subdir126

subdir127

subdir128

subdir129

subdir130

subdir131

subdir132

subdir133

subdir134

subdir135

subdir136

subdir137

subdir138

subdir139

subdir140

subdir141

subdir142

subdir143

subdir144

subdir145

subdir146

subdir147

subdir148

subdir149

subdir150

subdir151

subdir152

subdir153

subdir154

subdir155

subdir156

subdir157

subdir158

subdir159

subdir160

subdir161

subdir162

subdir163

subdir164

subdir165

subdir166

subdir167

subdir168

subdir169

subdir170

subdir171

subdir172

subdir173

subdir174

subdir175

subdir176

subdir177

subdir178

subdir179

subdir180

subdir181

subdir182

subdir183

subdir184

subdir185

subdir186

subdir187

subdir188

subdir189

subdir190

subdir191

subdir192

subdir193

subdir194

subdir195

subdir196

subdir197

subdir198

subdir199

subdir200

subdir201

subdir202

subdir203

subdir204

subdir205

subdir206

subdir207

subdir208

subdir209

subdir210

subdir211

subdir212

subdir213

subdir214

subdir215

subdir216

subdir217

subdir218

subdir219

subdir220

subdir221

subdir222

subdir223

subdir224

subdir225

subdir226

subdir227

subdir228

subdir229

subdir230

subdir231

subdir232

subdir233

subdir234

subdir235

subdir236

subdir237

subdir238

subdir239

subdir240

subdir241

subdir242

subdir243

subdir244

subdir245

subdir246

subdir247

subdir248

subdir249

subdir250

subdir251

subdir252

subdir253

subdir254

subdir255

subdir256

subdir257

subdir258

subdir259

subdir260

subdir261

subdir262

subdir263

subdir264

subdir265

subdir266

subdir267

subdir268

subdir269

subdir270

subdir271

subdir272

subdir273

subdir274

subdir275

subdir276

subdir277

subdir278

subdir279

subdir280

subdir281

subdir282

subdir283

subdir284

subdir285

subdir286

subdir287

subdir288

subdir289

subdir290

subdir291

subdir292

subdir293

subdir294

subdir295

subdir296

subdir297

subdir298

subdir299

subdir300

subdir301

subdir302

subdir303

subdir304

subdir305

subdir306

subdir307

subdir308

subdir309

subdir310

subdir311

subdir312

subdir313

subdir314

subdir315

subdir316

subdir317

subdir318

subdir319

subdir320

subdir321

subdir322

subdir323

subdir324

subdir325

subdir326

subdir327

subdir328

subdir329

subdir330

subdir331

subdir332

subdir333

subdir334

subdir335

subdir336

subdir337

subdir338

subdir339

subdir340

subdir341

subdir342

subdir343

subdir344

subdir345

subdir346

subdir347

subdir348

subdir349

subdir350

subdir351

subdir352

subdir353

subdir354

subdir355

subdir356

subdir357

subdir358

subdir359

subdir360

subdir361

subdir362

subdir363

subdir364

subdir365

subdir366

subdir367

subdir368

subdir369

subdir370

subdir371

subdir372

subdir373

subdir374

subdir375

subdir376

subdir377

subdir378

subdir379

subdir380

subdir381

subdir382

subdir383

subdir384

subdir385

subdir386

subdir387

subdir388

subdir389

subdir390

subdir391

subdir392

subdir393

subdir394

subdir395

subdir396

subdir397

subdir398

subdir399

subdir400

subdir401

subdir402

subdir403

subdir404

subdir405

subdir406

subdir407

subdir408

subdir409

subdir410

subdir411

subdir412

subdir413

subdir414

subdir415

subdir416

subdir417

subdir418

subdir419

subdir420

subdir421

subdir422

subdir423

subdir424

subdir425

subdir426

subdir427

subdir428

subdir429

subdir430

subdir431

subdir432

subdir433

subdir434

subdir435

subdir436

subdir437

subdir438

subdir439

subdir440

subdir441

subdir442

subdir443

subdir444

subdir445

subdir446

subdir447

subdir448

subdir449

subdir450

subdir451

subdir452

subdir453

subdir454

subdir455

subdir456

subdir457

subdir458

subdir459

subdir460

subdir461

subdir462

subdir463

subdir464

subdir465

subdir466

subdir467

subdir468

subdir469

subdir470

subdir471

subdir472

subdir473

subdir474

subdir475

subdir476

subdir477

subdir478

subdir479

subdir480

subdir481

subdir482

subdir483

subdir484

subdir485

subdir486

subdir487

subdir488

subdir489

subdir490

subdir491

subdir492

subdir493

subdir494

subdir495

subdir496

subdir497

subdir498

subdir499

subdir500

subdir501

subdir502

subdir503

subdir504

subdir505

subdir506

subdir507

subdir508

subdir509

subdir510

subdir511

subdir512

subdir513

subdir514

subdir515

subdir516

subdir517

subdir518

subdir519

subdir520

subdir521

subdir522

subdir523

subdir524

subdir525

subdir526

subdir527

subdir528

subdir529

subdir530

subdir531

subdir532

subdir533

subdir534

subdir535

subdir536

subdir537

subdir538

subdir539

subdir540

subdir541

subdir542

subdir543

subdir544

subdir545

subdir546

subdir547

subdir548

subdir549

subdir550

subdir551

subdir552

subdir553

subdir554

subdir555

subdir556

subdir557

subdir558

subdir559

subdir560

subdir561

subdir562

subdir563

subdir564

subdir565

subdir566

subdir567

subdir568

subdir569

subdir570

subdir571

subdir572

subdir573

subdir574

subdir575

subdir576

subdir577

subdir578

subdir579

subdir580

subdir581

subdir582

subdir583

subdir584

subdir585

subdir586

subdir587

subdir588

subdir589

subdir590

subdir591

subdir592

subdir593

subdir594

subdir595

subdir596

subdir597

subdir598

subdir599

subdir600

subdir601

subdir602

subdir603

subdir604

subdir605

subdir606

subdir607

subdir608

subdir609

subdir610

subdir611

subdir612

subdir613

subdir614

subdir615

subdir616

subdir617

subdir618

subdir619

subdir620

subdir621

subdir622

subdir623

subdir624

subdir625

subdir626

subdir627

subdir628

subdir629

subdir630

subdir631

subdir632

subdir633

subdir634

subdir635

subdir636

subdir637

subdir638

subdir639

subdir640

subdir641

subdir642

subdir643

subdir644

subdir645

subdir646

subdir647

subdir648

subdir649

subdir650

subdir651

subdir652

subdir653

subdir654

subdir655

subdir656

subdir657

subdir658

subdir659

subdir660

subdir661

subdir662

subdir663

subdir664

subdir665

subdir666

subdir667

subdir668

subdir669

subdir670

subdir671

subdir672

subdir673

subdir674

subdir675

subdir676

subdir677

subdir678

subdir679

subdir680

subdir681

subdir682

subdir683

subdir684

subdir685

subdir686

subdir687

subdir688

subdir689

subdir690

subdir691

subdir692

subdir693

subdir694

subdir695

subdir696

subdir697

subdir698

subdir699

subdir700

subdir701

subdir702

subdir703

subdir704

subdir705

subdir706

subdir707

subdir708

subdir709

subdir710

subdir711

subdir712

subdir713

subdir714

subdir715

subdir716

subdir717

subdir718

subdir719

subdir720

subdir721

subdir722

subdir723

subdir724

subdir725

subdir726

subdir727

subdir728

subdir729

subdir730

subdir731

subdir732

subdir733

subdir734

subdir735

subdir736

subdir737

subdir738

subdir739

subdir740

subdir741

subdir742

subdir743

subdir744

subdir745

subdir746

subdir747

subdir748

subdir749

subdir750

subdir751

subdir752

subdir753

subdir754

subdir755

subdir756

subdir757

subdir758

subdir759

subdir760

subdir761

subdir762

subdir763

subdir764

subdir765

subdir766

subdir767

subdir768

subdir769

subdir770

subdir771

subdir772

subdir773

subdir774

subdir775

subdir776

subdir777

subdir778

subdir779

subdir780

subdir781

subdir782

subdir783

subdir784

subdir785

subdir786

subdir787

subdir788

subdir789

subdir790

subdir791

subdir792

subdir793

subdir794

subdir795

subdir796

subdir797

subdir798

subdir799

subdir800

subdir801

subdir802

subdir803

subdir804

subdir805

subdir806

subdir807

subdir808

subdir809

subdir810

subdir811

subdir812

subdir813

subdir814

subdir815

subdir816

subdir817

subdir818

subdir819

subdir820

subdir821

subdir822

subdir823

subdir824

subdir825

subdir826

subdir827

subdir828

subdir829

subdir830

subdir831

subdir832

subdir833

subdir834

subdir835

subdir836

subdir837

subdir838

subdir839

subdir840

subdir841

subdir842

subdir843

subdir844

subdir845

subdir846

subdir847

subdir848

subdir849

subdir850

subdir851

subdir852

subdir853

subdir854

subdir855

subdir856

subdir857

subdir858

subdir859

subdir860

subdir861

subdir862

subdir863

subdir864

subdir865

subdir866

subdir867

subdir868

subdir869

subdir870

subdir871

subdir872

subdir873

subdir874

subdir875

subdir876

subdir877

subdir878

subdir879

subdir880

subdir881

subdir882

subdir883

subdir884

subdir885

subdir886

subdir887

subdir888

subdir889

subdir890

subdir891

subdir892

subdir893

subdir894

subdir895

subdir896

subdir897

subdir898

subdir899

subdir900

subdir901

subdir902

subdir903

subdir904

subdir905

subdir906

subdir907

subdir908

subdir909

subdir910

subdir911

subdir912

subdir913

subdir914

subdir915

subdir916

subdir917

subdir918

subdir919

subdir920

subdir921

subdir922

subdir923

subdir924

subdir925

subdir926

subdir927

subdir928

subdir929

subdir930

subdir931

subdir932

subdir933

subdir934

subdir935

subdir936

subdir937

subdir938

subdir939

subdir940

subdir941

subdir942

subdir943

subdir944

subdir945

subdir946

subdir947

subdir948

subdir949

subdir950

subdir951

subdir952

subdir953

subdir954

subdir955

subdir956

subdir957

subdir958

subdir959

subdir960

subdir961

subdir962

subdir963

subdir964

subdir965

subdir966

subdir967

subdir968

subdir969

subdir970

subdir971

subdir972

subdir973

subdir974

subdir975

subdir976

subdir977

subdir978

subdir979

subdir980

subdir981

subdir982

subdir983

subdir984

subdir985

subdir986

subdir987

subdir988

subdir989

subdir990

subdir991

subdir992

subdir993

subdir994

subdir995

subdir996

subdir997

subdir998

subdir999

subdir1000

subdir1001

subdir1002

subdir1003

subdir1004

subdir1005

subdir1006

subdir1007

subdir1008

subdir1009

subdir1010

subdir1011

subdir1012

subdir1013

subdir1014

subdir1015

subdir1016

subdir1017

subdir1018

subdir1019

subdir1020

subdir1021

subdir1022

subdir1023

subdir102

Connect the LUN to a host

To connect the Cloud Volumes ONTAP LUN to a host, complete the following steps:

1. On the Cloud Manager Canvas page, double-click the Cloud Volumes ONTAP working environment to create and manage volumes.
2. Click Add Volume > New Volume, select iSCSI, and click Create Initiator Group. Click Continue.



3. After the volume is provisioned, select the volume, and then click Target IQN. To copy the iSCSI Qualified Name (IQN), click Copy. Set up an iSCSI connection from the host to the LUN.

To accomplish the same for the host residing on the VMware Cloud on AWS SDDC, complete the following steps:

- a. RDP to the VM hosted on VMware cloud on AWS.
- b. Open the iSCSI Initiator Properties dialog box: Server Manager > Dashboard > Tools > iSCSI Initiator.
- c. From the Discovery tab, click Discover Portal or Add Portal and then enter the IP address of the

iSCSI target port.

- d. From the Targets tab, select the target discovered and then click Log On or Connect.
- e. Select Enable Multipath, and then select Automatically Restore This Connection When the Computer Starts or Add This Connection to the List of Favorite Targets. Click Advanced.



The Windows host must have an iSCSI connection to each node in the cluster. The native DSM selects the best paths to use.



LUNs from the SVM appear as disks to the Windows host. Any new disks that are added are not automatically discovered by the host. Trigger a manual rescan to discover the disks by completing the following steps:

1. Open the Windows Computer Management utility: Start > Administrative Tools > Computer Management.
2. Expand the Storage node in the navigation tree.
3. Click Disk Management.
4. Click Action > Rescan Disks.



When a new LUN is first accessed by the Windows host, it has no partition or file system. Initialize the LUN; and optionally, format the LUN with a file system by completing the following steps:

1. Start Windows Disk Management.
2. Right-click the LUN, and then select the required disk or partition type.
3. Follow the instructions in the wizard. In this example, drive F: is mounted.



On the Linux clients, ensure the iSCSI daemon is running. After the LUNs are provisioned, refer to the detailed guidance on iSCSI configuration for your Linux distribution. For example, Ubuntu iSCSI configuration can be found [here](#). To verify, run `lsblk` cmd from the shell.

Mount Cloud Volumes ONTAP NFS volume on Linux client


To mount the Cloud Volumes ONTAP (DIY) file system from VMs within VMC on AWS SDDC, complete the following steps:

1. Connect to the designated Linux instance.
2. Open a terminal on the instance using secure shell (SSH) and log in with the appropriate credentials.
3. Make a directory for the volume's mount point with the following command.

```
$ sudo mkdir /fsxcvotesting01/nfsdemov0101
```

4. Mount the Amazon FSx for NetApp ONTAP NFS volume to the directory that is created in the previous step.

```
sudo mount -t nfs nfsvers=4.1,172.16.0.2:/nfsdemov0101  
/fsxcvotesting01/nfsdemov0101
```



```
root@ubuntu01:/fsx# mount -t nfs 172.16.0.2:/nfsdemov0101 /fsxcvotesting01/nfsdemov0101_
```

Filesystem	1k-blocks	Used	Available	Use%	Mounted on
tmpfs	814096	1176	812920	1%	/run
/dev/mapper/ubuntu--vg-ubuntu--lv	15412168	3666428	11745740	24%	/
tmpfs	4071960	0	4071960	0%	/dev/shm
tmpfs	5120	0	5120	0%	/run/lock
tmpfs	4096	0	4096	0%	/sys/fs/cgroup
/dev/sda2	999320	254996	675324	26%	/boot
tmpfs	814392	4	814388	1%	/run/user/1000
172.16.0.2:/nfsdemov0101	9961472	4241792	5719680	43%	/fsxcvotesting01/nfsdemov0101
198.19.254.209:/nfsdemov0101	996160	512	995648	1%	/fsx/nfsdemov0101

Overview of ANF Datastore Solutions

Every successful organization is on a path of transformation and modernization. As part of this process, companies typically use their existing VMware investments while leveraging cloud benefits and exploring how to make migration, burst, extend, and disaster recovery processes as seamless as possible. Customers migrating to the cloud must evaluate the issues of elasticity and burst, data center exit, data center consolidation, end- of- life scenarios, mergers, acquisitions, and so on. The approach adopted by each organization can vary based on their respective business priorities. When choosing cloud-based operations, selecting a low- cost model with appropriate performance and minimal hindrance is a critical goal. Along with choosing the right

platform, storage and workflow orchestration is particularly important to unleash the power of cloud deployment and elasticity.

Use Cases

Although the Azure VMware solution delivers unique hybrid capabilities to a customer, limited native storage options have restricted its usefulness for organizations with storage-heavy workloads. Because storage is directly tied to hosts, the only way to scale storage is to add more hosts, which can increase costs by 35-40% or more for storage intensive workloads. These workloads need additional storage, not additional horsepower, but that means paying for additional hosts.

Let's consider the following scenario; a customer requires six hosts for horsepower (vCPU/vMem), but they also have a substantial requirement for storage. Based on their assessment, they require 12 hosts to meet storage requirements. This increases the overall TCO because they must buy all that additional horsepower when all they really need is more storage. This is applicable for any use case, including migration, disaster recovery, bursting, dev/test, and so on.

Another common use case for Azure VMware Solution is disaster recovery (DR). Most organizations do not have a fool-proof DR strategy, or they might struggle to justify running a ghost datacenter just for DR. Administrators might explore zero-footprint DR options with a pilot-light cluster or an on-demand cluster. They could then scale the storage without adding additional hosts, potentially an attractive option.

So, to summarize, the use cases can be classified in two ways:

- Scaling storage capacity using ANF datastores
- Using ANF datastores as a disaster recovery target for a cost-optimized recovery workflow from on-premises or within Azure regions between the software-defined datacenters (SDDCs). This guide provides insight into using Azure NetApp Files to provide optimized storage for datastores (currently in public preview) along with best-in-class data protection and DR capabilities in an Azure VMware solution, which enables you to offload storage capacity from vSAN storage.



The Azure NetApp Files datastore capability is currently in public preview. Contact NetApp or Microsoft solution architects in your region for additional information.

VMware Cloud options in Azure

Azure VMware Solution

The Azure VMware Solution (AVS) is a hybrid cloud service that provides fully functioning VMware SDDCs within a Microsoft Azure public cloud. AVS is a first-party solution fully managed and supported by Microsoft and verified by VMware that uses Azure infrastructure. Therefore, customers get VMware ESXi for compute virtualization, vSAN for hyper-converged storage, and NSX for networking and security, all while taking advantage of Microsoft Azure's global presence, class-leading data center facilities, and proximity to the rich ecosystem of native Azure services and solutions. A combination of Azure VMware Solution SDDC and Azure NetApp Files provides the best performance with minimal network latency.

Regardless of the cloud used, when a VMware SDDC is deployed, the initial cluster includes the following components:

- VMware ESXi hosts for compute virtualization with a vCenter server appliance for management.
- VMware vSAN hyper-converged storage incorporating the physical storage assets of each ESXi host.
- VMware NSX for virtual networking and security with an NSX Manager cluster for management.

Conclusion

Whether you are targeting all-cloud or hybrid cloud, Azure NetApp files provide excellent options to deploy and manage the application workloads along with file services while reducing the TCO by making the data requirements seamless to the application layer. Whatever the use case, choose Azure VMware Solution along with Azure NetApp Files for rapid realization of cloud benefits, consistent infrastructure, and operations across on-premises and multiple clouds, bi-directional portability of workloads, and enterprise-grade capacity and performance. It is the same familiar process and procedures used to connect the storage. Remember, it is just the position of the data that changed along with new names; the tools and processes all remain the same, and Azure NetApp Files helps in optimizing the overall deployment.

Takeaways

The key points of this document include:

- You can now use Azure NetApp Files as a datastore on AVS SDDC.
- Boost the application response times and deliver higher availability to provide access workload data when and where it is needed.
- Simplify the overall complexity of the vSAN storage with simple and instant resizing capabilities.
- Guaranteed performance for mission-critical workloads using dynamic reshaping capabilities.
- If Azure VMware Solution Cloud is the destination, Azure NetApp Files is the right storage solution for optimized deployment.

Where to find additional information

To learn more about the information described in this document, refer to the following website links:

- Azure VMware Solution documentation

<https://docs.microsoft.com/en-us/azure/azure-vmware/>

- Azure NetApp Files documentation

<https://docs.microsoft.com/en-us/azure/azure-netapp-files/>

- Integrate Azure NetApp Files with Azure VMware Solution

<https://docs.microsoft.com/en-us/azure/azure-vmware/netapp-files-with-azure-vmware-solution>

NetApp Guest Connected Storage Options for Azure

Azure supports guest connected NetApp storage with the native Azure NetApp Files (ANF) service or with Cloud Volumes ONTAP (CVO).

Azure NetApp Files (ANF)

Azure netApp Files brings enterprise-grade data management and storage to Azure so you can manage your workloads and applications with ease. Migrate your workloads to the cloud and run them without sacrificing performance.

Azure netApp Files removes obstacles, so you can move all of your file-based applications to the cloud. For

the first time, you do not have to re-architect your applications, and you get persistent storage for your applications without complexity.

Because the service is delivered through the Microsoft Azure Portal, users experience a fully managed service as part of their Microsoft enterprise Agreement. World-class support, managed by Microsoft, gives you complete peace of mind. This single solution enables you to quickly and easily add multiprotocol workloads. you can build and deploy both Windows and Linux file-based applications, even for legacy environments.

Azure NetApp Files (ANF) as guest connected storage

Configure Azure NetApp Files with Azure VMware Solution (AVS)

Azure NetApp Files shares can be mounted from VMs that are created in the Azure VMware Solution SDDC environment. The volumes can also be mounted on the Linux client and mapped on the Windows client because Azure NetApp Files supports SMB and NFS protocols. Azure NetApp Files volumes can be set up in five simple steps.

Azure NetApp Files and Azure VMware Solution must be in the same Azure region.




Create and mount Azure NetApp Files volumes

To create and mount Azure NetApp Files volumes, complete the following steps:

1. Log in to the Azure Portal and access Azure NetApp Files. Verify access to the Azure NetApp Files service and register the Azure NetApp Files Resource Provider by using the `az provider register --namespace Microsoft.NetApp --wait` command. After registration is complete, create a NetApp account.


For detailed steps, see [Azure NetApp Files shares](#). This page will guide you through the step-by-step process.

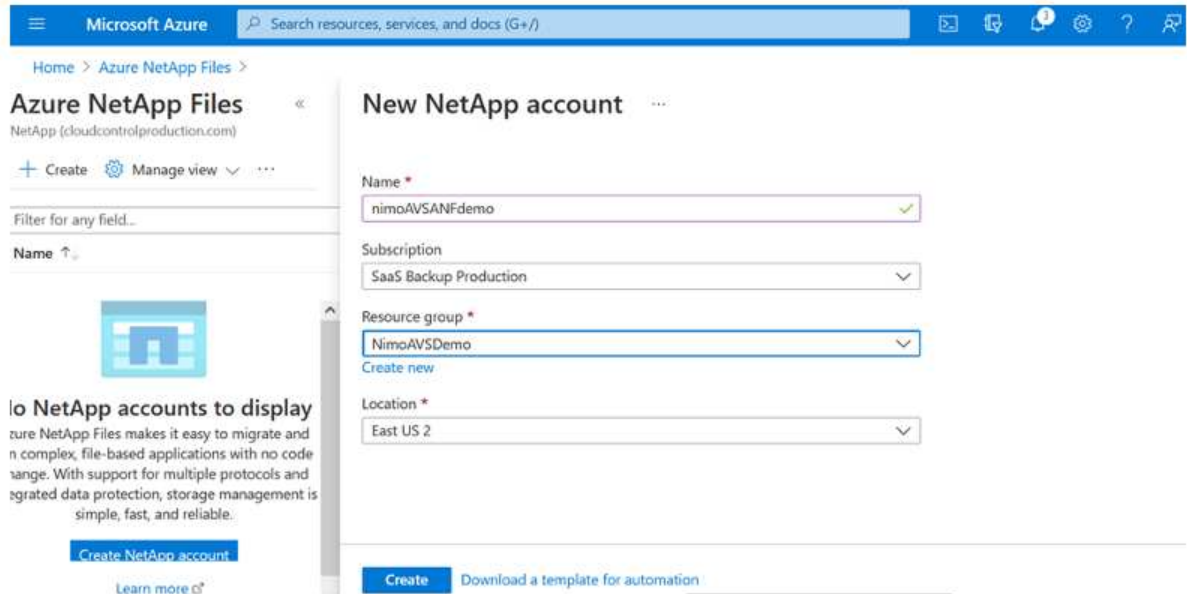


The screenshot shows the Azure NetApp Files 'New NetApp account' page. The left sidebar contains the 'Azure NetApp Files' header, a 'Create' button, a 'Manage view' dropdown, and a filter bar. The main content area is titled 'New NetApp account' and contains a form with the following fields: 'Name' (text input with value 'nimoAVSANFdemo'), 'Subscription' (dropdown menu with value 'SaaS Backup Production'), 'Resource group' (dropdown menu with value 'NimoAVSDemo'), and 'Location' (dropdown menu with value 'East US 2'). Below the form are two buttons: 'Create' and 'Download a template for automation'.

2. After the NetApp account is created, set up the capacity pools with the required service level and size.


For more information, see [Set up a capacity pool](#).

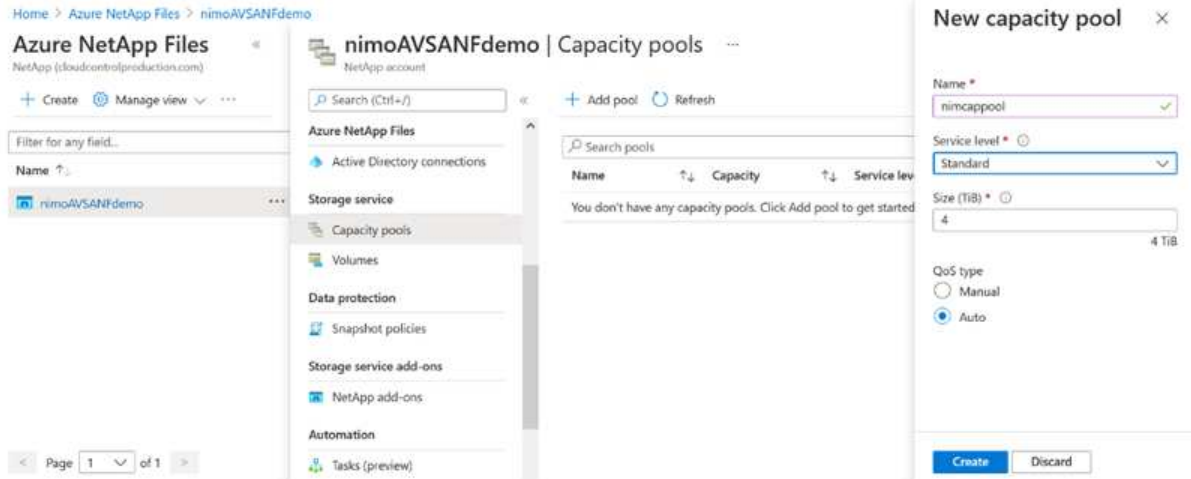

3. Configure the delegated subnet for Azure NetApp Files and specify this subnet while creating the volumes. For detailed steps to create delegated subnet, see [Delegate a subnet to Azure NetApp Files](#).

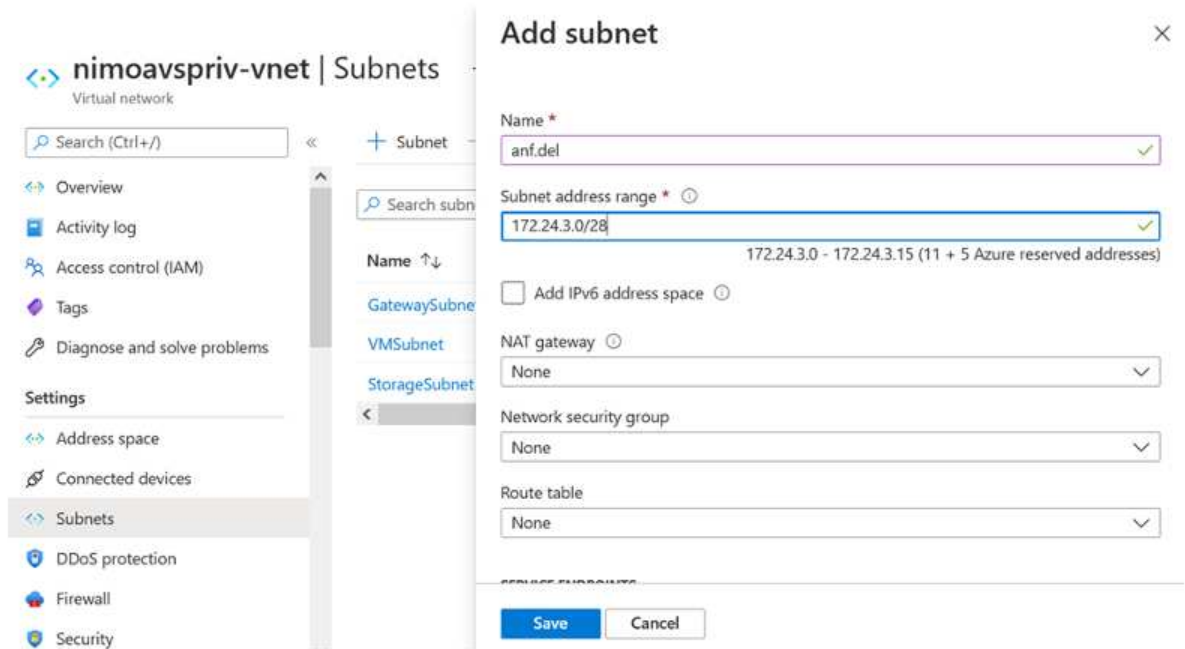



4. Add an SMB volume by using the Volumes blade under the Capacity Pools blade. Make sure the Active Directory connector is configured prior to creating the SMB volume.

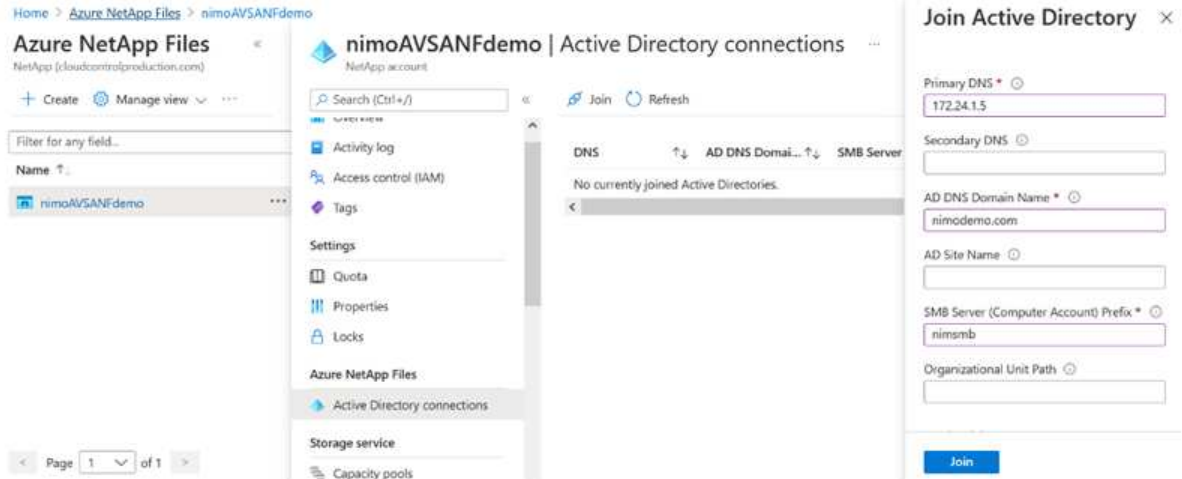

5. Click Review + Create to create the SMB volume.

If the application is SQL Server, then enable the SMB continuous availability.

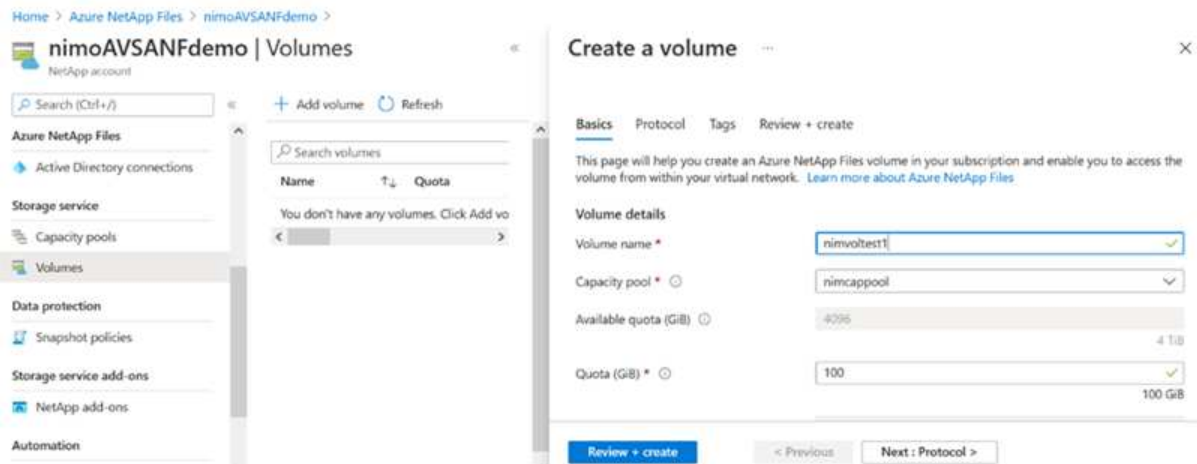


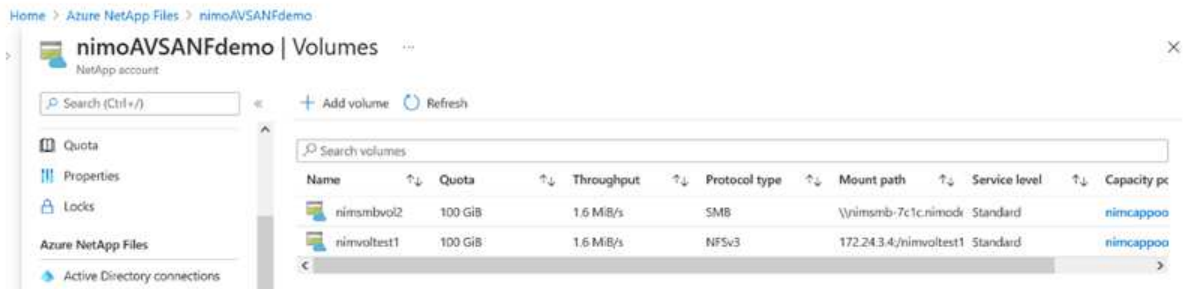


To learn more about Azure NetApp Files volume performance by size or quota, see [Performance considerations for Azure NetApp Files](#).

- After the connectivity is in place, the volume can be mounted and used for application data.

To accomplish this, from the Azure portal, click the Volumes blade, and then select the volume to mount and access the mount instructions. Copy the path and use the Map Network Drive option to mount the volume on the VM running on Azure VMware Solution SDDC.

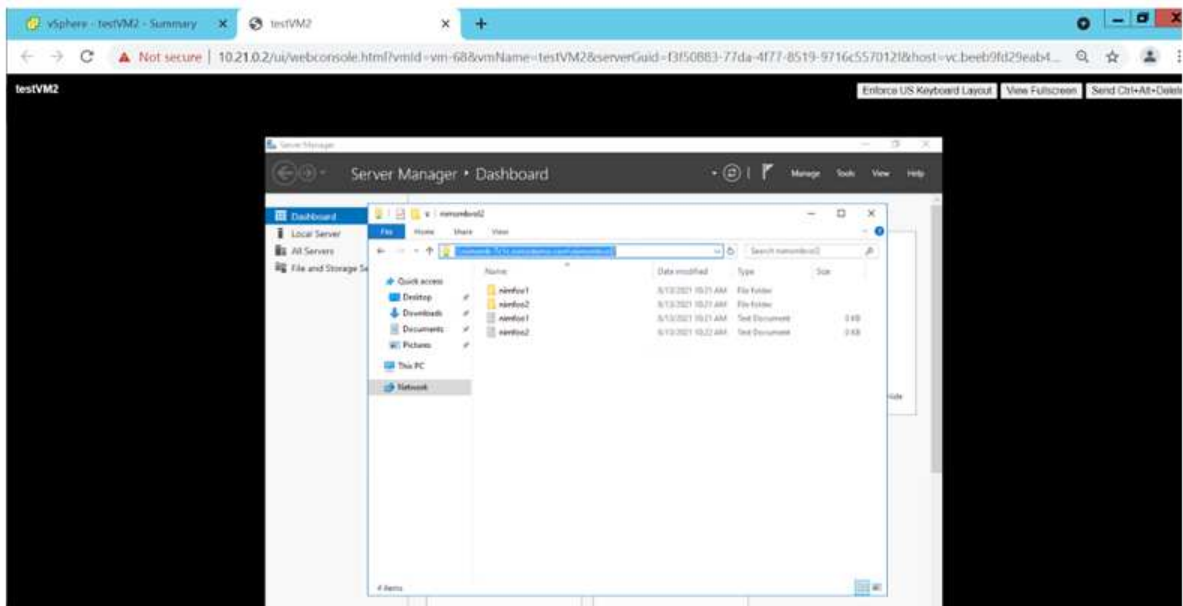

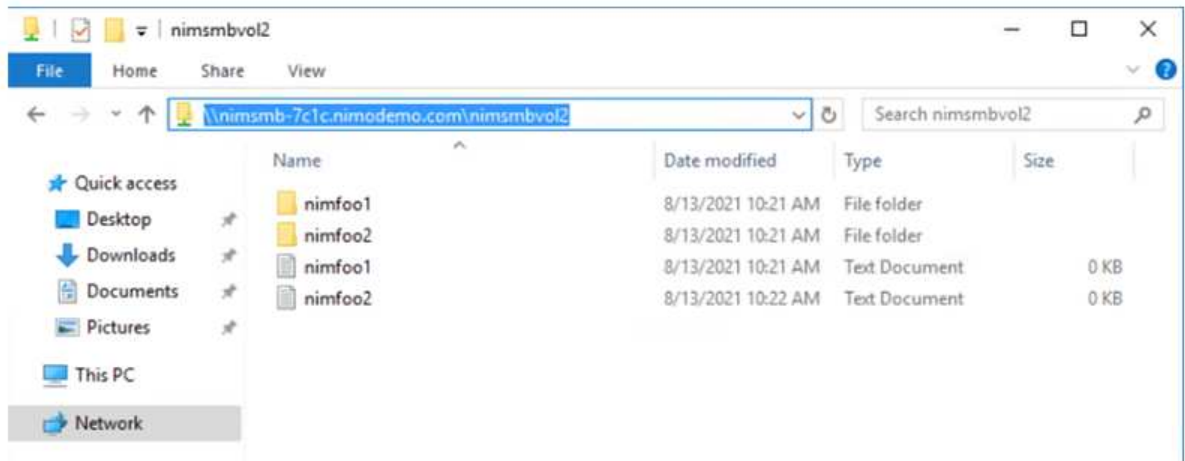

7. To mount NFS volumes on Linux VMs running on Azure VMware Solution SDDC, use this same process. Use volume reshaping or dynamic service level capability to meet the workload demands.

```
nimoadmin@nimoadmin-virtual-machine:~$ sudo mount -t nfs -o rw,hard,tcp 172.24.3.4:/nimodemonfsv1 /home/nimoadmin/nimodemo11
nimoadmin@nimoadmin-virtual-machine:~$ df
Filesystem                1K-blocks    Used Available Use% Mounted on
udev                      8168112         0   8168112   0% /dev
tmpfs                     1639548     1488   1638060   1% /run
/dev/sda5                 50824704  7902752  40310496  17% /
tmpfs                     8197728         0   8197728   0% /dev/shm
tmpfs                      5120         0     5120   0% /run/lock
tmpfs                     8197728         0   8197728   0% /sys/fs/cgroup
/dev/loop0                56832     56832         0 100% /snap/core18/2128
/dev/loop2                66688     66688         0 100% /snap/gtk-common-the
mes/1515
/dev/loop1               224256    224256         0 100% /snap/gnome-3-34-180
4/72
/dev/loop3                52224     52224         0 100% /snap/snap-store/547
/dev/loop4                33152     33152         0 100% /snap/snapd/12704
/dev/sda1                 523248         4   523244   1% /boot/efi
tmpfs                     1639544         52  1639492   1% /run/user/1000
/dev/sr0                  54738     54738         0 100% /media/nimoadmin/VMw
are Tools
172.24.3.4:/nimodemonfsv1 104857600         0 104857600   0% /home/nimoadmin/nino
demo11
nimoadmin@nimoadmin-virtual-machine:~$
```

For more information, see [Dynamically change the service level of a volume](#).

Cloud Volumes ONTAP (CVO)

Cloud volumes ONTAP, or CVO, is the industry-leading cloud data management solution built on NetApp's ONTAP storage software, available natively on Amazon Web Services (AWS), Microsoft Azure and Google Cloud Platform (GCP).

It is a software-defined version of ONTAP that consumes cloud-native storage, allowing you to have the same storage software in the cloud and on-premises, reducing the need to retrain your IT staff in all-new methods to manage your data.

CVO gives customers the ability to seamlessly move data from the edge, to the data center, to the cloud and back, bringing your hybrid cloud together — all managed with a single-pane management console, NetApp Cloud Manager.

By design, CVO delivers extreme performance and advanced data management capabilities to satisfy even your most demanding applications in the cloud

Cloud Volumes ONTAP (CVO) as guest connected storage



Deploy new Cloud Volumes ONTAP in Azure


Cloud Volumes ONTAP shares and LUNs can be mounted from VMs that are created in the Azure VMware Solution SDDC environment. The volumes can also be mounted on the Linux client and on Windows client because Cloud Volumes ONTAP supports iSCSI, SMB, and NFS protocols. Cloud Volumes ONTAP volumes can be set up in a few simple steps.

To replicate volumes from an on-premises environment to the cloud for disaster recovery or migration purposes, establish network connectivity to Azure, either using a site-to-site VPN or ExpressRoute. Replicating data from on-premises to Cloud Volumes ONTAP is outside the scope of this document. To replicate data between on-premises and Cloud Volumes ONTAP systems, see [Setting up data replication between systems](#).




Use [Cloud Volumes ONTAP sizer](#) to accurately size the Cloud Volumes ONTAP instances. Also monitor on-premises performance to use as inputs in the Cloud Volumes ONTAP sizer.


1. Log in to NetApp Cloud Central—the Fabric View screen is displayed. Locate the Cloud Volumes ONTAP tab and select Go to Cloud Manager. After you are logged in, the Canvas screen is displayed.

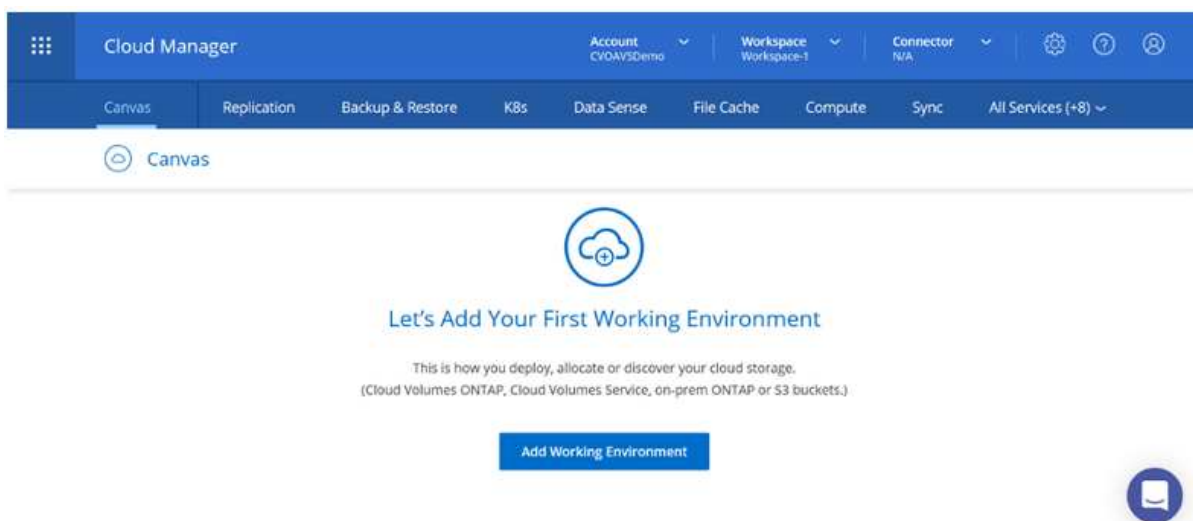

2. On the Cloud Manager home page, click Add a Working Environment and then select Microsoft Azure as the cloud and the type of the system configuration.

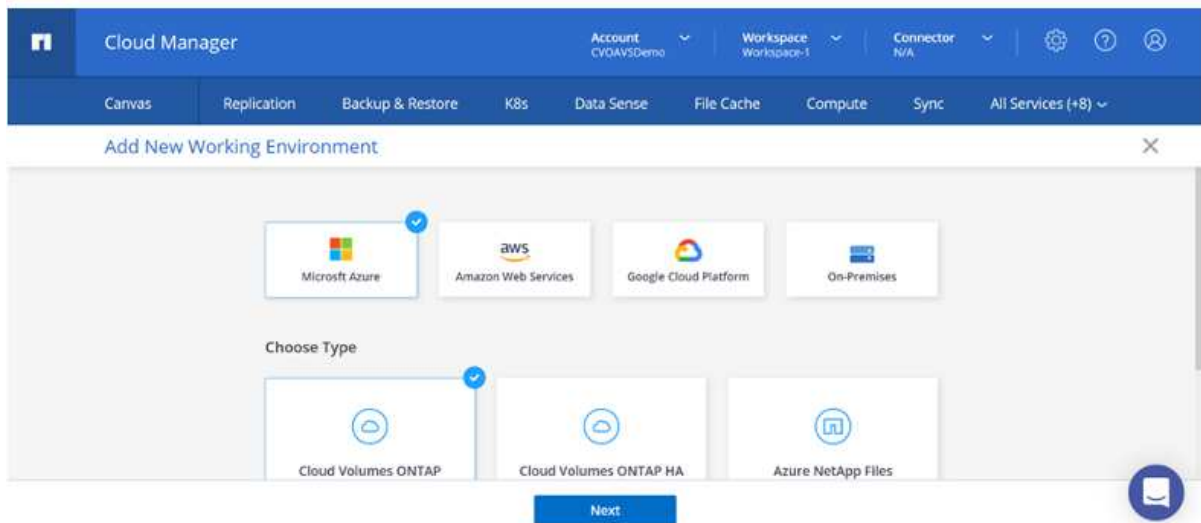

- When creating the first Cloud Volumes ONTAP working environment, Cloud Manager prompts you to deploy a Connector.

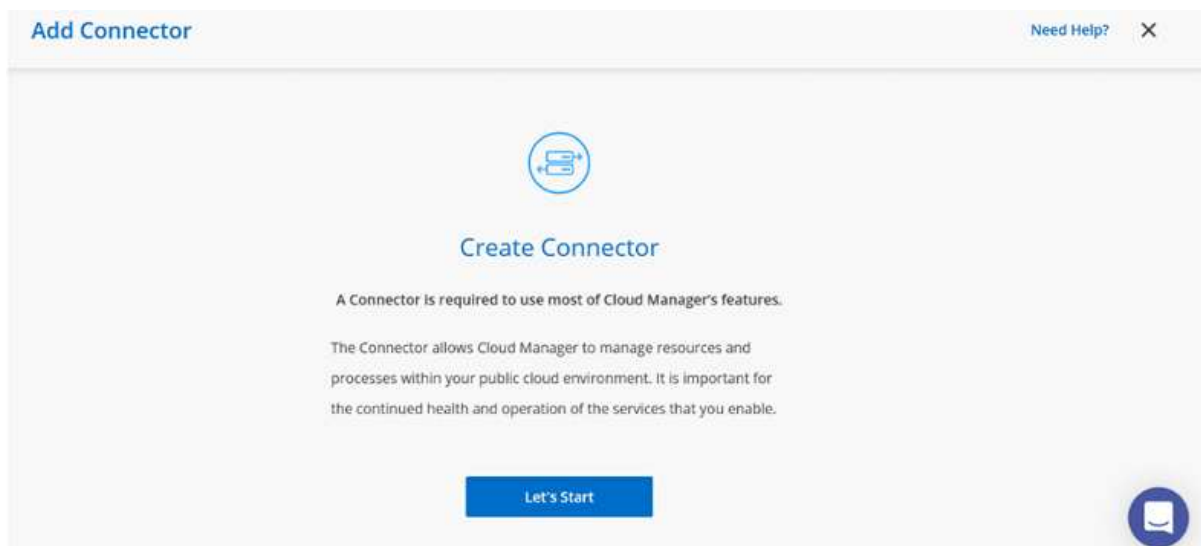

- After the connector is created, update the Details and Credentials fields.

Create a New Working Environment Details and Credentials

Managed Service Ide...	SaaS Backup Prod...	CMCVOSub	Edit Credentials
Credential Name	Azure Subscription	Marketplace Subscription	

Details

Working Environment Name (Cluster Name)

Credentials

User Name

Password

[Continue](#)

- Provide the details of the environment to be created including the environment name and admin

credentials. Add resource group tags for the Azure environment as an optional parameter. After you are done, click Continue.

Create a New Working Environment Details and Credentials

Details	Credentials
Working Environment Name (Cluster Name) <input type="text" value="nimavsCVO"/>	User Name <input type="text" value="admin"/>
<input type="button" value="+ Add Resource Group Tags"/> Optional Field	Password <input type="password" value="....."/>
	Confirm Password <input type="password" value="....."/>

6. Select the add-on services for Cloud Volumes ONTAP deployment, including Cloud Data Sense, Cloud Backup, and Cloud Insights. Select the services and then click Continue.

Create a New Working Environment Services

<input checked="" type="checkbox"/> Data Sense & Compliance	<input checked="" type="checkbox"/>	▼
<input checked="" type="checkbox"/> Backup to Cloud	<input checked="" type="checkbox"/>	▼
<input checked="" type="checkbox"/> Monitoring	<input checked="" type="checkbox"/>	▼

7. Configure the Azure location and connectivity. Select the Azure Region, resource group, VNet, and subnet to be used.

Create a New Working Environment Location & Connectivity


Azure Region <input type="text" value="East US 2"/>	Resource Group <input checked="" type="radio"/> Create a new group <input type="radio"/> Use an existing group
Availability Zone (Optional) <input type="text" value="Select an Availability Zone"/>	Resource Group Name <input type="text" value="nimavsCVO-rg"/>
VNet <input type="text" value="nimoavspv-vnet NimoAVSDemo"/>	Security Group <input checked="" type="radio"/> Generated security group <input type="radio"/> Use existing security group
Subnet <input type="text" value="172.24.2.0/24"/>	<input checked="" type="checkbox"/> I have verified network connectivity between the Cloud Manager server and the selected VNet.


8. Select the license option: Pay-As-You-Go or BYOL for using existing license. In this example, Pay-As-You-Go option is used.

Create a New Working Environment Cloud Volumes ONTAP Charging Methods & NSS Account

Cloud Volumes ONTAP Charging Methods

[Learn more about our charging methods](#)

☒ Pay-As-You-Go by the hour

☐ Bring your own license

NetApp Support Site Account *(Optional)*

[Learn more about NetApp Support Site \(NSS\) accounts](#)

To register this Cloud Volumes ONTAP to support, you should add NetApp Support Site Account.

Don't have a NetApp Support Site account? Select go to finish deploying this system. After it's created, use the Support Registration option to create an NSS account.

Continue


9. Select between several preconfigured packages available for the various types of workloads.

Create a New Working Environment


Preconfigured Packages

[Select a preconfigured Cloud Volumes ONTAP system that best matches your needs, or create your own configuration. Preconfigured settings can be modified at a later time.](#)


Change Configuration




POC and small workloads
Up to 500GB of storage



Database and application data
production workloads



Cost effective DR
Up to 500GB of storage



Highest performance production
workloads

Continue

10. Accept the two agreements regarding activating support and allocation of Azure resources. To create the Cloud Volumes ONTAP instance, click Go.

Create a New Working Environment

Review & Approve

nimavsCVO

Azure | East US 2

☒ I understand that in order to activate support, I must first register Cloud Volumes ONTAP with NetApp. [More information >](#)

☒ I understand that Cloud Manager will allocate the appropriate Azure resources to comply with my above requirements. [More information >](#)

Overview

Networking

Storage

Go

11. After Cloud Volumes ONTAP is provisioned, it is listed in the working environments on the Canvas page.

CanvasReplicationBackup & RestoreK8sData SenseFile CacheComputeSyncAll Services (+8) ▾

Canvas

Go to Tabular View

Add Working Environment

SINGLE

nimavsCVO

Cloud Volumes ONTAP

Freemium

-

+

nimavsCVO

On

DETAILS

Cloud Volumes ONTAP | Azure | Single

SERVICES

Replication

Enter Working Environment



Additional configurations for SMB volumes

1. After the working environment is ready, make sure the CIFS server is configured with the appropriate DNS and Active Directory configuration parameters. This step is required before you can create the SMB volume.

The screenshot shows the 'nimavsCVO' console interface. At the top, there are tabs for 'Volumes' and 'Replications'. Below the tabs, there's a 'Create a CIFS server' button and a '+ Advanced' link. The configuration fields are as follows:

Field	Value
DNS Primary IP Address	172.24.1.5
Active Directory Domain to join	nimodemo.com
DNS Secondary IP Address (Optional)	Example: 127.0.0.1
Credentials authorized to join the domain	nimoadmin

2. Creating the SMB volume is an easy process. Select the CVO instance to create the volume and click the Create Volume option. Choose the appropriate size and cloud manager chooses the containing aggregate or use advanced allocation mechanism to place on a specific aggregate. For this demo, SMB is selected as the protocol.

The screenshot shows the 'Volume Details, Protection & Protocol' configuration page. It has two main sections: 'Details & Protection' and 'Protocol'.

Details & Protection:

Field	Value
Volume Name:	nimavssmbvol1
Size (GB):	50
Snapshot Policy:	default

Protocol:

The 'Protocol' section has three tabs: NFS, CIFS (selected), and iSCSI. Below the tabs, there are fields for 'Share name:', 'Permissions:', and 'Users / Groups:'.


Field	Value
Share name:	nimavssmbvol1_share
Permissions:	Full Control
Users / Groups:	Everyone;


At the bottom of the page, there is a blue 'Continue' button.

3. After the volume is provisioned, it will be available under the Volumes pane. Because a CIFS share is provisioned, give your users or groups permission to the files and folders and verify that those users can access the share and create a file. This step is not required if the volume is replicated from an on-premises environment because the file and folder permissions are all retained as part of SnapMirror replication.

Volumes

1 Volume | 50 GB Allocated | 1.74 MB Total Used (1.74 MB in Disk, 0 KB in Blob)


nimavssmbvol1
ONLINE


INFO		CAPACITY	
Disk Type	PREMIUM_LRS		1.74 MB Disk Used
Tiering Policy	Auto		0 GB Blob Used
Backup	OFF		

- After the volume is created, use the mount command to connect to the share from the VM running on the Azure VMware Solution SDDC hosts.
- Copy the following path and use the Map Network Drive option to mount the volume on the VM running on Azure VMware Solution SDDC.

Mount Volume nimavssmbvol1

Go to your machine and enter this command

\\172.24.2.8\nimavssmbvol1_share

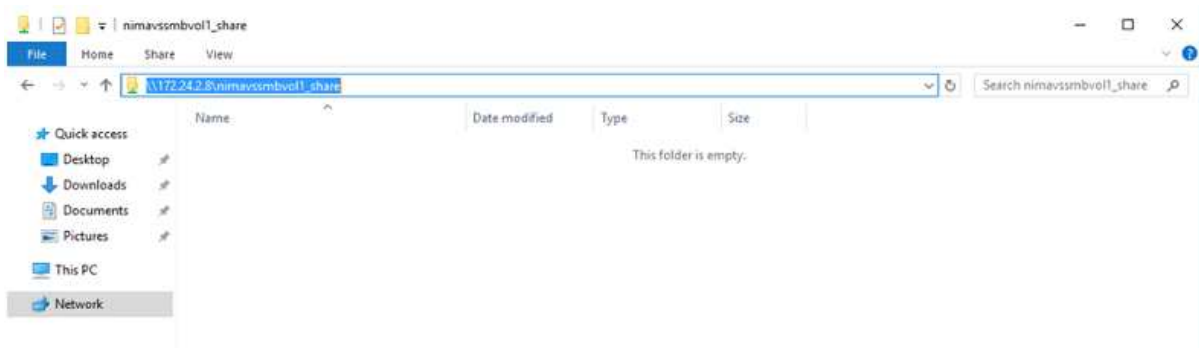



Connect the LUN to a host

To connect the LUN to a host, complete the following steps:

1. On the Canvas page, double-click the Cloud Volumes ONTAP working environment to create and manage volumes.
2. Click Add Volume > New Volume and select iSCSI and click Create Initiator Group. Click Continue.

The screenshot shows two side-by-side configuration panels. The left panel, titled 'Details & Protection', contains a 'Volume Name' field with the value 'nimavsscsi1', a 'Size (GB)' field with the value '500', a 'Snapshot Policy' dropdown menu set to 'default', and a 'Default Policy' link. The right panel, titled 'Protocol', has three tabs: 'NFS', 'CIFS', and 'iSCSI' (which is selected). Below the tabs is a link 'What about LUNs?'. Under the 'Initiator Group' section, there are two radio buttons: 'Map Existing Initiator Groups' (unselected) and 'Create Initiator Group' (selected). Below this is an 'Initiator Group' text field containing the value 'avsvmlG'. At the bottom center of the two panels is a blue 'Continue' button.

3. After the volume is provisioned, select the volume, and then click Target IQN. To copy the iSCSI Qualified Name (IQN), click Copy. Set up an iSCSI connection from the host to the LUN.

To accomplish the same for the host residing on Azure VMware Solution SDDC:


- a. RDP to the VM hosted on Azure VMware Solution SDDC.
- b. Open the iSCSI Initiator Properties dialog box: Server Manager > Dashboard > Tools > iSCSI Initiator.
- c. From the Discovery tab, click Discover Portal or Add Portal and then enter the IP address of the iSCSI target port.
- d. From the Targets tab, select the target discovered and then click Log on or Connect.
- e. Select Enable multipath, and then select Automatically Restore This Connection When the Computer Starts or Add This Connection to the List of Favorite Targets. Click Advanced.

Note: The Windows host must have an iSCSI connection to each node in the cluster. The native DSM selects the best paths to use.



LUNs on storage virtual machine (SVM) appear as disks to the Windows host. Any new disks that are added are not automatically discovered by the host. Trigger a manual rescan to discover the disks by completing the following steps:



1. Open the Windows Computer Management utility: Start > Administrative Tools > Computer Management.
2. Expand the Storage node in the navigation tree.
3. Click Disk Management.
4. Click Action > Rescan Disks.

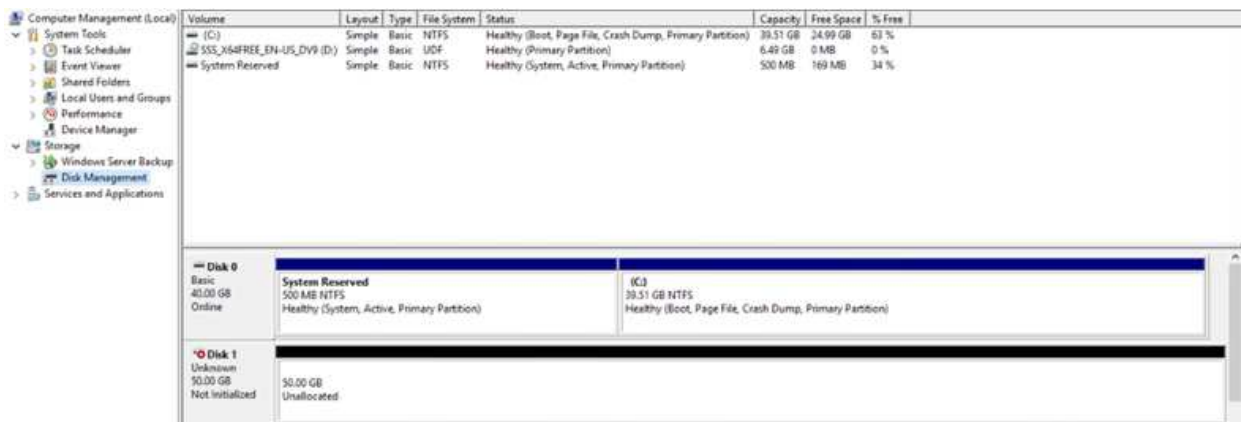

When a new LUN is first accessed by the Windows host, it has no partition or file system. Initialize the LUN; and optionally, format the LUN with a file system by completing the following steps:

1. Start Windows Disk Management.

2. Right-click the LUN, and then select the required disk or partition type.
3. Follow the instructions in the wizard. In this example, drive E: is mounted

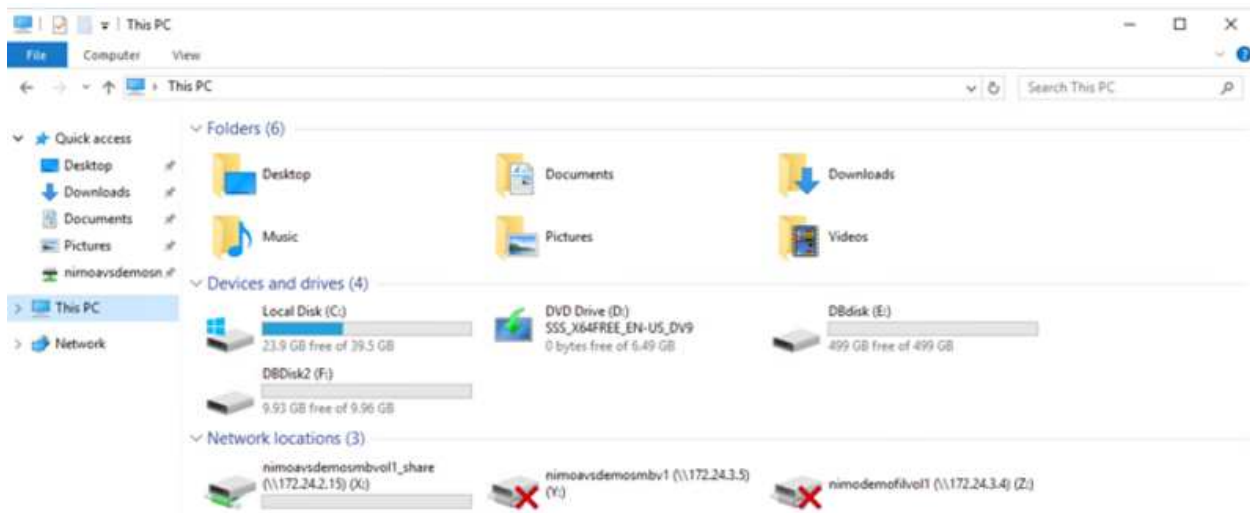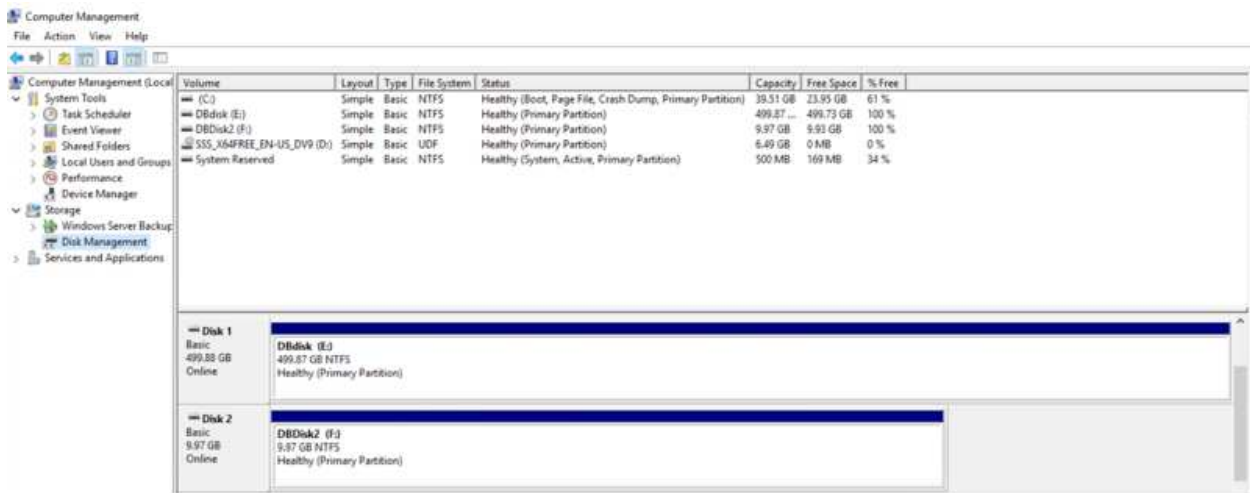

NetApp Storage Options for GCP

GCP supports guest connected NetApp storage with Cloud Volumes ONTAP (CVO) or Cloud Volumes Service (CVS).

Cloud Volumes ONTAP (CVO)

Cloud volumes ONTAP, or CVO, is the industry-leading cloud data management solution built on NetApp's ONTAP storage software, available natively on Amazon Web Services (AWS), Microsoft Azure and Google Cloud Platform (GCP).

It is a software-defined version of ONTAP that consumes cloud-native storage, allowing you to have the same storage software in the cloud and on-premises, reducing the need to retrain you IT staff in all-new methods to manage your data.

CVO gives customers the ability to seamlessly move data from the edge, to the data center, to the cloud and

back, bringing your hybrid cloud together — all managed with a single-pane management console, NetApp Cloud Manager.

By design, CVO delivers extreme performance and advanced data management capabilities to satisfy even your most demanding applications in the cloud

Cloud Volumes ONTAP (CVO) as guest connected storage



Deploy Cloud Volumes ONTAP in Google Cloud (Do It Yourself)


Cloud Volumes ONTAP shares and LUNs can be mounted from VMs that are created in the GCVE private cloud environment. The volumes can also be mounted on the Linux client and on Windows client and LUNS can be accessed on Linux or Windows clients as block devices when mounted over iSCSI because Cloud Volumes ONTAP supports iSCSI, SMB, and NFS protocols. Cloud Volumes ONTAP volumes can be set up in a few simple steps.

To replicate volumes from an on-premises environment to the cloud for disaster recovery or migration purposes, establish network connectivity to Google Cloud, either using a site-to-site VPN or Cloud Interconnect. Replicating data from on-premises to Cloud Volumes ONTAP is outside the scope of this document. To replicate data between on-premises and Cloud Volumes ONTAP systems, see [xref:./ehc/gcp/Setting up data replication between systems](#).




Use [Cloud Volumes ONTAP sizer](#) to accurately size the Cloud Volumes ONTAP instances. Also monitor on-premises performance to use as inputs in the Cloud Volumes ONTAP sizer.

1. Log in to NetApp Cloud Central—the Fabric View screen is displayed. Locate the Cloud Volumes ONTAP tab and select Go to Cloud Manager. After you are logged in, the Canvas screen is displayed.

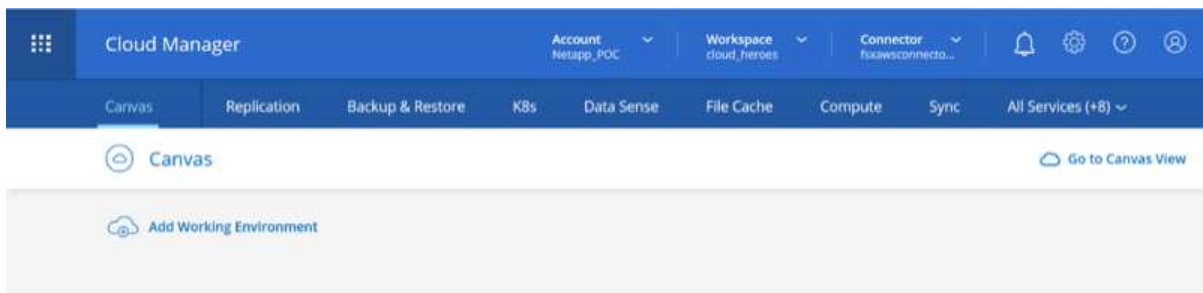

2. On the Cloud Manager Canvas tab, click Add a Working Environment and then select Google Cloud Platform as the cloud and the type of the system configuration. Then, click Next.

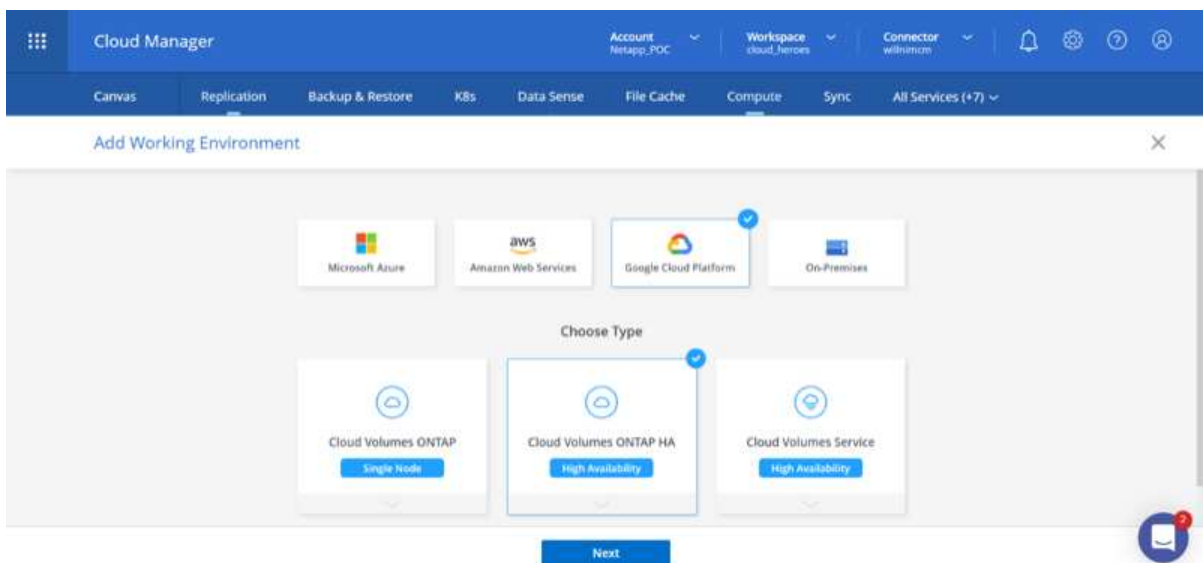

3. Provide the details of the environment to be created including the environment name and admin credentials. After you are done, click Continue.

[↑ Previous Step](#)CV-Performance-Testing
Google Cloud ProjectHCLMainBillingAccountSubs...
Marketplace Subscription[Edit Project](#)

Details

Working Environment Name (Cluster Name)

cvogcveva

Service Account



Notice: A Google Cloud service account is required to use two features: backing up data using Backup

Credentials

User Name

admin

Password

Confirm Password

[Continue](#)

4. Select or deselect the add-on services for Cloud Volumes ONTAP deployment, including Data Sense & Compliance or Backup to Cloud. Then, click Continue.

HINT: A verification pop-up message will be displayed when deactivating add-on services. Add-on services can be added/removed after CVO deployment, consider to deselect them if not needed from the beginning to avoid costs.

[↑ Previous Step](#)

Data Sense & Compliance



Backup to Cloud



WARNING:By turning off Backup to Cloud, future data recovery will not be possible in case of data corruption or loss

[Continue](#)

5. Select a location, choose a firewall policy, and select the checkbox to confirm network connectivity to Google Cloud storage.

↑ Previous Step Location Connectivity

GCP Region
europe-west3

GCP Zone
europe-west3-c

VPC
cloud-volumes-vpc

Subnet
10.0.6.0/24

Firewall Policy
☒ Generated firewall policy ☐ Use existing firewall policy

☒ I have verified connectivity between the target VPC and Google Cloud storage.

Continue

6. Select the license option: Pay-As-You-Go or BYOL for using existing license. In this example, Freemium option is used. Then, click on Continue.

↑ Previous Step Cloud Volumes ONTAP Charging Methods NetApp Support Site Account

Learn more about our charging methods

☐ Pay-As-You-Go by the hour

☐ Bring your own license

☒ Freemium (Up to 500GB)

Learn more about NetApp Support Site (NSS) accounts

NetApp Support Site Account
mchad

To add a new NetApp Support Site account, go to the Support - NSS Management tab.

Continue

7. Select between several preconfigured packages available based on the type of workload that will be deployed on the VMs running on VMware cloud on AWS SDDC.

HINT: Hoover your mouse over the tiles for details or customize CVO components and ONTAP version by clicking on Change Configuration.

Create a New Working Environment Preconfigured Packages

Select a preconfigured Cloud Volumes ONTAP system that best matches your needs, or create your own configuration. Preconfigured settings can be modified at a later time.

Change Configuration

POC and small workloads
Up to 500GB of storage

Database and application data production workloads

Cost effective DR
Up to 500GB of storage

Highest performance production workloads

Continue

8. On the Review & Approve page, review and confirm the selections. To create the Cloud Volumes ONTAP instance, click Go.

Create a New Working Environment Review & Approve

↑ Previous Step cvogcveval Show API request
GCP | europe-west3

This Cloud Volumes ONTAP instance will be registered with NetApp support under the NSS Account **mchad**.

☒ I understand that Cloud Manager will allocate the appropriate GCP resources to comply with my above requirements. [More information >](#)

Overview Networking Storage

Storage System:	Cloud Volumes ONTAP	Cloud Volumes ONTAP runs on:	n2-standard-4
License Type:	Cloud Volumes ONTAP Freemium	Encryption:	Google Cloud Managed
Capacity Limit:	500GB	Write Speed:	Normal

Go

9. After Cloud Volumes ONTAP is provisioned, it is listed in the working environments on the Canvas page.

Cloud Manager Account: NetApp_POC Workspace: cloud_futures Connector: willamcrist

Canvas Replication Backup & Restore KBs Data Sense File Cache Compute Sync All Services (+7) ▾

Canvas Go to Tabular View

Add Working Environment

cvogcve01
Cloud Volumes ONTAP
Freemium

DatacenterDude
Azure NetApp Files
31 Volumes 9.71 TiB Capacity

Working Environments

- 1 Cloud Volumes ONTAP
43.05 GiB Provisioned Capacity
- 1 FSx for ONTAP (High-Availability)
0 B Provisioned Capacity
- 1 Azure NetApp Files
9.71 TiB Provisioned Capacity



Additional configurations for SMB volumes

1. After the working environment is ready, make sure the CIFS server is configured with the appropriate DNS and Active Directory configuration parameters. This step is required before you can create the SMB volume.

HINT: Click on the Menu Icon (°), select Advanced to display more options and select CIFS setup.

The screenshot shows the 'Create a CIFS server' configuration page for environment 'cvogcve01'. The page has tabs for 'Volumes' and 'Replications'. A '+ Advanced' link is visible. The configuration fields are as follows:

Field	Value
DNS Primary IP Address	192.168.0.16
DNS Secondary IP Address (Optional)	Example: 127.0.0.1
Active Directory Domain to join	nimgcveval.com
Credentials authorized to join the domain	administrator

At the bottom, there are 'Save' and 'Cancel' buttons.

2. Creating the SMB volume is an easy process. At Canvas, double-click the Cloud Volumes ONTAP working environment to create and manage volumes and click on the Create Volume option. Choose the appropriate size and cloud manager chooses the containing aggregate or use advanced allocation mechanism to place on a specific aggregate. For this demo, CIFS/SMB is selected as the protocol.

The screenshot shows the 'Volume Details, Protection & Protocol' configuration page. It is divided into two main sections: 'Details & Protection' and 'Protocol'.

Details & Protection:

Field	Value
Volume Name:	cvogcvesmbvol01
Size (GB):	10
Snapshot Policy:	default

Protocol:

The 'CIFS' tab is selected. The configuration fields are as follows:

Field	Value
Share name:	cvogcvesmbvol01_share
Permissions:	Full Control
Users / Groups:	Everyone;

At the bottom, there is a 'Continue' button.

3. After the volume is provisioned, it will be available under the Volumes pane. Because a CIFS share is provisioned, give your users or groups permission to the files and folders and verify that those users can access the share and create a file. This step is not required if the volume is replicated from an on-premises environment because the file and folder permissions are all retained as part of SnapMirror replication.

HINT: Click on the volume menu (°) to display its options.




ONLINE

INFO

Disk Type PD-SSD
Tiering Policy None

CAPACITY



1.84 MB
Disk Used

- After the volume is created, use the mount command to display the volume connection instructions, then connect to the share from the VMs on Google Cloud VMware Engine.




Volumes Replications

Mount Volume cvogcvesmbvol01

Go to your machine and enter this command

```
\\10.0.6.251\cvogcvesmbvol01_share
```



- Copy the following path and use the Map Network Drive option to mount the volume on the VM running on the Google Cloud VMware Engine.

Specify the drive letter for the connection and the folder that you want to connect to:

Drive: Y:
Folder: \\10.0.6.251\cvogcvesmbvol01_share Browse...

Example: \\server\share

☒ Reconnect at sign-in


☐ Connect using different credentials

[Connect to a Web site that you can use to store your documents and pictures.](#)

Finish

Cancel

Once mapped, it can be easily accessed, and the NTFS permissions can be set accordingly.

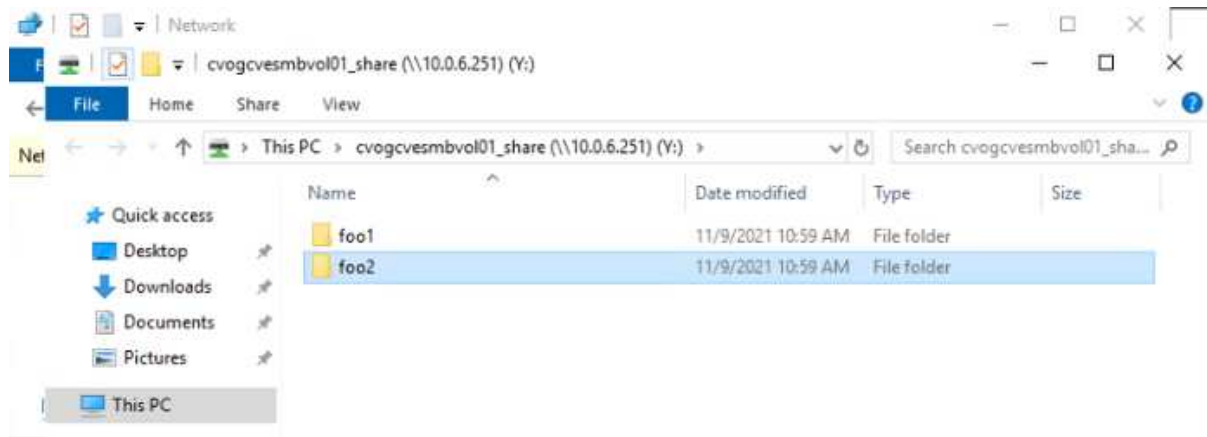



Connect the LUN on Cloud Volumes ONTAP to a host

To connect the cloud volumes ONTAP LUN to a host, complete the following steps:

1. On the Canvas page, double-click the Cloud Volumes ONTAP working environment to create and manage volumes.
2. Click Add Volume > New Volume and select iSCSI and click Create Initiator Group. Click Continue.

Create new volume in cvogcve01

Volume Details, Protection & Protocol

The screenshot displays the NetApp Cloud Manager web interface. The top navigation bar includes 'Details & Protection' and 'Protocol'. The 'Protocol' section is active, showing 'iSCSI' selected over 'NFS' and 'CIFS'. Below this, the 'Initiator Group' section has 'Create Initiator Group' selected. The 'Initiator Group' field contains 'Win1G'. The 'Operating System Type' dropdown is set to 'Windows'. The 'Details & Protection' section on the left shows 'Volume Name: cvogcvescilun01' and 'Size (GB): 10'. A 'Continue' button is visible at the bottom of the configuration panel. Below the configuration panel, a browser window shows the 'vmcdc01' console, which displays a Windows Server Manager dashboard with various system settings and a file explorer window open to 'This PC'.

3. After the volume is provisioned, select the volume menu (°), and then click Target iQN. To copy the iSCSI Qualified Name (iQN), click Copy. Set up an iSCSI connection from the host to the LUN.


To accomplish the same for the host residing on Google Cloud VMware Engine:

- a. RDP to the VM hosted on Google Cloud VMware Engine.
- b. Open the iSCSI Initiator Properties dialog box: Server Manager > Dashboard > Tools > iSCSI Initiator.

- c. From the Discovery tab, click Discover Portal or Add Portal and then enter the IP address of the iSCSI target port.
- d. From the Targets tab, select the target discovered and then click Log on or Connect.
- e. Select Enable multipath, and then select Automatically Restore This Connection When the Computer Starts or Add This Connection to the List of Favorite Targets. Click Advanced.




The Windows host must have an iSCSI connection to each node in the cluster. The native DSM selects the best paths to use.

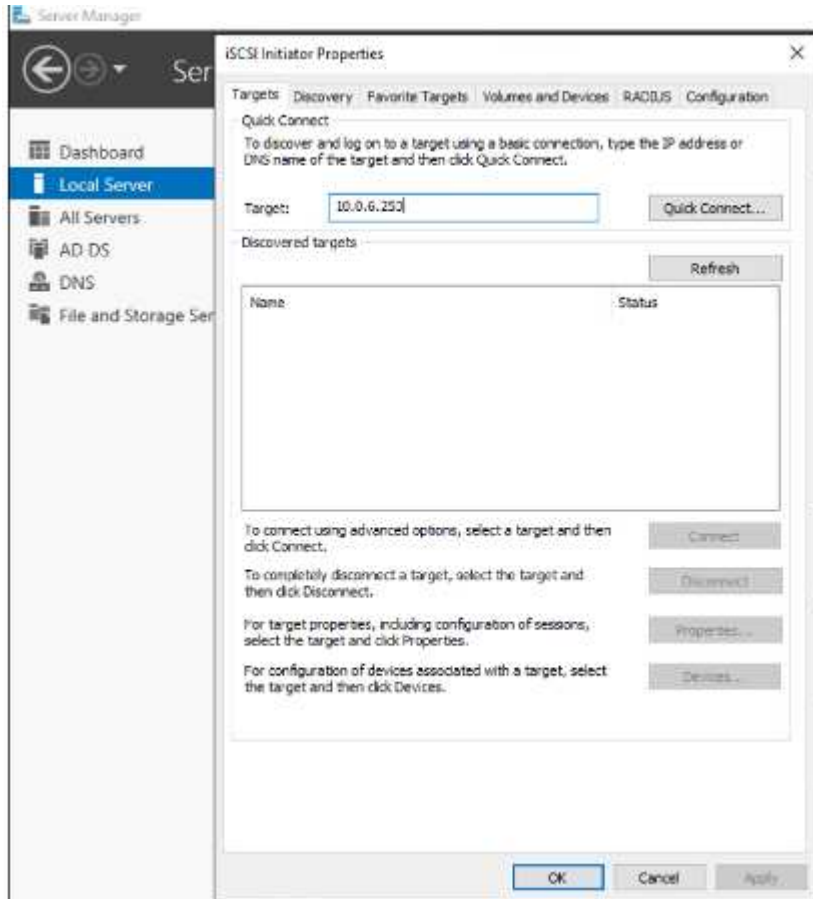


LUNs on storage virtual machine (SVM) appear as disks to the Windows host. Any new disks that are added are not automatically discovered by the host. Trigger a manual rescan to discover the disks by completing the following steps:

1. Open the Windows Computer Management utility: Start > Administrative Tools > Computer Management.
2. Expand the Storage node in the navigation tree.
3. Click Disk Management.
4. Click Action > Rescan Disks.

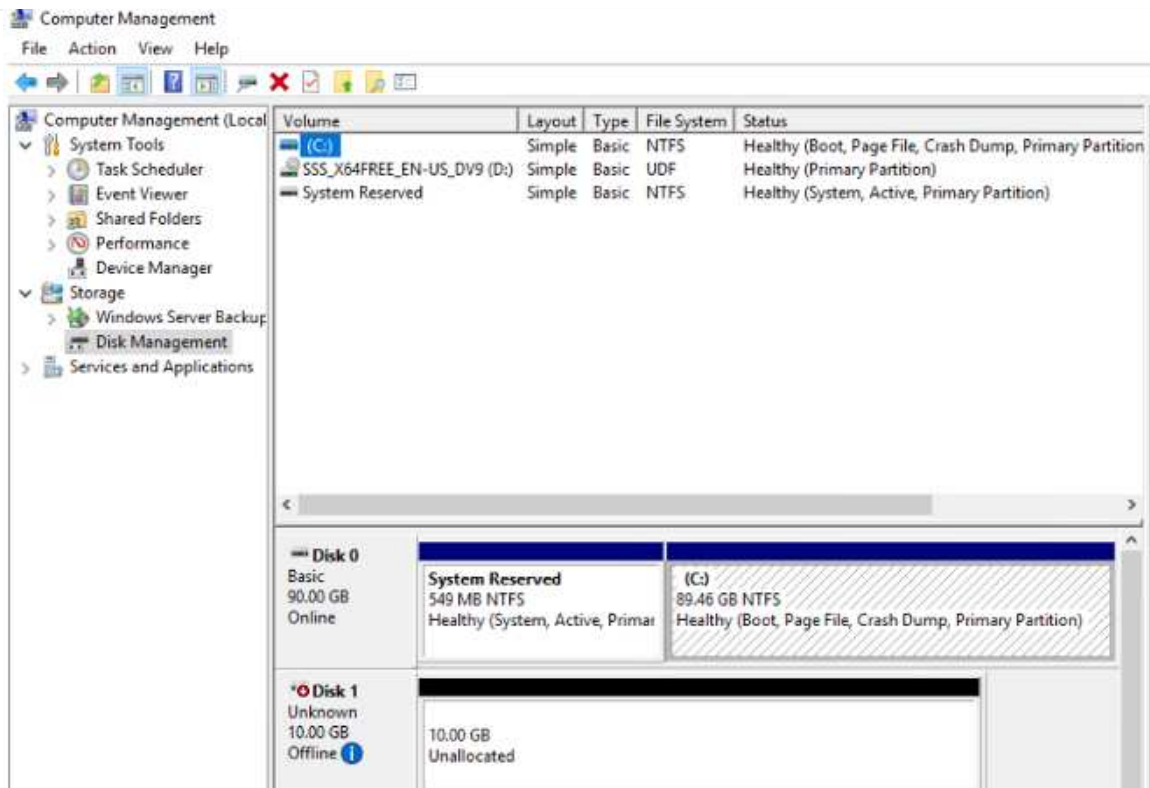

When a new LUN is first accessed by the Windows host, it has no partition or file system. Initialize the LUN; and optionally, format the LUN with a file system by completing the following steps:

5. Start Windows Disk Management.
6. Right-click the LUN, and then select the required disk or partition type.
7. Follow the instructions in the wizard. In this example, drive F: is mounted.

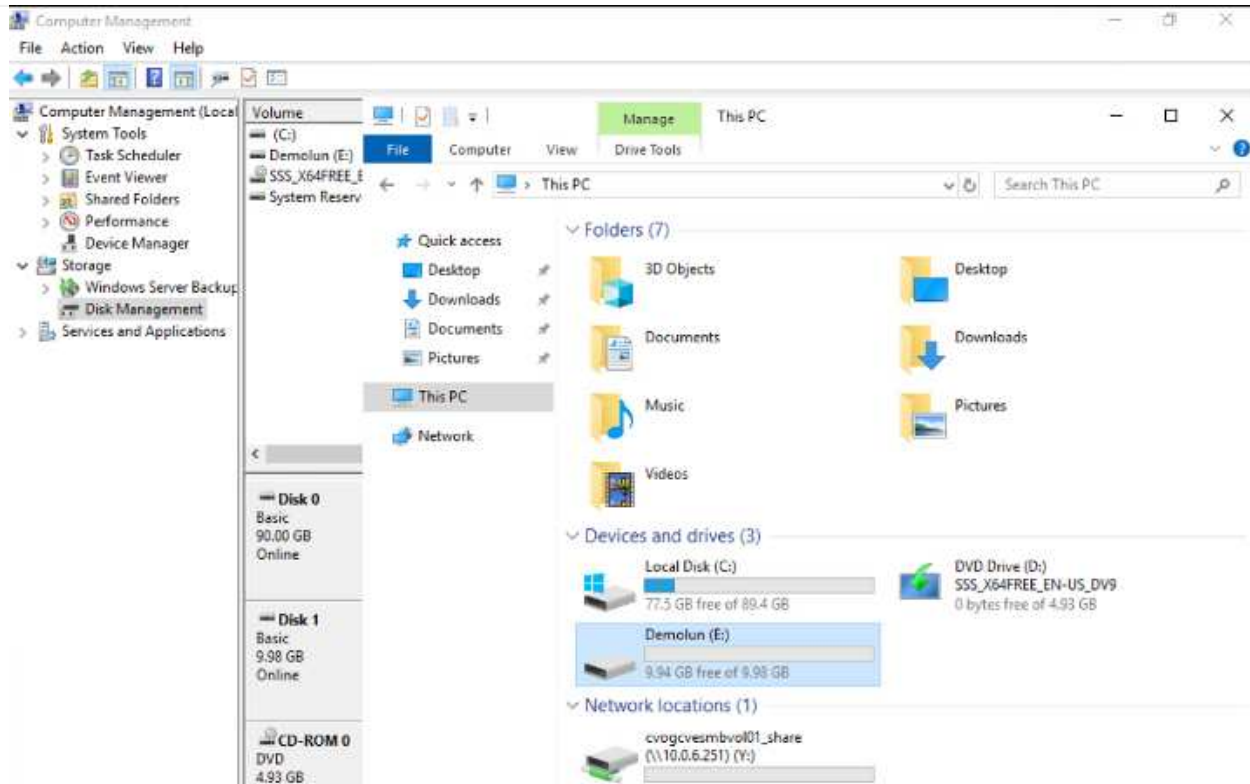

On the Linux clients, ensure the iSCSI daemon is running. Once the LUNs are provisioned, refer to the detailed guidance on iSCSI configuration with Ubuntu as an example here. To verify, run `lsblk` cmd from the shell.

```
niyaz@nimubu01:~$ lsblk
NAME        MAJ:MIN RM  SIZE RO TYPE MOUNTPOINT
loop0       7:0      0  55.4M 1 loop /snap/core18/2128
loop1       7:1      0  219M  1 loop /snap/gnome-3-34-1804/72
loop2       7:2      0  65.1M 1 loop /snap/gtk-common-themes/1515
loop3       7:3      0   51M  1 loop /snap/snap-store/547
loop4       7:4      0  32.3M 1 loop /snap/snapd/12704
loop5       7:5      0  32.5M 1 loop /snap/snapd/13640
loop6       7:6      0  55.5M 1 loop /snap/core18/2246
loop7       7:7      0    4K  1 loop /snap/bare/5
loop8       7:8      0  65.2M 1 loop /snap/gtk-common-themes/1519
sda         8:0      0   16G  0 disk
├─sda1      8:1      0   512M 0 part /boot/efi
├─sda2      8:2      0    1K  0 part
├─sda5      8:5      0  15.5G 0 part /
└─sdb       8:16     0    1G  0 disk
```

```

niyaz@nimubu01:~$ df -h
Filesystem      Size  Used Avail Use% Mounted on
udev            1.9G   0    1.9G   0% /dev
tmpfs           394M  1.5M  392M   1% /run
/dev/sda5       16G   7.6G  6.9G  53% /
tmpfs           2.0G   0    2.0G   0% /dev/shm
tmpfs           5.0M   0    5.0M   0% /run/lock
tmpfs           2.0G   0    2.0G   0% /sys/fs/cgroup
/dev/loop1      219M  219M   0 100% /snap/gnome-3-34-1804/72
/dev/loop2       66M   66M   0 100% /snap/gtk-common-themes/1515
/dev/loop3       51M   51M   0 100% /snap/snap-store/547
/dev/loop0       56M   56M   0 100% /snap/core18/2128
/dev/loop4       33M   33M   0 100% /snap/snapd/12704
/dev/sda1       511M   4.0K  511M   1% /boot/efi
tmpfs           394M   64K  394M   1% /run/user/1000
/dev/loop5       33M   33M   0 100% /snap/snapd/13640
/dev/loop6       56M   56M   0 100% /snap/core18/2246
/dev/loop7      128K  128K   0 100% /snap/bare/5
/dev/loop8       66M   66M   0 100% /snap/gtk-common-themes/1519
/dev/sdb        976M  2.6M  907M   1% /mnt

```




Mount Cloud Volumes ONTAP NFS volume on Linux client

To mount the Cloud Volumes ONTAP (DIY) file system from VMs within Google Cloud VMware Engine, follow the below steps:

Provision the volume following the below steps

1. In the Volumes tab, click Create New Volume.
2. On the Create New Volume page, select a volume type:

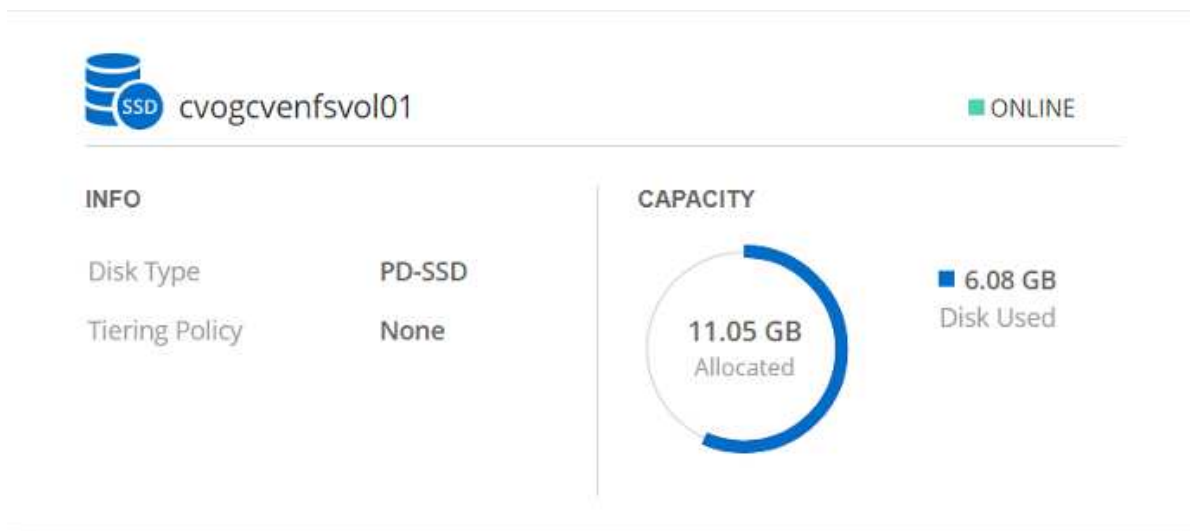

3. In the Volumes tab, place your mouse cursor over the volume, select the menu icon (°), and then click Mount Command.



Go to your Linux machine and enter this mount command

```
mount 10.0.6.251:/cvogcvenfsvol01 <dest_dir>
```



4. Click Copy.
5. Connect to the designated Linux instance.
6. Open a terminal on the instance using secure shell (SSH) and log in with the appropriate credentials.
7. Make a directory for the volume's mount point with the following command.

```
$ sudo mkdir /cvogcvetst
```

```
root@nimubu01:~# sudo mkdir cvogcvetst
```

8. Mount the Cloud Volumes ONTAP NFS volume to the directory that is created in the previous step.

```
sudo mount 10.0.6.251:/cvogcvenfsvol01 /cvogcvetst
```

```
root@nimubu01:~# sudo mount -t nfs 10.0.6.251:/cvogcvenfsvol01 cvogcvetst
```

Filesystem	1K-blocks	Used	Available	Use%	Mounted on
udev	1978500	0	1978500	0%	/dev
tmpfs	402272	1432	400840	1%	/run
/dev/sda5	15929256	7832332	7268048	52%	/
tmpfs	2011352	0	2011352	0%	/dev/shm
tmpfs	5120	0	5120	0%	/run/lock
tmpfs	2011352	0	2011352	0%	/sys/fs/cgroup
/dev/loop0	128	128	0	100%	/snap/bare/5
/dev/loop1	56832	56832	0	100%	/snap/core18/2128
/dev/loop2	56832	56832	0	100%	/snap/core18/2246
/dev/loop4	66688	66688	0	100%	/snap/gtk-common-
thenes/1515					
/dev/loop6	52224	52224	0	100%	/snap/snap-store/
547					
/dev/loop5	66816	66816	0	100%	/snap/gtk-common-
thenes/1519					
/dev/loop7	33280	33280	0	100%	/snap/snapd/13640
/dev/loop8	224256	224256	0	100%	/snap/gnome-3-34-
1894/72					
/dev/sda1	523248	4	523244	1%	/boot/efi
tmpfs	402268	52	402216	1%	/run/user/1000
/dev/sdb	515010816	42016812	446763220	9%	/home/nlyaz/cvsts
t					
/dev/loop9	43264	43264	0	100%	/snap/snapd/13831
10.0.6.251:/cvogcvenfsvol01	13199552	8577536	4622016	65%	/root/cvogcvetst

Cloud Volumes Service (CVS)

Cloud Volumes Services (CVS) is a complete portfolio of data services to deliver advanced cloud solutions. Cloud Volumes Services supports multiple file access protocols for major cloud providers (NFS and SMB support).

Other benefits and features include: data protection and restore with Snapshot; special features to replicate, sync and migrate data destinations on-prem or in the cloud; and consistent high performance at the level of a dedicated flash storage system.

Cloud Volumes Service (CVS) as guest connected storage

Configure Cloud Volumes Service with VMware Engine

Cloud Volumes Service shares can be mounted from VMs that are created in the VMware Engine environment. The volumes can also be mounted on the Linux client and mapped on the Windows client because Cloud Volumes Service supports SMB and NFS protocols. Cloud Volumes Service volumes can be set up in simple steps.

Cloud Volume Service and Google Cloud VMware Engine private cloud must be in the same region.


To purchase, enable and configure NetApp Cloud Volumes Service for Google Cloud from the Google Cloud Marketplace, follow this detailed [guide](#).




Create a CVS NFS volume to GCVE private cloud

To create and mount NFS volumes, complete the following steps:

1. Access Cloud Volumes from Partner Solutions within the Google cloud console.

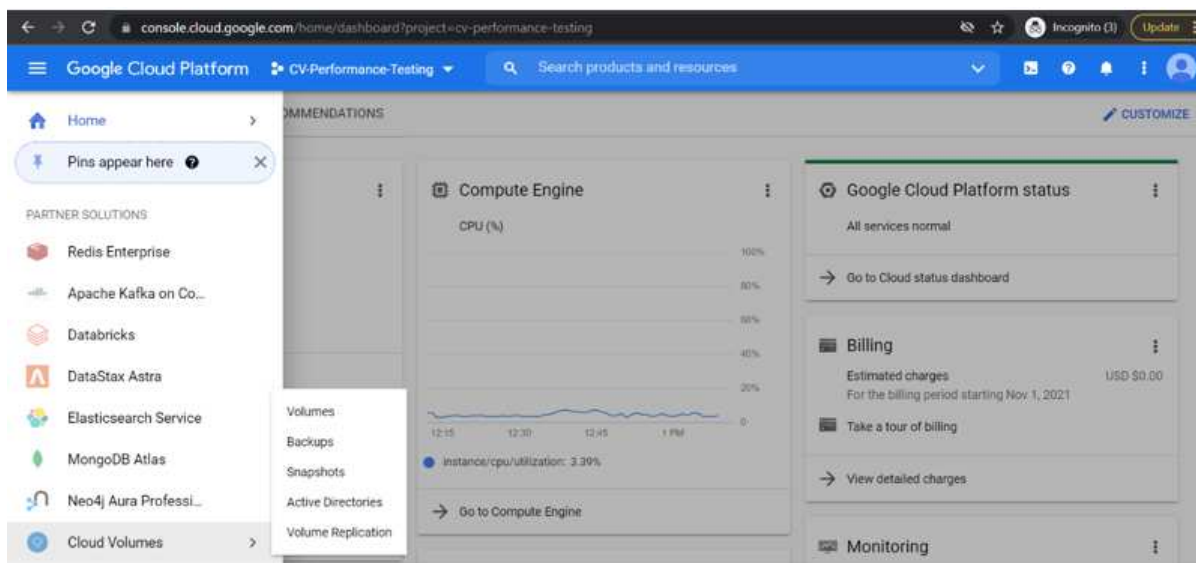

2. In the Cloud Volumes Console, go to the Volumes page and click Create.

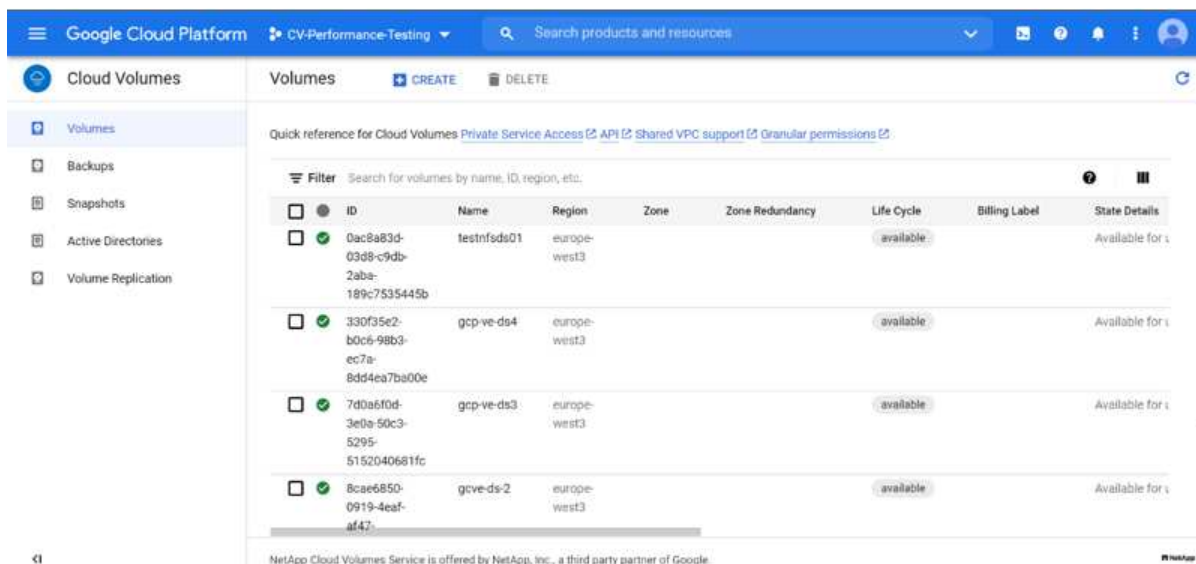

3. On the Create File System page, specify the volume name and billing labels as required for chargeback mechanisms.

Cloud Volumes	Create File System
<ul style="list-style-type: none"> Volumes Backups Snapshots Active Directories Volume Replication 	<p>Volume Name</p> <p>Name *</p> <input type="text" value="nimCVNFSvol01"/> <p>A human readable name used for display purposes.</p> <p>Billing Labels</p> <p>Label your volumes for billing reports, queries. Supported with CVS-Performance service type; can be set with CVS service type but not available for billing at this time.</p> <p>+ ADD LABEL</p>


- Select the appropriate service. For GCVE, choose CVS-Performance and desired service level for improved latency and higher performance based on the application workload requirements.

Cloud Volumes	Create File System
<ul style="list-style-type: none"> Volumes Backups Snapshots Active Directories Volume Replication 	<p>Service Type</p> <p>Cloud Volumes Service is offered as two service types: CVS and CVS-Performance. Select the service type that matches your workload needs. Region availability varies by service type. Learn more</p> <p> <input type="radio"/> CVS Offers volumes created with zonal high availability. </p> <p> <input checked="" type="radio"/> CVS-Performance Offers 3 performance levels and improved latency to address higher performance application requirements. </p> <p>Volume Replication</p> <p> <input type="checkbox"/> Secondary Select to create volume as a destination target for volume replication. Applicable only to CVS-performance volumes. </p>

- Specify the Google Cloud region for the volume and volume path (The volume path must be unique across all of cloud volumes in the project)

Cloud Volumes	Create File System
<ul style="list-style-type: none"> Volumes Backups Snapshots Active Directories Volume Replication 	<p>Region</p> <p>Region availability varies by service type.</p> <p>Region *</p> <input type="text" value="europe-west3"/> <p>Volume will be provisioned in the region you select.</p> <p>Volume Path *</p> <input type="text" value="nimCVSNFSol01"/> <p>Must be unique to the project.</p>

6. Select the level of performance for the volume.

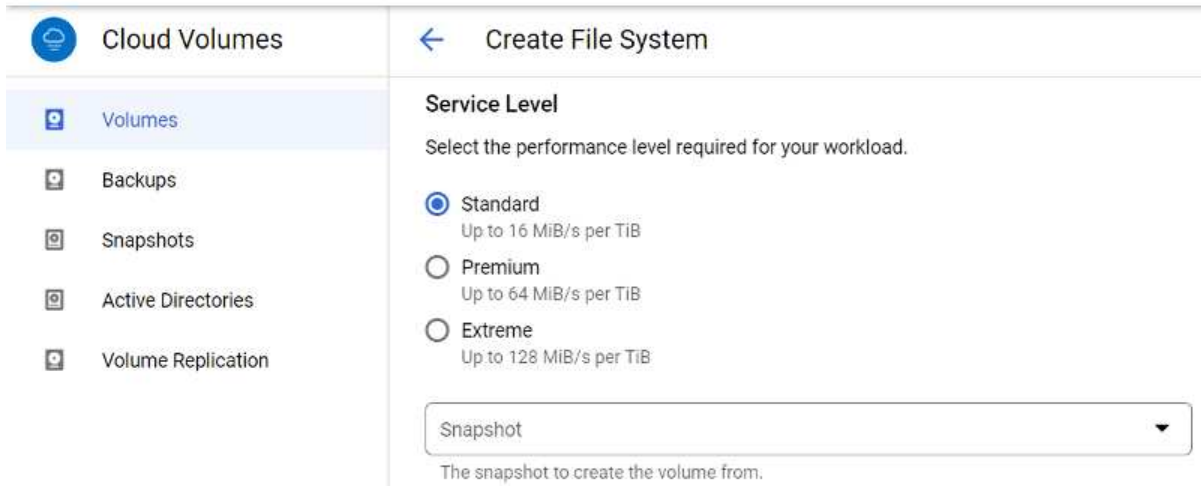

Cloud Volumes

- Volumes
- Backups
- Snapshots
- Active Directories
- Volume Replication

Create File System

Service Level

Select the performance level required for your workload.

☒ **Standard**
Up to 16 MiB/s per TiB


☐ **Premium**
Up to 64 MiB/s per TiB

☐ **Extreme**
Up to 128 MiB/s per TiB

Snapshot

The snapshot to create the volume from.

7. Specify the size of the volume and the protocol type. In this testing, NFSv3 is used.

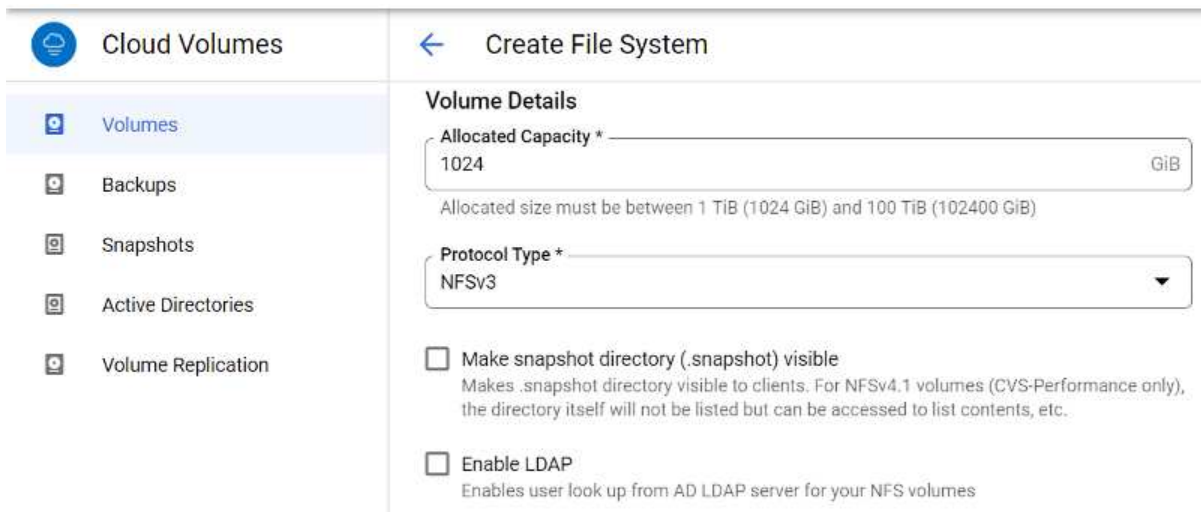

Cloud Volumes

- Volumes
- Backups
- Snapshots
- Active Directories
- Volume Replication

Create File System

Volume Details

Allocated Capacity * 1024 GiB

Allocated size must be between 1 TiB (1024 GiB) and 100 TiB (102400 GiB)

Protocol Type * NFSv3

☐ **Make snapshot directory (.snapshot) visible**
Makes .snapshot directory visible to clients. For NFSv4.1 volumes (CVS-Performance only), the directory itself will not be listed but can be accessed to list contents, etc.

☐ **Enable LDAP**
Enables user look up from AD LDAP server for your NFS volumes

8. In this step, select the VPC Network from which the volume will be accessible. Ensure VPC peering is in place.

HINT: If VPC peering has not been done, a pop-up button will be displayed to guide you through the peering commands. Open a Cloud Shell session and execute the appropriate commands to peer your VPC with Cloud Volumes Service producer. In case you decide to prepare VPC peering in beforehand, refer to these instructions.

Cloud Volumes

Volumes

Backups

Snapshots

Active Directories

Volume Replication

← Create File System

Network Details

☐ Shared VPC configuration
Provide the host project name when deploying in a shared VPC service project.

VPC Network Name *

cloud-volumes-vpc

Select the VPC Network from which the volume will be accessible. This cannot be changed later.

☐ Use Custom Address Range
Reserved Address range
netapp-addresses

- Manage the Export policy rules by adding the appropriate rules and Select the checkbox for the corresponding NFS version.

Note: Access to NFS volumes won't be possible unless an export policy is added.

Cloud Volumes

Volumes

Backups

Snapshots

Active Directories

Volume Replication

← Create File System

Export Policy

Rules

Item 1

Allowed Clients 1 *

0.0.0.0/0

Access

☒ Read & Write
☐ Read Only

Root Access

☒ On
☐ Off

Protocol Type (Select at least 1 of the below options)

Must select for Protocol type NFSv3. Optional for Protocol Type Both. Do not select for NFSv4.1

☒ Allows Matching Clients for NFSv3

- Click Save to create the volume.

<input type="checkbox"/>		4b8ed9d9-bc6d43d5-5a0f-7da26aed3ed0	nimnfsdemods02	europa-west3	Available for use	CVS-Performance	Primary	Extreme	NFSv3: 10.53.0.4/nimnfsdemods02
--------------------------	--	-------------------------------------	----------------	--------------	-------------------	-----------------	---------	---------	---------------------------------



Mounting NFS exports to VMs running on VMware Engine

Before preparing to mount the NFS volume, ensure the peering status of private connection is listed as Active. Once status is Active, use the mount command.

To mount an NFS volume, do the following:

1. In the Cloud Console, go to Cloud Volumes > Volumes.
2. Go to the Volumes page
3. Click the NFS volume for which you want to mount NFS exports.
4. Scroll to the right, under Show More, click Mount Instructions.

To perform the mounting process from within the guest OS of the VMware VM, follow the below steps:

1. Use SSH client and SSH to the virtual machine.
2. Install the nfs client on the instance.
 - a. On Red Hat Enterprise Linux or SuSE Linux instance:


```
sudo yum install -y nfs-utils
```

- b. On an Ubuntu or Debian instance:

```
sudo apt-get install nfs-common
```

3. Create a new directory on the instance, such as "/nimCVSNFSol01":

```
sudo mkdir /nimCVSNFSol01
```

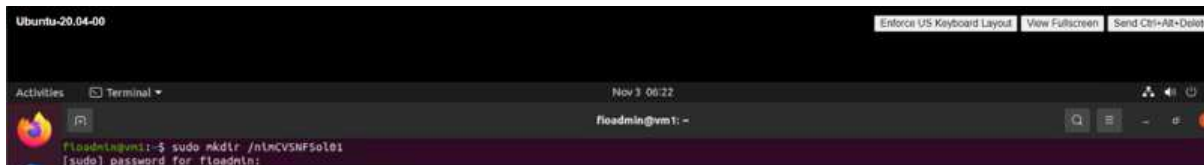

4. Mount the volume using the appropriate command. Example command from the lab is below:

```
sudo mount -t nfs -o rw,hard,rsz=65536,wsz=65536,vers=3,tcp  
10.53.0.4:/nimCVSNFSol01 /nimCVSNFSol01
```

```
root@vm1:~# sudo mkdir /nimCVSNFSol01  
root@vm1:~# sudo mount -t nfs -o rw,hard,rsz=65536,wsz=65536,vers=3,tcp 10.53.0.4:/nimCVSNFSol01 /nimCVSNFSol01
```

```

root@vm1:~# df
Filesystem                1K-blocks      Used    Available Use% Mounted on
udev                    16409952         0    16409952   0% /dev
tmpfs                   3288328      1580     3286748   1% /run
/dev/sdb5              61145932  19231356    38778832  34% /
tmpfs                 16441628         0    16441628   0% /dev/shm
tmpfs                   5120         0         5120   0% /run/lock
tmpfs                 16441628         0    16441628   0% /sys/fs/cgroup
/dev/loop0              128         128         0 100% /snap/bare/5
/dev/loop1             56832     56832         0 100% /snap/core18/2128
/dev/loop2            66688     66688         0 100% /snap/gtk-common-themes/1515
/dev/loop4            66816     66816         0 100% /snap/gtk-common-themes/1519
/dev/loop3            52224     52224         0 100% /snap/snap-store/547
/dev/loop5            224256    224256         0 100% /snap/gnome-3-34-1804/72
/dev/sdb1             523248         4     523244   1% /boot/efi
tmpfs                 3288324        28     3288296   1% /run/user/1000
10.53.0.4:/gcve-ds-1    107374182400 1136086016 106238096384   2% /base
/dev/mapper/nfsprdvgl-prod01 419155968 55384972 363770996 14% /datastore1
/dev/loop8            33280     33280         0 100% /snap/snapd/13270
/dev/loop6            33280     33280         0 100% /snap/snapd/13640
/dev/loop7            56832     56832         0 100% /snap/core18/2246
10.53.0.4:/nimCVSNFSol01 107374182400 256 107374182144   1% /nimCVSNFSol01
root@vm1:~#

```




Creating and Mounting SMB Share to VMs running on VMware Engine

For SMB volumes, make sure the Active Directory connections is configured prior to creating the SMB volume.

Active Directory connections [+ CREATE](#) [DELETE](#) [C](#)

Create a Windows Active Directory connection to your existing AD server. This is a prerequisite step before creating volumes with the SMB protocol type. [Learn more](#)

Filter Search for Active Directory connections by ID, username, DNS, netBIOS, region, etc.

<input type="checkbox"/>	Username	Domain	DNS Servers	NetBIOS Prefix	OU Path	AD Server Name	KDC IP	Region	Status
<input checked="" type="checkbox"/>	administrator	nimgcveval.com	192.168.0.16	nimgsmb	CN=Computers			europa-west3	In Use

Once the AD connection is in place, create the volume with the desired service level. The steps are like creating NFS volume except selecting the appropriate protocol.

1. In the Cloud Volumes Console, go to the Volumes page and click Create.
2. On the Create File System page, specify the volume name and billing labels as required for chargeback mechanisms.

[←](#) Create File System

Volume Name

Name *

nimCVSMBvol01

A human readable name used for display purposes.

Billing Label

Label your volumes for billing reports, queries.



Supported with CVS-Performance service type; can be set with CVS service type but not available for billing at this time.

[+ ADD LABEL](#)

3. Select the appropriate service. For GCVE, choose CVS-Performance and desired service level for improved latency and higher performance based on the workload requirements.

Create File System

Service Type

Cloud Volumes Service is offered as two service types: CVS and CVS-Performance. Select the service type that matches your workload needs. [Region availability](#)  varies by service type. [Learn more](#) 

☐ CVS

Offers volumes created with zonal high availability.

☒ CVS-Performance

Offers 3 performance levels and improved latency to address higher performance application requirements.

Volume Replication

☐ Secondary

Select to create volume as a destination target for volume replication. Applicable only to CVS-performance volumes.

- Specify the Google Cloud region for the volume and volume path (The volume path must be unique across all of cloud volumes in the project)

Create File System

Region

Region availability varies by service type.

Region *

europa-west3



Volume will be provisioned in the region you select.

Volume Path *

nimCVSMBvol01



Must be unique to the project.

- Select the level of performance for the volume.

← Create File System

Service Level

Select the performance level required for your workload.

- ☒ Standard
Up to 16 MiB/s per TiB
- ☐ Premium
Up to 64 MiB/s per TiB
- ☐ Extreme
Up to 128 MiB/s per TiB

Snapshot

The snapshot to create the volume from.

6. Specify the size of the volume and the protocol type. In this testing, SMB is used.

← Create File System

Volume Details

Allocated Capacity *

1024

GiB

Allocated size must be between 1 TiB (1024 GiB) and 100 TiB (102400 GiB)

Protocol Type *

SMB

- ☐ Make snapshot directory (.snapshot) visible
Makes .snapshot directory visible to clients. For NFSv4.1 volumes (CVS-Performance only), the directory itself will not be listed but can be accessed to list contents, etc.
- ☐ Enable SMB Encryption
Enable this option only if you require encryption of your SMB data traffic.
- ☐ Enable CA share support for SQL Server, FSLogix
Enable this option only for SQL Server and FSLogix workloads that require continuous availability.
- ☐ Hide SMB Share
Enable this option to make SMB shares non-browsable

7. In this step, select the VPC Network from which the volume will be accessible. Ensure VPC peering is in place.

HINT: If VPC peering has not been done, a pop-up button will be displayed to guide you through the peering commands. Open a Cloud Shell session and execute the appropriate commands to peer your VPC with Cloud Volumes Service producer. In case you decide to prepare VPC

peering in beforehand, refer to these [instructions](#).

Network Details

☐ Shared VPC configuration

Provide the host project name when deploying in a shared VPC service project.

VPC Network Name +

cloud-volumes-vpc

Select the VPC Network from which the volume will be accessible. This cannot be changed later.

☐ Use Custom Address Range

Reserved Address range

netapp-addresses

✓ SHOW SNAPSHOT POLICY

SAVE

CANCEL

8. Click Save to create the volume.

<input type="checkbox"/>	<input checked="" type="checkbox"/>	6a4552ed-7378-7302-be28-21a169374f28	nimCVSMBvol01	europa-west3	Available for use	CVS-Performance	Primary	Standard	SMB : \\nimsmb-3830.nimgcveval.com\nimCVSMBvol01
--------------------------	-------------------------------------	--------------------------------------	---------------	--------------	-------------------	-----------------	---------	----------	--

To mount the SMB volume, do the following:

1. In the Cloud Console, go to Cloud Volumes > Volumes.
2. Go to the Volumes page
3. Click the SMB volume for which you want to map an SMB share.
4. Scroll to the right, under Show More, click Mount Instructions.

To perform the mounting process from within the Windows guest OS of the VMware VM, follow the below steps:

1. Click the Start button and then click on Computer.
2. Click Map Network Drive.
3. In the Drive list, click any available drive letter.
4. In the folder box, type:

```
\\nimsmb-3830.nimgcveval.com\nimCVSMBvol01
```

Map Network Drive

What network folder would you like to map?

Specify the drive letter for the connection and the folder that you want to connect to:

Drive:

Folder:

Example: \\server\share


☒ Reconnect at sign-in

☐ Connect using different credentials

[Connect to a Web site that you can use to store your documents and pictures.](#)

To connect every time you log on to your computer, select the Reconnect at sign-in check box.

5. Click Finish.

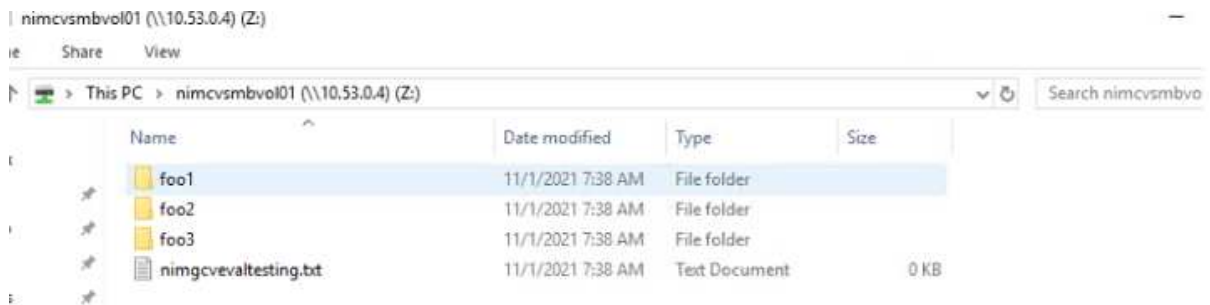

Region Availability for NFS datastores on AWS / VMC, Azure / AVS, and GCP / GCVE

Learn more about the the Global Region support for NFS datastores on AWS, Azure and Google Cloud Platform (GCP).

AWS Region Availability

Americas

AWS Region	VMC Availability	FSx ONTAP Availability	NFS Datastore Availability
US East (Northern Virginia)	Yes	Yes	Yes
US East (Ohio)	Yes	Yes	Yes
US West (Northern California)	Yes	No	No
US West (Oregon)	Yes	Yes	Yes
GovCloud (US West)	Yes	Yes	Yes
Canada (Central)	Yes	Yes	Yes
South America (Sao Paulo)	Yes	Yes	Yes

Last updated on: June 2, 2022.

EMEA

AWS Region	VMC Availability	FSx ONTAP Availability	NFS Datastore Availability
Europe (Ireland)	Yes	Yes	Yes
Europe (London)	Yes	Yes	Yes
Europe (Frankfurt)	Yes	Yes	Yes
Europe (Paris)	Yes	Yes	Yes
Europe (Milan)	Yes	Yes	Yes
Europe (Stockholm)	Yes	Yes	Yes

Last updated on: June 2, 2022.

Asia Pacific

AWS Region	VMC Availability	FSx ONTAP Availability	NFS Datastore Availability
Asia Pacific (Sydney)	Yes	Yes	Yes
Asia Pacific (Tokyo)	Yes	Yes	Yes
Asia Pacific (Osaka)	Yes	No	No
Asia Pacific (Singapore)	Yes	Yes	Yes
Asia Pacific (Seoul)	Yes	Yes	Yes
Asia Pacific (Mumbai)	Yes	Yes	Yes
Asia Pacific (Jakarta)	No	No	No
Asia Pacific (Hong Kong)	No	Yes	No

Last updated on: June 2, 2022.

Americas

Azure Region	AVS Availability	ANF Availability	NFS Datastore Availability
Central US	Yes	Yes	Yes
East US	Yes	Yes	Yes
East US 2	No	Yes	No
North Central US	Yes	Yes	Yes
South Central US	Yes	Yes	Yes
West Central US	No	No	No
West US	Yes	Yes	Yes
West US2	No	Yes	No
West US3	GA: H1-2023	Yes	Yes
Canada Central	Yes	Yes	Yes
Canada East	Yes	Yes	Yes
Brazil South	Yes	Yes	Yes
Brazil Southeast	No	GA: Q2-2022	No

Last updated on: June 7, 2022.

EMEA

Azure Region	AVS Availability	ANF Availability	NFS Datastore Availability
North Europe	Yes	Yes	Yes
West Europe	No	Yes	No
France Central	Yes	Yes	Yes
France South	No	GA: H2-2022	No
Germany North	No	Yes	No
Germany West Central	Yes	Yes	Yes
Norway East	No	Yes	No
Norway West	No	Yes	No
Sweden Central	GA: Q2-2022	GA: Q2-2022	No
Sweden South	No	No	No
Switzerland North	No	Yes	No
Switzerland West	No	Yes	No
UAE Central	No	Yes	No
UAE North	No	Yes	No
UK South	Yes	Yes	Yes

UK West	Yes	Yes	Yes
---------	-----	-----	-----

Last updated on: June 7, 2022.

Asia Pacific

Azure Region	AVS Availability	ANF Availability	NFS Datastore Availability
Australia East	Yes	Yes	Yes
Australia Southeast	Yes	Yes	Yes
Australia Central	No	Yes	No
Japan East	Yes	Yes	No
Japan West	Yes	Yes	Yes
East Asia	No	Yes	No
Southeast Asia	Yes	Yes	Yes
Central India	No	Yes	No
South India	No	Yes	No
Korea Central	No	Yes	No

Last updated on: June 20, 2022.

GCP Region Availability

GCP region availability will be released when GCP enters public availability.

Copyright Information

Copyright © 2022 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.