



Ch 10

1) before calling function

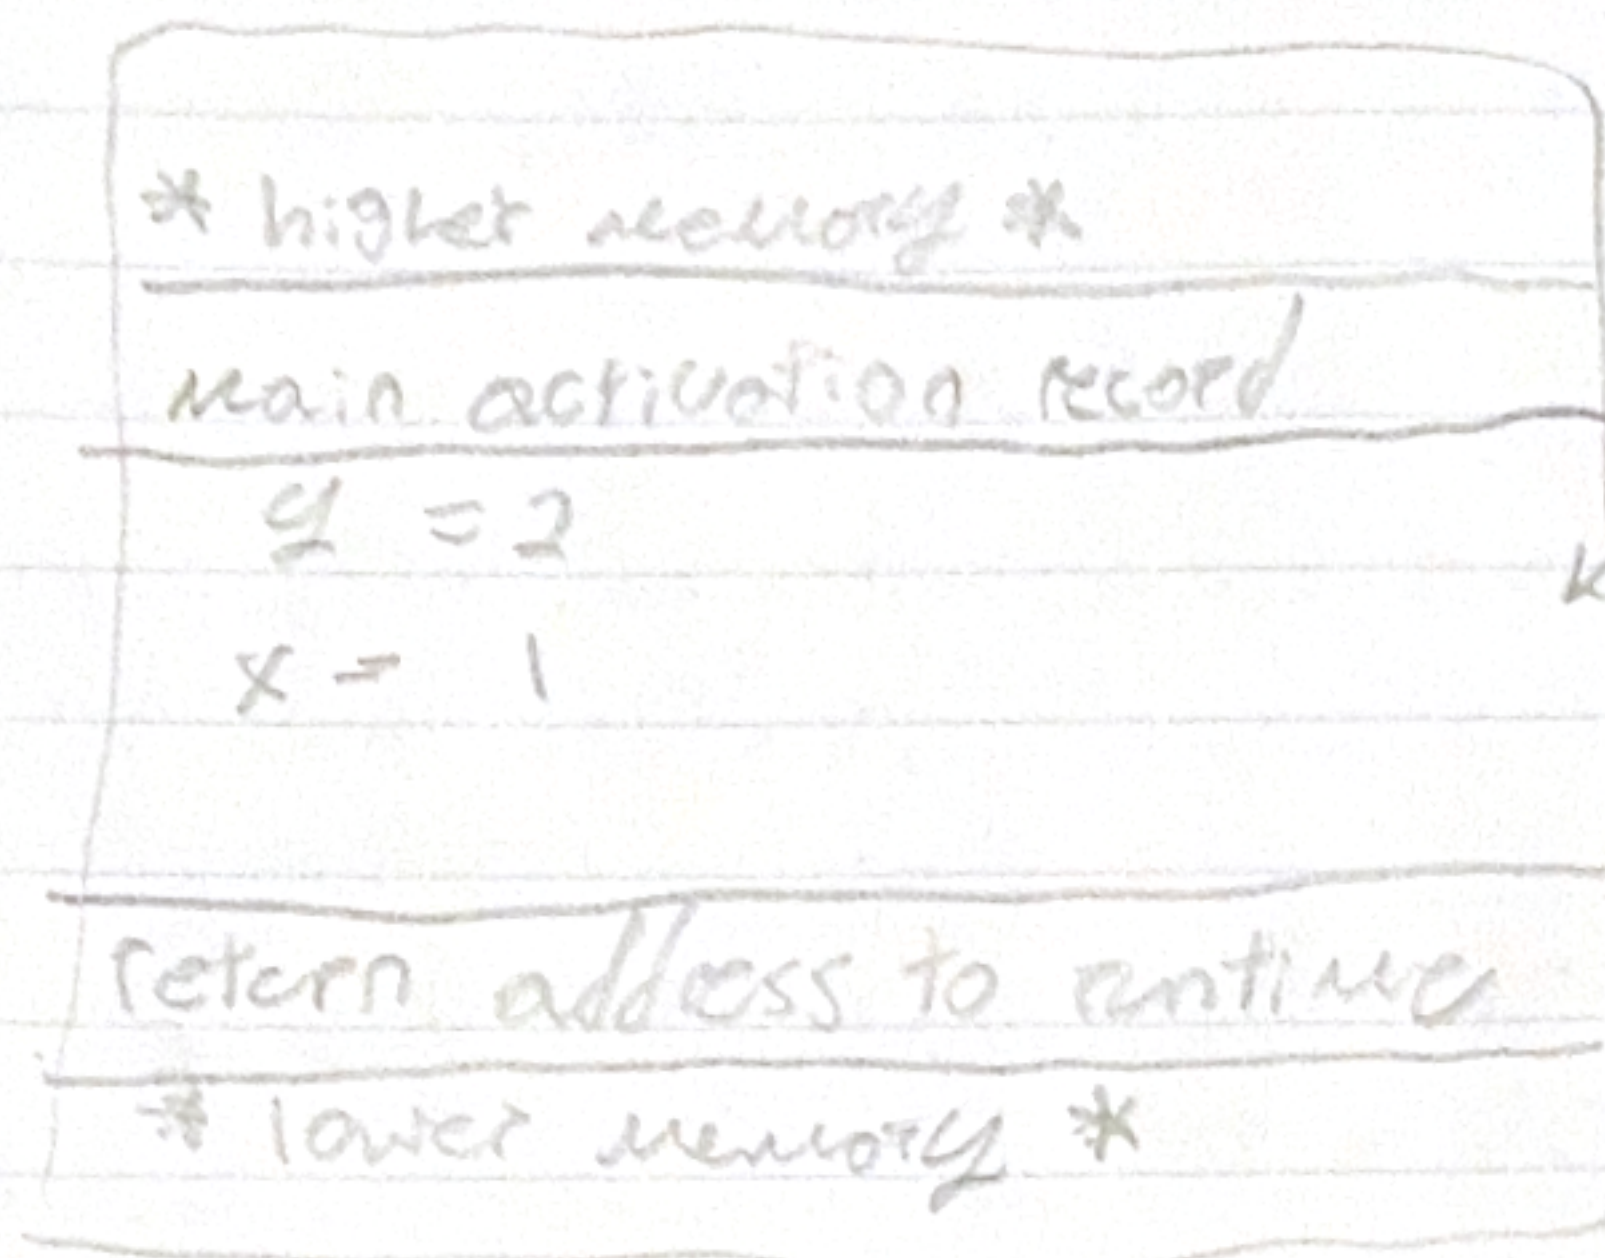


define as two values

2) when function begins the activation record is pushed on top of mains

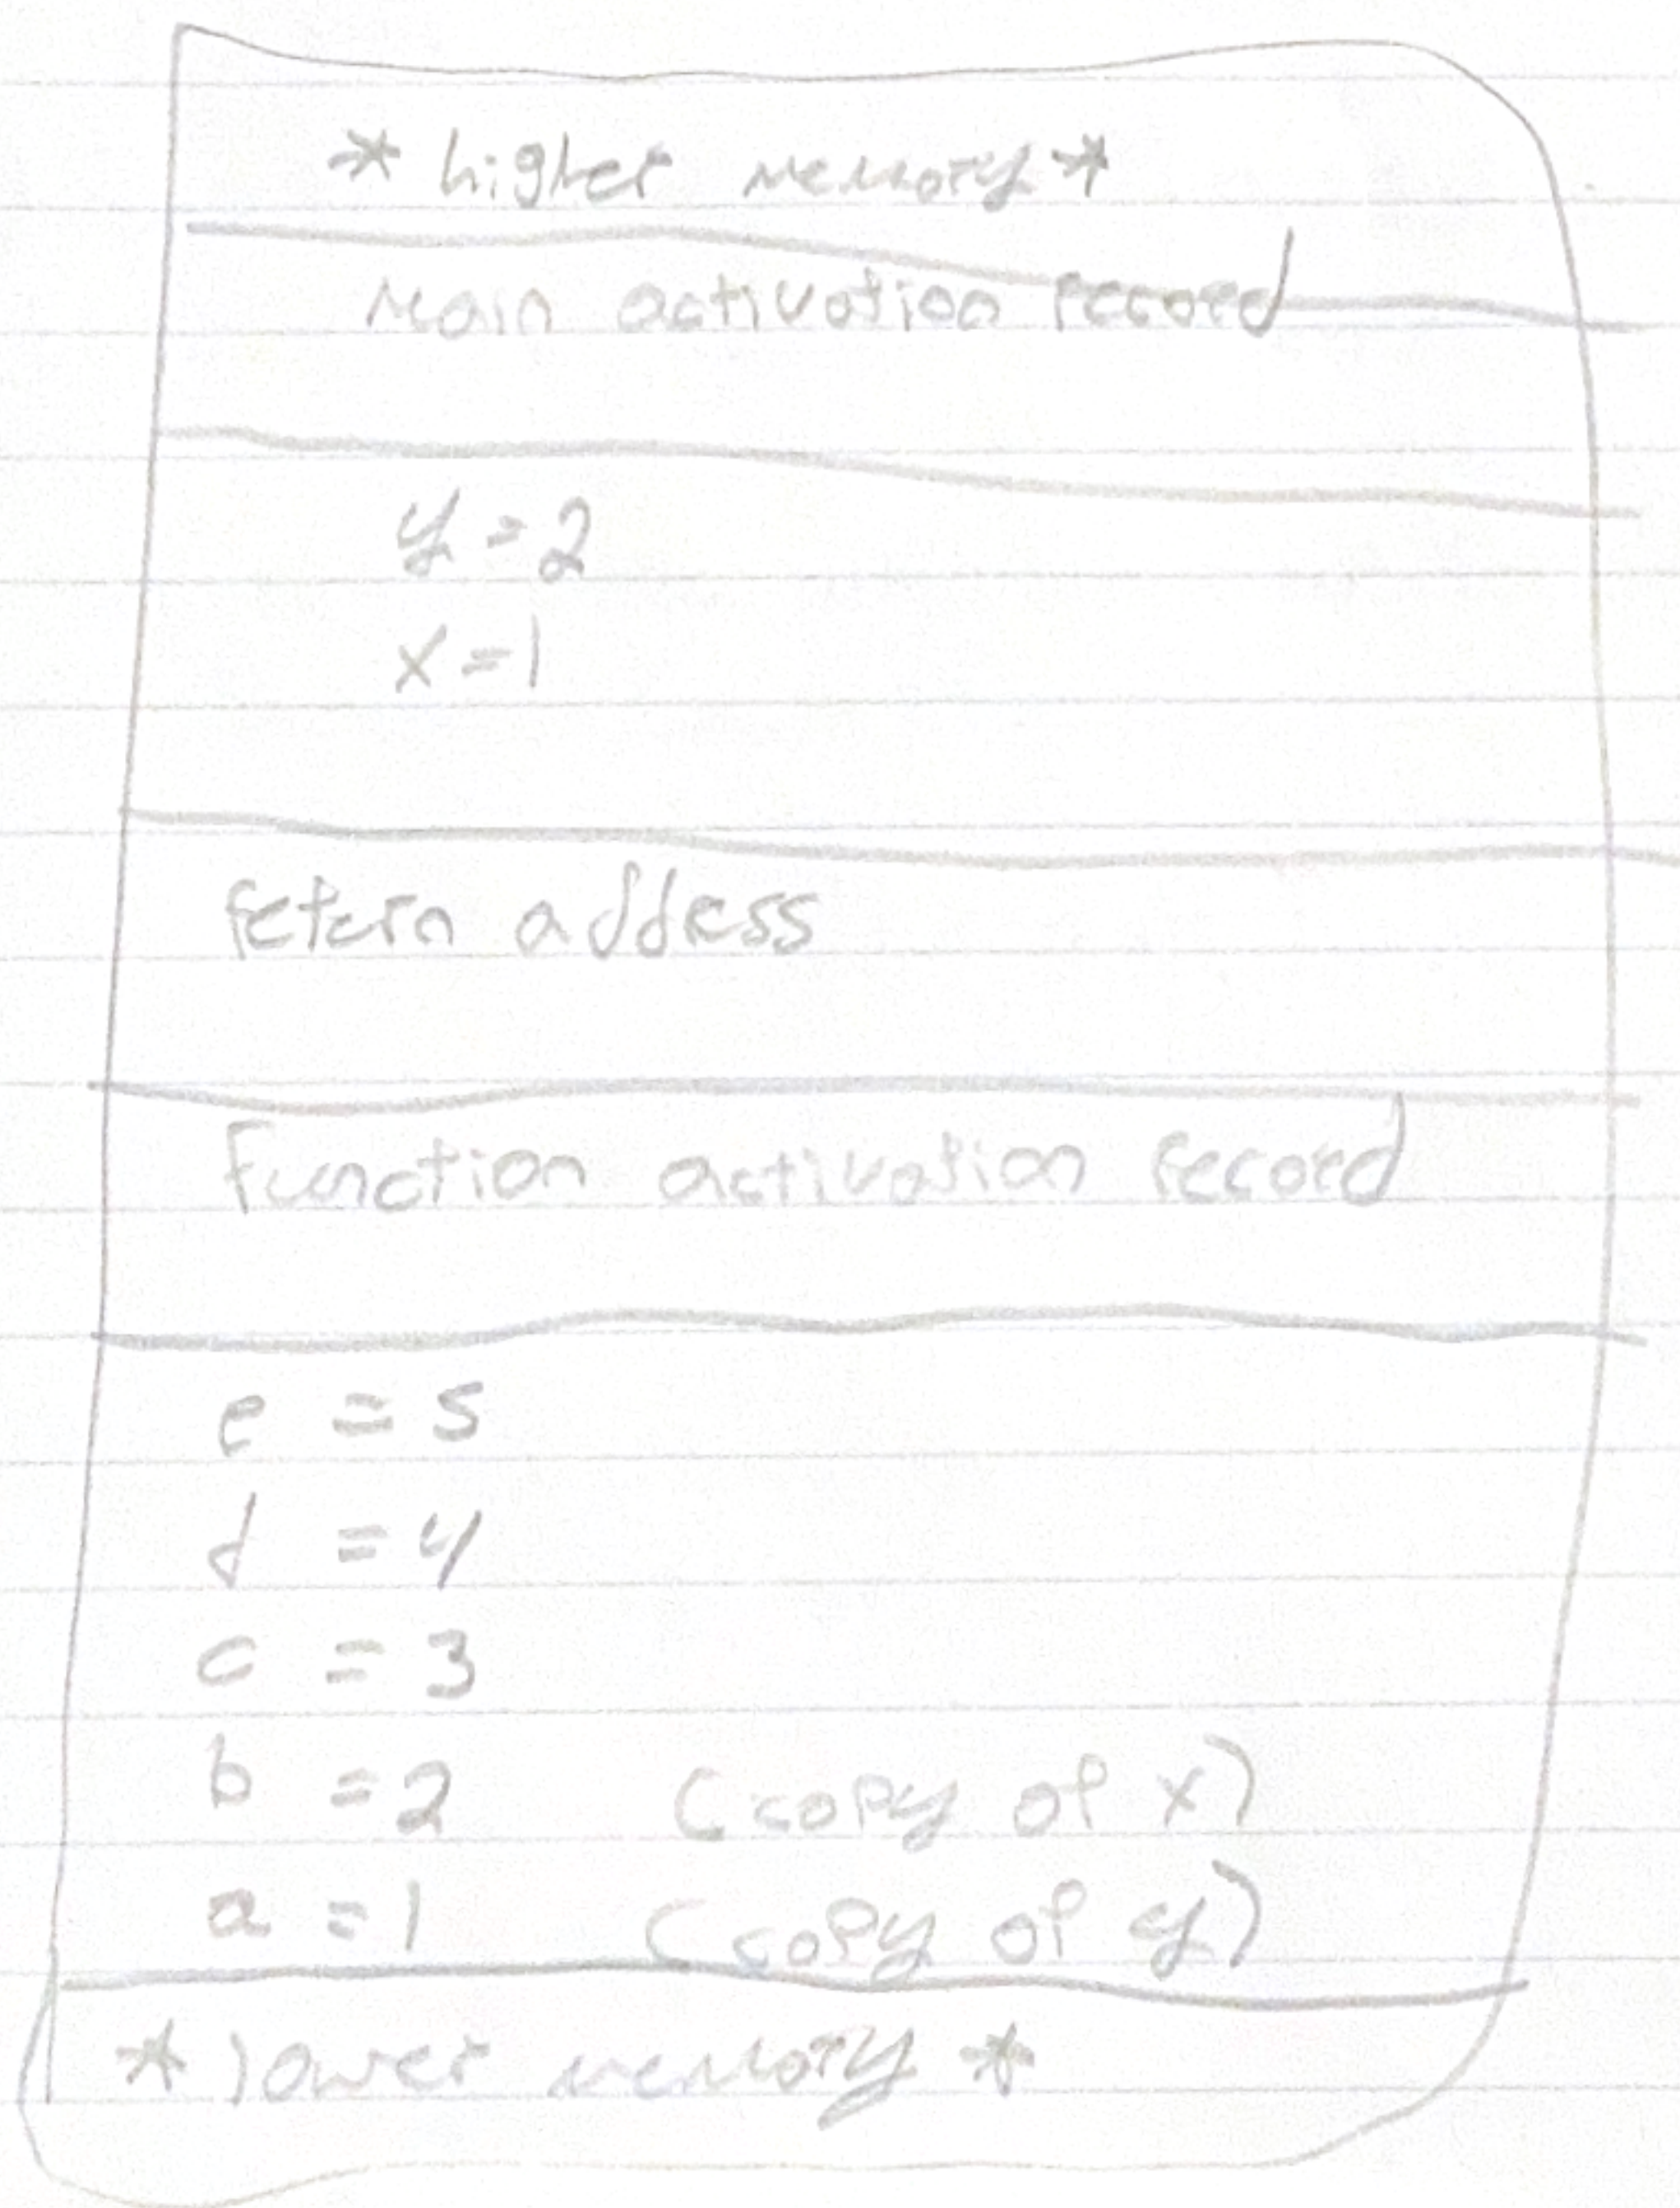

3) Result after returning from function
the function will be popped

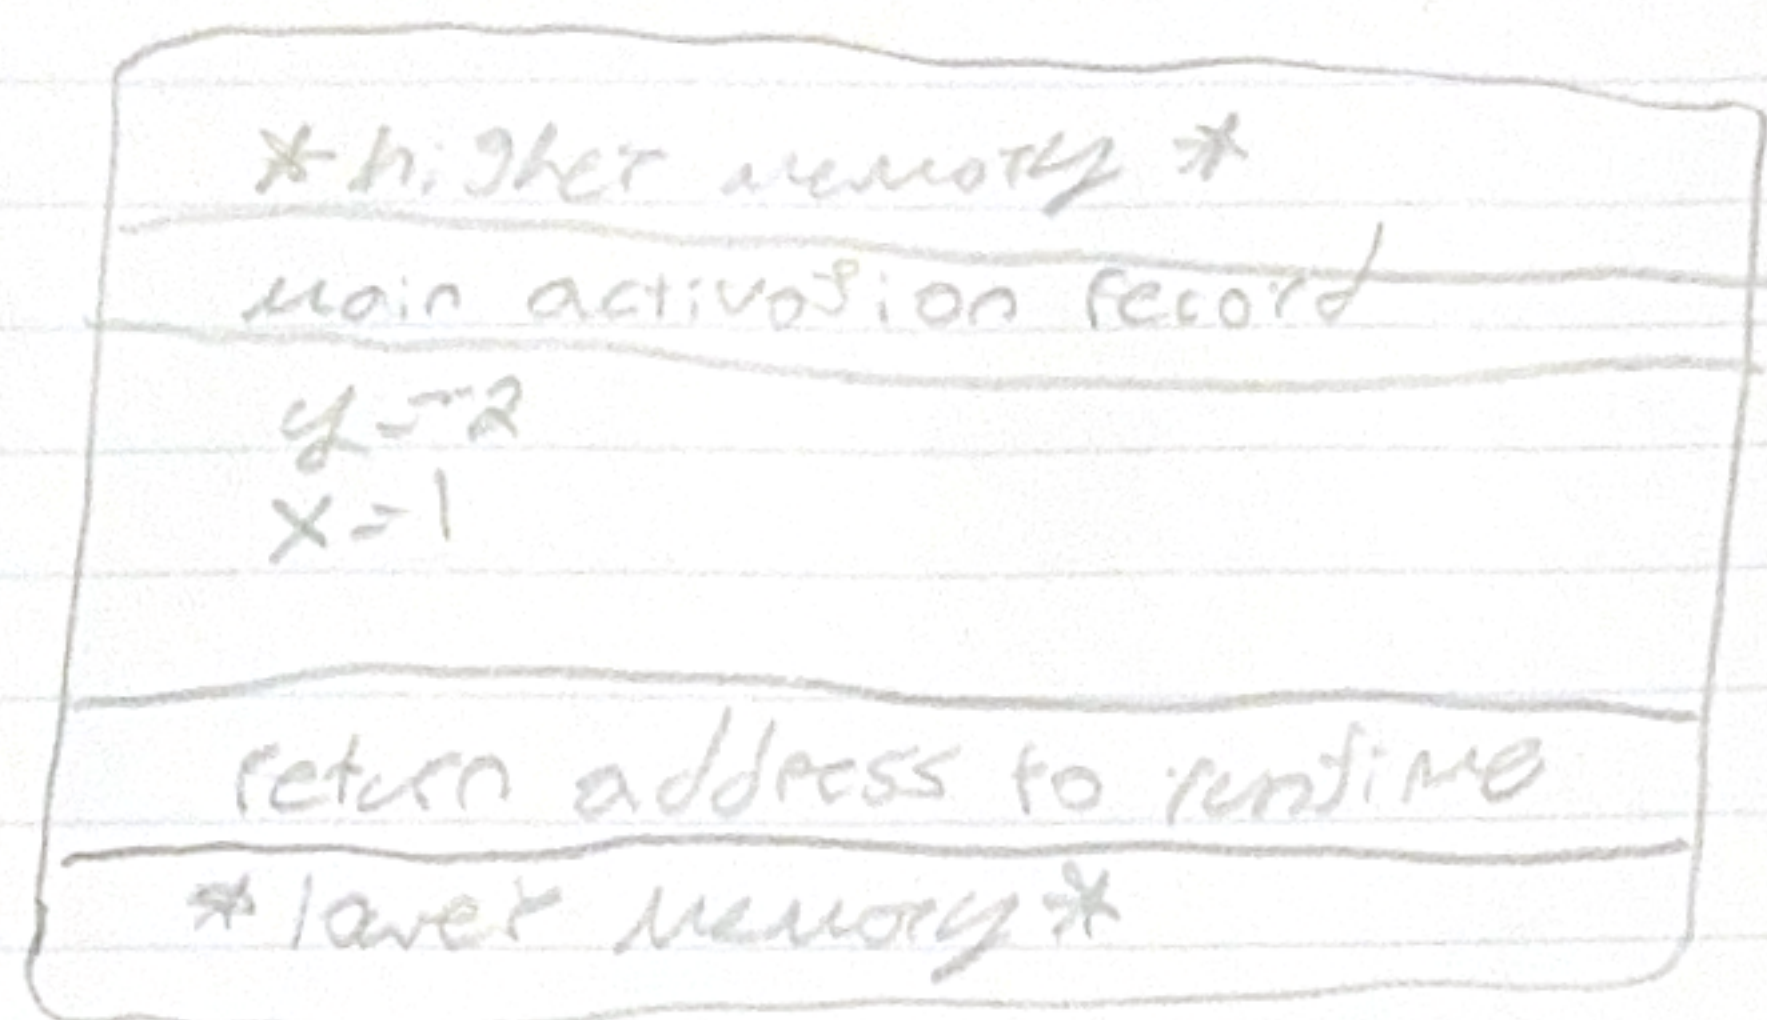

Part 2)

As the addresses output from Program 2 line up with the activation record, the stack grows downwards and main's frame will be above functions frame and within each frame the local variables appear in the order they are declared.