



PHP 5 Filesystem Functions

[< Previous](#)[Next >](#)

PHP Filesystem Introduction

The filesystem functions allow you to access and manipulate the filesystem.

Installation

The filesystem functions are part of the PHP core. There is no installation needed to use these functions.

Unix / Windows Compatibility

When specifying a path on Unix platforms, a forward slash (/) is used as directory separator.


On Windows platforms, both forward slash (/) and backslash (\) can be used.

Runtime Configuration

The behavior of the filesystem functions is affected by settings in php.ini.

Filesystem configuration options:

COLOR
PICKER



HOW TO

Tabs
Dropdowns
Accordions
Convert
Weights
Animated
Buttons
Side
Navigation
Top
Navigation
Modal Boxes
Progress Bars
Parallax
Login Form
HTML
Includes

Name	Default	Description	Changeable
allow_url_fopen	"1"	Allows fopen()-type functions to work with URLs (available since PHP 4.0.4)	PHP_INI_SYSTEM
user_agent	NULL	Defines the user agent for PHP to send (available since PHP 4.3)	PHP_INI_ALL
default_socket_timeout	"60"	Sets the default timeout, in seconds, for socket based streams (available since PHP 4.3)	PHP_INI_ALL
from	""	Defines the anonymous FTP password (your email address)	PHP_INI_ALL
auto_detect_line_endings	"0"	When set to "1", PHP will examine the data read by fgets() and file() to see if it is using Unix, MS-Dos or Mac line-ending characters (available since PHP 4.3)	PHP_INI_ALL

[Google Maps](#)
[Range Sliders](#)
[Tooltips](#)
[Slideshow](#)
[Filter List](#)
[Sort List](#)

SHARE




CERTIFICATI

HTML, CSS,
 JavaScript,
 PHP, jQuery,
 Bootstrap
 and XML.

[Read More »](#)

Learn How to Build a Website

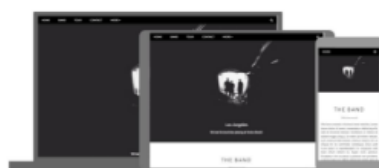

PHP 5 Filesystem Functions

Function	Description
<u>basename()</u>	Returns the filename component of a path
<u>chgrp()</u>	Changes the file group
<u>chmod()</u>	Changes the file mode
<u>chown()</u>	Changes the file owner
<u>clearstatcache()</u>	Clears the file status cache
<u>copy()</u>	Copies a file
<u>delete()</u>	See <u>unlink()</u> or <u>unset()</u>
<u>dirname()</u>	Returns the directory name component of a path
<u>disk_free_space()</u>	Returns the free space of a directory
<u>disk_total_space()</u>	Returns the total size of a directory
<u>diskfreespace()</u>	Alias of <u>disk_free_space()</u>
<u>fclose()</u>	Closes an open file
<u>feof()</u>	Tests for end-of-file on an open file
<u>fflush()</u>	Flushes buffered output to an open file
<u>fgetc()</u>	Returns a character from an open file
<u>fgetcsv()</u>	Parses a line from an open file, checking for CSV fields
<u>fgets()</u>	Returns a line from an open file
<u>fgetss()</u>	Returns a line, with HTML and PHP tags removed, from an open file
<u>file()</u>	Reads a file into an array
<u>file_exists()</u>	Checks whether or not a file or directory exists
<u>file_get_contents()</u>	Reads a file into a string
<u>file_put_contents()</u>	Writes a string to a file
<u>fileatime()</u>	Returns the last access time of a file
<u>filectime()</u>	Returns the last change time of a file
<u>filegroup()</u>	Returns the group ID of a file
<u>fileinode()</u>	Returns the inode number of a file
<u>filemtime()</u>	Returns the last modification time of a file
<u>fileowner()</u>	Returns the user ID (owner) of a file
<u>fileperms()</u>	Returns the permissions of a file
<u>filesize()</u>	Returns the file size
<u>filetype()</u>	Returns the file type
<u>flock()</u>	Locks or releases a file

<u>fnmatch()</u>	Matches a filename or string against a specified pattern
<u>fopen()</u>	Opens a file or URL
<u>fpassthru()</u>	Reads from an open file, until EOF, and writes the result to the output buffer
<u>fputcsv()</u>	Formats a line as CSV and writes it to an open file
<u>fputs()</u>	Alias of <u>fwrite()</u>
<u>fread()</u>	Reads from an open file
<u>fscanf()</u>	Parses input from an open file according to a specified format
<u>fseek()</u>	Seeks in an open file
<u>fstat()</u>	Returns information about an open file
<u>ftell()</u>	Returns the current position in an open file
<u>ftruncate()</u>	Truncates an open file to a specified length
<u>fwrite()</u>	Writes to an open file
<u>glob()</u>	Returns an array of filenames / directories matching a specified pattern
<u>is_dir()</u>	Checks whether a file is a directory
<u>is_executable()</u>	Checks whether a file is executable
<u>is_file()</u>	Checks whether a file is a regular file
<u>is_link()</u>	Checks whether a file is a link
<u>is_readable()</u>	Checks whether a file is readable
<u>is_uploaded_file()</u>	Checks whether a file was uploaded via HTTP POST
<u>is_writable()</u>	Checks whether a file is writeable
<u>is_writeable()</u>	Alias of <u>is_writable()</u>
<u>lchgrp()</u>	Changes group ownership of symlink
<u>lchown()</u>	Changes user ownership of symlink
<u>link()</u>	Creates a hard link
<u>linkinfo()</u>	Returns information about a hard link
<u>lstat()</u>	Returns information about a file or symbolic link
<u>mkdir()</u>	Creates a directory
<u>move_uploaded_file()</u>	Moves an uploaded file to a new location
<u>parse_ini_file()</u>	Parses a configuration file
<u>parse_ini_string()</u>	Parses a configuration string
<u>pathinfo()</u>	Returns information about a file path
<u>pclose()</u>	Closes a pipe opened by <u>popen()</u>

<u>popen()</u>	Opens a pipe
<u>readfile()</u>	Reads a file and writes it to the output buffer
<u>readlink()</u>	Returns the target of a symbolic link
<u>realpath()</u>	Returns the absolute pathname
<u>realpath_cache_get()</u>	Returns realpath cache entries
<u>realpath_cache_size()</u>	Returns realpath cache size
<u>rename()</u>	Renames a file or directory
<u>rewind()</u>	Rewinds a file pointer
<u>rmdir()</u>	Removes an empty directory
<u>set_file_buffer()</u>	Sets the buffer size of an open file
<u>stat()</u>	Returns information about a file
<u>symlink()</u>	Creates a symbolic link
<u>tempnam()</u>	Creates a unique temporary file
<u>tmpfile()</u>	Creates a unique temporary file
<u>touch()</u>	Sets access and modification time of a file
<u>umask()</u>	Changes file permissions for files
<u>unlink()</u>	Deletes a file

[< Previous](#)
[Next >](#)

[REPORT ERROR](#)
[PRINT PAGE](#)
[FORUM](#)
[ABOUT](#)

Top 10 Tutorials

[HTML Tutorial](#)
[CSS Tutorial](#)
[JavaScript Tutorial](#)
[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[SQL Tutorial](#)
[PHP Tutorial](#)

Top 10 References

[HTML Reference](#)
[CSS Reference](#)
[JavaScript Reference](#)
[W3.CSS Reference](#)
[Browser Statistics](#)

Top 10 Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[W3.CSS Examples](#)
[HTML DOM Examples](#)

Web Certificates

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[jQuery Certificate](#)
[PHP Certificate](#)
[Bootstrap Certificate](#)
[XML Certificate](#)

[jQuery Tutorial](#)
[Angular Tutorial](#)
[XML Tutorial](#)

[PHP Reference](#)
[HTML Colors](#)
[HTML Character Sets](#)
[jQuery Reference](#)
[AngularJS Reference](#)

[PHP Examples](#)
[ASP Examples](#)
[jQuery Examples](#)
[Angular Examples](#)
[XML Examples](#)

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy. Copyright 1999-2017 by Refsnes Data. All Rights Reserved.
Powered by W3.CSS.

