


Login

[illegible]


Get user id: 1

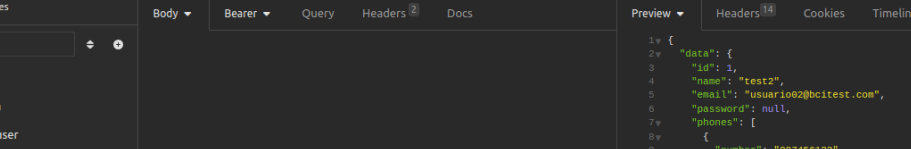


The screenshot displays the Swagger UI interface for a REST client. The top bar shows the URL `http://localhost:8081/api/user/1` and the response status `200 OK`. The left sidebar contains a list of endpoints, with `GET /api/user/1` selected. The main area shows the response body as a JSON object:

```
{
  "data": {
    "id": 1,
    "name": "test2",
    "email": "usuario2@bcitest.com",
    "password": null,
    "phones": [
      {
        "number": "987456123",
        "citycode": "45",
        "countrycode": "CW"
      }
    ],
    "created": "2023-11-20T06:03:39.903105Z",
    "modified": "2023-11-20T06:03:39.903114Z",
    "lastLogin": "2023-11-20T13:37:12.939990Z",
    "keyAccess": "12118f9a-95e4-4000-84ca-04ec79d486b5"
  }
}
```


User not found

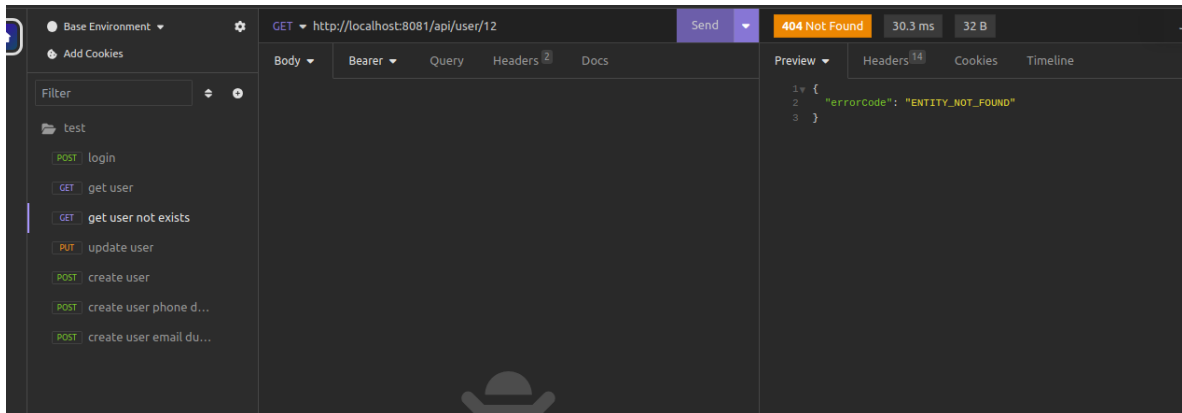


Create user

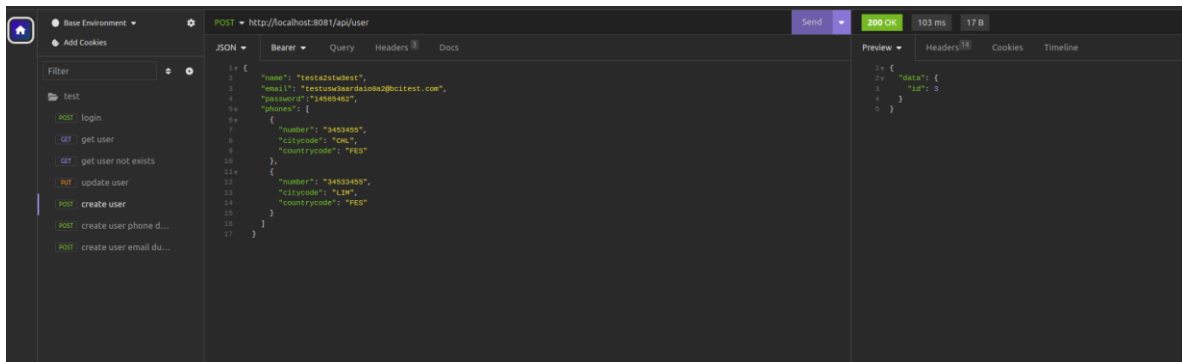


Create user with email duplicated

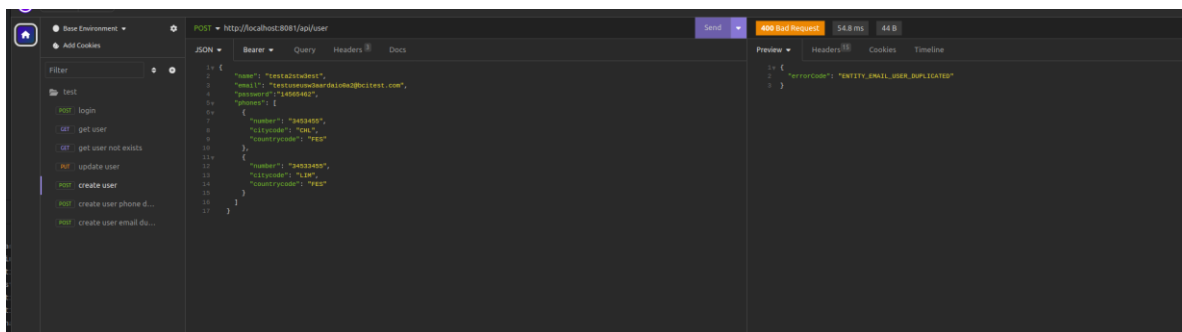


Create user with phone duplicated

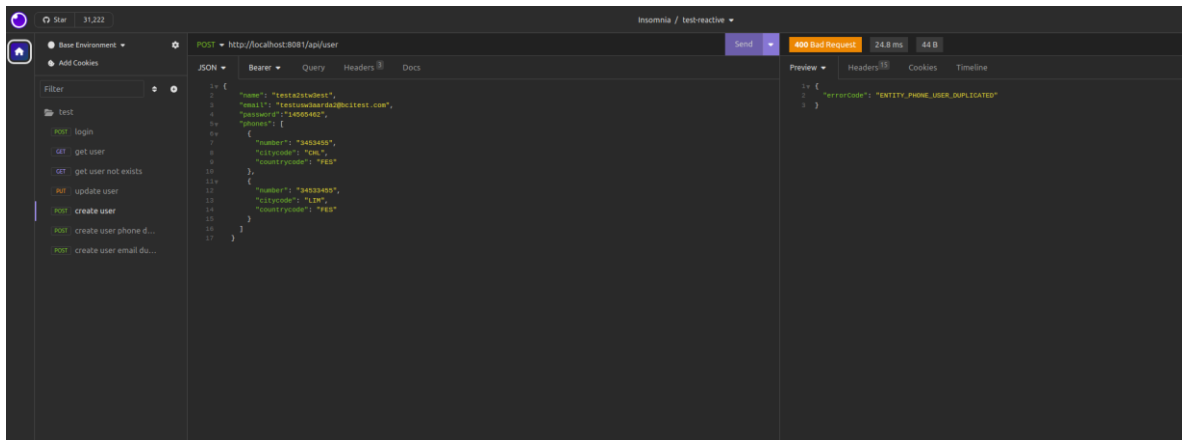


Invalid format

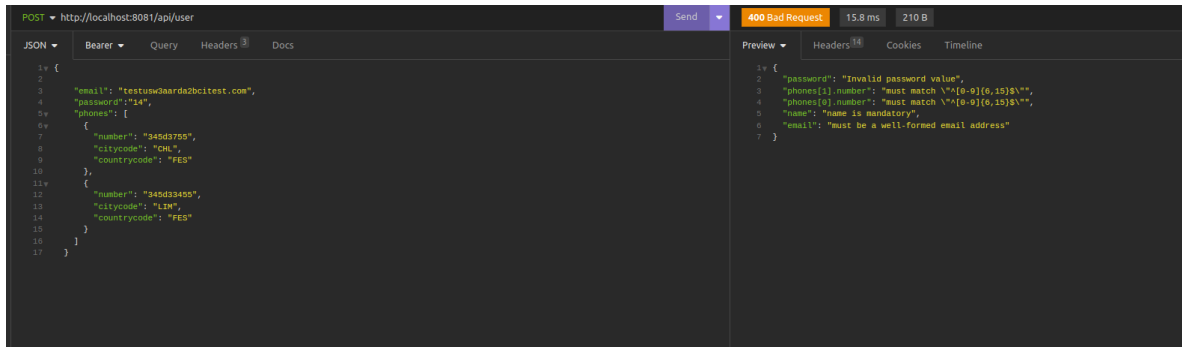

Update user id: 1

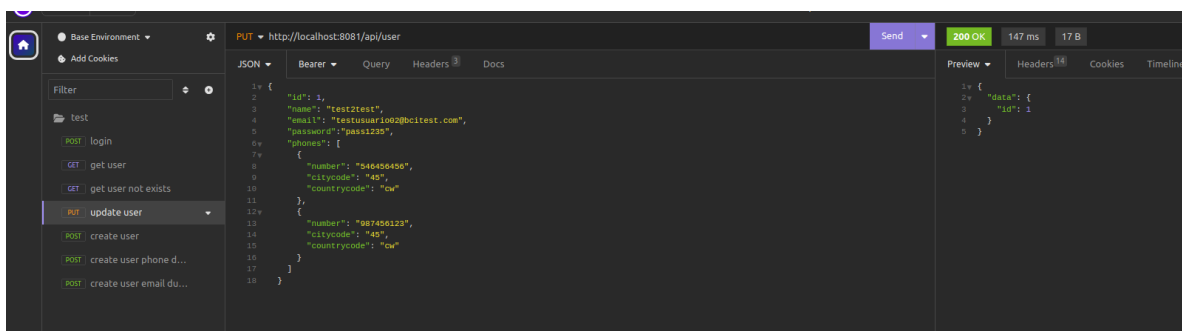

Get user id: 1

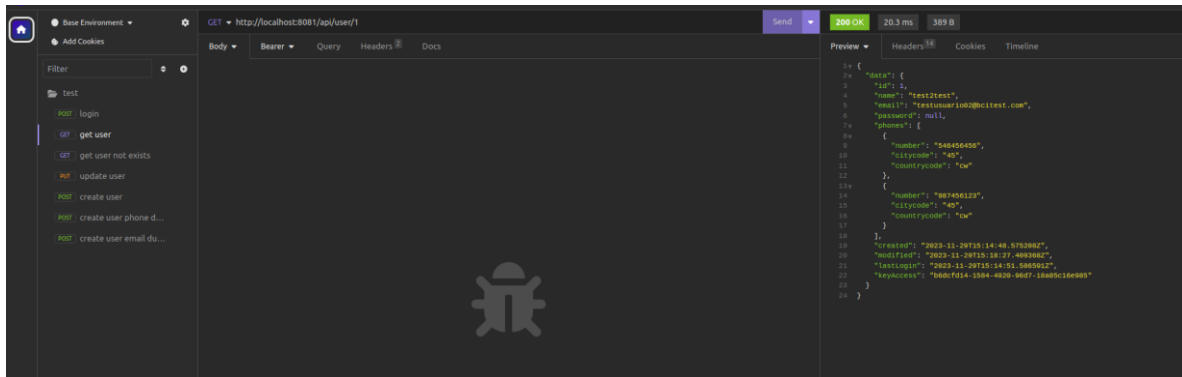

Get user id: 2

