

Introduction to LLVM compiler framework

Stefano Cherubin

Politecnico di Milano

06-05-2016

This material is strongly based on material produced by Michele Scandale and Ettore Speziale for the course 'Code Optimizations and Transformations'.

Contents

- 1 Introduction
- 2 Compiler organization
- 3 Algorithm design
- 4 Inside LLVM
- 5 LLVM-IR language
- 6 Conclusions
- 7 Bibliography

Compilers and compilers

Approaching to compilers, we need to understand the difference between a *toy-compiler* and *production-quality compiler*.

Toy Compiler

- small code-base
- easy doing tiny edits
- impossible doing normal/big edits

Production-Quality Compiler

- huge code-base
- difficult performing any kind of edits
- compiler-code extremely optimized

Key concepts:

- working with a production-quality compiler is *initially hard*, but ...
- ... an huge set of tools for analyzing/transforming/testing code is provided – toy compilers *miss these things*!

LLVM: Low Level Virtual Machine

Initially started as a research project at Urbana-Champaign:

- now intensively used for **researches** involving compilers
- key technology for **leading industries** – AMD, Apple, Intel, NVIDIA

If you are there, then it is **your key-technology**:


- open-source compilers: Open64 [1], GCC [2], LLVM [3]
- LLVM is relatively **young** – GCC performances are better – but ...
- ...it is highly modular, well written, kept *clean* by developers.

Contents

- 1 Introduction
- 2 Compiler organization**
- 3 Algorithm design
- 4 Inside LLVM
- 5 LLVM-IR language
- 6 Conclusions
- 7 Bibliography

Compiler pipeline

Typically a compiler is a **pipeline**:

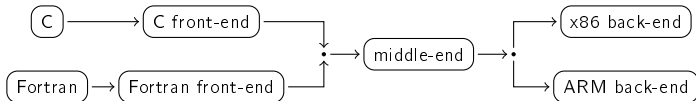

There are three main components:

- Front-end** **translate** a source file in the **intermediate representation**
- Middle-end** **analyze** intermediate representation, **optimize** it
- Back-end** **generate** target machine assembly from the intermediate representation

Compiler pipeline

Internal pipelines

Each component is composed internally by pipelines:

- simple model of computations – **read** something, **produce** something
- only needed to specify **how to transform** input data into output data

Complexity lies on **chaining** together stages.

Compiler pipeline

We will consider only the *middle-end*: same concepts are valid also for {front,back}-end.

Technical terms:

Pass a pipeline stage

IR (a.k.a. Intermediate Representation) is the language used in the middle-end.

The **pass manager** manages a set of passes:

- build the compilation pipeline: **schedule** passes together according to **dependencies**.

Dependencies are **hints** used by the pass manager in order to schedule passes.

First insights

A compiler is **complex**:

- passes are the **elementary unit of work**
- pass manager must be **advisee** about pass chaining
- pipeline shapes are **not fixed** – it can change from one compiler execution to another ¹

Moreover, compilers must be **conservative**:

- apply a transformation only if program **semantic is preserved**

Compiler algorithms are designed differently!

¹e.g. optimized/not optimized builds

Contents

- 1 Introduction
- 2 Compiler organization
- 3 Algorithm design**
- 4 Inside LLVM
- 5 LLVM-IR language
- 6 Conclusions
- 7 Bibliography

Classical Algorithm Design

Dealing with algorithm design, a good approach is the following:

- 1 study the problem
- 2 make some example
- 3 identify the **common case**
- 4 derive the algorithm for the common case
- 5 add handling for **corner cases**
- 6 improve performing **optimizing the common case**

Weakness of the approach:

- **corner cases** – a *correct* algorithm **must** consider *all the corner cases*!

Compiler Algorithm Design

Be Conservative

Corner cases are difficult to handle:

- compiler algorithms must be **proved** to preserve program semantic
- having a common methodology helps on that

Compiler algorithms are built combining three kind of **passes**:

- analysis
- optimization
- normalization

We now consider a simple example: *loop hoisting*.

Loop Hoisting

It is a transformation that:

- looks for statements (inside the loop) not depending on the loop state
- move them outside the loop body

Loop Hoisting – Before

```
do {  
  a += i;  
  b = c;  
  i++;  
} while (i < k);
```

Loop Hoisting – After

```
b = c;  
do {  
  a += i;  
  i++;  
} while (i < k);
```

Loop Hoisting

Focus on the Transformation

The transformation is trivial:

- move “good” statement outside of the loop

This is the **optimization pass**. It needs to know:

- loops
- “good” statements

They are **analysis** passes:

- detecting loops in the program
- detecting loop-independent statements

When registering loop hoisting, also declare needed analysis:

- pipeline automatically built – analysis → optimization

Loop Hoisting

Proving Program Semantic Preservation

The proof is trivial:

- transformation is correct if analysis are correct, but ...
- ... usually analysis are built starting from other analysis already implemented inside the compiler

You have to prove that combining all analysis information gives you a correct view of the code:

- analysis information cannot induce optimization passes applying a transformation not preserving program semantic

Loop Hoisting

More Loops

We have spoken about loops, but which kind of loop?

- **do-while** loops?
- **while** loop?
- **for** loops?

We have seen loop hoisting on:

- **do-while** loops

What about other kinds of loops?

- they must be normalized – i.e. transformed to **do-while** loops

Normalization passes do that:

- before running loop hoisting, you must tell to the pass manager that loop normalization must be run before

This allows to recognize more loops, thus potentially improving optimization impact!

Compiler Algorithm Design

A methodology

You have to:

- 1 analyze the problem
- 2 make some examples
- 3 detect the common case
- 4 declare the **input format**
- 5 declare **analysis** you need
- 6 design an **optimization** pass
- 7 proof its **correctness**
- 8 improve algorithm performance by acting on common case – the only considered up to now. Please notice that corner cases are not considered – just do not optimize
- 9 improve the effectiveness of the algorithm by adding **normalization passes**

Contents

- 1 Introduction
- 2 Compiler organization
- 3 Algorithm design
- 4 Inside LLVM**
- 5 LLVM-IR language
- 6 Conclusions
- 7 Bibliography

Terminology

Speaking About LLVM IR

LLVM IR comes with 3 different flavours:

`assembly` human-readable format

`bitcode` binary on-disk machine-oriented format

`in-memory` binary in-memory format, used during compilation process

All formats have the same expressiveness!

File extensions:

`.ll` for assembly files

`.bc` for bitcode files

Tools

C Language Family Front-end

Writing LLVM assembly by hand is unfeasible:

- different front-ends available for LLVM
- use Clang [4] for the C family

The clang driver is compatible with GCC:

- \approx same command line options

To generate LLVM IR:

assembly `clang -emit-llvm -S -o out.ll in.c`

bitcode `clang -emit-llvm -o out.bc in.c`

It can also generate native code starting from LLVM assembly or LLVM bitcode – like compiling an assembly file with GCC

Tools

Playing with LLVM Passes

LLVM IR can be manipulated using `opt`:

- read an input file
- run specified LLVM passes on it
- respecting user-provided order

Useful passes:

- print CFG with `opt -view-cfg input.ll`
- print dominator tree with `opt -view-dom input.ll`
- ...

Pass chaining:

- run *mem2reg*², then view the CFG with `opt -mem2reg -view-cfg input.ll`

²More on this later


Pass Hierarchy

LLVM provides a lot of passes:

- try `opt -help`

For performance reasons there are different kind of passes:

LLVM Passes

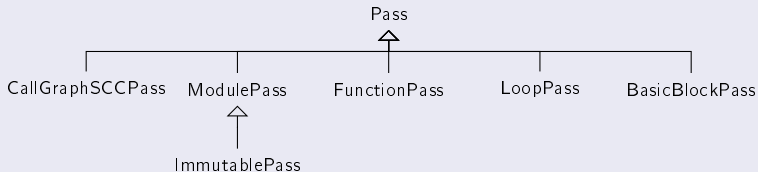

LLVM Passes

Each pass kind visits particular elements of a module:

`ImmutablePass` compiler configuration – never run

`CallGraphSCCPass` post-order visit of CallGraph SCCs

`ModulePass` visit the whole module

`FunctionPass` visit functions

`LoopPass` post-order visit of loop nests

`BasicBlockPass` visit basic blocks

Specializations comes with restrictions:

- e.g. a `FunctionPass` cannot add or delete functions
- refer to [5] for accurate description of features and limitations of each kind of pass

What is Available Inside LLVM?

LLVM provides passes performing basic transformations:

- variables promotion
- loops canonicalization
- ...

They can be used to **normalize/canonicalize** the input:

- transform into a form analyzable for further passes

Input normalization is **essential**:

- keep passes implementation manageable

Contents

- 1 Introduction
- 2 Compiler organization
- 3 Algorithm design
- 4 Inside LLVM
- 5 LLVM-IR language**
- 6 Conclusions
- 7 Bibliography

LLVM IR

LLVM IR [6] language is RISC-based:

- instructions operates on **variables**³
- only **load** and **store** access memory
- **alloca** used to reserve memory on function stacks

There are also few **high level instructions**:

- function call – **call**
- pointer arithmetics – **getelementptr**
- ...

³Virtual registers

LLVM IR

Types & Variables

LLVM IR is **strongly typed**:

- e.g. you cannot assign a floating point value to an integer variable without an explicit cast

Almost everything is **typed** – e.g.:

functions @fact – i32 (i32)

statements %3 = icmp eq i32 %2, 0 – i1

A variable can be:

global @var = **common global** i32 0, **align** 4

function parameter **define** i32 @fact(i32 %n)

local %2 = **load** i32, i32* %1, **align** 4

Local variables are defined by statements

LLVM IR

Example: factorial

```

define i32 @fact(i32 %n) {
entry:
    %retval = alloca i32, align 4
    %n.addr = alloca i32, align 4
    store i32 %n, i32* %n.addr, align 4
    %0 = load i32, i32* %n.addr, align 4
    %cmp = icmp eq i32 %0, 0
    br i1 %cmp, label %if.then, label %if.end

if.then:
    store i32 1, i32* %retval, align 4
    br label %return

if.end:
    %1 = load i32, i32* %n.addr, align 4
    %2 = load i32, i32* %n.addr, align 4
    %sub = sub nsw i32 %2, 1
    %call = call i32 @fact(i32 %sub)
    %mul = mul nsw i32 %1, %call
    store i32 %mul, i32* %retval, align 4
    br label %return

return:
    %3 = load i32, i32* %retval, align 4
    ret i32 %3
}

```

LLVM IR Language

Static Single Assignment

LLVM IR is SSA-based:

- every variable is **statically assigned** exactly **once**

Statically means that:

- inside each function
- for each variable `%foo`
- there is only one statement in the form `%foo = ...`

Static is different from dynamic:

- a static assignment can be executed more than once

Static Single Assignment

Examples

Scalar SAXPY

```
float saxpy(float a, float x, float y) {  
    return a * x + y;  
}
```

Scalar LLVM SAXPY

```
define float @saxpy(float %a, float %x, float %y) {  
    %1 = fmul float %a, %x  
    %2 = fadd float %1, %y  
    ret float %2  
}
```

Temporary %1 not reused! %2 is used for the second assignment!

Static Single Assignment

Examples

Array SAXPY

```
void saxpy(float a, float x[4], float y[4], float z[4]) {
    for(unsigned i = 0; i < 4; ++i)
        z[i] = a * x[i] + y[i];
}
```

Array LLVM SAXPY

```
for.cond:
    %i.0 = phi i32 [ 0, %entry ], [ %inc, %for.inc ]
    %cmp = icmp ult i32 %i.0, 4
    br i1 %cmp, label %for.body, label %for.end

...

for.inc:
    %inc = add i32 %i.0, 1
    br label %for.cond
```

One assignment for loop counter `%i.0`

Static Single Assignment

Handling Multiple Assignments

Max

```
float max(float a, float b) {  
    return a > b ? a : b;  
}
```

LLVM Max – Bad

```
%1 = fcmp ogt float %a, %b  
br i1 %1, label %if.then, label %if.else  
if.then:  
    %2 = %a  
    br label %if.end  
if.else:  
    %2 = %b  
    br label %if.end  
if.end:  
    ret float %2
```

Why is it bad?

Static Single Assignment

Use **phi** to Avoid Troubles

The `%2` variable must be statically set once

LLVM Max

```
%1 = fcmp ogt float %a, %b
br i1 %1, label %if.then, label %if.end
if.then:
  br label %if.end
if.else:
  br label %if.end
if.end:
  %2 = phi float [ %a, %if.then ], [ %b, %if.else ]
  ret float %2
```

The **phi** instruction is a *conditional move*:

- it takes $(variable_i, label_i)$ pairs
- if coming from predecessor identified by $label_i$, its value is $variable_i$

Static Single Assignment

Definition and Uses

Each SSA variable is set only once:

- variable **definition**

Each SSA variable can be used by multiple instructions:

- variable **uses**

Algorithms and technical language abuse of these terms:

Let $\%foo$ be a variable. If $\%foo$ definition has not side-effects, and no uses, dead-code elimination can be efficiently performed by erasing $\%foo$ definition from the CFG.

Static Single Assignment

Rationale

Old compilers are not SSA-based:

- putting input into SSA-form is expensive
- cost must be amortized

New compilers are SSA-based:

- SSA easier to work with
- SSA-based analysis/optimizations faster

All modern compilers are SSA-based:

- exception are old version of the HotSpot Client compiler

Contents

- 1 Introduction
- 2 Compiler organization
- 3 Algorithm design
- 4 Inside LLVM
- 5 LLVM-IR language
- 6 Conclusions**
- 7 Bibliography

Conclusions

LLVM is a **production-quality** compiler framework:

⇒ impossible knowing all details

But:

- is well organized
- if you know compilers theory is “easy” finding what you need inside sources

Please take into account C++:

- basic skills required

Contents

- 1 Introduction
- 2 Compiler organization
- 3 Algorithm design
- 4 Inside LLVM
- 5 LLVM-IR language
- 6 Conclusions
- 7 Bibliography**

Bibliography I



AMD.

Open64.

<http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite>.



GNU.

GNU Compiler Collection.

<http://gcc.gnu.org>.



University of Illinois at Urbana-Champaign.

Low Level Virtual Machine.

<http://www.llvm.org>.



University of Illinois at Urbana-Champaign.

Clang: a C language family frontend for LLVM.

<http://clang.llvm.org>.

Bibliography II



Chris Lattner and Jim Laskey.

Writing an LLVM Pass.

<http://llvm.org/docs/WritingAnLLVMPass.html>.



Chris Lattner and Vikram Adve.

LLVM Language Reference Manual.

<http://llvm.org/docs/LangRef.html>.



Linus Torvalds.

Re: SCO: "thread creation is about a thousand times faster than onnative.

<https://lkml.org/lkml/2000/8/25/132>.



Bruce Eckel.

Thinking in C++ – Volume One: Introduction to Standard C++.

<http://mindview.net/Books/TICPP/ThinkingInCPP2e.html>.

Bibliography III



Bruce Eckel and Chuck Allison.

Thinking in C++ – Volume Two: Practical Programming.

<http://mindview.net/Books/TICPP/ThinkingInCPP2e.html>.



John T. Criswell, Daniel Dunbar, Reid Spencer, and Tanya Lattner.

LLVM Testing Infrastructure Guide.

<http://llvm.org/docs/TestingGuide.html>.



LLVM Community.

LLVM Coding Standards.

<http://llvm.org/docs/CodingStandards.html>.



LLVM Community.

LLVM Passes.

<http://llvm.org/docs/Passes.html>.

Bibliography IV



LLVM Community.

Autovectorization in LLVM.

<http://llvm.org/docs/Vectorizers.html>.



LLVM Community.

LLVM Programmer's Manual.

<http://llvm.org/docs/ProgrammersManual.html>.



Ettore Speziale.

Compiler Optimization and Transformation Passes.

<https://github.com/speziale-ettore/COTPasses>.



Scott Chacon.

Pro Git.

<http://git-scm.com/book>.