



JustRecipe

*Group Project for Large Scale and Multi-Structured
Databases*

Francesco Campilongo
Daniele Cioffo
Francesco Iemma

Academic Year 2020/21

Contents

1	Dataset	3
2	Design	4
2.1	Introduction To The Application	4
2.2	Requirements	4
2.2.1	Main Actors	4
2.2.2	Functional Requirements	5
2.2.3	Non-Functional Requirements	6
2.2.4	Actors and Use Cases	7
2.3	UML Class Diagram	8
2.4	Data Model	10
2.4.1	DocumentDB	10
2.4.2	GraphDB	11
2.5	Distributed Database Design	12
2.5.1	Replicas	12
2.5.2	Sharding	12
2.6	Software Architecture	12
2.6.1	Inter-Databases Consistency	12
3	Implementation and Test	13
3.1	Main Modules	13
3.2	Main Packages and Classes	13
3.2.1	it.unipi.dii.inginf.lsdب.justrecipe.config	13
3.2.2	it.unipi.dii.inginf.lsdب.justrecipe.main	13
3.2.3	it.unipi.dii.inginf.lsdب.justrecipe.model	13
3.2.4	it.unipi.dii.inginf.lsdب.justrecipe.persistence	14
3.2.5	it.unipi.dii.inginf.lsdب.justrecipe.controller	14
3.2.6	it.unipi.dii.inginf.lsdب.justrecipe.utils	15
3.3	Most Relevant Queries	15
3.3.1	MongoDB	15
3.3.2	Neo4J	20
3.4	Tests and Statistical Analysis	23
3.4.1	Queries Analysis	23
3.4.2	Index Analysis	23
4	User Manual	24

Introduction

In the social network era the large scale databases topic is very relevant. The handling of big data such as informations of users and moreover is a critical asset of our society. In fact, from the viewpoint of the security is very important to handle in the correct way this very huge amount of data because, otherwise, it is possible to have leak of critical information that cause critical issues about users privacy.

Another problem caused from large amount of data created from the applications used every day from all of us, is the following: *How we can manage this data?*.

Nowadays we have a lot of tools to do this, the most famous, and maybe the most used, is for sure MongoDB. It allows us to handle a huge amount of data without critical issues and maintaining good performance. Another well-known tool is Neo4J (and so Graph DB) that is in charge of handle the social part of the application, in fact the graph is indeed a network, and so this is the best way to represents a social network where the interactions between users are fundamental and very widespread.

Our aim is to design and implement a modern application which can handle a huge amount of data maintaining good performance and implementing a social network side in order to exploit the desire for social relations of our society.

Chapter 1

Dataset

In this first chapter of this document we will talk about searching for the initial dataset.

As specified in the project documentation, the dataset had to be at least 50MB large, and this quantity could not be generated directly within the application. So we did an initial search, finding two datasets, which were generated by their authors by performing the scraping on the sites *www.FoodNetwork.com* and *www.Epicurios.com*. The second dataset was more complete (more nutritional values), so it was used as the main dataset. The other dataset was used to complement the other, reaching a total of 67.8 MB, with 45349 recipes.

To correctly extract the data present in the two datasets we wrote a program in Java, called *RecipeReader*, thanks to which we adapted the two different formats and removed the duplicates (recipes with the same title that were present in both datasets). To implement this program we used the GSON library and the Jackson library.

The variety property is ensured by using two different sources. The velocity / variability properties are ensured because comments and recipes are eliminated and added inside the application, indeed this data may lose importance after a certain time interval since new data quickly arrives.

Chapter 2

Design

2.1 Introduction To The Application

The topic of cuisine is extensively widespread in our society. In fact we can think at the success achieved by tv shows related to cooking in the last years and also at the fact that a lot of chefs are becoming superstars. Then there is another important factor: the coronavirus outbreak.

With the coronavirus outbreak a lot of people became cuisine lovers, in fact at the first moments of the pandemia several ingredients as flour and yeast were very hard to find, because people were confined in their home and so they had more free time.

But this topic is not a recente one. The first recipe book dates back to eighth century B.C. and it is the so-called *Eraclio* (by the name of the city in which he was found). Then also an important latin writer, Apicio, wrote one of the most important recipe books of the roman era: *De Re Coquinaria* which dates back to the first century B.C..

So the topic of cuisine is inherent to human nature, because the necessity of eating is a basic need. Furthermore, everyone has experimented the infamous question: “What will I eat this evening?”. JustRecipe has the aim of answer to this question, it has the aim of helping university student or workers to retrieve and to do fast and simple recipes.

So this application is basically a recipe book but it is also more than this.

JustRecipe is also a social network which allow people to enjoy, to ex-change ideas about cooking, to feel less lonely in this hard period.

2.2 Requirements

2.2.1 Main Actors

The main actors of the application are four:

- Unregistered User
He is the user which open the application for the first time, in order to access he must sign-up.
- User
He is the normal user (the registered one).
- Moderator
He is in charge of controlling the comments and eventually delete the ones which contain abuses.
- Administrator
He is the most powerful actor, he can delete users and recipes and he is also in charge of elect moderators

Each actor can do all the features of the previous ones in the list.

2.2.2 Functional Requirements

Features offered to the Unregistered User

- Registration

In order to access the application an user must sign-up. Otherwise he is not allowed to access and to use all the functionalities.

Features offered to the Registered User

- Login/Logout

The only way to access the application, as we said previously, is to sign-up and login. At the end the user can logout and close the session.

- Search a recipe

It's possible to search a recipe searching for the title and for categories.

- Browse suggested recipes

The suggestions will be offered in a proper section, they are done considering the relationships between the user logged, the users followed by the user logged and so on so forth.

- Browse recipes of following users

In a proper section (i.e. the Homepage) the user can browse the recipes of the following user. Indeed he can see only a snapshot of the recipes. If he wants a more in-depth view, he can click on it and see the recipe page in which he is able to see all the recipe details.

- Add a recipe

The user can insert a new recipe.

- Edit own recipes

The user can edit the recipes previously added by himself.

- Comment recipes

Every user can make a comment about recipes

- Follow another user

The most important feature of each social network: the users can follow each others.

- Like a recipe

In order to evaluate a recipe each user can like its.

Features offered to the Moderator

- Delete comments

The moderator is in charge of delete comments which contain racist abuse, crude terms and so on so forth.

Features offered to the Administrator

- Delete users

The admin can delete the users which don't respect the application guidelines.

- Delete recipes

The admin can delete recipes not correctly inserted

- Elect moderators

In order to handle better the application, the admin can elect some users as moderators.

2.2.3 Non-Functional Requirements

The non-functional requirements of the applications are described in the following lists:

- *Usability*: The application must be user-friendly so a GUI is adopted. A low response time is necessary in order to avoid too long waits for the user.
- *Data Availability*: For modern shared-data systems and for a social network application, the most crucial requirement is that the data must be always available as the service too.
- *Tolerance to single point of failure*: If a server crashes another one is available, this is ensured by the use of replicas.
- *Data Consistency*: The operations must be monotonic and so all the users must see the last version of the data and the update operations must be performed in the same order in which they are issued.
- *Reliability*: The application must work without crashes and so it must handle exceptions if they occur.
- *Administration Control*: Administrators must have the possibility of delete users that don't respect the rules of conduct, they are helped by the moderators that are in charge of checking comments of the users.
- *Flexibility*: Due to the fact that the recipes attribute are not all mandatory, the data must be handled in a flexible way.

2.2.4 Actors and Use Cases

The use case diagram of the application is described in the figure 2.1



Figure 2.1: Use Case Diagram

Some observations on the diagram are necessary:

- The circles in blue are the ones which described actions available only for the owner of the object on which the actions are applied.

So, in detail, this means that a **User** can edit/delete a profile if and only if he owns this profile. Then he can edit a recipe and/or a comment if and only if he adds that recipe or that comment.

- When we are seeing the recipe detail we can go on the user that have been added that recipe. So the extend relation between *View Recipe* and *View User* means this.
- The action *Browse Recipes of following users* is available only if the **User** follows at least one user. Otherwise he can start to follow users and only after this he can see suggested recipes (*Browse Suggested Recipes*). In this case, due to the fact that the user follows nobody, he will see the most famous recipes in general because it's impossible to suggest specific recipes due to the fact that he has no following and no likes or comments.

- The actions in red are the ones that can be performed only by the **Administrator**
- The actions in orange are the ones that can be performed only by the **Moderators**

2.3 UML Class Diagram

Let analyze the UML Class Diagram. There are three main entities: User, Comment, Recipe. It's important to point out that the **User** of the Use Case Diagram is here the so-called *Registered User* and the *User* of this diagram is the generic user. Then we underline the fact that, in order to represent the three actors of the use case diagram, a generalization is needed.

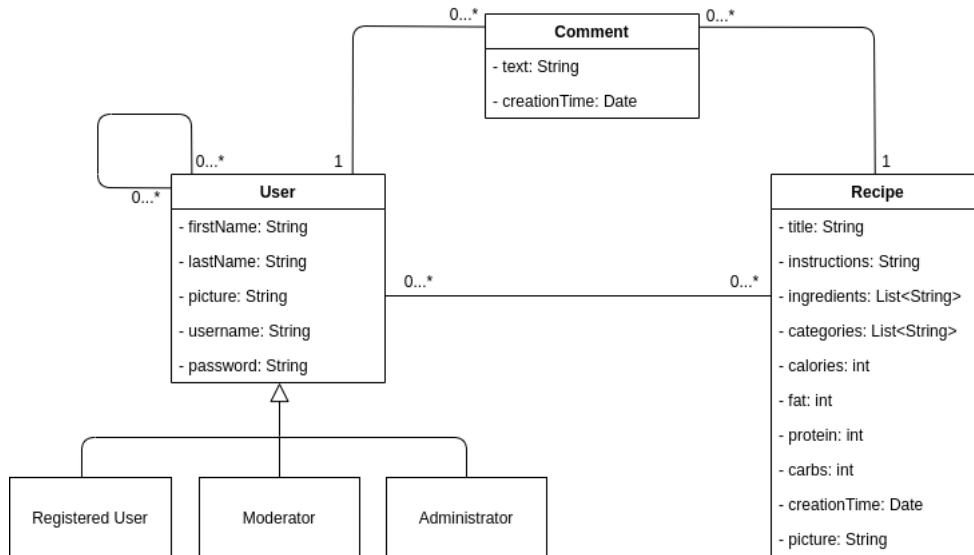


Figure 2.2: UML Analysis Classes Diagram with generalization unsolved

Observing the figure 2.2 it's possible to understand that we can resolve the generalization putting an attribute in the entity *User*. It is an integer and we call it *role*: if it's a *Normal User* role is 0; if *Moderator* then 1; if *Administrator* then 2.



Figure 2.3: UML Analysis Classes Diagram

Table 2.1: Classes definitions

Class	Description
Registered User	A standard user (registered one) who can only perform basic operations
Moderator	User who can also check comments and decide to delete them
Administrator	Most powerful user, he can also delete users and recipes, and elect moderator
Comment	Comment posted by a user
Recipe	Recipe added by one user

Table 2.2: Classes attributes - User

Attribute	Type	Description
firstName	String	First name of the user
lastName	String	Last name of the user
picture	String	URL of the profile picture
username	String	Username of the user (identifier)
password	String	Password chosen by the user, used for the login phase
role	int	Role of the user (0: Normal User, 1: Moderator, 2: Administrator)

Table 2.3: Classes attributes - Comment

Attribute	Type	Description
text	String	Plain text of the comment
creationTime	Date	Creation timestamp of the comment

Table 2.4: Classes attributes - Recipe

Attribute	Type	Description
title	String	Title of the recipe (identifier)
instructions	String	Operations to be performed to make the recipe
ingredients	List<String>	Ingredients to be used in the recipe
categories	List<String>	Categories to which the recipe belongs
calories	int	Calories contained in the recipe
fat	int	Fat contained in the recipe
protein	int	Protein contained in the recipe
carbs	int	Carbs contained in the recipe
creationTime	Date	Creation timestamp of the recipe
picture	String	URL of the recipe picture

2.4 Data Model

In this section we will discuss about the design choices performed in terms of data model in order to handle in the better way our dataset.

2.4.1 DocumentDB

The document DB is used in order to handle the large dataset of recipes that we have. In particular, it allows us to perform fast query even if the size of the dataset is very big and this is the main reason that brings us to choose it. Moreover, we use a DocumentDB in order to respect the *flexibility* requirement, because it is schema-less and this allow us to maintain heterogeneous recipes in our database (some recipes have some attributes, instead others have not those).

```

1 {
2   "_id":
3     {"$oid": "5fdb5fd86796ee4e73ef5b84"},
4   "title":
5     "Lentil, Apple, and Turkey Wrap ",
6   "instructions":
7     "1. Place the stock, lentils, celery, carrot, thyme, and
8     salt in a medium saucepan and bring to a boil. Reduce heat
9     to low and simmer until the lentils are tender, about 30
10    minutes, depending on the lentils. (If they begin to
11    dry out, add water as needed)... " ,
12   "ingredients":
13     ["4 cups low-sodium vegetable or chicken stock", "1 cup
14     dried brown lentils", ...],
15   "categories":
16     ["Sandwich", "Bean", "Fruit", "Tomato", "turkey", ...],
17   "calories":
18     426,
19   "fat":
20     7,
21   "protein":
22     30,
23   "carbs":
24     20,
25   "creationTime":
26     {
27       "$date": "2020-12-17T13:40:40.658Z"
28     },
29   "authorUsername":
30     "oscar.evans",

```

```

30  "picture":
31      "https://assets.epicurious.com/photos/551
        b0595e7851a541a30b23f/master/pass/239173_lentil-apple-
        and-turkey-wrap_6x4.jpg",
32  "comments":
33      [
34          {
35              "authorUsername": "oliver.smith",
36              "text": "Very good!!!",
37              "creationTime":
38                  {
39                      "$date": "2020-12-17T13:50:40.658Z"
40                  }
41          },
42          {
43              "authorUsername": "jessica.evans",
44              "text": "Fantastic",
45              "creationTime":
46                  {
47                      "$date": "2020-12-17T13:52:40.658Z"
48                  }
49          }, ...
50      ]
51  }

```

2.4.2 GraphDB

The Graph database is the one that handles the social part of the application. Thanks to it we are able to analyze the relationships among users and their recipes.

We have two type of nodes within the database:

- **User:** it is the node that represents the user inside the graph. Its attribute are: *firstName*, *lastName*, *username*, *password*, *picture*¹, *role*².
- **Recipe:** it is the node that represents the recipe within the graph. Its attribute are: *title*, *calories*, *fat*, *carbs*, *protein*, *picture*¹

The information about the user are present only on the GraphDB because we handle the social part only with it. Instead some information about recipes are present in both databases, in particular on GraphDB we have info that are already present also in the DocumentDB, but the opposite is not true.

The GraphDB relationships are:

- **Adds:** if the user *A* has added the recipe *R*, then we have a relationship *:ADDS* from *A* to *R* ($A \rightarrow R$).
We have as property, the one called *when* that is the timestamp which indicates when the recipe has been added.
- **Follows:** if the user *A* has followed the user *B*, then we have a relationship *:FOLLOWS* from *A* to *B* ($A \rightarrow B$).
- **Likes:** if the user *A* has liked the recipe *R*, then we have a relationship *:LIKES* from *A* to *R* ($A \rightarrow R$).

All the relationships that starts from a node *X* are deleted if *X* has deleted, furthermore if *X* is a user, also the recipes that he has added will be eliminated. In figure 2.4 we can see an example of the nodes, the relationships and the attributes.

¹Only the URL of the picture is saved in this field, otherwise the size of this attribute would be too large

²0 for the normal user, 1 for moderator and 2 for the administrator

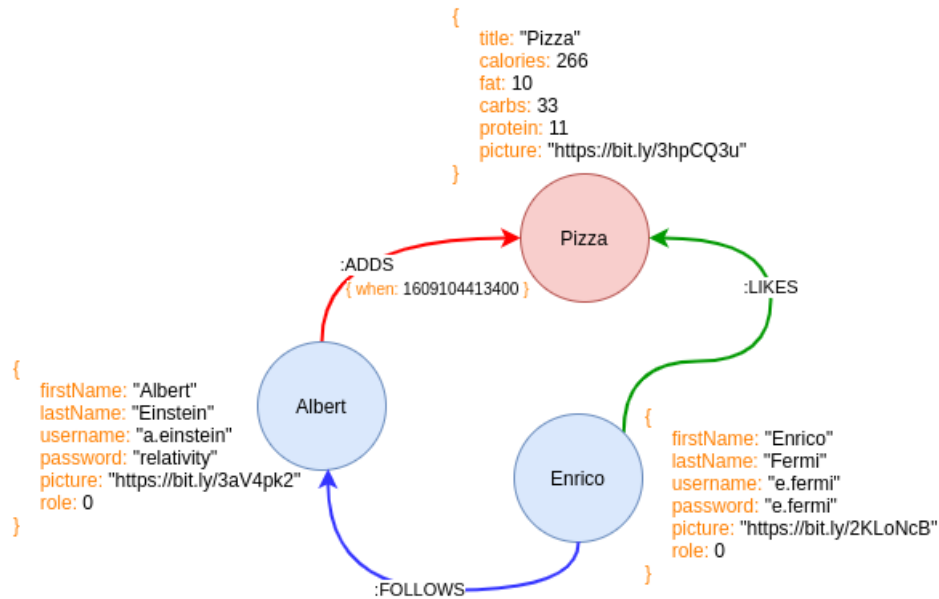


Figure 2.4: Example of Neo4J nodes and relationships

2.5 Distributed Database Design

breve introduzione sull'utilità di aver un db distribuito (chiacchiere varie)

2.5.1 Replicas

Dire in modo discorsivo come sono state fatte le repliche per mongodb (macchine virtuali ecc...) e per neo4j (per neo4j solo in locale per "not mandatory").

2.5.2 Sharding

2.6 Software Architecture

Solutions to the requirements (as Java Fx for usability requirements).

Client server architecture

The graph database management system that we use is Neo4J. This part of the system handle the so-called *snapshot* for both users and recipes (the info of recipe snap are in both dbs instead user snap are only on neo4j).

The DocumentDB Management System used is MongoDB.

Vincoli (chiavi ecc....)

2.6.1 Inter-Databases Consistency

Chapter 3

Implementation and Test

3.1 Main Modules

The implementation code is divided into two main modules: *RecipeReader* and *JustRecipe*.

- *RecipeReader*: is a program we wrote to get our initial dataset, extracting the information that interests us from the two initial datasets (see chapter 1).
- *JustRecipe*: is the actual application, whose implementation will be analyzed in more detail in the next sections. The application was developed following the MVC (Model, View, Controller) pattern. The View displays the data contained in the model and was mainly developed using .fxml files, which allow you to write all the graphic components and their properties in separate files. The Model provides methods for accessing data useful for the application. The Controller receives the commands from the user and implements them by changing the status of the other two components. This division allowed us to completely separate the three components, for a more readable and maintainable code.

3.2 Main Packages and Classes

In this section will be presented the main packages of *JustRecipe* module and the respective classes.

3.2.1 `it.unipi.dii.inginf.lsdb.justrecipe.config`

This package is used to handle the configuration parameters, stored in *config.xml*. The schema for the validation is in the file *config.xsd*. The validation is very important to be sure of the correctness of the file *config.xml*.

Classes:

- *ConfigurationParameters*: this class stores all the configuration parameters needed by the application. For example the IP for the Neo4j database. These values do not need to be changed, so only get methods are provided.

3.2.2 `it.unipi.dii.inginf.lsdb.justrecipe.main`

This package contains the Main class, that starts the application.

Classes:

- *Main*: this class extends *Application* and implements the *start* method.

3.2.3 `it.unipi.dii.inginf.lsdb.justrecipe.model`

This package contains the classes required for the model. These classes are the java bean for our application.

Classes:

- *Comment*: This class stores all the information about a comment, like the text, the username of the author and the timestamp of creation.
- *Recipe*: This class stores all the information about a recipe, like the title, the ingredients, and so on.
- *User*: This class stores all the information about a user, like the username, the password, and so on.
- *Session*: This class is used to maintain the information of the session, like the logged user. We used the singleton design pattern for this class.

3.2.4 it.unipi.dii.inginf.lsd.b.justrecipe.persistence

This package deals with managing the persistence of data, in fact it contains the classes used to interface with databases.

Classes:

- *DatabaseDriver*: this *interface* declares all the methods that has to be implemented in a database driver. This methods are *initConnection()* and *closeConnection()*.
- *MongoDBDriver*: this class implements *DatabaseDriver* and is responsible for implementing all the queries that have to be run on MongoDB. We used the Singleton design pattern, because a single instance of this driver must be shared by all application classes.
- *Neo4jDriver*: this class implements *DatabaseDriver* and is responsible for implementing all the queries that have to be run on Neo4j. We used the Singleton design pattern, because a single instance of this driver must be shared by all application classes.

3.2.5 it.unipi.dii.inginf.lsd.b.justrecipe.controller

This package contains the classes required for the controller part of the MVC pattern. For each different page to be shown to the user, a special controller has been implemented, which manages the events resulting from the actions taken by the user and updates the model and the view.

Classes:

- *WelcomePageController*: this class manages the login/register page of the application.
- *HomePageController*: this class handles the homepage section of the application (shows the recipes of following users and handles the event, like the click on a recipe snapshot).
- *DiscoveryPageController*: this class manages the discovery section of the application. So it is in charge of showing the results of search made by the user.
- *ProfilePageController*: this class manages the profile section of the application. The profile could be either mine or someone else's. Thanks to this class it is possible to manage some events such as following a user, deleting my profile, seeing his recipes, and so on.
- *AdministrationPageController*: this class handles the Administration section of the application. Of course, not all the users can access to this page, only the moderator (for seeing the last comments) and the administrators (for doing all the possible operations) can access.
- *EditProfilePageController*: this class manages the page for editing the personal profile. The user can insert a new profile image, change the personal information, and so on. The administrator can change the role of the user in this page.
- *AddRecipePageController*: this class manages the page of the application used for insert a new recipe.
- *RecipeSnapshotController*: this class manages the single recipe snapshot, like the click on him.

- *RecipePageController*: this class handles the page in which we show all the information about a recipe. In this page it is possible also to comment a recipe and see the comments already done.
- *CommentController*: this class manages the single comment and all the operations that can be done on him.
- *UserSnapshotController*: this class manages the single snapshot of one user, and all the operations that can be done on him.

3.2.6 it.unipi.dii.inginf.lsdb.justrecipe.utils

This package contains a class used to store all the utility functions that we use in the application. Classes:

- *Utils*: this class is used for containing some utility functions used inside the application (to avoid code replication).

3.3 Most Relevant Queries

In the following section will be presented the most relevant query performed with MongoDB and Neo4J. Some important point must be underlined:

- The operation of *skip* and *limit*, use in the most of the following queries, are necessary due to implementation reasons. In fact the results are not shown all in the same page (because of the size of the database the output can be huge) but only a subset of the result are shown (for instance, the first X) and in order to go on and see the other result, the query will be performed with different value of *<howManyToSkip>* (the first time is 0, the second is X) and *<howManyToGet>* (it's a fixed number, must be equal to the previous X)
- In Neo4J part, due to performance reasons, some queries compute also followers, followings and recipes added by each user. This is necessary because when the user is given as result this information must be showed and if we don't compute it here we have to do another query for each user.

3.3.1 MongoDB

Recipes of the user

This query gives the opportunity to collect all the recipes written by a specific User through checking the author username field. This search is case sensitive cause we are using the username.

- Input: a string who represent an username (unique through the users), how many recipe to skip, and how many to get.
- Output: a list of recipes, all added by the user erlier selected, ordered by the .

```

1 db.recipes.aggregate (
2   [
3     {
4       $match :
5       {
6         authorUsername: <authorUsername>
7       }
8     },
9     {
10      $sort :
11      {
12        creationTime : -1

```



```

13     }
14   },
15   {
16     $skip: <howManyToSkip>
17   },
18   {
19     $limit: <howManyToGet>
20   }
21 ]
22 )

```

Search for recipe title

Given a portion of the title, this query is capable of returning as a result a set of recipes whose titles contain it. Research must be case insensitive (see *options:"i"* in the regexMatch step of the aggregation)

- Input: portion of the title, how many recipes to skip and how many recipes to get.
- Output: set of recipes.

```

1 db.recipes.aggregate (
2   [
3     {
4       $match :
5       {
6         title:
7         {
8           $regex: /^.*<portionOfTheTitle>.*$/,
9           $options: "i"
10        }
11      }
12    },
13    {
14      $sort :
15      {
16        creationTime : -1
17      }
18    },
19    {
20      $skip: <howManyToSkip>
21    },
22    {
23      $limit: <howManyToGet>
24    }
25  ]
26 )

```

Search Most Versatile User

This query let select the most versatile user, the one who had covered more recipe categories (added at least 5 different recipe in a *category*, than this *category* is covered).

- Input: howMany, an int who let us select the first howMany most versatile users.
- Output: For this early implementation of this application, we need only the best most versatile user (the first one, his/her username)

```

1 db.recipes.aggregate (
2 [
3 {
4   $unwind : "$categories"
5 },
6 {
7   $group :
8   {
9     _id : "$authorUsername",
10    "$categories",
11    numRecipes:
12    {
13      $sum: 1
14    }
15  }
16 },
17 {
18   $match:
19   {
20     numRecipe{
21       gte: 5
22     }
23   }
24 },
25 {
26   $group :
27   {
28     _id : "$author",
29     numDistinctCategories:
30     {
31       $sum: 1
32     }
33   }
34 },
35 {
36   $sort :
37   {
38     numDistinctCategories: -1
39   }
40 },
41 {
42   $limit: <howMany>
43 }
44 ]
45 )

```

Search for recipe category

Given the category, or a part of this, the query returns recipes that belong to it. The search is case insensitive.

It's important to point out that a recipe belongs to more than one categories, so a recipe can be part of the result of the search of two different categories (this is normal and it is allowed).

- Input: portion of the category or the entire one *<portionOfTheCategory>*, how many recipes to skip *<howManyToSkip>* and how many to get *<howManyToGet>*.
- Output: set of recipes belonging to the given category

```

1 db.recipes.aggregate (
2   [
3     {
4       $match :
5       {
6         categories:
7         {
8           $regex: /^.*<portionOfTheCategory>.*$/,
9           $options: "i"
10        }
11      }
12    },
13    {
14      $sort :
15      {
16        creationTime : -1
17      }
18    },
19    {
20      $skip: <howManyToSkip>
21    },
22    {
23      $limit: <howManyToGet>
24    }
25  ]
26 )

```

Search for recipe ingredients

This query give the possibility to find a specific number of recipes given some of the recipe ingredients. The search is case insensitive for a more easy to use experience.

- Input: a list of ingredients, how many recipes to skip and how many recipe to show.
- Output: a list of recipes, all of them have at least all the ingredients specified before. The results are ordered from the newer to the older recipe.

```

1 db.recipes.aggregate (
2   [
3     {
4       $match :
5       {
6         ingredients:
7         {
8           $regex: /^.*<ingredients[i]>.*$/,
9           $options: "i"
10        }
11      }
12    },
13    {
14      $sort :
15      {
16        creationTime : -1
17      }
18    },
19    {
20      $skip: <howManyToSkip>
21    },

```

```

22 {
23   $limit: <howManyToGet>
24 }
25 ]
26 )

```

Most common recipe categories

This query allows you to get a ranking of the categories most used by users for their recipes.

- Input: how many categories to skip, how many categories to get.
- Output: list with the categories ordered by the number of use.

```

1 db.recipes.aggregate (
2   [
3     {
4       $unwind : "$categories"
5     },
6     {
7       $group :
8       {
9         _id : "$categories",
10        numberOfRecipes:
11        {
12          $sum: 1
13        }
14      }
15    },
16    {
17      $project:
18      {
19        'category': '$_id',
20        numberOfRecipes: 1,
21        _id: 0
22      }
23    },
24    {
25      $sort :
26      {
27        numberOfRecipes : -1
28      }
29    },
30    {
31      $skip: <howManyToSkip>
32    },
33    {
34      $limit: <howManyToGet>
35    }
36  ]
37 )

```

Last Comments

The query returns the last comments sorted for creation time, in order to have the most recent as first and the most old as last.

- Input: *howManyToGet* and *howManyToSkip*

- Output: set of the last comments sorted by creation time in descendant order.

```

1 db.recipes.aggregate (
2   [
3     {
4       $unwind : "$comments"
5     },
6     {
7       $sort :
8       {
9         comments.creationTime : -1
10      }
11    },
12    {
13      $skip: <howManyToSkip>
14    },
15    {
16      $limit: <howManyToGet>
17    }
18  ]
19 )

```

3.3.2 Neo4J

Tabella con dominio grafo e descrizione

Suggested Recipes

We have two levels of suggestions with different relevance.

- First Level

Recipe R is a first level suggestion for the user X , if R has been added by the user Y where Y is followed by W who is followed by X ($X \rightarrow W \rightarrow Y$). Or R has been added by Z where Z is followed by Y ($X \rightarrow W \rightarrow Y \rightarrow Z$).

- Second Level

Recipe R is a second level suggestion for the user X if R has been added by the user Y where Y is the owner of at least N recipes liked by X .

The two level of suggestions are in a single query, the first recipes are the ones related to the first level, then at the end we have the ones related to the second level. The code is show below:

```

1 MATCH path =
2 (recipe:Recipe)<-[a:ADDS]-(owner:User)<-[:FOLLOWS*2..3]
3 -(me:User{username:$u})
4 RETURN recipe.title, recipe.calories, recipe.carbs,
5 recipe.protein, recipe.fat, recipe.picture,
6 a.when, owner.username
7 ORDER BY length(path) ASC, a.when DESC
8 SKIP $howManyToSkipFirstLv
9 LIMIT $howManyToGetFirstLv
10 UNION
11 MATCH (:User{username:$u})-[l:LIKES]->(:Recipe)<-[:ADDS]-(
12 owner:User)
13 WITH DISTINCT(owner) AS owner, COUNT(DISTINCT l) AS numLikes
14 WHERE numLikes > 3
15 MATCH (owner)-[a:ADDS]->(recipe:Recipe)
16 RETURN recipe.title, recipe.calories, recipe.carbs,
17 recipe.protein, recipe.fat, recipe.picture, a.when,

```

```

18 owner.username
19 ORDER BY a.when DESC
20 SKIP $showManyToSkipSecondLv
21 LIMIT $showManyToGetSecondLv

```

Recipes of following users

This query returns all the recipes of the following users of a specific user.

- Input: How many recipe name to skip, how many recipe name to show and a string who represents a specific username.
- Output: A set of recipe name of the specific user's following users have added.

```

1 MATCH (u1:User{username:$username})-[:FOLLOWS]->(u2:User)-[a:
  ADDS]->(r:Recipe)
2 RETURN r.title AS title, r.calories AS calories,
3        r.fat AS fat, r.protein AS protein, r.carbs AS carbs,
4        r.picture AS picture, u2.username AS authorUsername
5 ORDER BY a.when DESC
6 SKIP $skip LIMIT $limit

```

Most followed and active users

This query returns the list of the most followed and active users, namely the influencers. Most followed means that the list is ordered by the number of followers. Active means that the list is ordered by the number of recipes added by the user.

- Input: How many users to skip, how many users to show.
- Output: A list of the most followed and active users.

```

1 MATCH (u:User)
2 OPTIONAL MATCH (u)-[f1:FOLLOWS]-(:User)
3 OPTIONAL MATCH (u)-[f2:FOLLOWS]->(:User)
4 OPTIONAL MATCH (u)-[a:ADDS]->(:Recipe)
5 RETURN u.firstName, u.lastName, u.username,
6        u.firstName AS firstName, u.lastName AS lastName,
7        u.picture AS picture, u.username AS username,
8        u.password AS password, u.role AS role,
9        COUNT(DISTINCT f1) AS follower,
10       COUNT(DISTINCT f2) AS following,
11       COUNT(DISTINCT a) AS numRecipes
12 ORDER BY follower DESC, numRecipes DESC
13 SKIP $howManySkip LIMIT $howMany

```

Most liked users

This query returns the list of the most liked users, namely the users who received more like to their recipes.

- Input: How many users to skip, how many users to show.
- Output: A list of the most liked users.

```

1 MATCH (u:User)
2 OPTIONAL MATCH (u)-[:ADDS]->(:Recipe)-[:LIKES]-(:User)
3 OPTIONAL MATCH (u)-[f1:FOLLOWS]-(:User)
4 OPTIONAL MATCH (u)-[f2:FOLLOWS]->(:User)

```

```

5  OPTIONAL MATCH (u)-[a:ADDS]->(r:Recipe)
6  RETURN u.firstName, u.lastName, u.username,
7         u.firstName AS firstName, u.lastName AS lastName,
8         u.picture AS picture, u.username AS username,
9         u.password AS password, u.role AS role,
10 COUNT(DISTINCT f1) AS follower,
11 COUNT(DISTINCT f2) AS following,
12 COUNT(DISTINCT a) AS numRecipes,
13 COUNT(DISTINCT l) AS totLikes
14 ORDER BY totLikes DESC
15 SKIP $howManySkip LIMIT $howMany

```

Best Recipes

This query returns the list of the best recipes, namely the most liked ones.

- Input: How many recipes to skip, how many recipes to show.
- Output: A list of the best recipes.

```

1  MATCH (:User)-[l:LIKES]->(r:Recipe)
2  MATCH (u:User)-[a:ADDS]->(r)
3  RETURN r.title AS title, r.calories AS calories,
4         r.fat AS fat, r.protein AS protein, r.carbs AS carbs,
5         r.picture AS picture, u.username AS authorUsername,
6  COUNT(DISTINCT l) AS likes
7  ORDER BY likes DESC
8  SKIP $skip LIMIT $limit

```

To clarify, the first match is used to avoid to consider the recipes which have not at least one like, and the second match is used to find the user that adds the recipe.

Search for username

Given a portion of the username, this query is able to return all users whose usernames contain it. The search must be case insensitive, so the toLower function is used.

- Input: portion of the username, how many users to skip and how many users to get.
- Output: set of users.

```

1  MATCH (u:User)
2  WHERE toLower(u.username) CONTAINS toLower($username)
3  OPTIONAL MATCH (u)-[f1:FOLLOWS]-(:User)
4  OPTIONAL MATCH (u)-[f2:FOLLOWS]->(r:Recipe)
5  OPTIONAL MATCH (u)-[a:ADDS]->(r:Recipe)
6  RETURN u.firstName AS firstName, u.lastName AS lastName,
7         u.picture AS picture, u.username AS username,
8         u.password AS password, u.role AS role,
9  COUNT(DISTINCT f1) AS follower,
10 COUNT(DISTINCT f2) AS following,
11 COUNT(DISTINCT a) AS numRecipes
12 SKIP $skip LIMIT $limit

```

Search for user's full-name

Given the full-name or a part of it, the query returns the users that contains in their full-name the given input. The query is case-insensitive.

- Input: The full-name (*\$fullName*), how many users to skip (*\$skip*) and how many users to get (*\$limit*).
- Output: The users that contains in their full-name the given input *\$fullName*.

```

1  MATCH (u:User)
2  WHERE
3  toLower(u.firstName+' '+u.lastName)
4  CONTAINS toLower($fullName)
5  OR
6  toLower(u.lastName + ' ' + u.firstName)
7  CONTAINS toLower($fullName)
8  OPTIONAL MATCH (u)<-[f1:FOLLOWS]-(:User)
9  OPTIONAL MATCH (u)-[f2:FOLLOWS]->(:User)
10 OPTIONAL MATCH (u)-[a:ADDS]->(:Recipe)
11 RETURN u.firstName AS firstName, u.lastName AS lastName,
12        u.picture AS picture, u.username AS username,
13        u.password AS password, u.role AS role,
14        COUNT (DISTINCT f1) AS follower,
15        COUNT (DISTINCT f2) AS following,
16        COUNT (DISTINCT a) AS numRecipes
17 SKIP $skip LIMIT $limit

```

3.4 Tests and Statistical Analysis

3.4.1 Queries Analysis

read-heavy application

Dare un peso a tutte le query (quanto vengono usate e quanto sono importanti)

3.4.2 Index Analysis

Test senza indici e con indici.

Poi dire mi serve questo indice.

Indici da considerare:

- when in relation ADDS of graphDB
- creationTime Recipe
- creationTime Comment
- recipe title MongoDB
- username (anche in modo nascosto facciamo query per username su neo4j e per titolo su mongodb)

Chapter 4

User Manual