

Table of contents

Daniel's Notes	5
Todo	5
Projects	5
3D Printing	5
Electronics	5
Useful stuff	5
Vehicles	5
Reading List	5
Topics	5
Check out	6
Video course	6
3D Printing	7
CNC	7
Laser cutter	7
Snapmaker	7
Ultimaker	7
Repairs	7
Amateur radio	9
RTLSDR	9
Articles	9
Links	9
BaoFeng UV-5R	9
Features	9
UV-5R SPECIFICATIONS	9
Links	10
Electronics	11
Canbus	11
Tools	11
Canbus addresses	11
FTDI	11
FT232	11
i2c	12
Articles	12
Led	12
Links	12
433mHz	13
Tools	13
PDF's	13
Audio	13
Articles	13
Microphone Array	13
Synthesizers	14
MAX3107	14
Datasheets	14
Espressif	15
ESP 32	15
ESP 8266	15
GSM Modules	15
Adafruit Fona 3g cellular breakout	15
Sierra Wireless WP7607-1	18
Modbus	18
Hardware	20
Oculus Rift	20
Oculus Rift + Steam VR + Linux	20
Links	20

SDR	20
LimeSDR	20
SDRPlay	20
Machine learning	21
Articles	21
Chat bots	21
Alternatives	21
On premise	21
Programming	22
Sorting	22
Hexagonal architecture	22
Frameworks	22
Firebase	22
Sapphire	22
Spring boot	22
Programming languages	22
C++	22
Golang	22
Hammerspoon	23
Rust	23
Projects	24
Status Light	24
iOS app	24
BMW Media Center	24
Articles	24
Shoppinglist for BMW	24
Crudus Markdown Notes	24
Platform	24
Links	24
Libraries	24
Other Editors	25
Crudus Photos	25
Tensor flow	25
Articles	25
Photo History	25
Tools	25
Links	25
Crudus Sense	26
BLE device configuration specification	26
MQTT publish Topics	27
MQTT Subscribe Topics	27
Extensions	27
Kaldheim.org	27
Links	27
Maximus	27
Components	27
Robotics	27
Articles	27
Artificial Intelligence	27
BNO055	27
Development board	30
Dynamixel AX-12A	31
GPS	34
Maximus AI	36
Robotics	38
Mechanical keyboard	41
Inspiration	41
Tools	41

Motorcycle App	41
Pip-Boy	42
Montering	42
LCD skjerm	42
Project Management System	42
Inspiration	42
RPI Security camera	42
Articles	42
Reflow Oven	43
Links	43
USB Media Controller	43
Dimensions	43
Security	44
Articles	44
LoRaWAN	44
Shopping lists	45
Shopping list for home office	45
Keyboard	45
Network	45
Software	46
Rabbit MQ	46
Security	46
Ubuntu	46
Articles	46
Ubuntu + Windows dual boot	46
tmux shortcuts & cheatsheet	46
Sessions	47
Windows (tabs)	47
Panels (splits)	47
Sync Panels	47
Resizing Panels	47
Copy mode:	48
Misc	48
Configurations Options:	49
Resources:	49
Notes:	49
Changelog:	49
Request an Update:	49
Vim Cheat Sheet	49
Global	49
Cursor movement	49
Insert mode - inserting/appending text	51
Editing	51
Cut and paste	51
Marking text (visual mode)	52
Visual commands	52
Registers	52
Search and replace	52
Search in multiple files	53
Working with multiple files	53
Tabs	53
Exiting	54
UX - UI	55
Methods	55
Colors	55
Links	55

Useful stuff	56
Useful Commands	56
Terminal recording	56
WiFi QR-code	56
Rsync	56
Unite PDF documents	56
Vehicles	57
Cars	57
BMW - BS82067	57
Motorcycles	57
MV Augusta - FC7664	57
Kunder	58
Aibel	58
Haugaland Kraft	58
Hydro	58

Daniel's Notes

[Reading list](#)

Todo

- ☐ Do this
- ☒ Done that

Projects

- [Projects](#)
- [Crudus MD Notes](#)
- [Crudus Sense](#)
- [Crudus Photos](#)
- [Maximus](#)

3D Printing

- [3D printing](#)

Electronics

- [Electronics](#)

Useful stuff

- [Markdown Cheatsheet](#)
- [Useful commands](#)

Vehicles

- [Vehicles](#)
- [BMW - BS82067](#)
- [MV Agusta - FC7664](#)

Reading List

- [Elixir phoenix absinthe graphql react apollo](#) <https://schneider.dev/blog/elixir-phoenix-absinthe-graphql-react-apollo-absurdly-deep-dive/>
- [Uber design](#): <http://simonpan.com/work/uber/>
- [Modern GPS Tracking Platform](#): <https://www.traccar.org>

Topics

Collision engine

- <https://gamedev.stackexchange.com/questions/26501/how-does-a-collision-engine-work>

The OAuth 2.0 Authorization Framework

- <https://tools.ietf.org/html/rfc6749>

Event Sourcing

- <https://www.martinfowler.com/eaaDev/EventSourcing.html>

Micro frontends

- <https://www.martinfowler.com/articles/micro-frontends.html>

Micro services

- <https://www.martinfowler.com/microservices/>

12 factor application

- <https://12factor.net/>

RabbitMQ RPC

- <https://www.rabbitmq.com/tutorials/tutorial-six-python.html>

Check out

- My business card runs linux
- <https://www.envoyproxy.io/docs/envoy/latest/start/start>
- <https://github.com/heptio/contour>
- <https://www.jaegertracing.io/>
- <https://istio.io/>

Video course

- <https://www.linkedin.com/learning/jhipster-build-and-deploy-spring-boot-microservices/welcome>
- <https://www.linkedin.com/learning/microservices-asynchronous-messaging/getting-work-done-in-microservices>
- <https://vimeo.com/74589816>
- <https://vimeo.com/99531595>
- <https://www.infoq.com/presentations/migration-cloud-native/>

3D Printing

- [Ultimaker](#)
- [Snapmaker](#)

CNC

Laser cutter

- [Lasersaur](#)

Snapmaker

<https://forum.snapmaker.com/t/reverse-engineering-the-module-wiring/3031>

3D Printing Module:

PIN1: VCC, Heater Socket Pin 1, Fan+
PIN2: Stepper Coil A+
PIN3: Heater Socket Pin 2
PIN4: Stepper Coil A-
PIN5: Thermistor Socket Pin 1
PIN6: Stepper Coil B-
PIN7: GND, Fan-, Thermistor Socket Pin 2
PIN8: Stepper Coil B+

Heated Build Plate:

PIN1: Heating Element +
PIN2: UNUSED
PIN3: Heating Element -
PIN4: UNUSED
PIN5: Thermistor +
PIN6: Thermistor -

The heating element registered as 12Ohms so 48W at 24V. The Thermistor gave a reading of 80kOhm in my 90 degree F garage.

Linear Module:


PIN1: Coil A +
PIN2: Coil A -
PIN3: Coil B +
PIN4: Limit Switch +
PIN5: Coil B -
PIN6: Limit Switch -

Ultimaker

Repairs

Nozzle

Ultimaker 2 - Removing the Nozzle <https://www.youtube.com/watch?v=-1Nh0snHLYw>

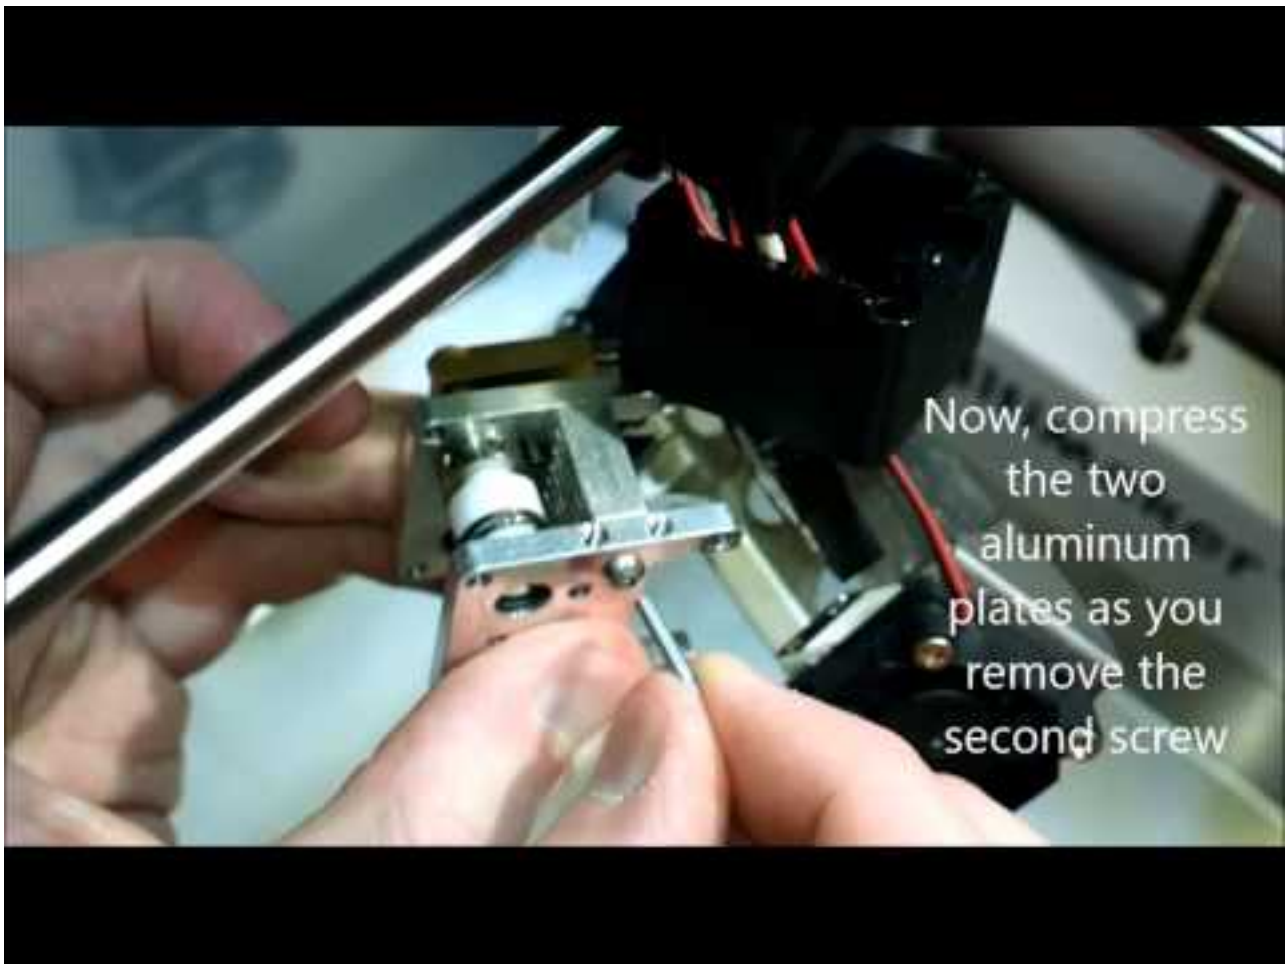

Amateur radio

RTLSDR

- [RTLSDR](#)

Articles

- [Walkie Talkies](#)

Links

- [Ham radio Frequency Chart](#)
- [Norske Frekvenser](#)

BaoFeng UV-5R

![Baofeng](../Amateur radio/uv-5rLG.jpg)

Features

25KHz/12.5KHz Switchable (Wide/Narrow Band)

FM Radio (65.0MHz-108.0MHz)

Large Inverted LCD Display

LED Flashlight

High /Low RF Power Switchable

VOX

50 CTCSS/ 104 DCS Tones

Tone searching/scanning

Dual standby

PC programmable

Transmitter time-out timer(TOT)

Busy channel lock-out(BCLO)

UV-5R SPECIFICATIONS

Frequency range:

[TX] 136 - 174MHz, 400 - 520MHz

[RX] 136 - 174MHz, 400 - 520MHz, 68-108MHz (FM Broadcast)

Channel Capacity:

128 Channels

Channel Spacing

25KHz (wide band)12.5KHz (narrow band)

Sensitivity

≤0.25μV (wide band) ≤0.35μV (narrow band)

Operation Voltage

7.4V DC ±20%

Battery:

1500mAh

Frequency step:

2.5, 5, 6.25, 10, 12.5, 20, 25, 30 and 50KHz

Antenna:

Antenna Connector: SMA-Female / Antenna Impedance: 50Ω

Accessory Connector:

Kenwood 2 Pin Standard

Stability:

±2.5ppm

Output power:

5W / 1W

Audio Power Output

700mW/10%

Links

- [Manual](#)

Electronics

- I2C

Canbus

Tools

- <https://github.com/erimoq/cantools>

Canbus addresses


- <https://community.carloop.io/t/list-of-can-id-descriptions-from-opengarages-org/104>
- <http://www.loopybunny.co.uk/CarPC/can/267.html>

FTDI

FT232

This version have 3.3V. The data signals are at 3V and the power line provides 5V. We suggest this for any product that needs FTDI cables. Because the cable is 5V-logic compliant, you can use it with 3v or 5v logic just fine - no level shifting required!.

[Adafruit product page](#)

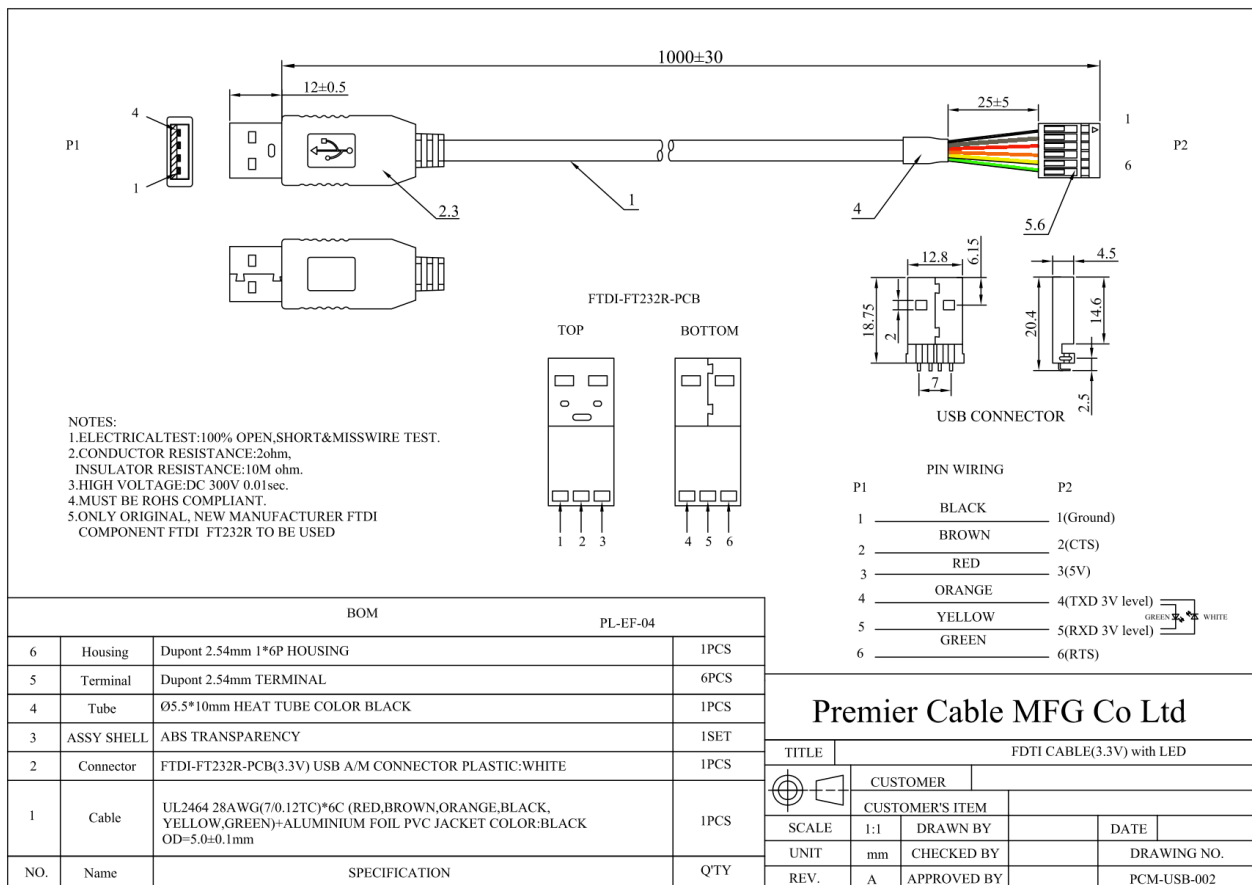



Links

- [DS_TTL-232R_CABLES_V201.pdf](#)

i2c

Articles

- [I2C in a nutshell](#)

Led


Links

- <https://www.instructables.com/id/WiFi-LED-Light-Strip-Controller/>

433mHz

Tools


Surface Microstrip

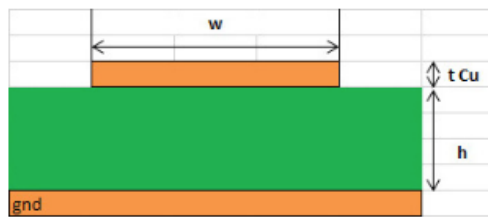

Formula Restrictions: $0.1 < w/h < 3.0$

w	<input checked="" type="radio"/>	<input type="text" value="2985,3242"/>	μm	Track width
t Cu	<input type="radio"/>	<input type="text" value="35"/>	μm	Track height
h	<input type="radio"/>	<input type="text" value="1600"/>	μm	Isolation height
Er		<input type="text" value="4,3"/>		Dielectric constant (FR4 - Standard: 4,3)
Z ₀	<input type="radio"/>	<input type="text" value="50"/>	Ω	Impedance ca.

Strip line impedance calculator: <https://www.multi-circuit-boards.eu/en/pcb-design-aid/impedance-calculation.html>

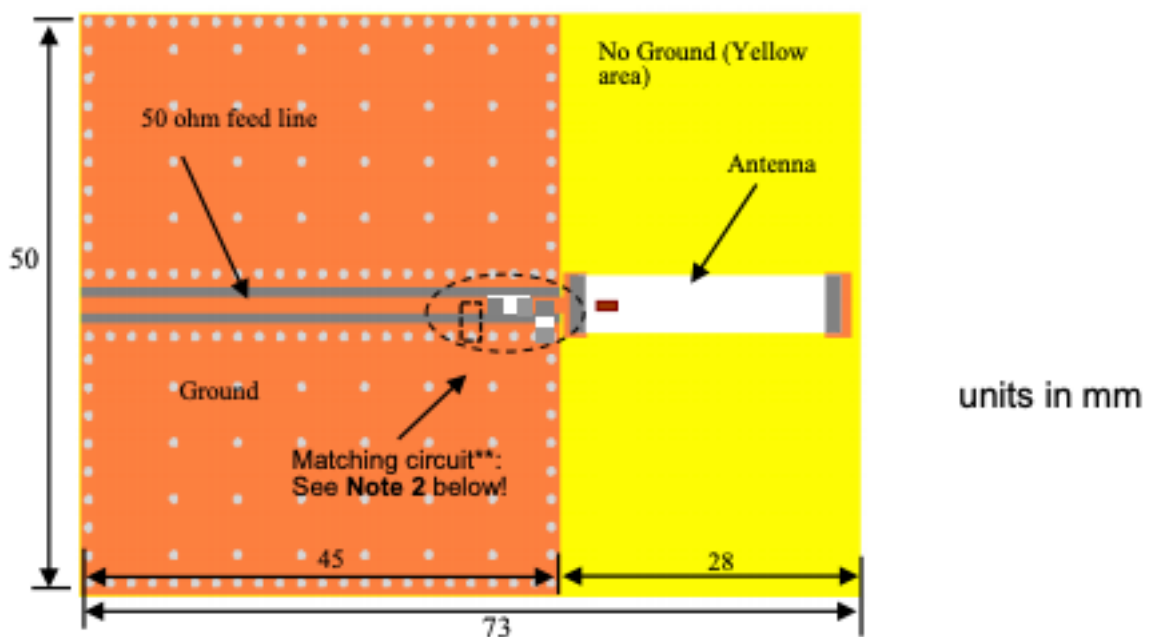

50 ohm impedance feed line: <https://www.disk91.com/2015/technology/hardware/design-a-50ohm-impedance-net-for-rf-signals/>

PDF's

- [433 MHz ISM Antenna SMD.pdf](#)

Audio

Articles

- [How to build a Microphone Amplifier Circuit](#)


Microphone Array

Links

- [Quad op-amp LM3900 \(PDF\)](#)
- [Multi-channel audio mixer circuit using LM3900](#)

Synthesizers

Atari Punk Console Modification (changed speaker to line output) of the Stepped Tone Generator taken from the "Engineer's Mini-Notebook - 555 Circuits" by Forrest M. Mims, III (Siliconconcepts, 1984)

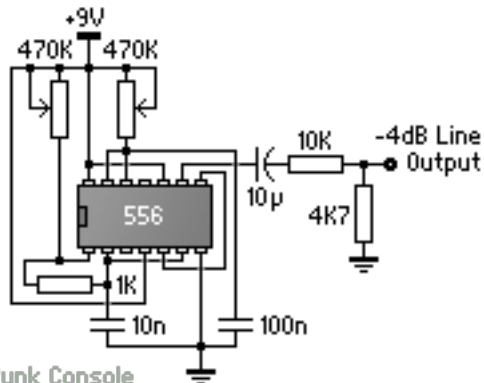


Atari Punk Console
kaustic machines - original circuit by Forrest M. Mims, III

Links

- <https://compiler.kaustic.net/machines/apc.html>

MAX3107

The MAX3107 is an advanced universal asynchronous receiver-transmitter (UART) with 128 words each of receive and transmit first-in/first-out (FIFO) that can be controlled through I²C or high-speed SPI™. The 2x and 4x rate modes allow a maximum of 24Mbps data rates. A phase-locked loop (PLL), prescaler, and fractional baud-rate generator allow for high-resolution baud-rate programming and minimize the dependency of baud rate on reference clock frequency.

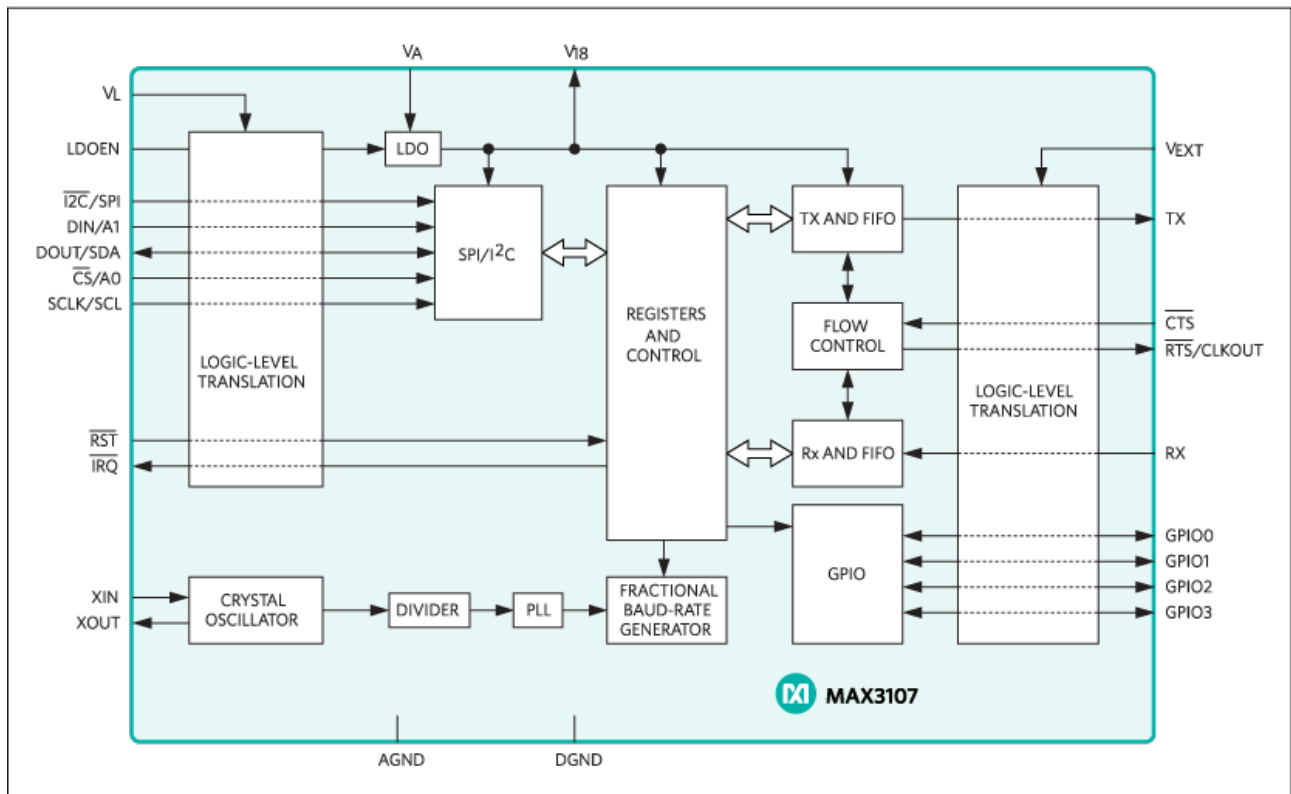

Datasheets

- [MAX3107.pdf](#)

Espressif

ESP 32

Encryption

- <https://limitedresults.com/2019/11/pwn-the-esp32-forever-flash-encryption-and-sec-boot-keys-extraction/>

ESP 8266

GSM Modules

Adafruit Fona 3g cellular breakout

- Quad-band 850MHz GSM, 900MHz EGSM, 1800MHz DCS, 1900MHz PCs - connect onto any global GSM network with any 2G SIM.
- This is the European Version - with dual-band UMTS/HSDPA 900/2100MHz WCDMA + HSDPA
- Fully-integrated GPS (Qualcomm PM8015 GPS) that can be controlled and query over the same serial port
- Make and receive voice calls using a headset or an external 8Ω speaker + electret microphone
- Send and receive SMS messages
- Send and receive GPRS data (TCP/IP, HTTP, etc.)
- AT command interface can be used with 300, 600, 1200, 4800, 9600, 19200, 38400, 57600, 115200, 230K, 461K, 961K, 3.2M, 3.7M and 4.0Mbps
- Native USB support - plug it into a computer and you'll get serial ports for AT commands, GPS NMEA as well as a modem (note we've only tried out the AT&NMEA ports on Windows)

Cool fact: The Fona also has a built-in GPS.

Not-so-cool fact: The Pi can only make one serial connection. Checkout article *Sending AT commands to SIM900 whilst pppd is active*



GPS specifications

- 16 acquisition channels
- GPS L1 C/A code
- Sensitivity
 - Tracking: -157 dBm
 - Cold starts : -144 dBm
- Time-To-First-Fix
 - Cold starts: 100s (typ.)
 - Hot starts: 1s (typ.)
- Accuracy: approx 2.5 meters

Implementation

Setup Edit `/boot/config.txt`

```
enable_uart=1
```

Install dependencies

```
sudo apt-get update
```

```
sudo apt-get install ppp screen
```

Try it out

```
sudo screen /dev/serial0 115200
```

```
sudo -i
```

```
cd /etc/ppp/peers/
```

```
wget https://raw.githubusercontent.com/adafruit/FONA_PPP/master/fona
```

Celluar Open that file to view PPPD settings when "fona" is called. Read more about chat and chatscripts [here](#).

```
vim fona
```

You should see this:

```
### Example PPPD configuration for FONA GPRS connection on Debian/Ubuntu.

### MUST CHANGE: Change the -T parameter value **** to your network's APN value.
### For example if your APN is 'internet' (without quotes), the line would look like:
### connect "/usr/sbin/chat -v -f /etc/chatscripts/gprs -T internet"
connect "/usr/sbin/chat -v -f /etc/chatscripts/gprs -T telia"

### MUST CHANGE: Uncomment the appropriate serial device for your platform below.
### For Raspberry Pi use /dev/ttyAMA0 by uncommenting the line below:
/dev/ttyUSB0
###/dev/ttyAMA0
### For BeagleBone Black use /dev/ttyO4 by uncommenting the line below:
###/dev/ttyO4

### Speed of the serial line.
115200

### Assumes that your IP address is allocated dynamically by the ISP.
noipdefault

### Try to get the name server addresses from the ISP.
```



```
usepeerdns
```

```
### Use this connection as the default route to the internet.  
defaultroute
```

```
### Makes PPPD "dial again" when the connection is lost.  
persist
```

```
### Do not ask the remote to authenticate.  
noauth
```

```
### No hardware flow control on the serial link with FONA  
nocrtscts
```

```
### No modem control lines with FONA.  
local
```

connect to internet:

```
sudo pon fona
```

disconnect

```
sudo poff fona
```

Realtime clock Set the realtime clock see [Forum](#).

AT+CLTS? You will get this if it is disabled:

```
+CLTS: 0
```

To enable it enter this:

```
AT+CLTS=1
```

CLTS=1 must be saved in the SIM800's nonvolatile memory so it will be enabled when the module powers up and registers on the network.

Since this setting is not automatically saved in nonvolatile memory, you must save it with:

```
AT&W
```

(This saves all writeable settings)

Now restart your SIM800

After it registers AT+CCLK? will respond with the correct time, as in my case:

```
+CCLK: "14/08/08,02:25:43-16"
```

Send SMS Set in sms mode:

```
AT+CMGF=1
```

Send message

```
AT+CMGS="+4799999999"<ENTER>  
> your message<CTRL+Z>
```

Data sim phone number:

```
+47 580009700018
```

```
AT+CCLK="02/02/20,23:19:00+01"
```

```
AT+CMGS="+4794835300"
```

```
AT+CMGR=ALL
```

```
AT+CSCA="+47580009700018"
```

```
ATD + +4794835300;
```

```
AT+CMGF=0
```

```
AT+CREG
```

```
AT+CMGF=1
```

```
AT+CHTTPSOPSE="google.com",443,2
```

```
AT+CGDCONT=1,"IP","telia"
```

```
AT+CGDCONT?
```

Commands log (02.02.2020)

Important note

I 2019 startet utfasingen av 3G fylke for fylke. Utfasingen startet med 900MHz-båndet, mens 2100MHz fases ut i 2020. En hovedårsak til utfasingen er at 4G-nettet i 2019 var fullt utbygd og kunne overta de fleste funksjonene 3G-nettet hadde, samt at frekvensene til 3G etter en utfasing kan brukes til andre funksjoner. Utstyr uten 4G-mulighet virker etter utfasingen via 2G, slik at telefonfunksjonene virker, mens dataoverføring via mobilnettet ikke lenger er mulig. I følge Telia gikk 4G-hastighetene i Hedmark opp da 3G-nettet ble slukket. [ref. Wikipedia](#)

Articles

- [Cellular & GPS Enabled Pi 3: Fona + Pi 3](#)
- [FONA Tethering to Raspberry Pi or BeagleBone Black](#)
- [Sending AT commands to SIM900 whilst pppd is active](#)

Sierra Wireless WP7607-1

Reliable Cat-1 LTE connectivity for 4G networks with 3G and 2G fallback in EMEA The WP7607-1 module is part of the WP Series offering a secure device-to-cloud architecture enabling IoT developers to build a Linux-based product on a single module – reducing overall system complexity and time-to-market.

This LTE Cat-1 wireless module is ideal for low-bandwidth IoT applications that require real-time communication along with the longevity and network quality that 4G LTE networks bring.

Delivering up to 10Mbps download speed, many organizations are using Cat-1 networks as a stepping stone to low-power wide-area (LPWA) networks as 4G LTE can provide a superior user experience over 2G and 3G technologies.

WP Series

Links

- [Digikey - WP7607-1](#)
- [Sierra Wireless - Embedded solutions](#)
- [AirPrime WP7607-1 IoT Module](#)

Modbus

Tutorial: <https://www.renesas.com/eu/en/www/doc/whitepapers/interface/rs-485-transceiver-tutorial.pdf>

Chip brukt i kontroller: SN65HVD485E Half-Duplex RS-485 Transceiver (<http://www.ti.com/lit/ds/symlink/sn65hvd485e.pdf>)

RS-485 til UART <https://www.sparkfun.com/products/10124>

Anbefalt modbus usb driver: <https://www.sparkfun.com/products/9822>

Datasheets: <https://www.sparkfun.com/datasheets/BreakoutBoards/USB-to-RS485-Breakout-v11.pdf>

For “end of line” motstand kjøp både 120 og 220ohm

Hardware

Oculus Rift

Oculus Rift + Steam VR + Linux

Article: <https://steamcommunity.com/app/221410/discussions/0/1696046342850651740/>

Links

- [OpenHMD](#)

SDR

LimeSDR

- [LimeSDR Mini](#)

SDRPlay

- [SDRPlay](#)

Machine learning

Articles

- [Contrastive Self-Supervised Learning](#)
- [Dopamine and temporal difference learning: A fruitful relationship between neuroscience and AI](#)

Chat bots

Alternatives

- [Wit.ai](#)
- [Botpress](#)
- [Botkit](#)
- [Dialogflow](#)

On premise

- [ai-chatbot-framework](#)

Programming

- [Rust](#)

Sorting

- [Flash sort algorithm](#)

Hexagonal architecture

The **hexagonal architecture**, or **ports and adapters architecture**, is an architectural pattern used in software design. It aims at creating loosely coupled application components that can be easily connected to their software environment by means of ports and adapters. This makes components exchangeable at any level and facilitates test automation.

[Read more](#)

Frameworks

Firebase

Alternatives

- [Sapphire](#)

Sapphire

Open source alternative to firebase <https://sapphire-db.com/start/main>

Spring boot

Quarkus [The JHipster Quarkus demo app](#)

- <https://quarkus.io/>

Programming languages

C++

Articles

- [Datastructure APIs in C++](#)

Videos

- [Bjarne Stroustrup – The Essence of C++ \(2014\)](#)

Golang

Tips and tricks

```
go mod init
go mod vendor
```

Vendors

Links

Web framework

- [Gin gonic](#)

ORM

- <http://gorm.io/>

GUI

- <https://hackernoon.com/how-to-add-a-gui-to-your-golang-app-in-5-easy-steps-c25c99d4d8e0>
- <https://github.com/andlabs/ui>
- <https://github.com/therecipe/qt>

Web

- GraphQL Schema Language Cheat Sheet
- Learn Golang + GraphQL + Relay #1
- Learn Golang + GraphQL + Relay #2
- <https://github.com/mingrammer/go-web-framework-stars>

Div

- [Awesome Go](#) - A curated list of awesome Go frameworks, libraries and software.

Articles

- Example of Golang CRUD using MySQL from scratch
- Real-Time Maps with a Raspberry Pi, Golang, and HERE XYZ
- Reverse Geocoding NEO 6M GPS Positions with Golang and a Serial UART Connection

Serial UART

- [Go Serial](#)
- [Tarm Serial](#)

Hammerspoon

This is a tool for powerful automation of OS X. At its core, Hammerspoon is just a bridge between the operating system and a Lua scripting engine. What gives Hammerspoon its power is a set of extensions that expose specific pieces of system functionality, to the user.

<https://www.hammerspoon.org/>

Rust

Links

Web

- <https://rocket.rs/>

GUI

- <https://github.com/PistonDevelopers/conrod>
- <http://relm.ml/relm-intro>

ORM

- <http://diesel.rs/guides/getting-started/>

ESP32

- <https://mabez.dev/blog/posts/esp32-rust/>

Projects

- [Crudus MD Notes](#)
- [Maximus](#)

Status Light

iOS app

- <https://stackoverflow.com/questions/23535355/how-to-detect-call-incoming-programmatically>
- <https://www.raywenderlich.com/150015/callkit-tutorial-ios>

BMW Media Center

- BMW Connected Apps Protocol <https://hufman.github.io/stories/bmwconnectedapps>
- [Shopping list](#)

Articles

- <https://hackaday.io/project/161745-can-bus-hacker>
- <https://hackaday.com/2019/05/09/sniffing-can-to-add-new-features-to-a-modern-car/>

Shoppinglist for BMW

Bmw controller

- <https://www.cubietruck.com/products/cubieboard4-cc-a80-high-performance-mini-pc-development-board>
- <https://www.96boards.org/product/hikey960/>

Crudus Markdown Notes

En markdown applikasjon som kan synkronisere med git.

Platform

iOS / Android

- Nativescript
- <https://libgit2.org/>
- <https://github.com/libgit2/objective-git>
- <https://github.com/Raekye/ObjectiveGit-iOS-Example>

Desktop

- Electron

Links

- <https://libgit2.org/>
- <https://cocoapods.org/pods/libgit2>
- <https://github.com/libgit2/libgit2#android>

Libraries

JavaScript

- [Marked](#)
- [Remarkable](#)
- [PageDown](#) (and [PageDown Extra](#))
- [markdown-it](#)
- [Gitdown](#): GitHub markdown preprocessor

- [reMarked.js](#): HTML-to-Markdown processor
- [Kramed](#): Fork of Marked

Other Editors

- [StackEdit](#): In-browser MD document editor
- [Minimalist Online Markdown Editor](#)
- [Mou](#): macOS editor
- [Haroopad](#): Cross-platform editor

Crudus Photos

Tensor flow

Image to text ![[Image to text](./Projects/Crudus Photos/A2399A8D-E525-49D5-B751-CC896F304C16.jpg)]
<https://github.com/tensorflow/models/tree/master/research/im2txt>

Articles

Building a private, local photo search app using machine learning <https://towardsdatascience.com/building-a-private-local-photo-search-app-using-machine-learning-8aeef8d245c>

A step by step guide to Caffe <http://shengshuyang.github.io/A-step-by-step-guide-to-Caffe.html>

Photo History

Histogram in photography <https://www.phototraces.com/photography-basics/histogram-in-photography/>

Histogram basics https://docs.opencv.org/3.1.0/d1/db7/tutorial_py_histogram_begins.html

Tools

- [Tagbox](#)
- [NVIDIA docker support](#)

```
sudo apt install exiftran libjpeg-turbo-progs
```

Ubuntu

Links

Caffe

- <https://caffe.berkeleyvision.org/>

Model zoo

- <https://github.com/BVLC/caffe/wiki/Model-Zoo>

Docker image

- <https://github.com/BVLC/caffe/tree/master/docker>

Diff image

- <https://stackoverflow.com/questions/5132749/diff-an-image-using-imagemagick>

Image Fingerprint

- <https://realpython.com/fingerprinting-images-for-near-duplicate-detection/>

Frame Hash

- https://github.com/sschnug/pyVideoHash/blob/master/frame_hash.pyx

Image recognition

- <https://www.learnopencv.com/image-recognition-and-object-detection-part1/>

Duplicate images

- <https://github.com/philipbl/duplicate-images>
- <https://blog.iconfinder.com/detecting-duplicate-images-using-python-cb240b05a3b6>
- <https://www.youtube.com/watch?v=AlyJSGmkFXk>

OpenCV Line detection

- <https://www.codepool.biz/opencv-line-detection.html>
- https://docs.opencv.org/3.4/dd/dd7/tutorial_morph_lines_detection.html

Detect horizon

- <https://stackoverflow.com/questions/4705837/horizon-detection-algorithm>

OpenCV Auto-level / histogram

- <https://docs.opencv.org/2.4/modules/imgproc/doc/histograms.html?highlight=equalizehist#cv2.equalizeHist>

OpenCV rotate images

- <https://www.pyimagesearch.com/2017/01/02/rotate-images-correctly-with-opencv-and-python/>

MIT Deep learning

- <https://github.com/lexfridman/mit-deep-learning>

Tensorflow and docker

- <https://www.sicara.ai/blog/2017-11-28-set-tensorflow-docker-gpu>
- <https://stackoverflow.com/questions/47068709/your-cpu-supports-instructions-that-this-tensorflow-binary-was-not-compiled-to-u>
- <https://github.com/lakshayg/tensorflow-build>

OpenCV 4 <https://www.pyimagesearch.com/2018/08/17/install-opencv-4-on-macos/>

Crudus Sense

BLE device configuration specification

Name	Type	R/W	Key	UUID
Device name	String	R/W	deviceName	5759f8cc-69ee-11e9-8a12-1681be663d
WiFi Mac	String	R		51ecb1ca-6b85-11e9-a923-1681be663d
WiFi SSID	String	R/W	wifi-ssid	51ecb440-6b85-11e9-a923-1681be663d
WiFi passwd	String	W	wifi-pwd	51ecb594-6b85-11e9-a923-1681be663d
Room	String	R/W	loc-room	51ecb6ca-6b85-11e9-a923-1681be663d
Floor	Integer?	R/W	loc-floor	51ecb7f6-6b85-11e9-a923-1681be663d
Compound	String	R/W	Loc-comp	51ecb922-6b85-11e9-a923-1681be663d
MQTT topic	String	R/W	mqtt-topic	51ecba4e-6b85-11e9-a923-1681be663d
MQTT host	String	R/W	mqtt-host	51ecbf26-6b85-11e9-a923-1681be663d
MQTT port	Integer	R/W	mqtt-port	51ecc156-6b85-11e9-a923-1681be663d
MQTT username	String	R/W	mqtt-user	51ecc2c8-6b85-11e9-a923-1681be663d
MQTT password	String	W	mqtt-pwd	51ecc3fe-6b85-11e9-a923-1681be663d

Name	Type	R/W	Key	UUID
Crudus Accounts username	String	W	crudus-user	51ecc52a-6b85-11e9-a923-1681be663d
Crudus Accounts token	String	W	crudus-token	51ecc6d8-6b85-11e9-a923-1681be663d
Calibration temperature	String (comma separated)	R/W	cali-temp	51ecca5c-6b85-11e9-a923-1681be663d
Calibration humidity	String (comma separated)	R/W	cali-hum	51eccbb0-6b85-11e9-a923-1681be663d
Soft reset	boolean	W	soft-reset	51eccd18-6b85-11e9-a923-1681be663d

MQTT publish Topics

Topic	Payload	Comment

MQTT Subscribe Topics

Topic	Payload	Action	Comment
/sense/ota		Calls OTA for update	

Extensions

Sleep Tracking using an Arduino <https://duino4projects.com/sleep-tracking-using-an-arduino/>

Reset: <https://www.esp8266.com/viewtopic.php?t=9558&start=8>

Chip: CCS811 (indoor air quality sensor)

Kaldheim.org

Links

- <https://themes.getbootstrap.com/product/milo-magazineblog-theme/>

Maximus

Components

- [Stereo Pi](#)
- [Configure BNO055](#)

Robotics

- [Robotics](#)

Articles

- [Comparing Gyroscope Datasheets](#)

Artificial Intelligence

- [AI Notes](#)

BNO055

Installation


- [BNO055 - Python & CircuitPython](#)

```
pip3 install RPI.GPIO
pip3 install adafruit-blinka
```

i2c configuration

- I2C Clock Stretching

In order to use certain I2C sensors, such as the BNO055, you'll need to enable I2C clock stretching 'support' by greatly slowing down the I2C clock on the Raspberry Pi using the device tree overlay.

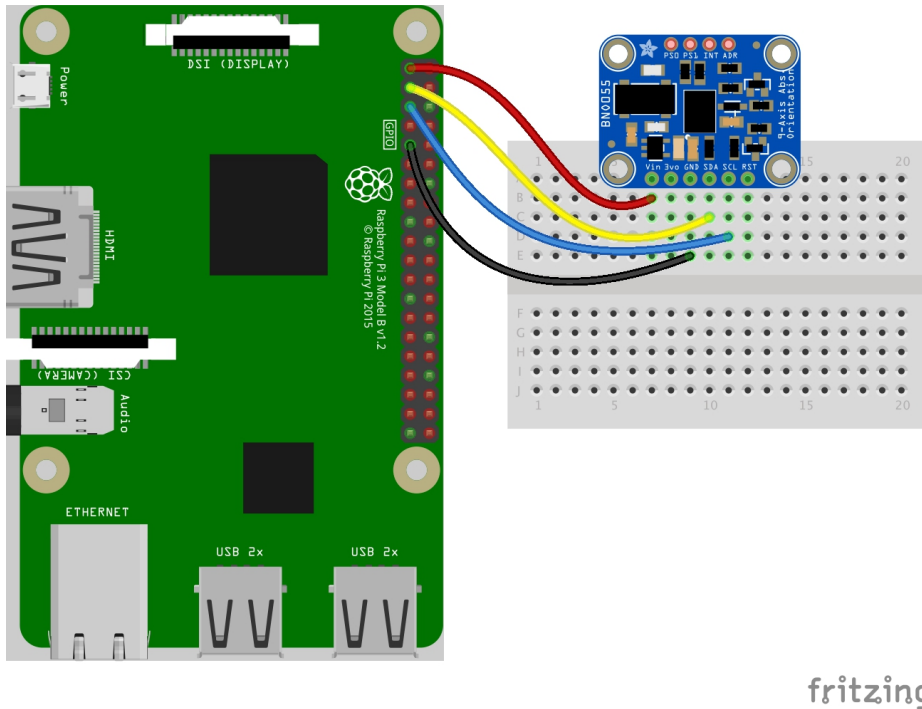

Edit `/boot/config.txt`

```
### Uncomment some of all of these to enable the optional hardware interfaces
dtparam=i2c_arm=on
dtparam=i2s=on
dtparam=spi=on

### Clock stretching by slowing down to 10KHz
dtparam=i2c_arm_baudrate=10000
```

Reboot the device

```
sudo reboot
```

Check for i2c devices:

```
$ i2cdetect -y 1
   0  1  2  3  4  5  6  7  8  9  a  b  c  d  e  f
00:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
10:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
20:  --  --  --  --  --  --  --  28  --  --  --  --  --  --  --
30:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
40:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
50:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
60:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
70:  --  --  --  --  --  --  --  --  --  --  --  --  --  --  --
```

```
mkdir Maximus && cd Maximus
python3 -m venv .env
```

```
source .env/bin/activate
pip3 install adafruit-circuitpython-bno055
```

Create new project Example data from sensor:

```
Temperature: 28 degrees C
Accelerometer (m/s^2): (-0.2, -0.07, -9.77)
Magnetometer (microteslas): (-27.75, -4.0625, 32.5)
Gyroscope (rad/sec): (-0.001090830782496456, -0.004363323129985824, 0.0)
Euler angle: (None, None, None)
Quaternion: (0.011474609375, -0.3623046875, 0.9320068359375, 0.0)
Linear acceleration (m/s^2): (1.28, 0.0, -0.01)
Gravity (m/s^2): (-0.21, -0.08, -9.8)
```

PID controller

- [Arduino BNO055 PID Gyro sensor](#)
- [PID Control for multiple linear actuators](#)

Videos

- [How to Implement an Inertial Measurement Unit \(IMU\) Using an Accelerometer, Gyro, and Magnetometer](#)
- [How to Merge Accelerometer with GPS to Accurately Predict Position and Velocity](#)

Links

- [Adafruit BNO055](#)
- [Adafruit BNO055 absolute orientation sensor](#)



Documents


- [An introduction and tutorial for PID controllers \(PDF\)](#)

Books


- [Technician's Guide to Programmable Controllers](#)
- [PID Controllers: Theory, Design, and Tuning](#)
- [PID Control Fundamentals](#)
- [Model-Reference Robust Tuning of PID Controllers \(Advances in Industrial Control\)](#)
- [HANDBOOK OF PI AND PID CONTROLLER TUNING RULES \(3RD EDITION\)](#)

Development board

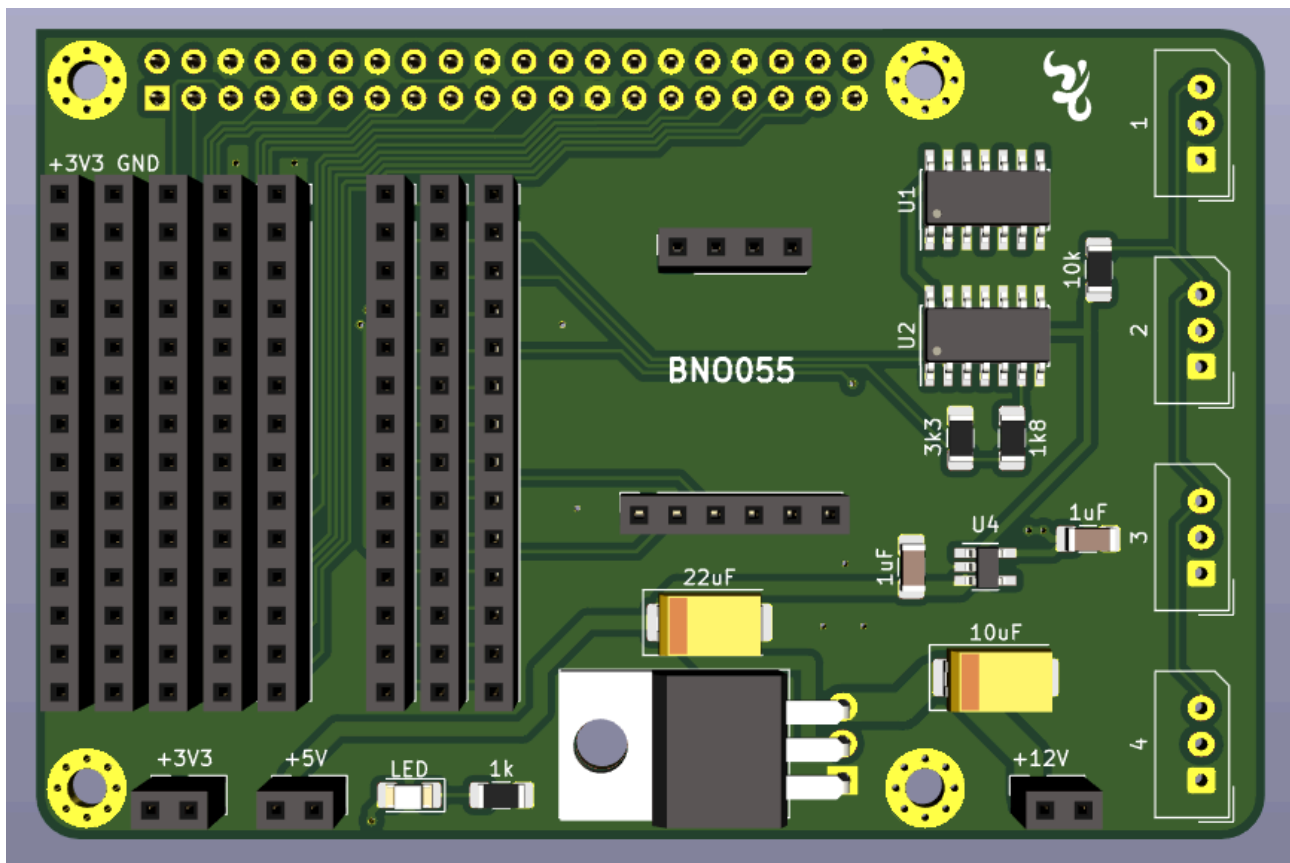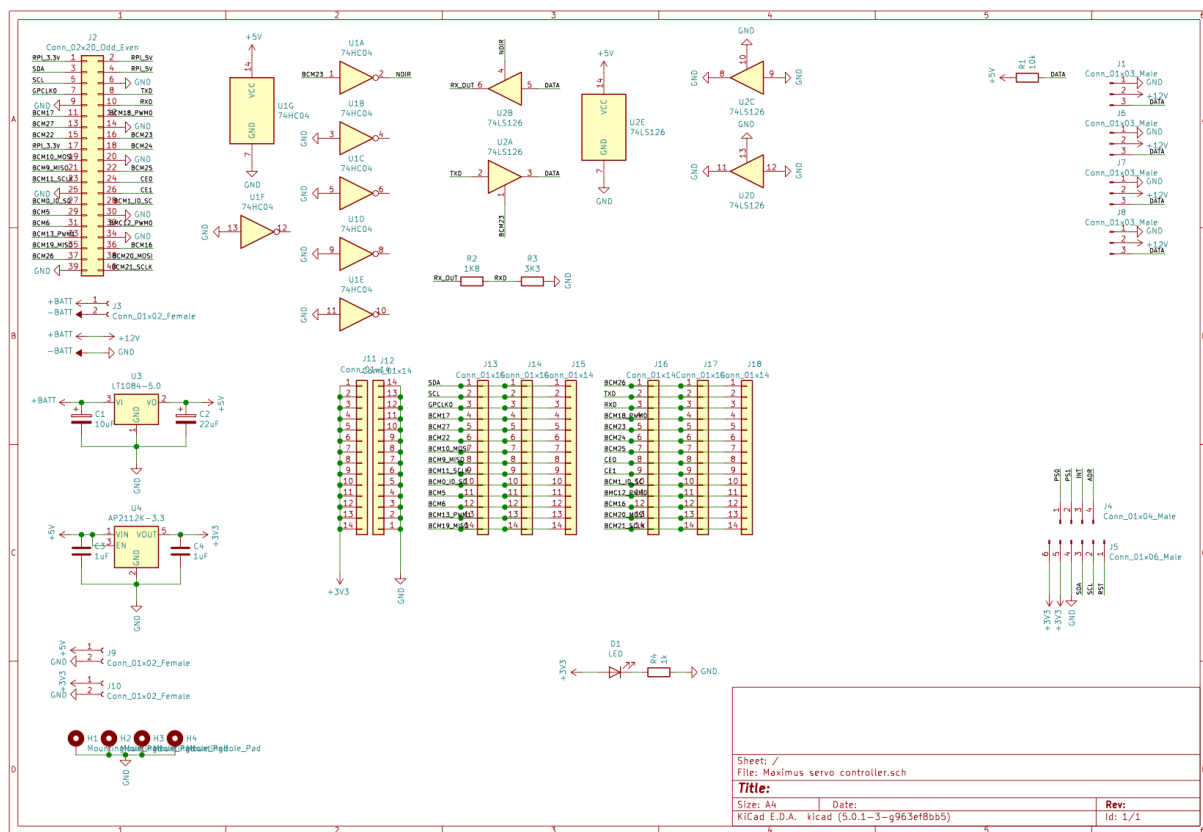

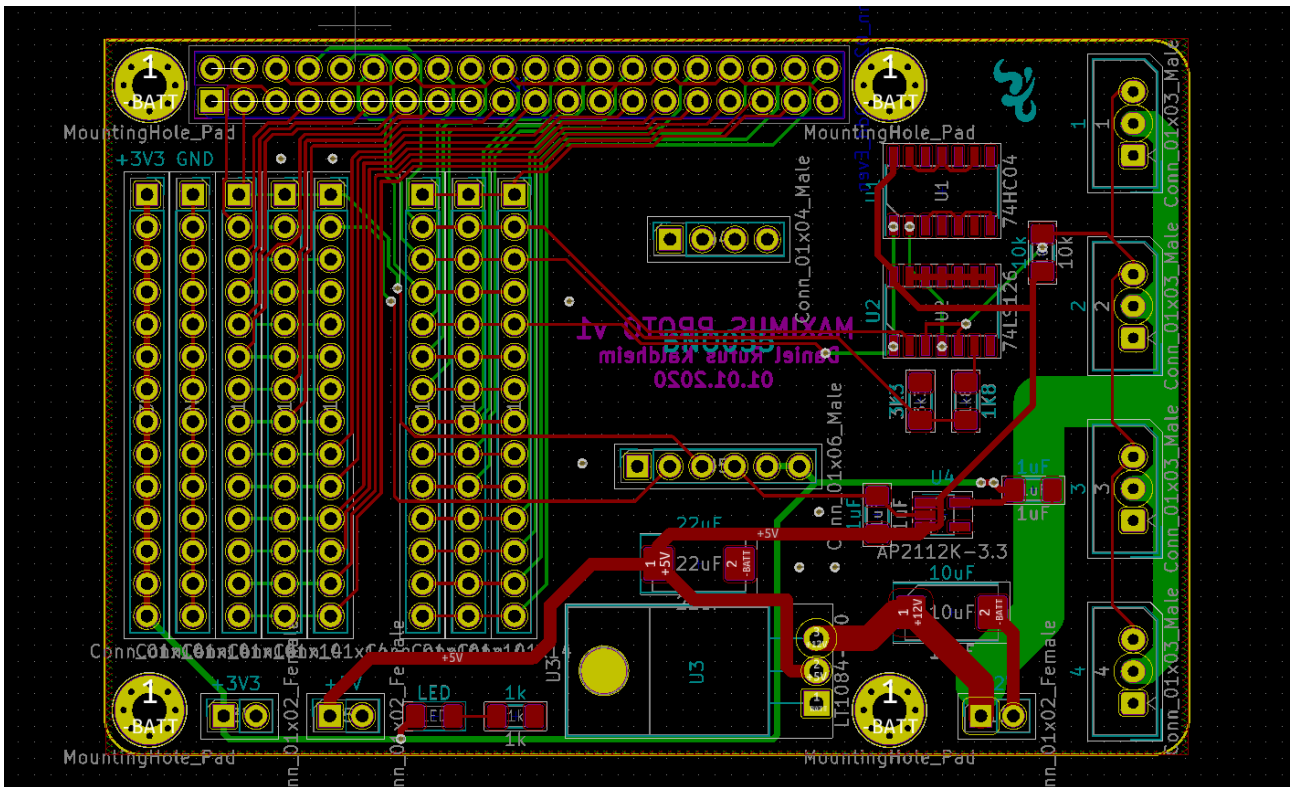

Raspberry Pi GPIO BCM numbering

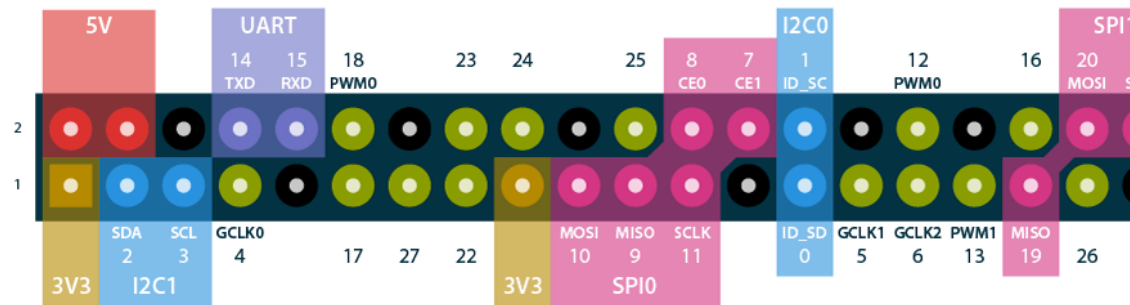

Raspberry Pi pinout

Dynamixel AX-12A

DYNAMIXEL is a robot exclusive smart actuator with fully integrated DC Motor + Reduction Gearhead + Controller + Driver + Network in one DC servo module.





Specification

Item	Specification
Baud Rate	7843 bps ~ 1 Mbps
Resolution	0.29 [°]
Running Degree	0 [°] ~ 300 [°] Endless Turn
Weight	53.5g(AX-12, AX-12+), 54.6g(AX-12A)
Dimensions (W x H x D)	32mm x 50mm x 40mm
Gear Ratio	254 : 1
Stall Torque	1.5 N*m (at 12V, 1.5A)
No Load Speed	59rpm (at 12V)
Operating Temperature	-5 [°C] ~ +70 [°C]
Input Voltage	9.0 ~ 12.0V (Recommended : 11.1V)
Command Signal	Digital Packet
Protocol Type	Half Duplex Asynchronous Serial Communication (8bit, 1stop, No Parity)
Physical Connection	TTL Level Multi Drop Bus
ID	0 ~ 253
Feedback	Position, Temperature, Load, Input Voltage, etc
Material	Engineering Plastic


Wiring


Item	TTL
Pinout	1 GND2 VDD3 DATA
Diagram	

Item	TTL
	
Housing	MOLEX 50-37-5033
	
PCB Header	MOLEX 22-03-5035
Crimp Terminal	MOLEX 08-70-1039
Wire Gauge	21 AWG

TTL communications To control the DYNAMIXEL actuators, the main controller needs to convert its UART signals to the half duplex type.

The recommended circuit diagram for this is shown below.

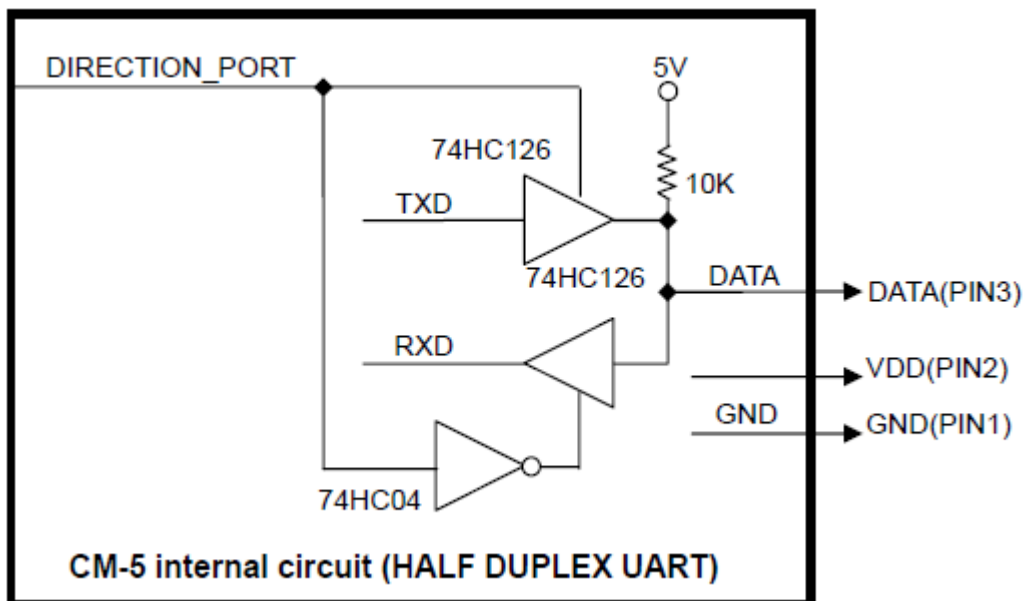

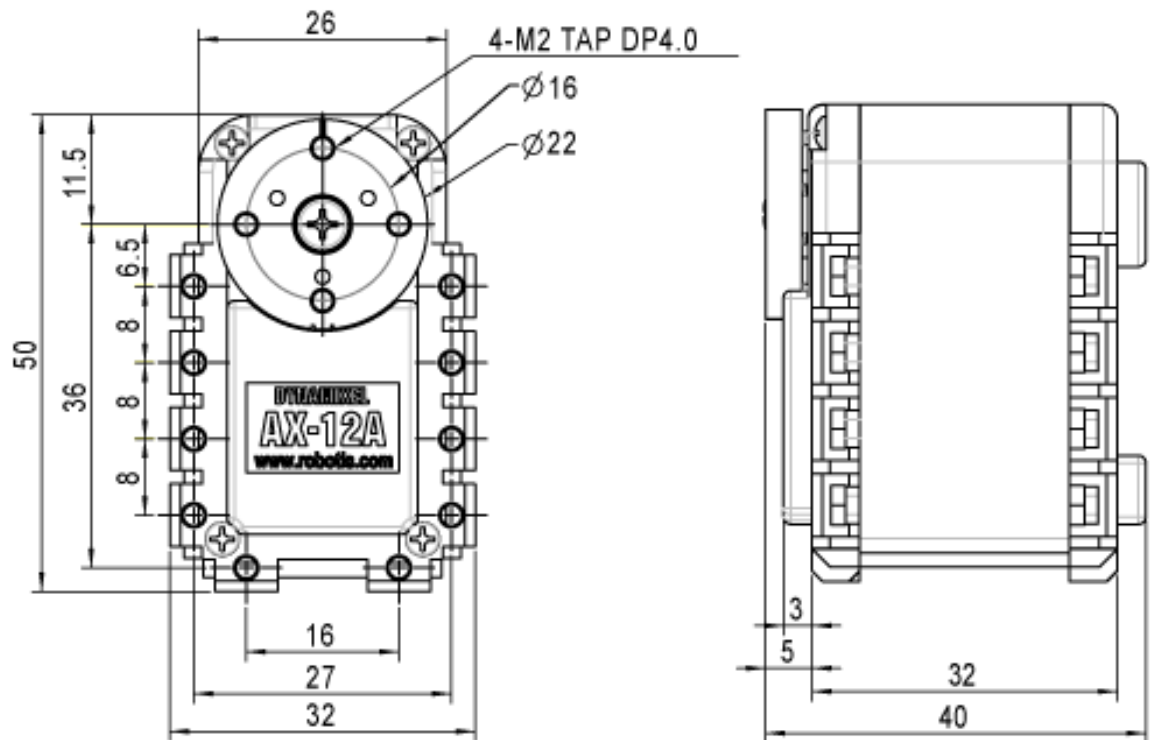

Drawings


Links

- [E-manual](#)
- [Dynamixel SDK](#)

GPS

Adafruit ultimate GPS breakout

- -165 dBm sensitivity, 10 Hz updates, 66 channels
- 5V friendly design and only 20mA current draw
- Breadboard friendly + two mounting holes
- RTC battery-compatible
- Built-in datalogging
- PPS output on fix
- Internal patch antenna + u.FL connector for external active antenna
- Fix status LED

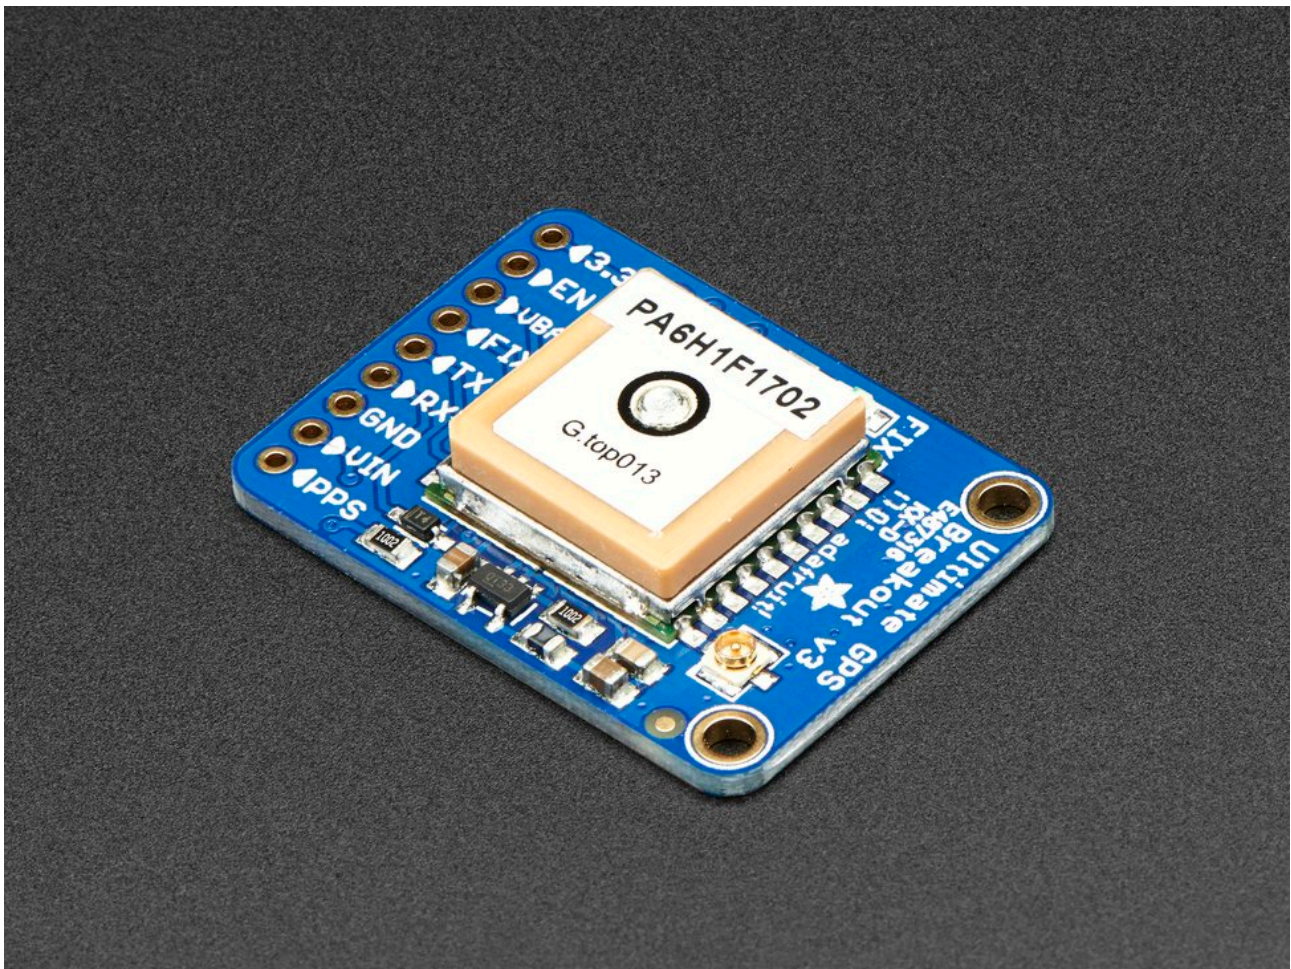


Technical details

- Satellites: 22 tracking, 66 searching
- Patch Antenna Size: 15mm x 15mm x 4mm
- Update rate: 1 to 10 Hz
- Position Accuracy: < 3 meters (all GPS technology has about 3m accuracy)
- Velocity Accuracy: 0.1 meters/s
- Warm/cold start: 34 seconds
- Acquisition sensitivity: -145 dBm
- Tracking sensitivity: -165 dBm
- Maximum Velocity: 515m/s
- Vin range: 3.0-5.5VDC
- MTK3339 Operating current: 25mA tracking, 20 mA current draw during navigation
- Output: NMEA 0183, 9600 baud default, 3V logic level out, 5V-safe input
- DGPS/WAAS/EGNOS supported
- FCC E911 compliance and AGPS support (Offline mode : EPO valid up to 14 days)
- Up to 210 PRN channels
- Jammer detection and reduction
- Multi-path detection and compensation

Links

- [Adafruit product page](#)
- [Adafruit Overview](#)

GPS antenna Recommended GPS antenna

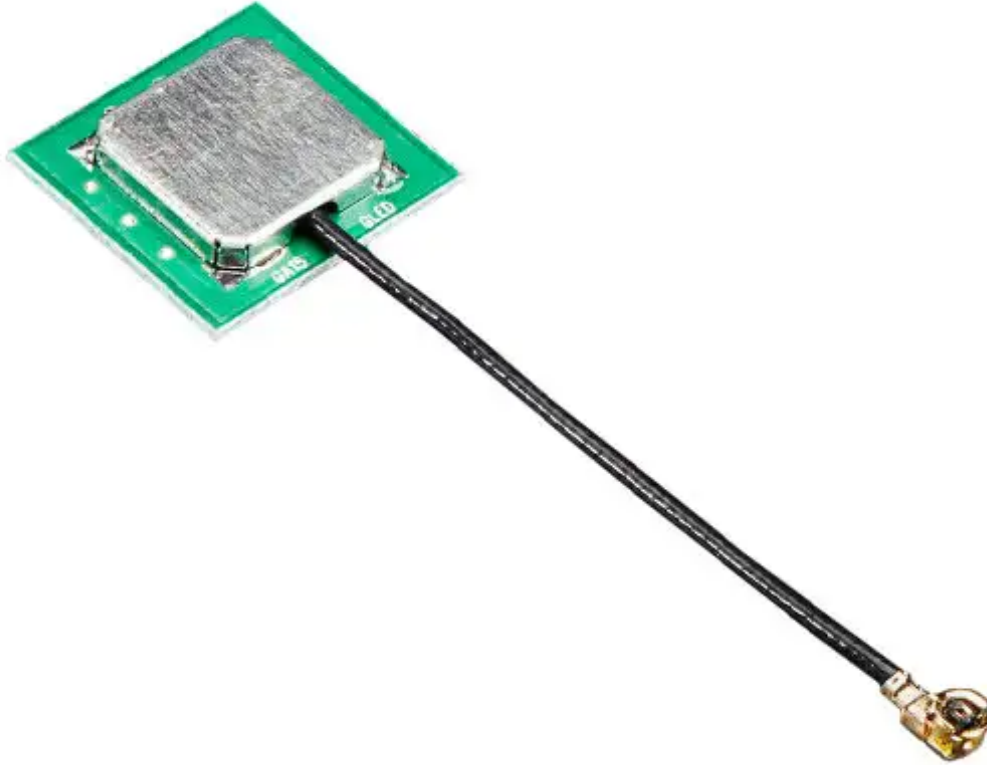

Links

- [RF ANT 1.575GHZ CER PATCH CAB](#)

Datasheets

- [Passive GPS Antenna uFL - 15mm x 15mm 1 dBi gain](#)

Maximus AI

For termial conversations

- <http://www.methods.co.nz/asciidoc/>

AIML

- <http://www.alicebot.org/aiml.html>
- <https://www.tutorialspoint.com/aiml/>
- <http://www.devdungeon.com/content/ai-chat-bot-python-aiml>
- <https://github.com/pandorabots/rosie/tree/master/lib/aiml>

Unicode hex: "\xf0\x9f\x90\xb6"

Artificial Intelligence

- <http://blog.hackerearth.com/2015/12/artificial-intelligence-101-how-to-get-started.html>

Words, spelling and so on

- <https://market.mashape.com/wordsapi/wordsapi>
- <https://github.com/montanaflynn/Spellcheck-API/>
- <https://market.mashape.com/sentity/sentity-text-analytics>
- <https://market.mashape.com/aylien/text-analysis>
- <https://market.mashape.com/textanalysis/text-summarization>
- <https://www.meaningcloud.com/developer/>
- <https://market.mashape.com/faceplusplus/faceplusplus-face-detection>
- <http://developers.answers.com/>

Grammar

- <https://learnenglish.britishcouncil.org/en/>
- <https://github.com/markfullmer/grammar/tree/Version-3>
- <https://github.com/languagetool-org/languagetool> (<http://wiki.languagetool.org/public-http-api>)

NLP / NER

- Part-of-speech tagging (POS)
- Chunking (CHK)
- Name entity recognition (NER)
- Info: <http://nlp.stanford.edu/software/CRF-NER.shtml>
- Download: <http://nlp.stanford.edu/software/stanford-ner-2016-10-31.zip>
- <https://github.com/agentile/PHP-Stanford-NLP> (old) use patrickschur
- <https://packagist.org/packages/patrickschur/stanford-nlp-tagger>
- <http://php-nlp-tools.com/>

Intent parser

- <https://github.com/MycroftAI/adapt>

Object recognition (caffe)

- <http://tutorial.caffe.berkeleyvision.org/caffe-cvpr15-detection.pdf>

Image analyze

- <https://github.com/Samshal/PHP-Photo-Information>
- <http://caffe.berkeleyvision.org/>

Automatic speech recognition

- <http://cmusphinx.sourceforge.net/>
- <http://kaldi-asr.org/>

Questions / answers

- <https://github.com/TScottJ/OpenEphyra>
- <https://cs.umd.edu/~miyyer/qblearn/>
- <https://github.com/brmson/yodaqa>

Lucida

- <http://lucida.ai/media/hpca-lucida-djinn-tutorial.pdf>

Animations

- https://www.youtube.com/watch?v=_WlqMqXpyxA

OCR / Deep learning

- <https://blogs.dropbox.com/tech/2017/04/creating-a-modern-ocr-pipeline-using-computer-vision-and-deep-learning/>

Neural network (arduino)

- <http://robotics.hobbizine.com/arduinoann.html>


Other Links

- <https://github.com/GokuMohandas/practicalAI>
- <http://www.aicheatsheets.com/>

Robotics

Read

- [PyRobot](#)

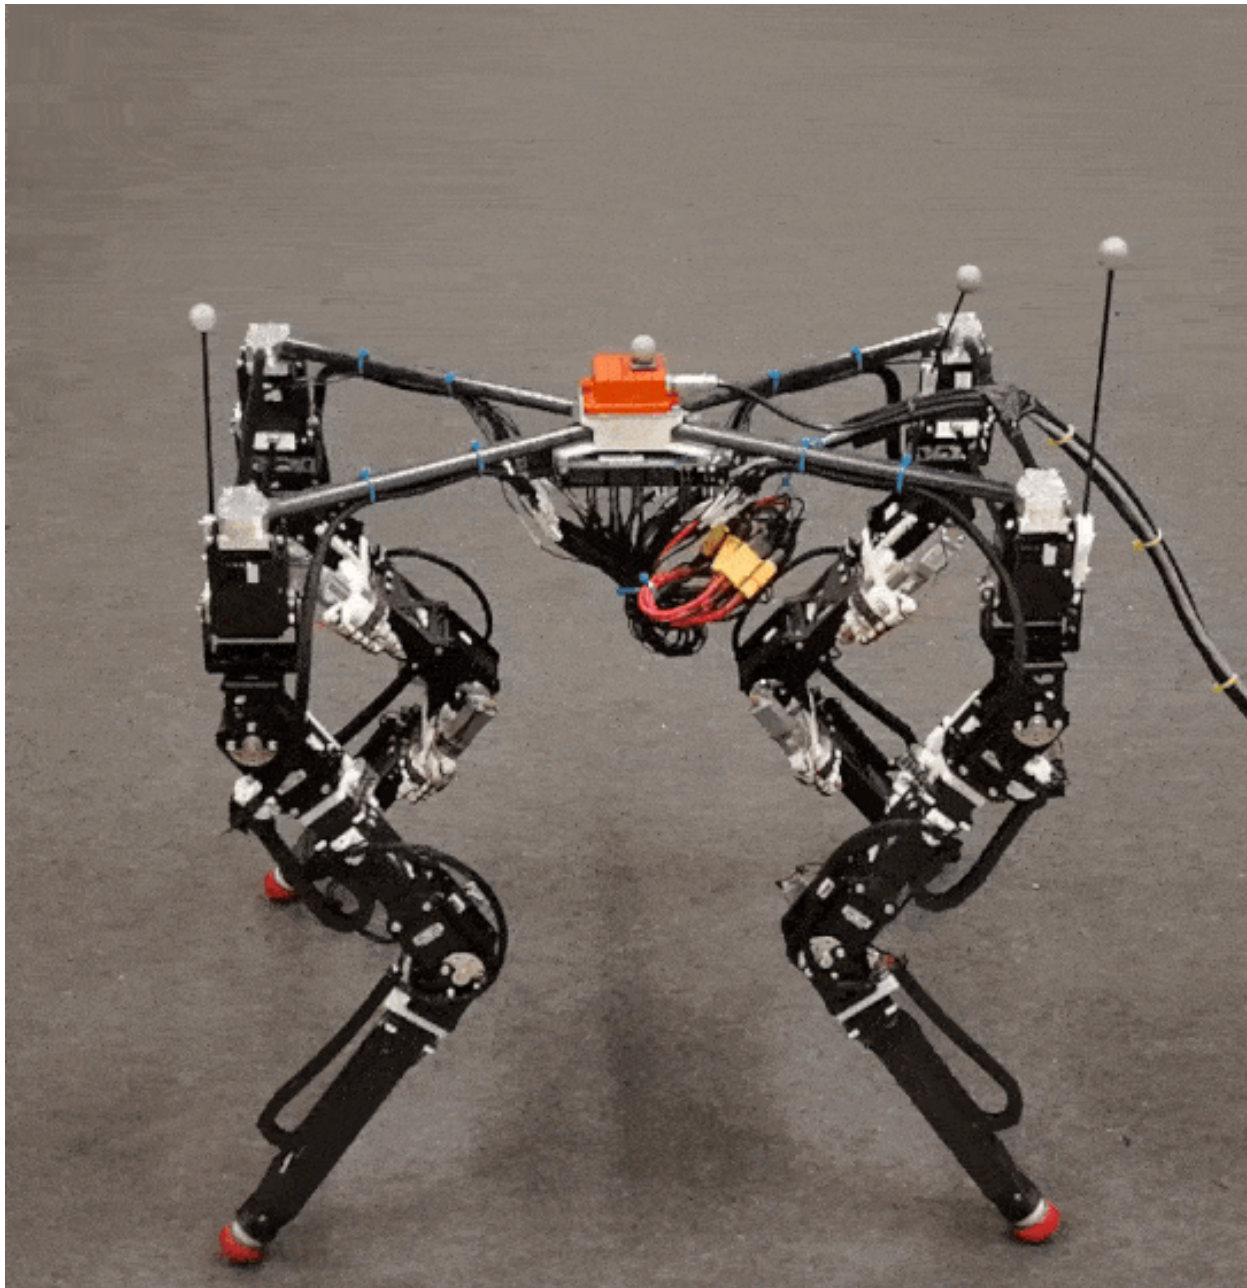

DyRET Robot


Links

- [DyRET Documentation](#)




Jetson Nano

- <https://www.nvidia.com/en-us/autonomous-machines/embedded-systems/jetson-nano/>

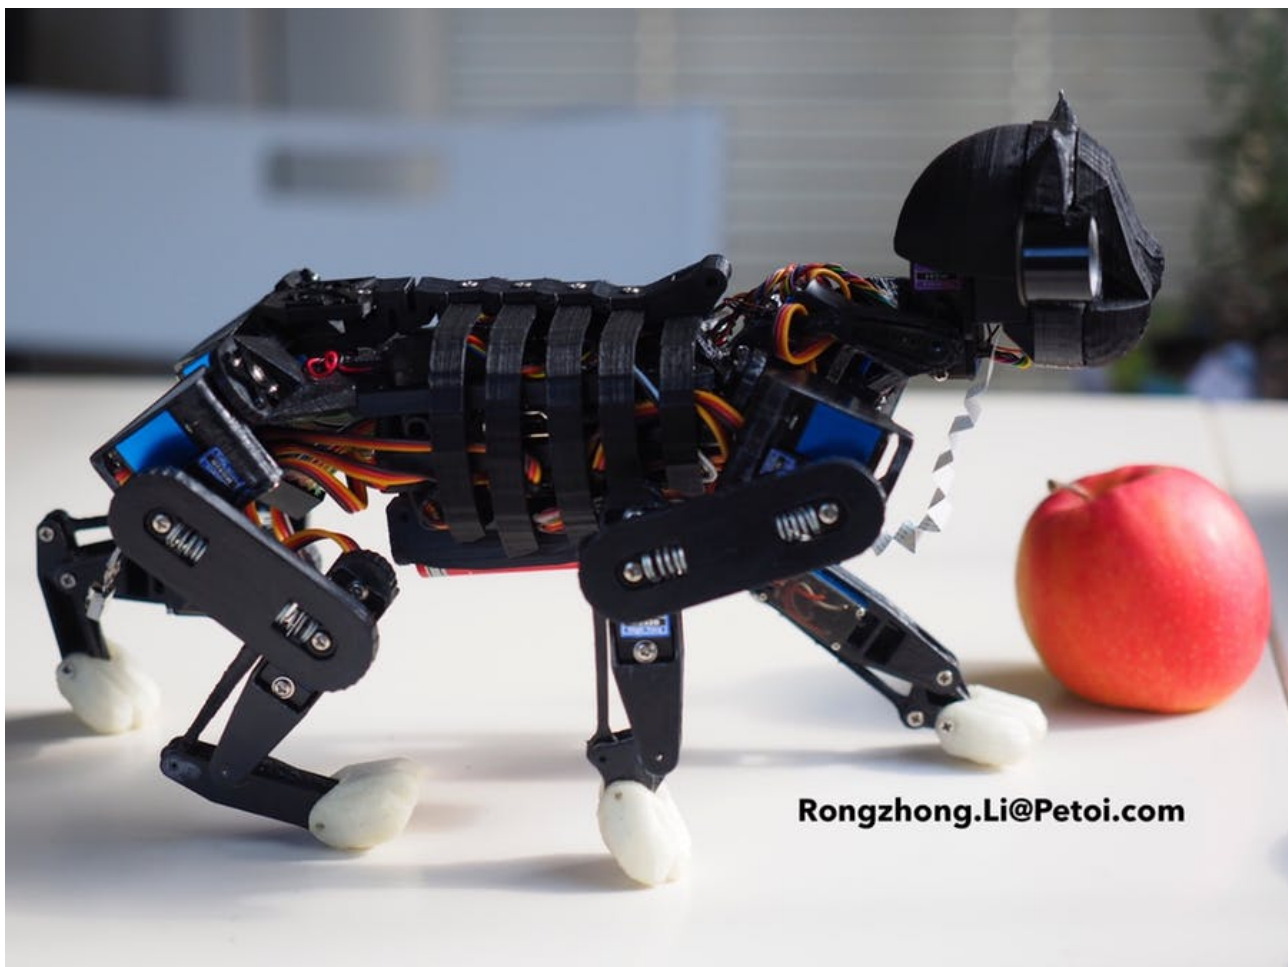

Open Cat

<https://www.hackster.io/petoi/opencat-845129>

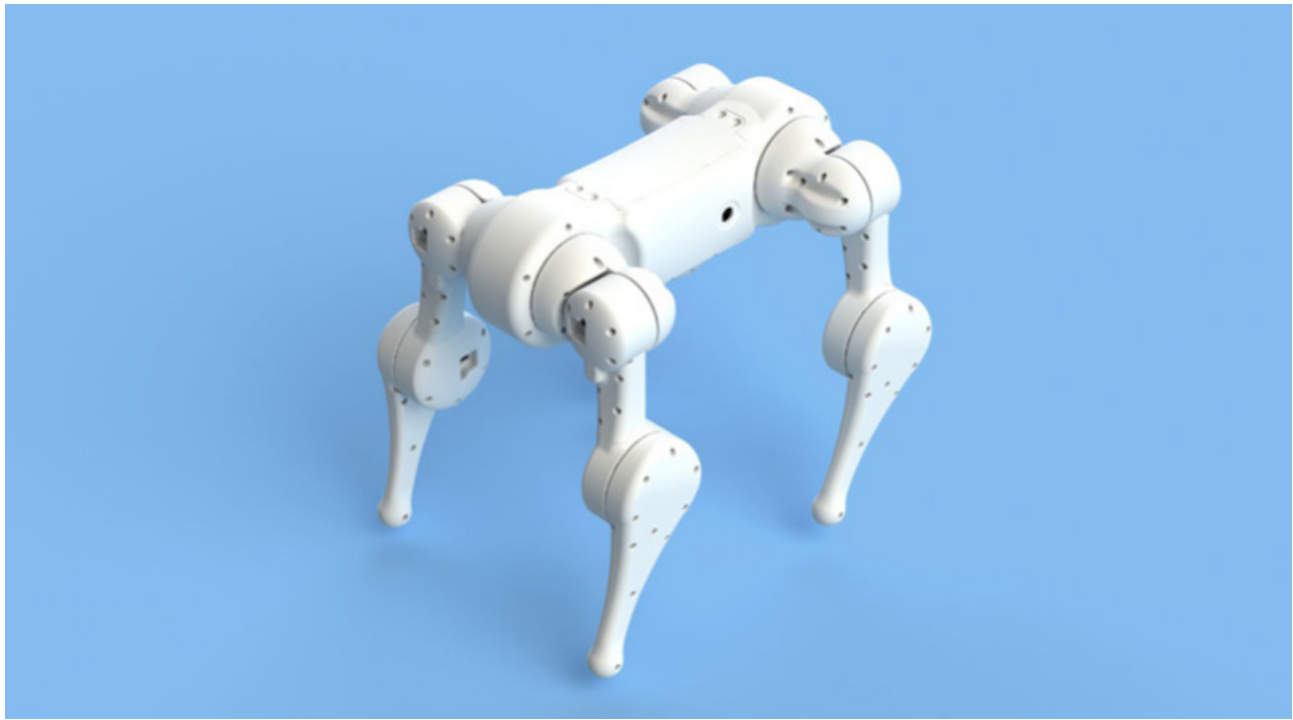

Pet dog

- <https://hackaday.com/2019/03/30/a-pet-robot-just-like-boston-dynamics-makes/>
- <https://hackaday.io/project/164493-dizzy-wolf>

Mechanical keyboard

Inspiration

- <https://github.com/ruiqimao/keyboard-pcb-guide>
- <https://imgur.com/gallery/fGa13nZ>
- <https://www.reddit.com/r/MechanicalKeyboards/wiki/customkeyboards>

Tools

- Keyboard Layout editor
- Plate & Case Builder
- ai03 Plate Generator

Motorcycle App

- Profile
 - Navn
 - epost
 - område / by
 - kommunikasjon (hjelm)
- Kjøretøy
 - model
 - årsmodel
 - merke
 - Bensin-logging
 - ★ Stasjon / lokasjon
 - ★ liter
 - ★ tripteller
 - ★ dato
 - ★ drivstoff type (oktan)
 - ★ drivstoff-pris
 - ★ fulltank / ikke full tank
 - Vedlikehold

- ★ Sjekkliste
 - ★ dekkbytte
 - ★ bremseklosser
 - ★ Diverse
- Venner
- Grupper
 - inviter venner til gruppe (lukket gruppe)
 - åpen gruppe
 - Åpen gruppe men begrenset godkjenning av admin
- Meldinger
 - venn til venn
 - gruppechat
 - turchat
- Ruter
 - Lag rute via kart
 - Lag rute ved å kjøre
 - Logg rute i bakgrunnen
 - legg til stopp punkt (pauser etc)
- Turer
 - planlegg rute via eksisterende rute
 - planlegg rute ved å lage via kart
 - inviter venner
 - inviter gruppe
 - kjør tur
 - ★ legg til møteplass
 - ★ legg til stopp (pauser etc)
 - ★ logg hvem som er med bassert på godkjenning og automatisk synkronisering av lokasjon
 - ★ logg faktisk kjørt rute
 - ★ logg tid
 - ★ logg tilfeldige forbipasserende (bassert på lokasjon og tid) (frivillig)
- statistikk
 - drivstoff forbruk
 - tid på sykkel
 - Avstand på sykkel

Pip-Boy

Montering

- <https://ytec3d.com/pip-boy-3000-mark-iv-assembly/>

LCD skjerm

- <https://no.mouser.com/ProductDetail/Newhaven-Display/NHD-43-480272MB-ASXN-CTP?qs=sGAEpiMZZMu%2fRY1>

Project Management System

Inspiration

- <https://codetree.com/>

RPI Security camera

Articles

- [Raspberry Pi Live Streaming camera: like on Times Square](#)

Reflow Oven

Links

Tutorial: <http://www.whizoo.com/reflowoven>

Ovn: <https://www.skousen.no/hvitevarer/ovn/mini-ovn/product/royal-16-ltr/>

Isolasjonsteip: <https://www.skruvat.no/Isolasjonstape-Reflect-A-Gold-P418338.aspx>

Isolasjonsteppe: <https://bakerovner.no/produkt/keramisk-isolasjon-rull-1260-c/>

Fugemasse / lim: <https://coop.no/sortiment/obs-bygg/maling-og-tilbehor/lim-fug-sparkel/casco-heat#product-info>

USB Media Controller

Dimensions

Høyde: 35mm x Bredde: 70 - 100mm

Security

Articles

- [Exploiting WiFi stack on Tesla Model S](#)

LoRaWAN

[LoRaWAN Encryption Keys Easy to Crack, Jeopardizing Security of IoT Networks](#)

Shopping lists

Shopping list for home office

Keyboard

- <https://www.daskeyboard.com/daskeyboard-4-ultimate/>
 - <https://www.teknikmagasinet.no/produkter/data-o-tv-spill/tastatur/varemerker/das-keyboard/das-keyboard-4-ultimate-with-cherry-mx-blue>
- https://mechanicalkeyboards.com/shop/index.php?l=product_detail&p=3901
- <http://www.wasdkeyboards.com/index.php/products/mechanical-keyboard/wasd-v2-105-key-iso-custom-mechanical-keyboard.html>

Network

- <https://mikrotik.com/product/RB3011UiAS-RM>
 - <https://www.eurodk.com/en/products/mt-rb/routerboard-3011uias-rm>
 - <https://freak.no/forum/showthread.php?t=219922&page=28>

Software

- [Rabbit MQ](#)

Rabbit MQ

Security

- Rabbit MQ access control: <http://www.rabbitmq.com/access-control.html>
- Multi-tenant SaaS AD: <https://vincentlauzon.com/2016/03/10/multi-tenant-saas-with-azure-active-directory-b2b-b2c/>

Ubuntu

Articles

- [Building a Linux Desktop for Cloud Native Development](#)

Ubuntu + Windows dual boot

Installing Windows **after** Ubuntu.

From <https://help.ubuntu.com/community/WindowsDualBoot>:

Recovering GRUB after reinstalling Windows Please refer to the [Reinstalling GRUB2](#) guide.

Master Boot Record backup and replacement This method does not work for computers with UEFI boot. In consequence, it won't work for pre-installed Windows 8 and some pre-installed with Windows 7.

Back-up the existing MBR, install Windows, replace your backup overwriting the Windows boot code:

1. Create an NTFS partition for Windows (using fdisk, GParted or whatever tool you are familiar with)
2. Backup the MBR e.g. `dd if=/dev/sda of=/mbr.bin bs=446 count=1`
3. Install Windows
4. Boot into a [LiveCD](#)
5. Mount your root partition in the LiveCD
6. Restore the MBR e.g. `dd if=/media/sda/mbr.bin of=/dev/sda bs=446 count=1`
7. Restart and Ubuntu will boot
8. Setup GRUB to boot Windows

tmux shortcuts & cheatsheet

start new:

tmux

start new with session name:

tmux new -s myname

attach:

tmux a # (or at, or attach)

attach to named:

tmux a -t myname

list sessions:

tmux ls

kill session:

```
tmux kill-session -t myname
```

Kill all the tmux sessions:

```
tmux ls | grep : | cut -d. -f1 | awk '{print substr($1, 0, length($1)-1)}' | xargs kill
```

In tmux, hit the prefix `ctrl+b` (my modified prefix is ctrl+a) and then:

Sessions

```
:new<CR> new session
s list sessions
$ name session
```

Windows (tabs)

```
c create window
w list windows
n next window
p previous window
f find window
, name window
& kill window
```

Panes (splits)

```
% vertical split
" horizontal split

o swap panes
q show pane numbers
x kill pane
+ break pane into window (e.g. to select text by mouse to copy)
- restore pane from window
[ space - toggle between layouts
<prefix> q (Show pane numbers, when the numbers show up type the key to goto that pane)
<prefix> { (Move the current pane left)
<prefix> } (Move the current pane right)
<prefix> z toggle pane zoom
```

Sync Panes

You can do this by switching to the appropriate window, typing your Tmux prefix (commonly Ctrl-B or Ctrl-A) and then a colon to bring up a Tmux command line, and typing:

```
:setw synchronize-panes
```

You can optionally add on or off to specify which state you want; otherwise the option is simply toggled. This option is specific to one window, so it won't change the way your other sessions or windows operate. When you're done, toggle it off again by repeating the command. [tip source](#)

Resizing Panes

You can also resize panes if you don't like the layout defaults. I personally rarely need to do this, though it's handy to know how. Here is the basic syntax to resize panes:

```
PREFIX : resize-pane -D (Resizes the current pane down)
PREFIX : resize-pane -U (Resizes the current pane upward)
PREFIX : resize-pane -L (Resizes the current pane left)
PREFIX : resize-pane -R (Resizes the current pane right)
PREFIX : resize-pane -D 20 (Resizes the current pane down by 20 cells)
```

```

PREFIX : resize-pane -U 20 (Resizes the current pane upward by 20 cells)
PREFIX : resize-pane -L 20 (Resizes the current pane left by 20 cells)
PREFIX : resize-pane -R 20 (Resizes the current pane right by 20 cells)
PREFIX : resize-pane -t 2 20 (Resizes the pane with the id of 2 down by 20 cells)
PREFIX : resize-pane -t -L 20 (Resizes the pane with the id of 2 left by 20 cells)

```

Copy mode:

Pressing PREFIX [places us in Copy mode. We can then use our movement keys to move our cursor around the screen. By default, the arrow keys work. we set our configuration file to use Vim keys for moving between windows and resizing panes so we wouldn't have to take our hands off the home row. tmux has a vi mode for working with the buffer as well. To enable it, add this line to .tmux.conf:

```
setw -g mode-keys vi
```

With this option set, we can use h, j, k, and l to move around our buffer.

To get out of Copy mode, we just press the ENTER key. Moving around one character at a time isn't very efficient. Since we enabled vi mode, we can also use some other visible shortcuts to move around the buffer.

For example, we can use "w" to jump to the next word and "b" to jump back one word. And we can use "f", followed by any character, to jump to that character on the same line, and "F" to jump backwards on the line.

Function	vi	emacs
Back to indentation	^	M-m
Clear selection	Escape	C-g
Copy selection	Enter	M-w
Cursor down	j	Down
Cursor left	h	Left
Cursor right	l	Right
Cursor to bottom line	L	
Cursor to middle line	M	M-r
Cursor to top line	H	M-R
Cursor up	k	Up
Delete entire line	d	C-u
Delete to end of line	D	C-k
End of line	\$	C-e
Goto line	:	g
Half page down	C-d	M-Down
Half page up	C-u	M-Up
Next page	C-f	Page down
Next word	w	M-f
Paste buffer	p	C-y
Previous page	C-b	Page up
Previous word	b	M-b
Quit mode	q	Escape
Scroll down	C-Down or J	C-Down
Scroll up	C-Up or K	C-Up
Search again	n	n
Search backward	?	C-r
Search forward	/	C-s
Start of line	0	C-a
Start selection	Space	C-Space
Transpose chars		C-t

Misc

```

d detach
t big clock
? list shortcuts
: prompt

```


Configurations Options:

```
# Mouse support - set to on if you want to use the mouse
* setw -g mode-mouse off
* set -g mouse-select-pane off
* set -g mouse-resize-pane off
* set -g mouse-select-window off

# Set the default terminal mode to 256color mode
set -g default-terminal "screen-256color"

# enable activity alerts
setw -g monitor-activity on
set -g visual-activity on

# Center the window list
set -g status-justify centre

# Maximize and restore a pane
unbind Up bind Up new-window -d -n tmp \; swap-pane -s tmp.1 \; select-window -t tmp
unbind Down
bind Down last-window \; swap-pane -s tmp.1 \; kill-window -t tmp
```

Resources:

- [tmux: Productive Mouse-Free Development](#)
- [How to reorder windows](#)

Notes:

-

Changelog:

- 1411143833002 - Added [toggle zoom](#) under Panes (splits) section.
- 1411143833002 - [Added Sync Panes](#)
- 1414276652677 - [Added Kill all tmux sessions](#)
- 1438585211173 - [corrected create and add next and previus thanks to @justinhendrick](#)

Request an Update:

We Noticed that our Cheatsheet is growing and people are coloberating to add new tips and tricks, so please tweet to me what would you like to add and let's make it better!

- Twitter: [@MohammedAlaa](#)

Vim Cheat Sheet

Global

```
:help keyword - open help for keyword
:saveas file - save file as
:close - close current pane
K - open man page for word under the cursor
```

Cursor movement

```
h - move cursor left
```

- j - move cursor down
- k - move cursor up
- l - move cursor right
- H - move to top of screen
- M - move to middle of screen
- L - move to bottom of screen
- w - jump forwards to the start of a word
- W - jump forwards to the start of a word (words can contain punctuation)
- e - jump forwards to the end of a word
- E - jump forwards to the end of a word (words can contain punctuation)
- b - jump backwards to the start of a word
- B - jump backwards to the start of a word (words can contain punctuation)
- % - move to matching character (default supported pairs: '()', '{}', '[]' - use :h matchpairs in vim for more info)
- 0 - jump to the start of the line
- ^ - jump to the first non-blank character of the line
- \$ - jump to the end of the line
- g_ - jump to the last non-blank character of the line
- gg - go to the first line of the document
- G - go to the last line of the document
- 5G - go to line 5
- fx - jump to next occurrence of character x
- tx - jump to before next occurrence of character x
- Fx - jump to previous occurrence of character x
- Tx - jump to after previous occurrence of character x
- ; - repeat previous f, t, F or T movement
- , - repeat previous f, t, F or T movement, backwards
- } - jump to next paragraph (or function/block, when editing code)
- { - jump to previous paragraph (or function/block, when editing code)
- zz - center cursor on screen
- Ctrl + e - move screen down one line (without moving cursor)
- Ctrl + y - move screen up one line (without moving cursor)
- Ctrl + b - move back one full screen
- Ctrl + f - move forward one full screen
- Ctrl + d - move forward 1/2 a screen
- Ctrl + u - move back 1/2 a screen

Insert mode - inserting/appendng text

- `i` - insert before the cursor
- `I` - insert at the beginning of the line
- `a` - insert (append) after the cursor
- `A` - insert (append) at the end of the line
- `o` - append (open) a new line below the current line
- `O` - append (open) a new line above the current line
- `ea` - insert (append) at the end of the word
- `Esc` - exit insert mode

Editing

- `r` - replace a single character
- `J` - join line below to the current one with one space in between
- `gJ` - join line below to the current one without space in between
- `gwip` - reflow paragraph
- `cc` - change (replace) entire line
- `C` - change (replace) to the end of the line
- `c$` - change (replace) to the end of the line
- `ciw` - change (replace) entire word
- `cw` - change (replace) to the end of the word
- `s` - delete character and substitute text
- `S` - delete line and substitute text (same as `cc`)
- `xp` - transpose two letters (delete and paste)
- `u` - undo
- `Ctrl + r` - redo
- `.` - repeat last command

Cut and paste

- `yy` - yank (copy) a line
- `2yy` - yank (copy) 2 lines
- `yw` - yank (copy) the characters of the word from the cursor position to the start of the next word `y$` - yank (copy) to end of line
- `p` - put (paste) the clipboard after cursor
- `P` - put (paste) before cursor
- `dd` - delete (cut) a line
- `2dd` - delete (cut) 2 lines
- `dw` - delete (cut) the characters of the word from the cursor position to the start of the next word `D` - delete (cut) to the end of the line

`d$` - delete (cut) to the end of the line

`x` - delete (cut) character

Marking text (visual mode)

`v` - start visual mode, mark lines, then do a command (like y-yank)

`V` - start linewise visual mode

`o` - move to other end of marked area

`Ctrl + v` - start visual block mode

`O` - move to other corner of block

`aw` - mark a word

`ab` - a block with ()

`aB` - a block with {}

`ib` - inner block with ()

`iB` - inner block with {}

`Esc` - exit visual mode

Visual commands

`>` - shift text right

`<` - shift text left

`y` - yank (copy) marked text

`d` - delete marked text

`~` - switch case

Registers

`:reg` - show registers content

`"xy` - yank into register x

`"xp` - paste contents of register x

Search and replace

`/pattern` - search for pattern

`?pattern` - search backward for pattern

`\vpattern` - 'very magic' pattern: non-alphanumeric characters are interpreted as special regex symbols (no escaping needed)

`n` - repeat search in same direction

`N` - repeat search in opposite direction

`:%s/old/new/g` - replace all old with new throughout file

`:%s/old/new/gc` - replace all old with new throughout file with confirmations

`:noh` - remove highlighting of search matches

Search in multiple files

`:vimgrep /pattern/ { {file} }` - search for pattern in multiple files e.g.

`:vimgrep /foo/ **/*`

`:cn` - jump to the next match

`:cp` - jump to the previous match

`:copen` - open a window containing the list of matches

Working with multiple files

`:e file` - edit a file in a new buffer

`:bnext` or `:bn` - go to the next buffer

`:bprev` or `:bp` - go to the previous buffer

`:bd` - delete a buffer (close a file)

`:ls` - list all open buffers

`:sp file` - open a file in a new buffer and split window

`:vsp file` - open a file in a new buffer and vertically split window

`Ctrl + ws` - split window

`Ctrl + ww` - switch windows

`Ctrl + wq` - quit a window

`Ctrl + wv` - split window vertically

`Ctrl + wh` - move cursor to the left window (vertical split)

`Ctrl + wl` - move cursor to the right window (vertical split)

`Ctrl + wj` - move cursor to the window below (horizontal split)

`Ctrl + wk` - move cursor to the window above (horizontal split)

Tabs

`:tabnew` or `:tabnew {page.words.file}` - open a file in a new tab

`Ctrl + wT` - move the current split window into its own tab

`gt` or `:tabnext` or `:tabn` - move to the next tab

`gT` or `:tabprev` or `:tabp` - move to the previous tab

`#gt` - move to tab number #

`:tabmove #` - move current tab to the #th position (indexed from 0)

`:tabclose` or `:tabc` - close the current tab and all its windows

`:tabonly` or `:tabo` - close all tabs except for the current one

`:tabdo command` - run the command on all tabs (e.g. `:tabdo q` - closes all opened tabs)

Exiting

`:w` - write (save) the file, but don't exit

`:w !sudo tee %` - write out the current file using sudo

`:wq` or `:x` or `ZZ` - write (save) and quit

`:q` - quit (fails if there are unsaved changes)

`:q!` or `ZQ` - quit and throw away unsaved changes

`:wqa` - write (save) and quit on all tabs

UX - UI

- [Colors](#)

Methods

- <https://material.io/design/>
- <http://www.designkit.org/methods>

Colors

Links

- <https://www.canva.com/colors/color-palette-generator/>

Useful stuff

Useful Commands

Terminal recording

[Asciinema](#)

```
brew install asciinema
```

1. Install

```
asciinema rec filename.cast
```

2. Record

```
asciinema play filename.cast
```

3. Play

WiFi QR-code

```
qrencode -o wifi.png "WIFI:T:WPA;S:<SSID>;P:<PASSWORD>;"
```

Rsync

[Rsync cheatsheet](#)

```
## syncing folder src into dest:  
rsync -avzP ./src /dest  
## syncing the content of src into dest:  
rsync -avzP ./src/ /dest
```

Unite PDF documents

```
brew install poppler
```

Install

```
pdfunite file1.pdf file2.pdf output.pdf
```

Usage

Vehicles

Cars

BMW - BS82067

Projects

- [BMW Media Center](#)

Roofbox

Sledge size

- Lengde: 152 cm
- Høyde: 50 cm
- Høyde, sammenlagt: 30 cm
- Bredde: 47 cm
- Vekt: 16 kg

Repairs

Rear break light Shopping list

- [Baklykt skjerm høyre](#)

Rear break light Links

- <https://www.bimmerforums.co.uk/forum/f74/rear-light-cluster-failure-fix-led-type-fitted-2008-lci-t115027/>
- <http://bimmers.no/forums/topic/804388-e91-lci-2010-problem-med-led-blinklys-bak/>

Links

- [Koed.no](#)
- [GSBildeler.no](#)

Motorcycles

MV Augusta - FC7664

Tidy Tail 954,82 kr (ink frakt, eks moms)

- <https://evotech-performance.com/products/mv-agusta-brutale-800-tail-tidy-2013-onwards>

Speil Styreender Snell Svart Dobbel ledd 219kr + frakt

- <https://www.xlmoto.no/speil-styreender-snell-svart-dobbel-ledd#?p>

USB-kontakt Booster 12V 329kr + frakt

- <https://www.xlmoto.no/usb-kontakt-booster-12v#?p>

Eksos

- <https://www.designcorse.com/products/qd-exhaust-f3-b3-rivale>

Kunder

Aibel

Haugaland Kraft

Hydro