

ANCRID™

Click-Flow Specification

Interactive Navigation & Control Behaviour

Every button, link, tab, field, upload and modal — and what happens after each click.

PURPOSE

This document specifies **intended product behaviour for the self-hosted build**. It is written for the developer implementing each page. Where the current application diverges from the intended flow, that divergence is marked rather than silently adopted as a requirement. Vendor-specific implementation details from the prototype platform are translated to neutral target-state language throughout.

DOCUMENT

ANCRID Click-Flow Specification

SYSTEM

ANCRID™ — Identity Layer

DOC TYPE

Interaction & Navigation Spec

PREPARED FOR

Engineering / Build Team

SURFACES COVERED


21 pages · 20 routes · 16 nav destinations

COMPANION DOCUMENT

ANCRID Master Workflow
ANCRID Functional Requirements

Every interactive control in ANCRID is documented as a small connected flow: what the user clicks, what the system does, and where each outcome leads. Shapes and colours carry fixed meaning — they are not decorative.

Shape & colour vocabulary

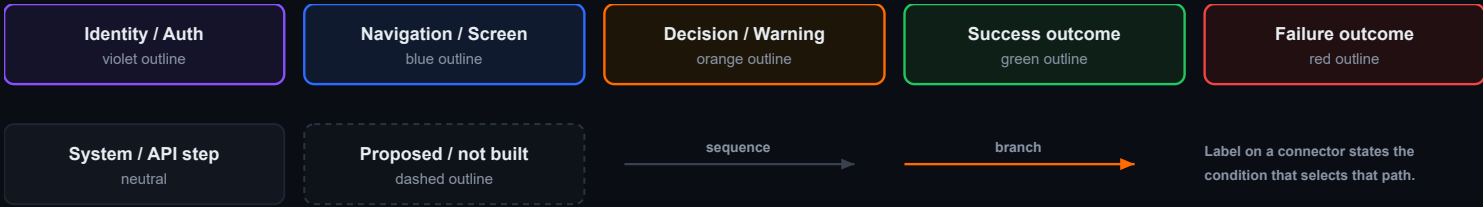

Behaviour classification

Every flow carries one of four labels. This prevents prototype behaviour from silently becoming a production requirement.

LABEL	MEANING	HOW THE DEVELOPER SHOULD TREAT IT
INTENDED	Supported by the ANCRID product specification and Master Workflow.	Build this. The current application may or may not already do it correctly.
OBSERVED	What the current application actually does today.	Recorded for reference only. Shown where it differs from Intended. Do not treat as a target.
DECISION	The application and the specification disagree, or the behaviour is undefined.	Do not guess. Requires a product decision before this control is built.
PROPOSED	Needed to complete the experience, but not yet approved.	Awaiting sign-off. Drawn dashed in diagrams.
DEAD	A control is rendered in the UI but has no handler attached.	Either wire it to the flow specified here, or remove it from the page.

TARGET-STATE LANGUAGE

This document describes the **self-hosted** product. Prototype-platform specifics are translated: a vendor session token becomes an **authenticated ANCRID session**; vendor object storage becomes the **approved media storage service**; a vendor AI key becomes the **configured AI service**. Where the replacement service does not yet exist, that is called out explicitly rather than assumed. A full translation table appears on the final page.

SCOPE NOTE — AUTHENTICATION

The ANCRID Master Workflow states that no module implements its own login and that every application consumes ANCRID. ANCRID itself is the identity provider, so it necessarily owns the sign-in surfaces documented on pages 03–04. The **consumption** side — other modules accepting an ANCRID session instead of presenting their own login — is specified on page 10 (SSO Handshake) and is currently the largest gap between specification and build.

Every route in ANCRID and how a user reaches it. Public surfaces require no session; the application shell requires an authenticated ANCRID session.


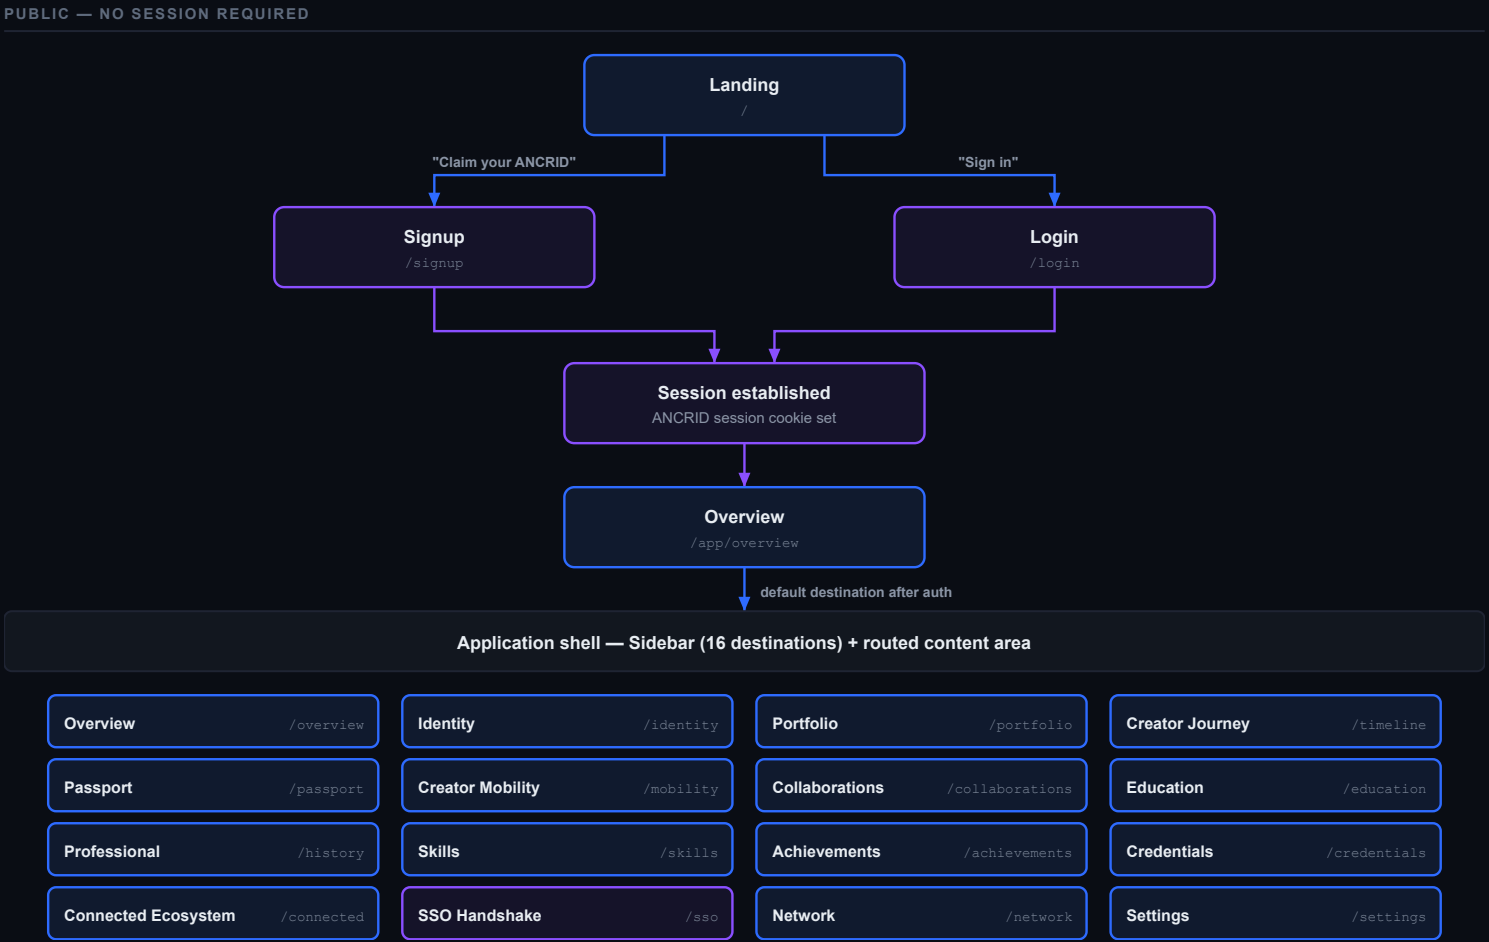


FIGURE 1 — AUTHENTICATED ROUTE MAP. ALL 16 SIDEBAR DESTINATIONS SIT UNDER /APP/.

Public surfaces reachable without a session

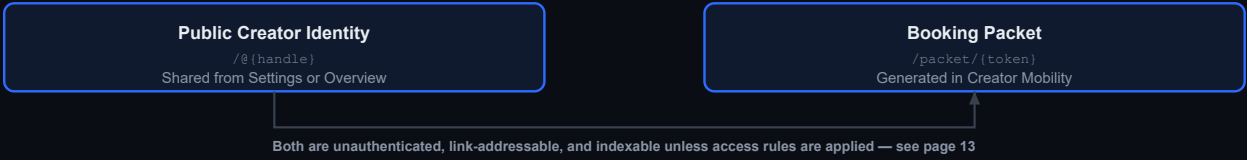


DECISION REQUIRED — UNMATCHED ROUTES

Any path that matches no route currently redirects to the public Landing page. For an authenticated user who mistypes an in-app URL this silently drops them out of the application shell rather than showing a not-found state inside it. **Decide:** in-app 404 for authenticated users, versus the present redirect.

Create an ANCRID


INTENDED

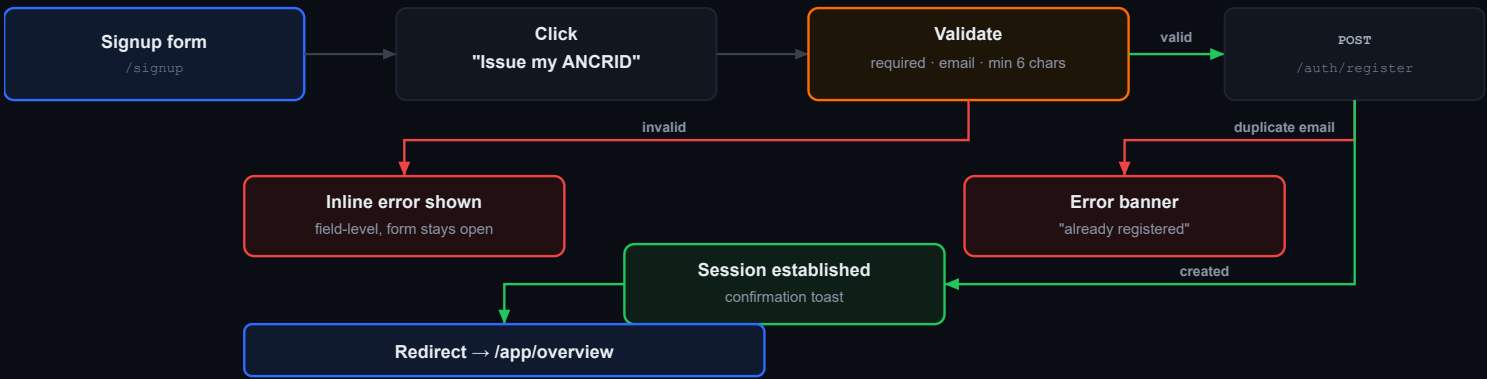

FIELD	CONTROL	VALIDATION & BEHAVIOUR
Professional Name	Text, required	Becomes the display name and seeds the public handle.
Email	Email, required	Unique. Duplicate returns a form-level error, not a field error.
Password	Password, required	Minimum 6 characters enforced client-side. DECISION Server-side strength policy is not defined — see page 15.
Discipline	Select, default Music	Music / Film / Photography / Writing / Design / Animation / Multi-Disciplinary.
Role	Select, default Creator	Creator / Student / Faculty / Mentor / Alumnus / Employer. DECISION Self-selected at signup with no approval step.
Institution	Text, prefilled	Free text. Not validated against an institution registry.

Sign in to an existing ANCRID

INTENDED

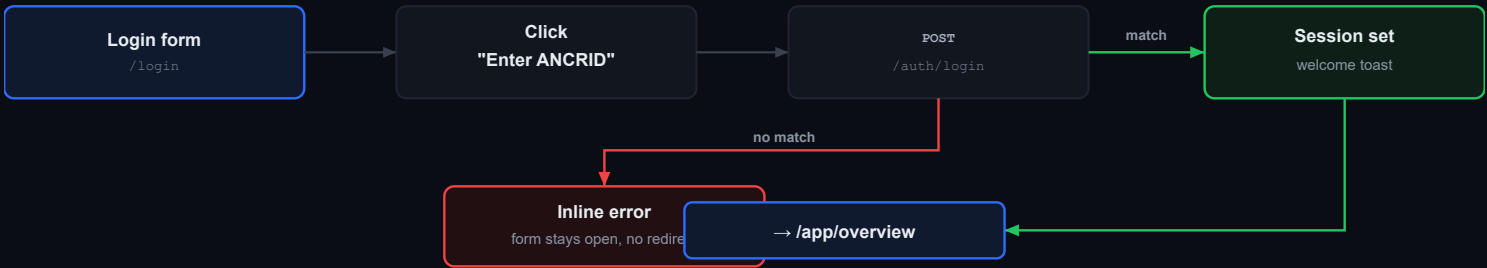

REMOVE BEFORE DEPLOYMENT — PREFILLED CREDENTIALS

The login form currently ships with a working email and password **pre-populated in the input fields**, and the same pair printed on-screen in a visible demo panel. This is prototype scaffolding. It must not reach any shared or public environment. **OBSERVED** — not an intended behaviour, and deliberately excluded from the flow above.

DECISION REQUIRED — MISSING ACCOUNT-RECOVERY PATHS

There is no forgotten-password flow, no password-change surface, and no email-verification step anywhere in ANCRID. For the identity provider of the entire ecosystem, a user who loses their password currently has no self-service route back in. **Three flows require specification before launch:** request reset · consume reset link · change password while signed in.

This flow runs on every navigation into `/app/*`. It is the single gate protecting all 16 authenticated destinations.

Entering a protected route



DECISION REQUIRED — RETURN-TO-DESTINATION AFTER RE-AUTHENTICATION

A user whose session expires mid-task is redirected to the login screen and, after signing in, is delivered to the Overview page — not back to what they were doing. For a user part-way through editing their identity or assembling a Booking Packet, the work context is lost. The dashed step above is the proposed correction: capture the attempted route, then restore it after successful authentication.

Signing out



INTENDED — SIGN-OUT MUST BE UNAMBIGUOUS

The user is returned to the Landing page in both branches, so sign-out always *appears* to succeed. That is the correct user-facing behaviour. However the control is an **unlabelled icon** in the sidebar footer. **PROPOSED** Give it a visible text label or an accessible name, and confirm before signing out if unsaved edits exist on the Settings page.

Settings is the single page in ANCRID where a user changes stored data. Identity is its read-only counterpart. Everything else in the application is display-only.

Editing and saving identity

INTENDED


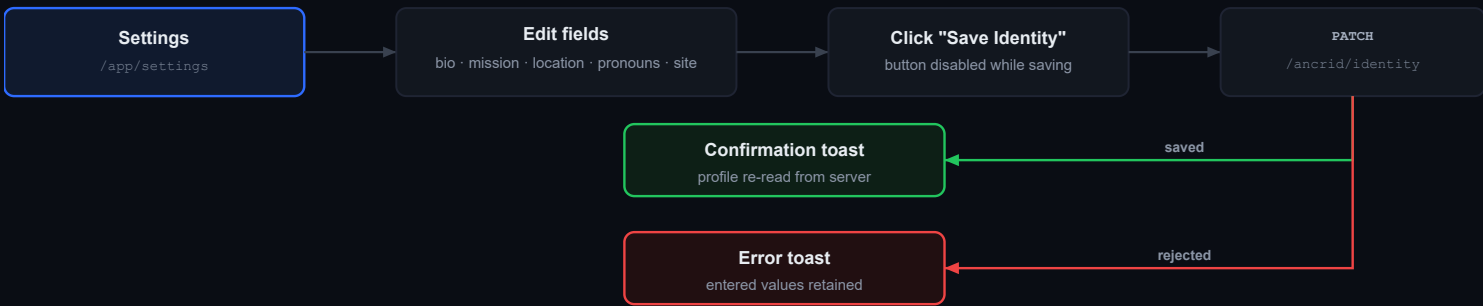


Image upload lifecycle — headshot and banner

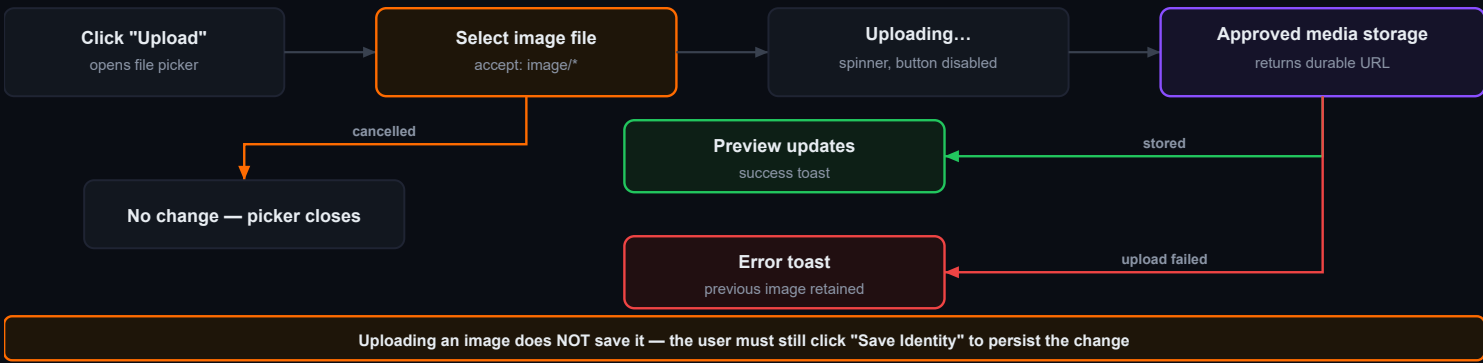

DECISION REQUIRED — TWO-STEP SAVE IS EASY TO LOSE

Upload and save are separate actions. A user who uploads a headshot, sees the preview update and a success toast, then navigates away, loses the image — it was never attached to their profile. The success toast actively implies otherwise. **Options:** persist the image URL immediately on upload; or keep the two-step save but warn on navigation with unsaved changes and reword the upload toast.


DECISION REQUIRED — UPLOAD CONSTRAINTS UNDEFINED

The file picker accepts any image type with no stated maximum size, minimum dimensions, or aspect-ratio guidance, and there is no crop step. A headshot and a wide banner have very different shape requirements. **Specify:** accepted formats, size ceiling, recommended dimensions per slot, and whether a crop tool is in scope.

CONTROL	TYPE	BEHAVIOUR
Copy public link	Button	Copies the public identity URL to the clipboard. Icon changes to a tick for roughly 1.5 seconds, plus a toast.
Open public profile	Link	Opens /@{handle} in a new tab.
Paste image URL	Text input	Alternative to uploading. Sets the image directly from an external address. DECISION Permits hot-linking to third-party hosts — confirm whether this should remain.

Nine destinations are read-only record lists that behave identically. They are specified once here rather than nine times. Each fetches its own collection on entry and renders a card or row list.

The shared pattern

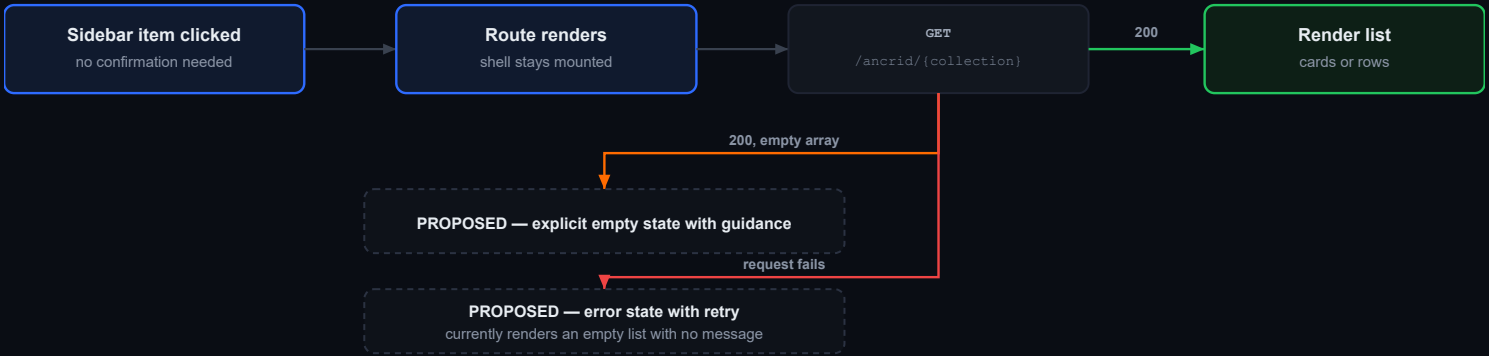

DESTINATION	COLLECTION ENDPOINT	CONTROLS	NOTES
Identity	/ancrid/identity	External link only	Read-only view of what Settings writes.
Passport	/ancrid/passport	None	Country count and international activity stamps.
Collaborations	/ancrid/collaborations	None	Collaborator, role, project, verification badge.
Skills	/ancrid/skills	None	Level, project count, years, verifying body.
Education	/ancrid/education	None	Institution, degree, years, capstone, mentors.
Professional	/ancrid/history	None	Row list of role, organisation, type, years.
Achievements	/ancrid/achievements	None	Title, issuer, year, award type.
Credentials	/ancrid/credentials	None	Credential, issuer, date, status badge.
Connected Ecosystem	/ancrid/ecosystem	None	Module status grid. See page 08.


APPLIES TO ALL NINE — NO FAILURE STATE EXISTS

None of these pages handles a failed request. If the collection cannot be loaded, the page renders as though the user simply has no records — an empty Credentials page looks identical whether the user has earned nothing or the service is unreachable. For a verified-identity product this is a meaningful misrepresentation. **Every record surface needs three distinct states:** populated, genuinely empty (with guidance on how to earn the first record), and failed-to-load (with a retry).


DECISION REQUIRED — THESE RECORDS ARE READ-ONLY

A creator cannot add, edit, or remove any skill, credential, achievement, collaboration or education entry from within ANCRID. The specification describes these as accumulating from verified ecosystem activity, which implies they arrive from other modules rather than by self-entry. **Confirm the intent:** if records are populated exclusively by upstream modules, each empty state should say which module produces that record type, so the user knows where to go.

Portfolio — medium filter

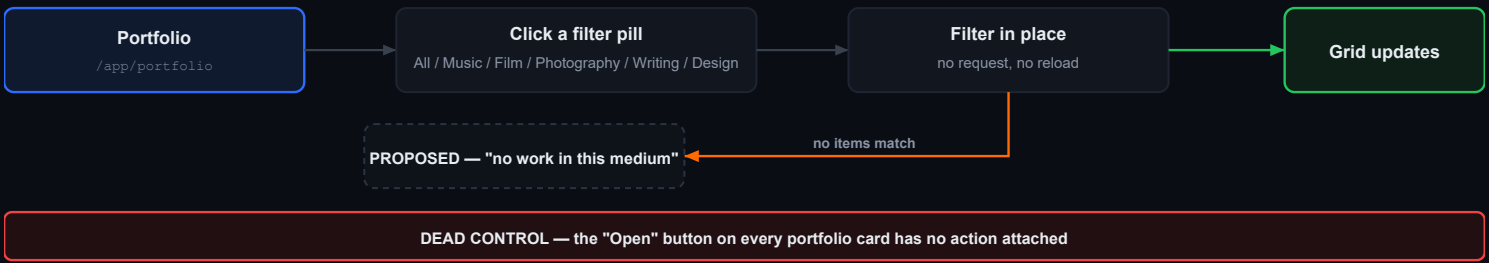

Network — directory search and filters

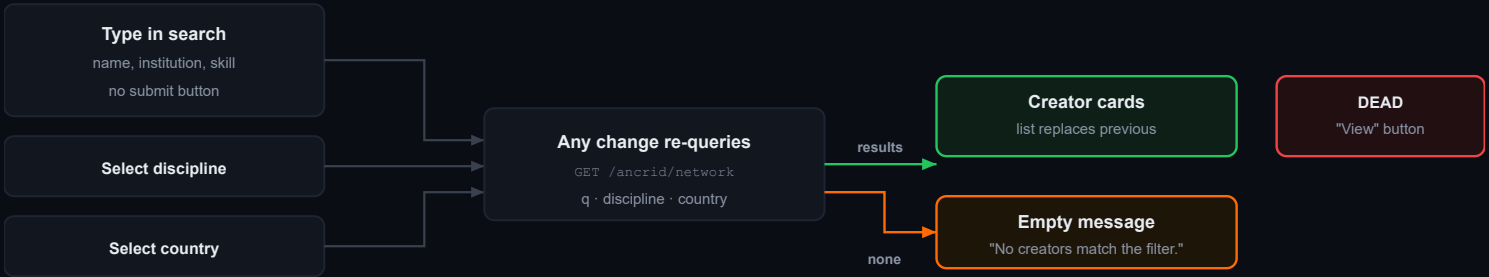

DECISION REQUIRED — SEARCH FIRES ON EVERY KEYSTROKE


The directory re-queries the server on each character typed, with no debounce and no loading indicator. On a large directory this produces a request per keystroke and results that visibly churn while typing. **PROPOSED** Debounce input by roughly 300 ms, show a loading state during the request, and discard responses that arrive out of order.

DEAD CONTROLS ON THIS PAGE PAIR

Portfolio's "Open" and Network's "View" are both rendered as interactive buttons and both do nothing when clicked. They are the two most prominent affordances on their respective cards, so a user will reasonably expect a detail view. **Decide per control:** wire it to a detail surface — which does not currently exist and would need specifying — or remove the button.

Connected Ecosystem

Presents each ANCR module and its connection state around a central ANCRID hub. This is the user-facing expression of the "one identity, every module" promise, so what it claims matters.

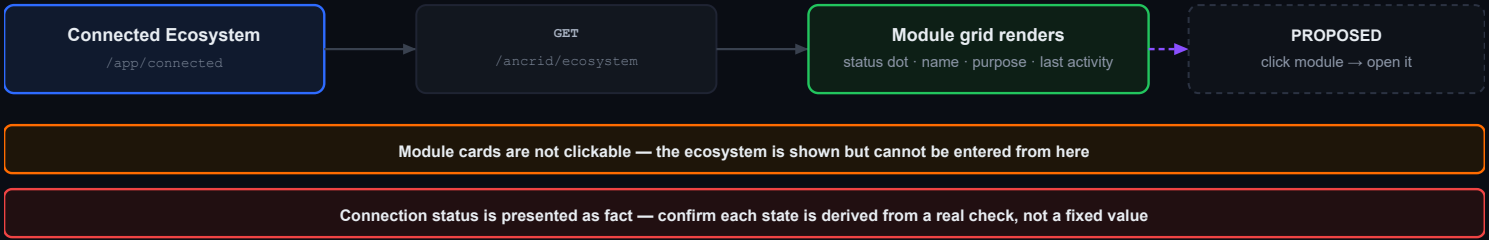


DECISION REQUIRED — THIS PAGE SHOULD BE THE LAUNCHER

The ANCRID Master Workflow recommends a central hub from which a user moves into any module without encountering another sign-in. This page already renders exactly that grid — but the cards are inert. Making each card open its module, carrying the ANCRID session, would deliver the recommended experience with the surface that already exists. **This is the single highest-value interaction change in ANCRID.** It depends on the SSO consumption flow on page 10.

VERIFY BEFORE LAUNCH — STATUS MUST BE TRUTHFUL

Each module card displays a connection status and a last-activity summary. If any of these values are fixed rather than derived from a live check, the page tells a creator their identity is synchronised with modules that are not in fact connected. **Requirement:** every status shown must reflect a real connectivity result, or be labelled as unavailable.


Creator Journey

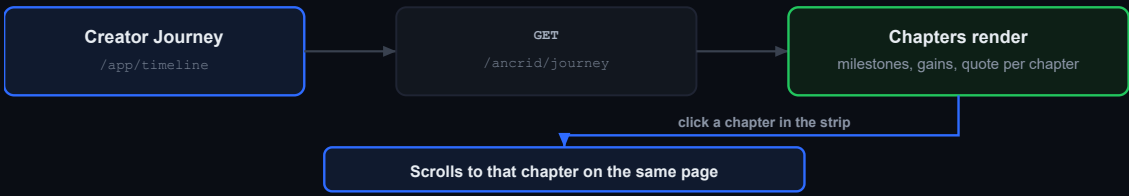

The chapter strip is in-page navigation only — it moves the viewport, it does not change route. If the journey has no chapters, the strip and all chapter sections are omitted entirely, leaving only the page heading. **PROPOSED** Add an empty state explaining how journey chapters are earned.

ANCRID issues identity tokens that other ANCR modules consume. This page is where a creator authorises a module and inspects the resulting token.

Authorise a module and verify the issued token

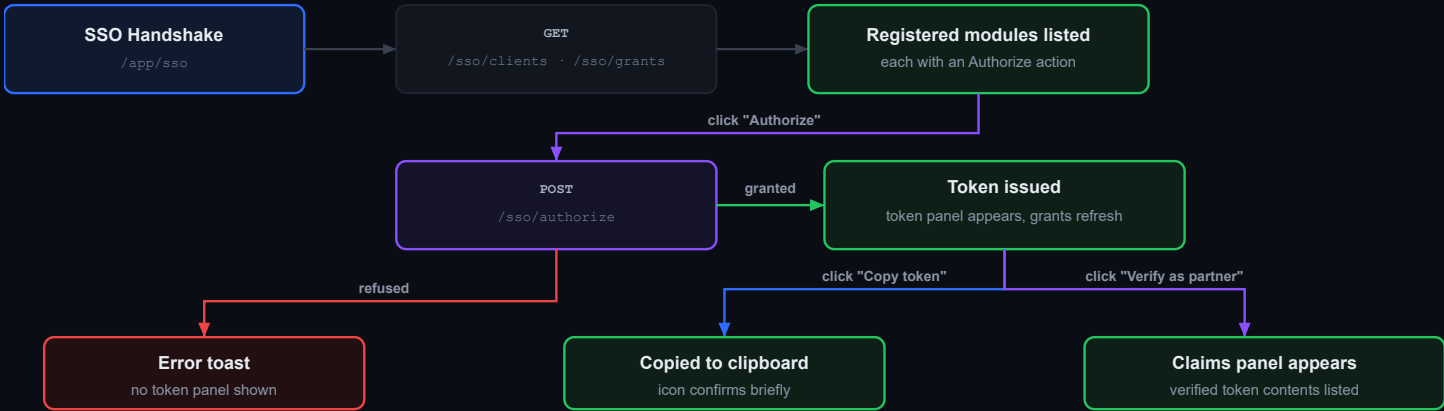


CONTROL	STATE	BEHAVIOUR
Authorize (per module)	Disabled while any authorisation is in flight	Issues a token for that module and refreshes grant history. DECISION The disabled state is shared across every module card, so authorising one module blocks all others — confirm this should be per-card.
Copy token	Appears only after a token exists	Copies the raw identity token to the clipboard.
Verify as partner	Appears only after a token exists	Simulates a partner module validating the token, then displays the decoded claims.
Grant history	Empty message when none	"No grants issued yet." Read-only.

THE CENTRAL GAP — TOKENS ARE ISSUED BUT NEVER CONSUMED

This page proves ANCRID can **issue** a valid identity token. Nothing in the ecosystem currently **accepts** one. There is no redirect into a module carrying the session, no return path back to ANCRID, and no module-side session establishment. Every other ANCR application presents its own separate sign-in.


Consequently the Master Workflow's core promise — sign in once, open any module without being asked again — is **not achievable with the current build**. Closing this gap requires specifying the consumption half of the handshake, shown below.

Proposed — module consumption flow

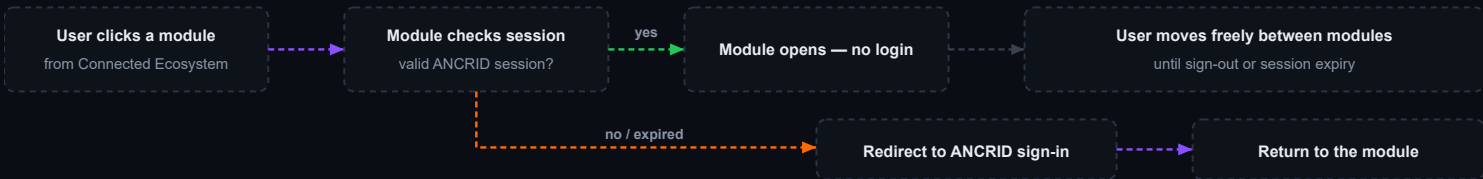

The largest single surface in ANCRID. All data loads once on entry; switching tabs is local and issues no further requests. Fourteen tabs are read-only; only Booking Packet is interactive.

Page entry and tab behaviour

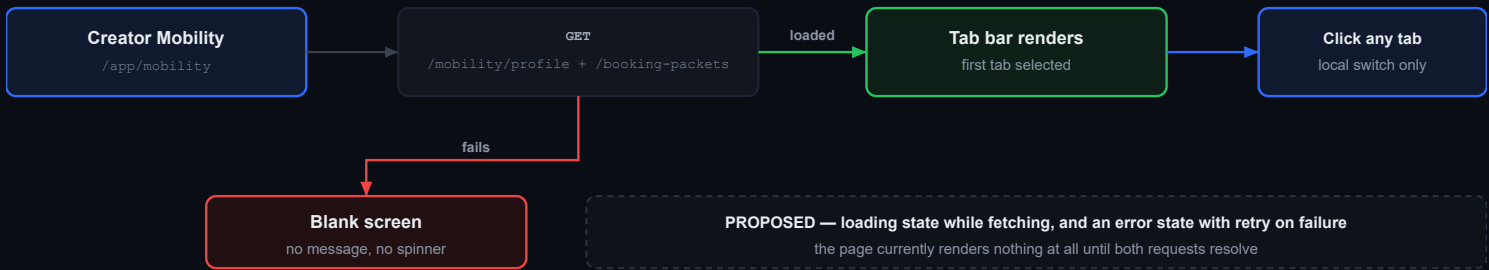

The fifteen tabs

TAB	INTERACTIVE	CONTENTS
Personal	No	Traveller identity details.
Programs	No	Loyalty and membership programmes.
Preferences	No	Seat, cabin, and travel preferences.
Dietary	No	Restrictions and requirements.
Medical	No	Medical notes. DECISION Sensitive category — see panel below.
Emergency	No	Emergency contacts. DECISION Sensitive category.
Team	No	Touring and working team.
Booking	No	Booking representation contacts.
Riders	No	Technical and hospitality riders.
Documents	No	Travel documents.
Global History	No	Prior international activity.
Calendar	No	Scheduled movement.
AI Assistant	Partly	Travel suggestions. DEAD Each suggestion renders an action button with no handler.
Permissions	No	Sharing rules.
Booking Packet	Yes	Generate, share and revoke packets — see page 11.

DECISION REQUIRED — SENSITIVE DATA HAS NO ACCESS CONTROLS


The Medical and Emergency tabs hold health information and third-party contact details. Within ANCRID these sit behind the ordinary session gate with no additional protection, no field masking, and no access logging. They can also be included in a shared Booking Packet (page 11). **Specify before any real data is entered:** who may view these tabs, whether values are masked by default, whether access is recorded, and the retention and deletion rules that apply.

DECISION REQUIRED — FOURTEEN TABS, NO WAY TO EDIT ANY OF THEM


Every mobility tab is read-only. A creator whose passport expires, dietary requirement changes, or emergency contact moves cannot correct any of it from this page. **Confirm the source of truth:** if this data is maintained elsewhere, each tab should say where and link to it; if ANCRID owns it, editing surfaces need specifying for all fourteen.

A Booking Packet is a shareable public link exposing a filtered subset of the creator's mobility profile. It is the only feature in ANCRID that publishes private data to an unauthenticated audience, so each control carries real consequence.

Generating a packet

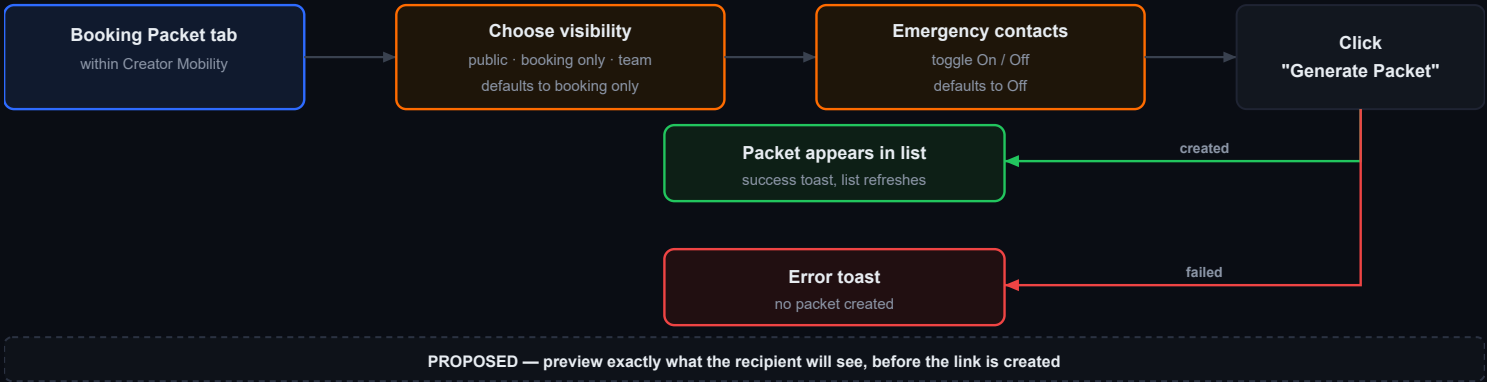

Managing an existing packet

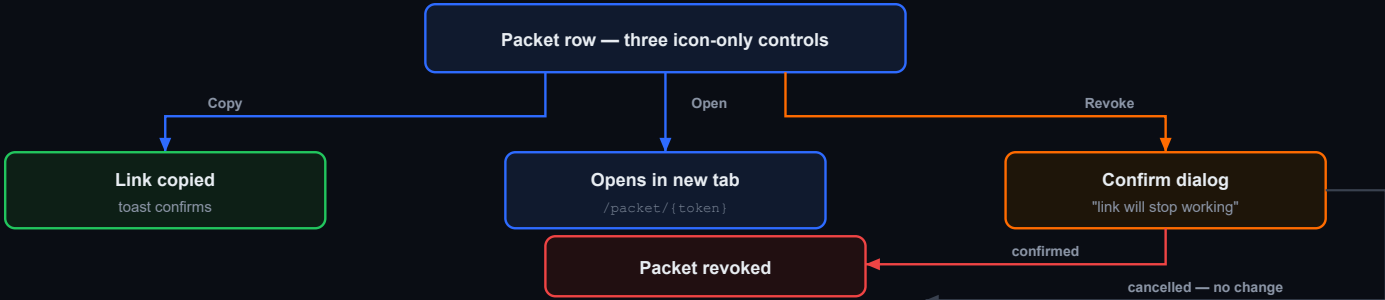

DECISION REQUIRED — THREE UNLABELLED ICON CONTROLS, ONE DESTRUCTIVE

Copy, Open and Revoke are rendered as icons with no text labels, sitting adjacent on each row. Revoke is irreversible and permanently breaks a link that may already be in a promoter's inbox. **PROPOSED** Give each control a visible or accessible label, and separate the destructive action from the two safe ones.

DECISION REQUIRED — PACKETS HAVE NO EXPIRY AND NO AUDIT


A generated link stays live indefinitely until manually revoked. There is no expiry option at creation, no record of how many times a packet has been opened, and no indication to the creator that a link is being accessed. For a document that can include medical and emergency contact information, this is a significant omission. **Specify:** optional expiry at generation, an access count per packet, and whether the creator is notified on first open.

CONFIRM — WHAT EACH VISIBILITY LEVEL ACTUALLY EXPOSES


Three visibility levels are offered but the page does not state what each one includes or withholds. A creator choosing "team" over "booking only" has no way to know what changes. **Requirement:** each level must be described at the point of choice, and the emergency-contact toggle must state plainly that enabling it publishes third-party personal contact details to anyone holding the link.

Two surfaces are reachable by anyone holding the address. Both are read-only, both are outside the application shell, and both are the creator's public face.

Public creator identity

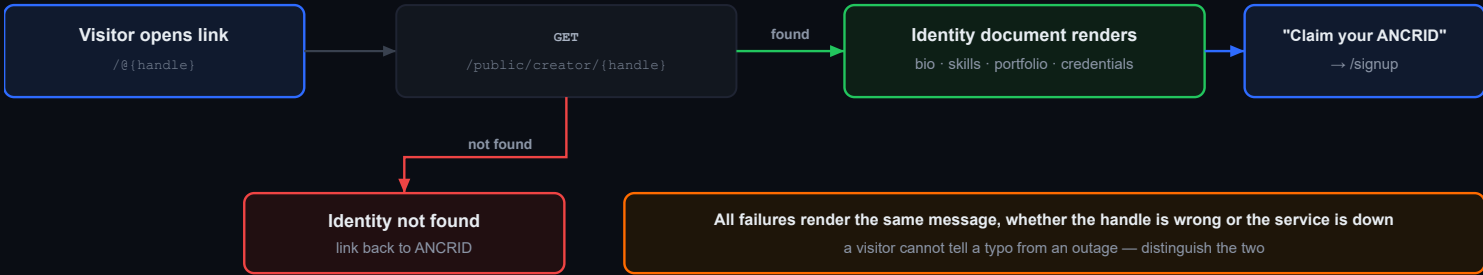

Public booking packet

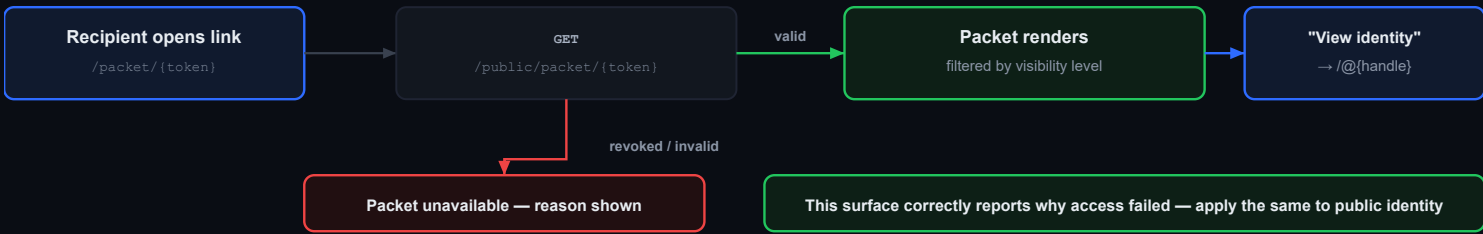

DECISION REQUIRED — PUBLIC IDENTITY HAS NO VISIBILITY CONTROL

Any creator with a handle has a live public page. There is no setting to make it private, no preview of how it appears to a visitor, and no indication within the application that it is publicly visible. The only hint is a copy-link control in Settings. **Specify:** a visibility toggle, a preview, and a clear statement in Settings of what a visitor can see.

INTENDED — BOTH SURFACES ARE RECRUITMENT POINTS

Each public surface carries a call to action inviting the visitor to claim their own ANCRID. This is correct and should be preserved: the public identity page is the primary organic entry point into the ecosystem, and the flow from visitor to new account should be as short as possible.

Every remaining interactive control not already covered by a flow diagram, with its destination or effect. Controls marked **DEAD** render but do nothing.

SURFACE	CONTROL	TYPE	RESULT
Landing	"Claim your ANCRID" ×3	Link	Goes to signup. Appears in header, hero and footer.
	"Sign in"	Link	Goes to login.
	Identity / Ecosystem / For Whom	Anchor	Scrolls within the page. No route change.
Shell	Brand mark	Link	Returns to Landing — leaves the application shell.
	Sidebar item ×16	Nav link	Routes to that destination; active item is highlighted.
	Log out	Icon button	Ends the session, returns to Landing. See page 04.
Overview	Copy public link	Button	Copies public identity URL; brief tick confirmation.
	"View public"	Link	Opens public identity in a new tab.
	Insight action DEAD	Button	Rendered on every AI insight card. No handler attached.
	"See all" (insights)	Link	Goes to Network.
	"See all" (milestones)	Link	Goes to Creator Journey.
Identity	Website	External link	Opens the creator's own site in a new tab. Only control on the page.
Settings	Copy public link	Button	Copies URL, tick confirmation plus toast.
	"Open"	Link	Opens public identity in a new tab.
	Upload headshot / banner	Button + file	See upload lifecycle, page 05.
	Paste image URL ×2	Text input	Sets image from an external address instead of uploading.
	"Save Identity"	Submit	Persists all fields. See page 05.
Portfolio	Filter pill ×6	Button	Filters the grid locally. No request.
	"Open" DEAD	Button	On every card. No handler attached.
Creator Journey	Chapter marker	Anchor	Scrolls to that chapter.
Network	Search field	Text input	Re-queries on every keystroke.
	Discipline / Country	Select ×2	Re-queries on change.
	"View" DEAD	Button	On every creator card. No handler attached.
SSO	"Authorize"	Button	Issues a token for that module. See page 09.
	"Copy token"	Button	Copies the issued token.
	"Verify as partner"	Button	Validates and displays claims.
Mobility	Tab ×15	Button	Local switch. No request.
	Visibility level ×3	Button	Sets packet visibility before generation.
	Emergency toggle	Toggle	Includes or excludes emergency contacts.
	"Generate Packet"	Button	Creates a shareable link. See page 11.
	Copy / Open / Revoke	Icon buttons	Per packet row. Revoke confirms first.
	Suggestion action DEAD	Button	On every AI travel suggestion. No handler attached.
Public identity	"Claim your ANCRID" ×2	Link	Goes to signup.
	Website	External link	Opens creator's site in a new tab.
Public packet	"View verified identity"	Link	Goes to the creator's public identity page.
	Website	External link	Opens creator's site in a new tab.

Consolidated from every page. Each item needs a product decision before the affected control can be built correctly. Nothing here should be resolved by the developer alone.

Dead controls — rendered, but no action attached

SURFACE	CONTROL	DECISION NEEDED
Overview	Action button on each AI insight	Each insight names an action. Should the button perform it, navigate to where it can be done, or be removed?
Portfolio	"Open" on each work card	Requires a portfolio detail view, which does not exist and is not specified. Build it or remove the button.
Network	"View" on each creator card	Should route to that creator's public identity page — which already exists. Lowest-effort fix of the four.
Mobility	Action on each travel suggestion	Same question as Overview insights.

Behaviour decisions

AREA	QUESTION	WHY IT MATTERS
Account recovery	Password reset, password change, and email verification are all absent.	A user who forgets their password has no route back into the identity provider for the entire ecosystem.
Password policy	Only a 6-character client-side minimum is enforced.	Server-side strength rules and rate limiting on sign-in attempts need defining.
Role at signup	Users self-select Faculty, Mentor or Employer with no approval.	If role ever grants privilege, self-selection becomes an escalation path.
Session return	Expiry sends the user to Overview, not back to their task.	Work in progress is silently abandoned.
Upload persistence	Uploading an image does not save it; a separate save is required.	The success toast implies the change was saved when it was not.
Upload constraints	No size limit, dimensions, or crop step defined.	Headshot and banner have very different shape needs.
Clearing a field	An identity field that has a value cannot be emptied — only replaced.	A creator who adds a website or pronoun and later wants it removed from their public page has no way to do so.
Packet freshness	Does an issued packet reflect later profile edits, or the values at the moment it was created?	A promoter holding a link may be reading stale riders or contacts. Determines whether packets are live views or snapshots.
Uploaded image reach	Uploaded headshots and banners are served without access control and are not removable.	An image uploaded once stays publicly addressable indefinitely, even after the creator replaces it.
Record editing	Nine record surfaces are entirely read-only.	Confirm records arrive from other modules, and say which in each empty state.
Failure states	No record surface distinguishes "empty" from "failed to load".	An outage is presented to the user as an empty record.

Behaviour decisions — continued

AREA	QUESTION	WHY IT MATTERS
Ecosystem launch	Module cards are not clickable.	Blocks the Master Workflow's central promise. Highest-value change available.
Module status	Connection states may not reflect live checks.	Tells creators their identity is synchronised when it may not be.
SSO consumption	Tokens are issued but no module consumes them.	Every module still presents its own login, contradicting the specification.
Sensitive tabs	Medical and Emergency data have no additional protection.	Health and third-party contact data need access rules before real entry.
Mobility editing	Fourteen tabs are read-only.	Expired documents and changed contacts cannot be corrected.
Packet expiry	Links never expire and access is not recorded.	Sensitive data stays exposed indefinitely with no audit trail.
Packet visibility	Three levels offered, none explained at the point of choice.	Creator cannot make an informed sharing decision.
Public visibility	No way to make a public identity private.	Every creator has a live public page with no opt-out.
Unmatched routes	Any unknown path redirects to Landing.	Authenticated users are dropped out of the shell by a typo.

MUST BE REMOVED BEFORE ANY SHARED ENVIRONMENT

Working credentials are pre-filled into the login form and additionally printed on screen. This is prototype scaffolding and is not a product behaviour. It is excluded from every flow in this document and must not survive into a deployed build.

The prototype was built on a hosted development platform. This document uses neutral, target-state language throughout. Where a replacement service does not yet exist, that is stated rather than assumed — a developer must not read a neutral phrase as an available service.

PROTOTYPE IMPLEMENTATION	DOCUMENTED AS	STATUS FOR SELF-HOSTED BUILD
Hosted platform session cookie	Authenticated ANCRID session	Session mechanism is ANCRID's own. Carries over directly.
Hosted platform OAuth exchange	ANCRID sign-in	DECISION Whether federated sign-in is offered at all is a product decision.
Hosted object storage	Approved media storage service	DECISION No such service is provisioned. Headshot and banner upload cannot work until one exists.
Hosted AI service key	Configured AI service	DECISION Insight and suggestion content depends on this. Provider and account not yet chosen.
Seeded demonstration records	—	Excluded. Not product behaviour. Every record surface must handle a genuinely empty account.
Pre-filled login credentials	—	Excluded. Must be removed before deployment.

BLOCKING DEPENDENCY — MEDIA STORAGE

The image upload flow on page 05 is specified against an approved media storage service. No such service is currently provisioned for the self-hosted build. Until one is chosen and configured, headshot and banner upload cannot function, and the paste-a-URL fallback becomes the only working path — which means every creator image is hot-linked from a third-party host outside your control. **This should be resolved early; it is a prerequisite, not a detail.**

How to extend this document to the other modules

This specification is the pattern for the remaining ANCR applications. The method that produced it:

- **Inventory every control first.** Read each page and record the literal label, what it calls, and what happens on success and failure. Controls with no handler are found this way, not by inspection of the running app.
- **Consolidate repeated patterns.** Nine ANCRID record surfaces share one flow. Documenting them once made the difference between a readable specification and ninety pages of near-identical diagrams.
- **Separate intended from observed.** Where the build and the specification disagree, say so and mark it for decision. Never let current behaviour silently become the requirement.
- **Name every dead control.** A rendered button that does nothing is a defect the user meets directly. List each one and require a decision: wire it, or remove it.
- **State what does not exist.** Empty states, error states and missing services are the parts a developer will otherwise invent inconsistently.

COMPANION DOCUMENTS

- **ANCRID Master Workflow** — ecosystem-level identity architecture and the single sign-on principle this document implements.
- **ANCRID Functional Requirements** — endpoint-level behaviour, request and response contracts, and test coverage analysis for the current build.