

SDK update rules

▾ Android

Changelog

Important update for outdated versions of the AppMetrica SDK

List of modules

Excluding geo from the list of dependencies

Disabling automatic collection of Ad Revenue data

Getting advertising IDs

> Migration guides

▾ AppMetrica SDK

SDK integration

Library features

Tracking user activity

Logging

Usage examples

Analyzing crashes

AppMetrica Gradle Plugin

Deferred deeplinks support

Product flow and offer events

Error descriptions

SDK reference

> Push SDK

> iOS

> Unity

> Flutter

> React Native

> Push campaigns

> Setting up data collection

SDK Developer docs / [Android](#) / AppMetrica SDK / Deferred deeplinks support

Deferred deeplinks support

A deferred deeplink is used to transfer parameters to the application at the first start. These parameters can be used to perform actions in the application (to open specific application screen, to display certain content, etc.) depending on the source of the user.


Unlike regular deeplinks, deferred deeplinks only work at the first application launch.



Deferred deeplinks work only on Android devices.

How deferred deeplinks work

The following scheme shows the deferred deeplinks workflow:

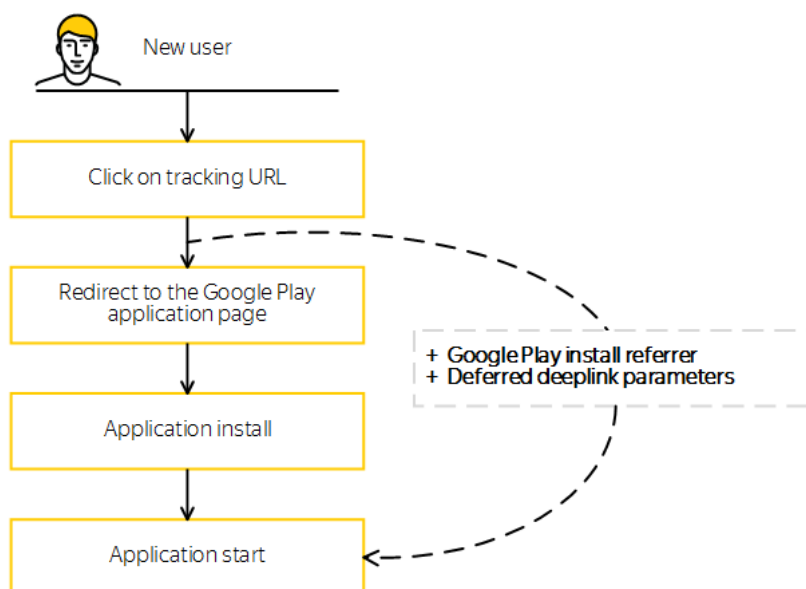

1. A user clicks on a tracking link that contains parameters for a deferred deeplink.
2. The tracking URL directs the user to the application store.
3. The user downloads the application.
4. After the first application start, the deferred deeplink parameters are sent to the application. You should perform a [request](#) to receive the parameters.

How to set up a deferred deeplink

1. Specify the link in [tracker](#) in the **Deeplink** field — the link will work both as a regular deeplink and as a deferred one.
2. Process the receipt of the deeplink or parameters in your application. For example, call up navigation on the desired screen or execute a [request](#).

If you are requesting deferred deeplink parameters, make sure that these parameters are available in the deeplink.



Parameters from the tracking link are not automatically transmitted to the deeplink, but they can be transmitted according to [instructions](#). You can transfer parameters in this way to both a regular deeplink and a deferred one.

Error descriptions

The [DeferredDeeplinkListener](#) and [DeferredDeeplinkParametersListener](#) interfaces contain descriptions of errors that may occur when making the request:

NOT_A_FIRST_LAUNCH

The parameters of the deferred deeplink can't be obtained since they can only be requested at the initial application start.

The first launch of the application is the session of the process (runtime environment, virtual machine) during which the user requests the parameters. If the deeplink is present at the time of the request, the listener is invoked synchronously in the thread. At the next start of the process, the library no longer sees the deferred deeplink and the [NOT_A_FIRST_LAUNCH](#) error is returned.

PARSE_ERROR

Depending on the interface, the error means the following:

- If the [DeferredDeeplinkListener](#) interface is used: couldn't find the deferred deeplink. This may happen if the deeplink doesn't contain the [appmetrica_deep_link](#) parameter.
- If the [DeferredDeeplinkParametersListener](#) interface is used: the deferred deeplink doesn't contain valid parameters. The [PARSE_ERROR](#) error is returned if one of the following conditions is not met:
 - INSTALL_REFERRER must contain the [appmetrica_deep_link](#) parameter.
 - The [appmetrica_deep_link](#) parameter value must contain the valid URI.
 - There must be at least one query parameter in the deeplink URI.

A valid deeplink example: `sampleapp://samplepath?sampleparam1=samplevalue1`.

Learn more

[Requesting deferred deeplink parameters](#)

If you didn't find the answer you were looking for, you can use the feedback form to submit your question. Please describe the problem in as much detail as possible. Attach a screenshot if possible.

[Contact support](#)[Suggest an improvement for documentation](#)

Was the article helpful?

 Yes

 No

[Previous](#)

[AppMetrica Cordova Plugin](#)

[Product flow and offer](#)

AppMetrica Gradle Plugin

Product flow and other