
Same colour = same software and sequence database in every panel.

- AlphaFold2 (panels a, b, d)
- AlphaFold-multimer (panel c)
- AlphaFold-Colab
- ColabFold, BFD/MGnify search
- ColabFold, ColabFoldDB search
- ColabFold with RoseTTAFold, BFD/MGnify search

BFD/MGnify, ColabFoldDB: databases of protein sequences.


a Fold accuracy: higher is better

Each dot: one domain of CASP14, a protein folding contest.
TM-score 1 = perfect. AlphaFold2 used templates, others none.

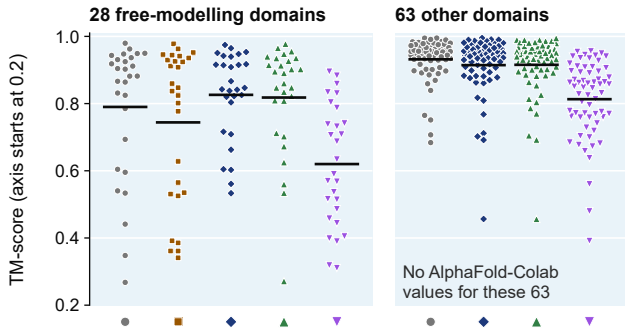

b Search time: lower is better


Time to build the multiple sequence alignment (MSA), per target.
One point per target, joined in order of length.

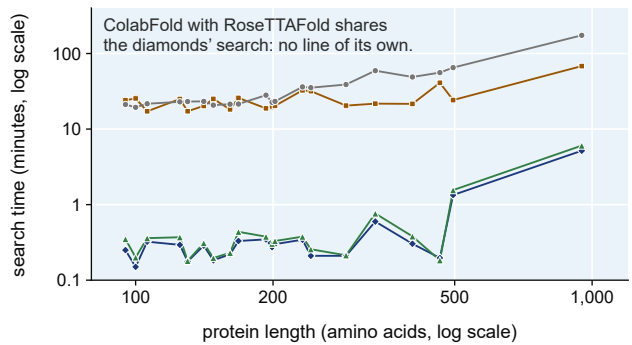

Median of 20 targets, computed from the source data:
AlphaFold2 takes 91 times, AlphaFold-Colab 81 times, as long as ColabFold (BFD/MGnify). No model run times in the data.


c Complex accuracy: higher is better

DockQ: match to the real complex; short bar = low DockQ.
Bars sorted by the AlphaFold-multimer score.
Residue-index mode: chains kept apart by an index offset.

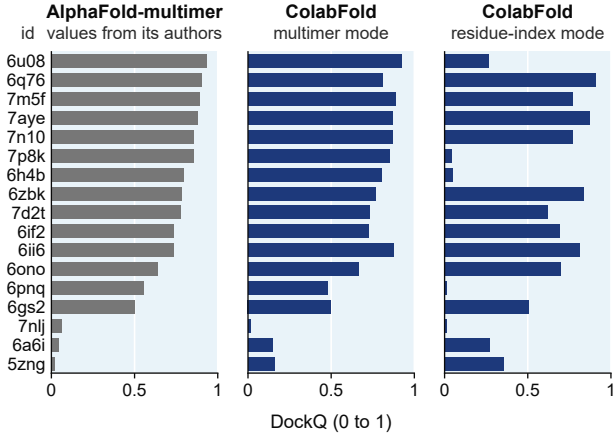

d Proteome run time: lower is better

Elapsed time while folding 1,762 proteins of *M. jannaschii*.
pLDDT: the model's confidence per residue.

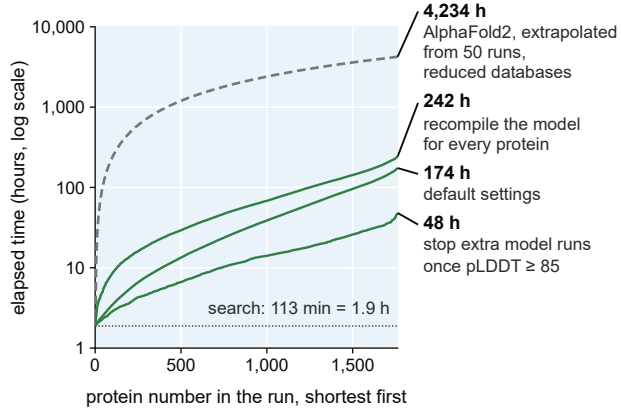

Marks are source data; computed numbers are labelled; we sort and convert units.

After Fig. 2 of Mirdita et al., Nature Methods 2022, doi:10.1038/s41592-022-01488-1, CC BY 4.0. Data: Source Data Fig. 2. Redesigned; values as published.