

# Data Science Academy

[www.datascienceacademy.com.br](http://www.datascienceacademy.com.br)

## Engenharia de Dados com Hadoop e Spark

Instalação e Configuração do Ecossistema Hadoop

## Sumário

<b>1.</b>	<b>Versão .....</b>	<b>4</b>
<b>2.</b>	<b>Configuração do Ambiente .....</b>	<b>5</b>
<b>2.1.</b>	<b>Criação da Máquina Virtual no VirtualBox .....</b>	<b>6</b>
<b>2.2.</b>	<b>Instalação do Sistema Operacional.....</b>	<b>15</b>
<b>2.3.</b>	<b>Instalação de Utilitários do Sistema Operacional.....</b>	<b>35</b>
<b>2.4.</b>	<b>Instalação do MySQL.....</b>	<b>46</b>
<b>3.</b>	<b>Instalação do servidor ssh .....</b>	<b>55</b>
<b>4.</b>	<b>Instalação do Java 8 .....</b>	<b>65</b>
<b>4.1.</b>	<b>Removendo o OpenJDK.....</b>	<b>65</b>
<b>4.2.</b>	<b>Instalação do JDK .....</b>	<b>67</b>
<b>5.</b>	<b>Instalação e Configuração do Hadoop .....</b>	<b>75</b>
<b>5.1.</b>	<b>Criando o usuário hadoop .....</b>	<b>75</b>
<b>5.2.</b>	<b>Configuração do ssh sem senha.....</b>	<b>78</b>
<b>5.3.</b>	<b>Download e Instalação do Hadoop .....</b>	<b>85</b>
<b>5.3.1.</b>	<b>Editando o arquivo hosts .....</b>	<b>85</b>
<b>5.3.2.</b>	<b>Download do Hadoop .....</b>	<b>87</b>
<b>5.4.</b>	<b>Configuração do Hadoop .....</b>	<b>92</b>
<b>5.4.1.</b>	<b>Editar arquivos de configuração do Hadoop .....</b>	<b>92</b>
<b>5.4.2.</b>	<b>Formatando o Namenode .....</b>	<b>95</b>
<b>5.4.3.</b>	<b>Iniciando o Hadoop .....</b>	<b>96</b>
<b>5.4.4.</b>	<b>Iniciando o Yarn.....</b>	<b>98</b>
<b>5.5.</b>	<b>Processando Big Data .....</b>	<b>102</b>
<b>6.</b>	<b>Instalação e Configuração do Zookeeper.....</b>	<b>120</b>
<b>6.1.</b>	<b>Download e Instalação do Zookeeper.....</b>	<b>120</b>
<b>6.2.</b>	<b>Configurando do Zookeeper .....</b>	<b>121</b>
<b>7.</b>	<b>Instalação e Configuração do HBase.....</b>	<b>133</b>
<b>7.1.</b>	<b>Download e Instalação do HBase.....</b>	<b>133</b>
<b>7.2.</b>	<b>Configurando o HBase .....</b>	<b>134</b>
<b>8.</b>	<b>Instalação e Configuração do Hive .....</b>	<b>145</b>
<b>8.1.</b>	<b>Download e Instalação do Hive .....</b>	<b>145</b>
<b>8.2.</b>	<b>Configurando o Hive.....</b>	<b>146</b>
<b>9.</b>	<b>Instalação e Configuração do Pig.....</b>	<b>157</b>
<b>9.1.</b>	<b>Download e Instalação do Pig.....</b>	<b>157</b>
<b>9.2.</b>	<b>Configurando do Pig .....</b>	<b>158</b>
<b>10.</b>	<b>Instalação e Configuração do Spark .....</b>	<b>165</b>
<b>10.1.</b>	<b>Download e Instalação do Spark .....</b>	<b>165</b>
<b>11.</b>	<b>Instalação e Configuração do Sqoop .....</b>	<b>172</b>
<b>11.1.</b>	<b>Download do Sqoop .....</b>	<b>172</b>
<b>11.2.</b>	<b>Configuração do Sqoop .....</b>	<b>173</b>
<b>12.</b>	<b>Instalação e Configuração do Apache Flume.....</b>	<b>181</b>

**13. Instalação e Configuração do Ambari (Opcional) .....188**

## 1. Versão

Este documento foi criado pela equipe Data Science Academy e pode ser distribuído livremente, desde que se faça menção à fonte.


Versão	Ação	Data
<b>1.0</b>	Criação do documento	28/07/2019

## 2. Configuração do Ambiente

Item	Versão
Virtual Box	6.0.8
Sistema Operacional	CentOS 7.6 (64 bits) ou CentOS 6.8 (32 bits)
Interface Gráfica	Gnome
Firefox Web Browser	60.7
Java	1.8
Apache Hadoop	3.2.0
Apache Zookeeper	3.5.5
Apache Hbase	2.2.0
Apache Hive	3.1.1
Apache Pig	0.17.0
Apache Spark	2.4.3
Apache Sqoop	1.4.7
Apache Flume	1.9.0
Apache Ambari	2.4.1


## 2.1. Criação da Máquina Virtual no VirtualBox

O Oracle VM Virtual Box é gratuito e pode ser baixado em <https://www.virtualbox.org>. Existem versões disponíveis para Windows, MAC, Linux e Solaris. Aqui utilizaremos a versão 6.0 e o tutorial será o mesmo independente do sistema operacional do seu computador. O uso do VirtualBox não é obrigatório e você pode instalar em uma máquina física se desejar.

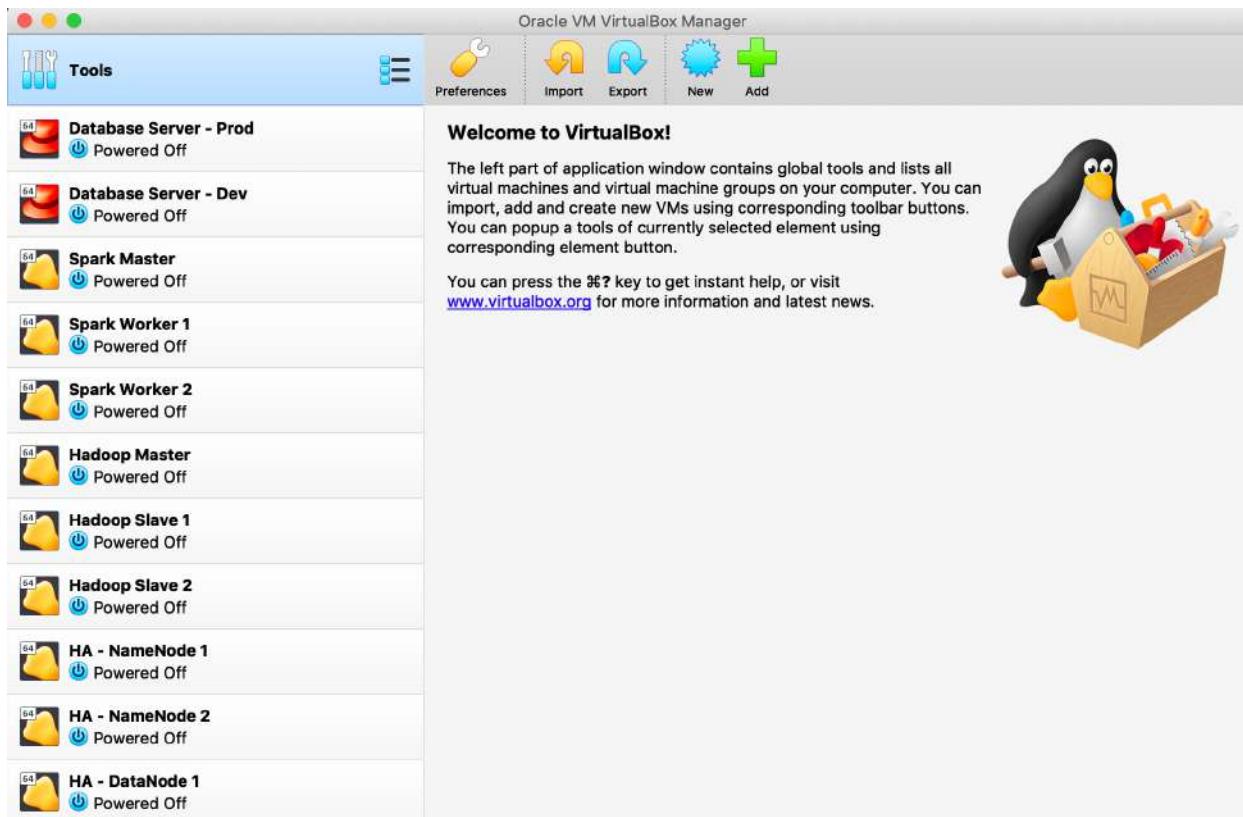


Abrindo o Gerenciador do Oracle Virtual Box

## Instalação e Configuração do Ecossistema Hadoop

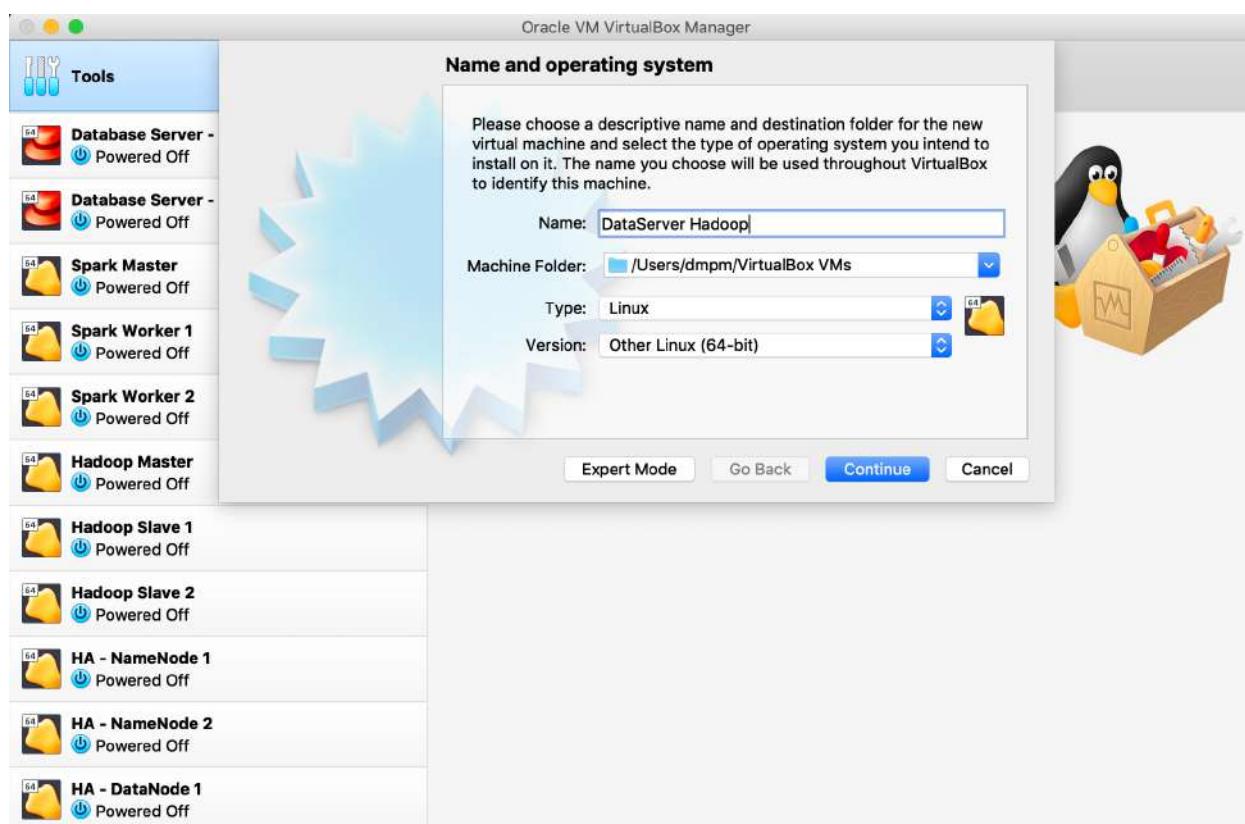


Definindo o nome da máquina virtual e a versão do sistema operacional

## Instalação e Configuração do Ecossistema Hadoop

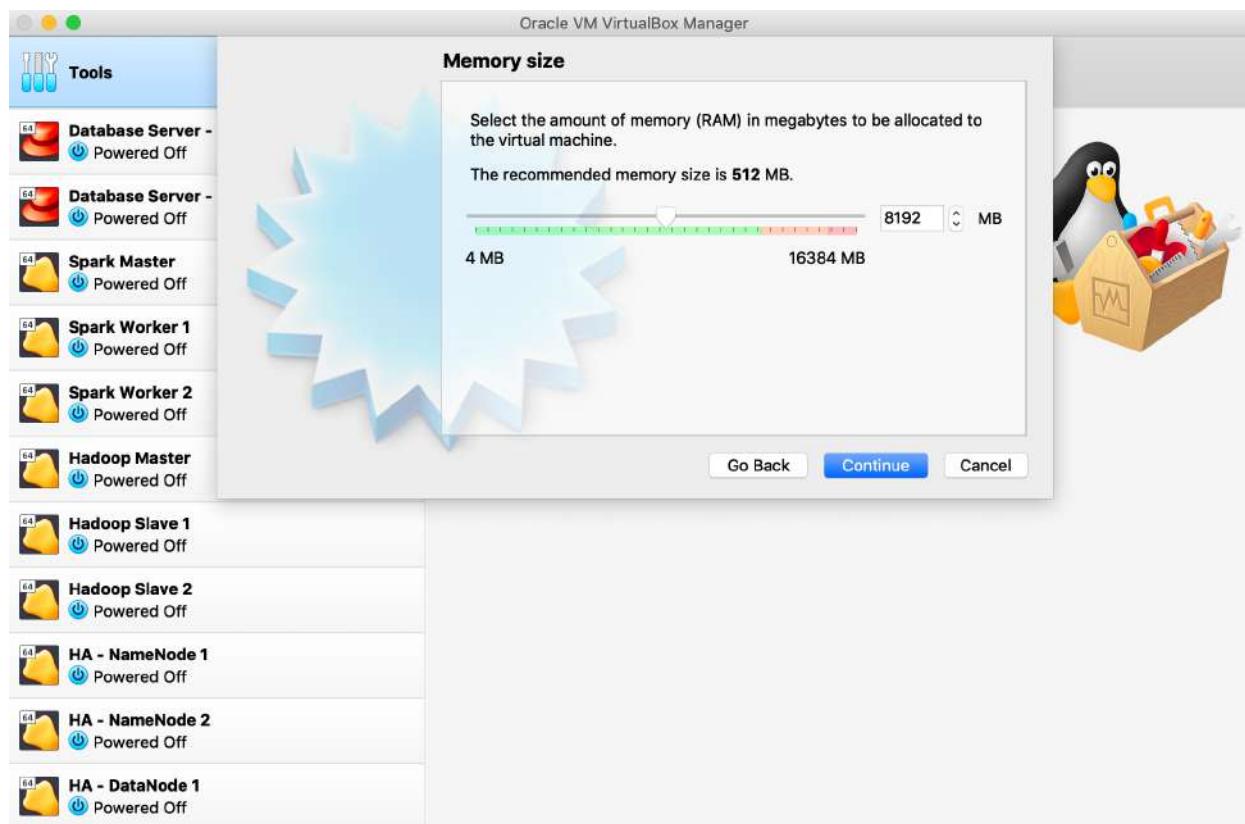

Configure metade da memória física do seu computador para a VM

## Instalação e Configuração do Ecossistema Hadoop

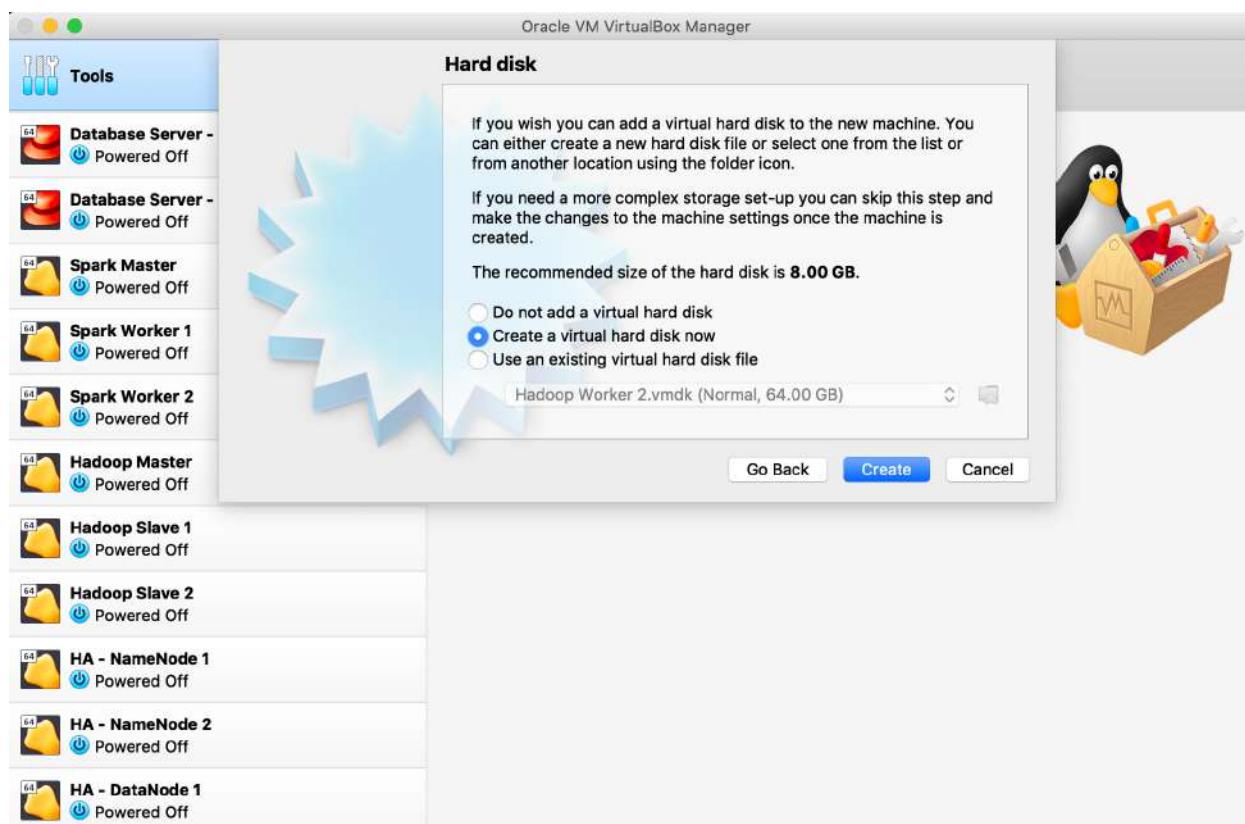


Criar um novo disco rígido virtual

## Instalação e Configuração do Ecossistema Hadoop




Selecione a opção VMDK

## Instalação e Configuração do Ecossistema Hadoop

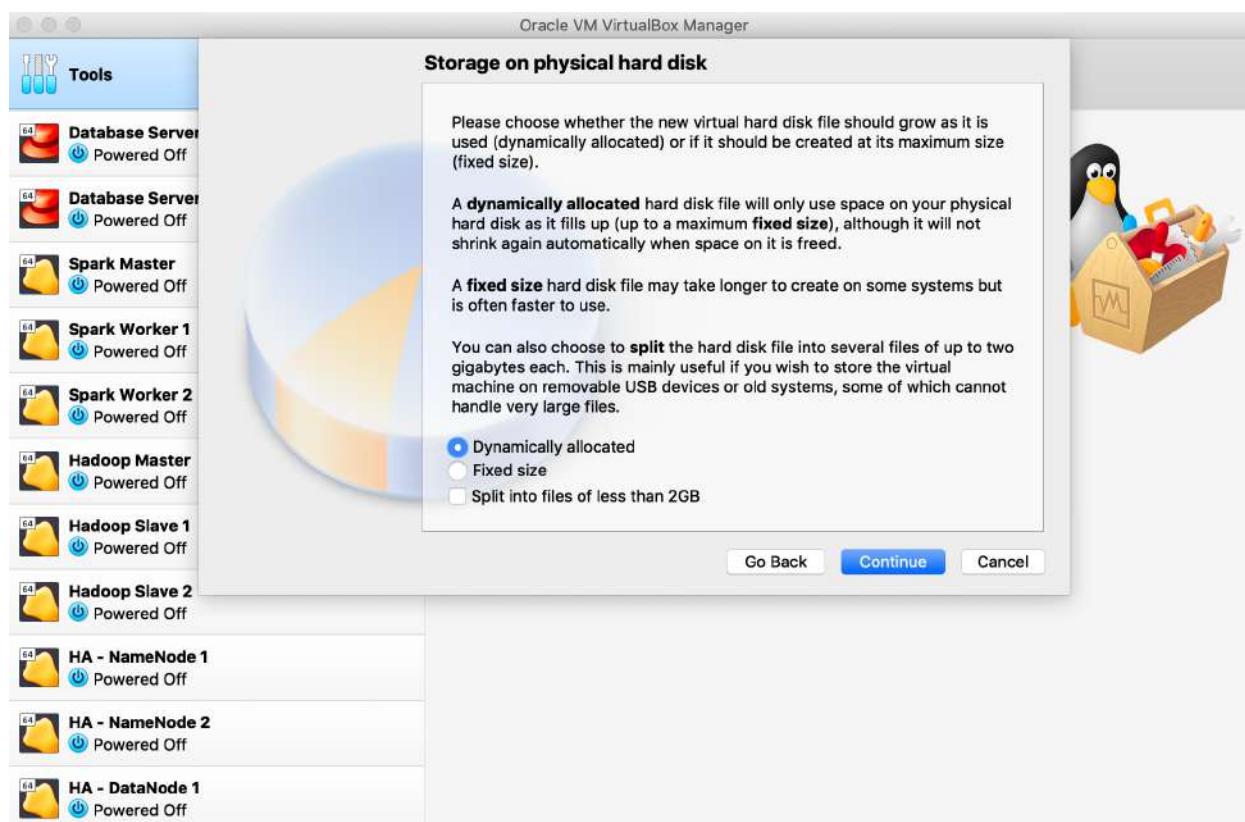


O disco deve ser alocado dinamicamente

## Instalação e Configuração do Ecossistema Hadoop

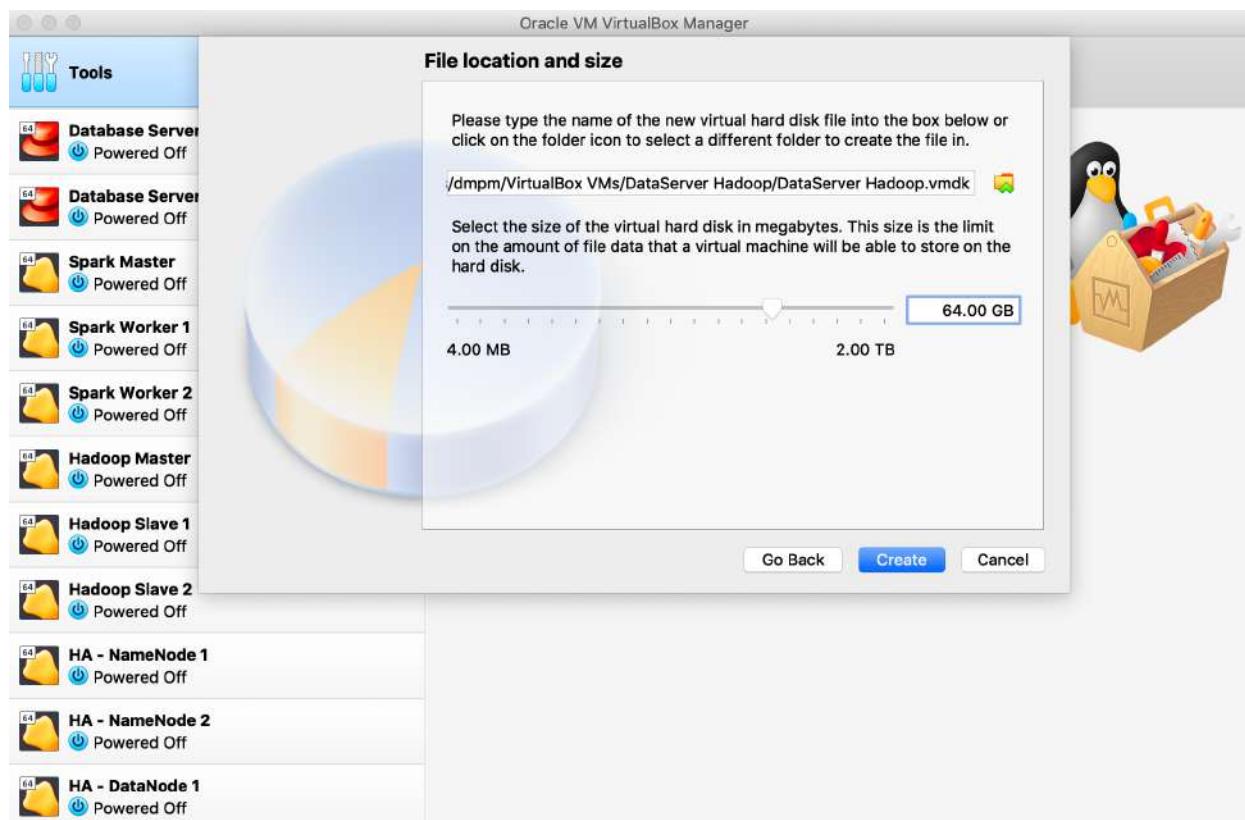

Selecione 64 GB para o disco virtual

## Instalação e Configuração do Ecossistema Hadoop

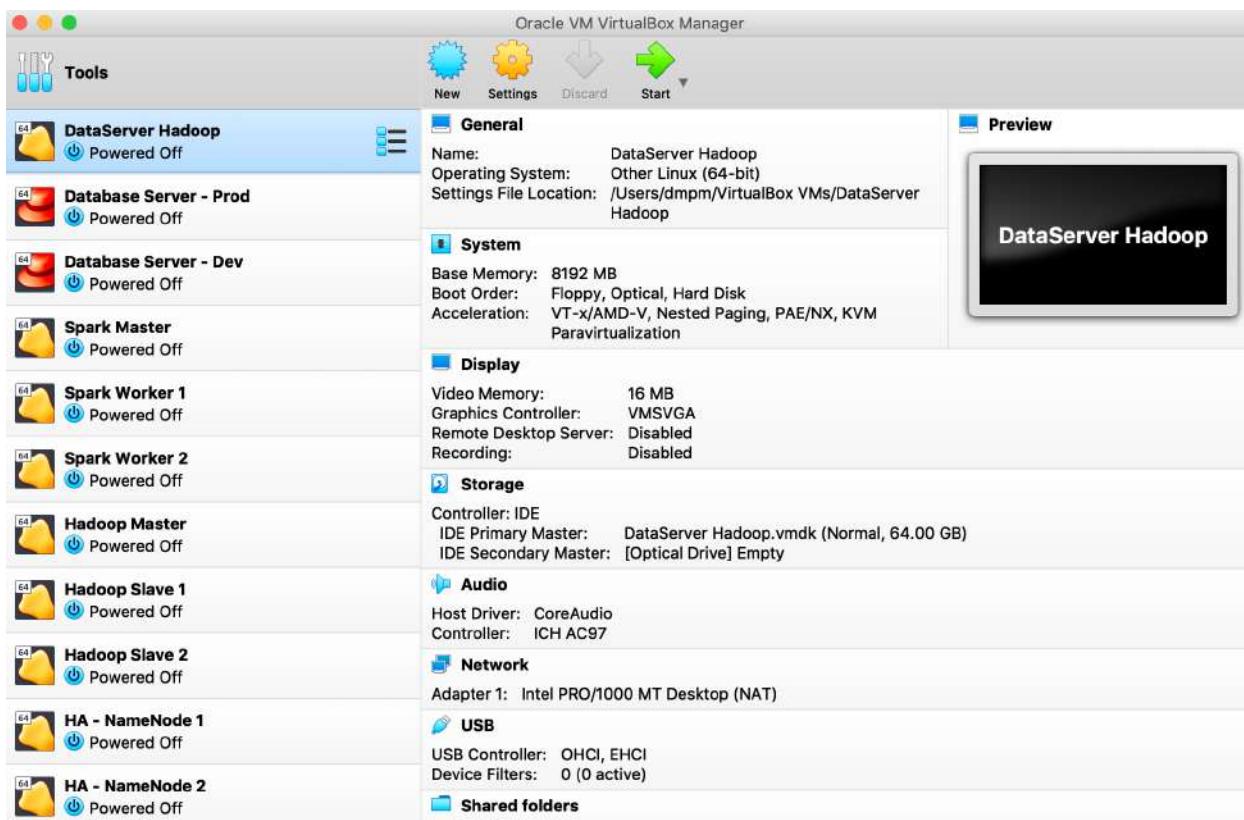

Máquina virtual criada. Selecione a VM e clique no botão Start para inicializar a VM.

## Instalação e Configuração do Ecossistema Hadoop



Selecione a mídia de instalação do sistema operacional

Utilizaremos o CentOS versão 7 64 bits. Caso sua máquina seja 32 bits você deve usar CentOS versão 6.8. Em ambos os casos faça o download do DVD de instalação como imagem .iso

CentOS 64 bits (versão 7):  
[http://isoredirect.centos.org/centos/7/isos/x86\\_64/](http://isoredirect.centos.org/centos/7/isos/x86_64/)


CentOS 32 bits (versão 6.8):  
<http://centos.mirror.netelligent.ca/centos/>

## 2.2. Instalação do Sistema Operacional




Selecione a opção de Instalação do Sistema Operacional CentOS 7

## Instalação e Configuração do Ecossistema Hadoop

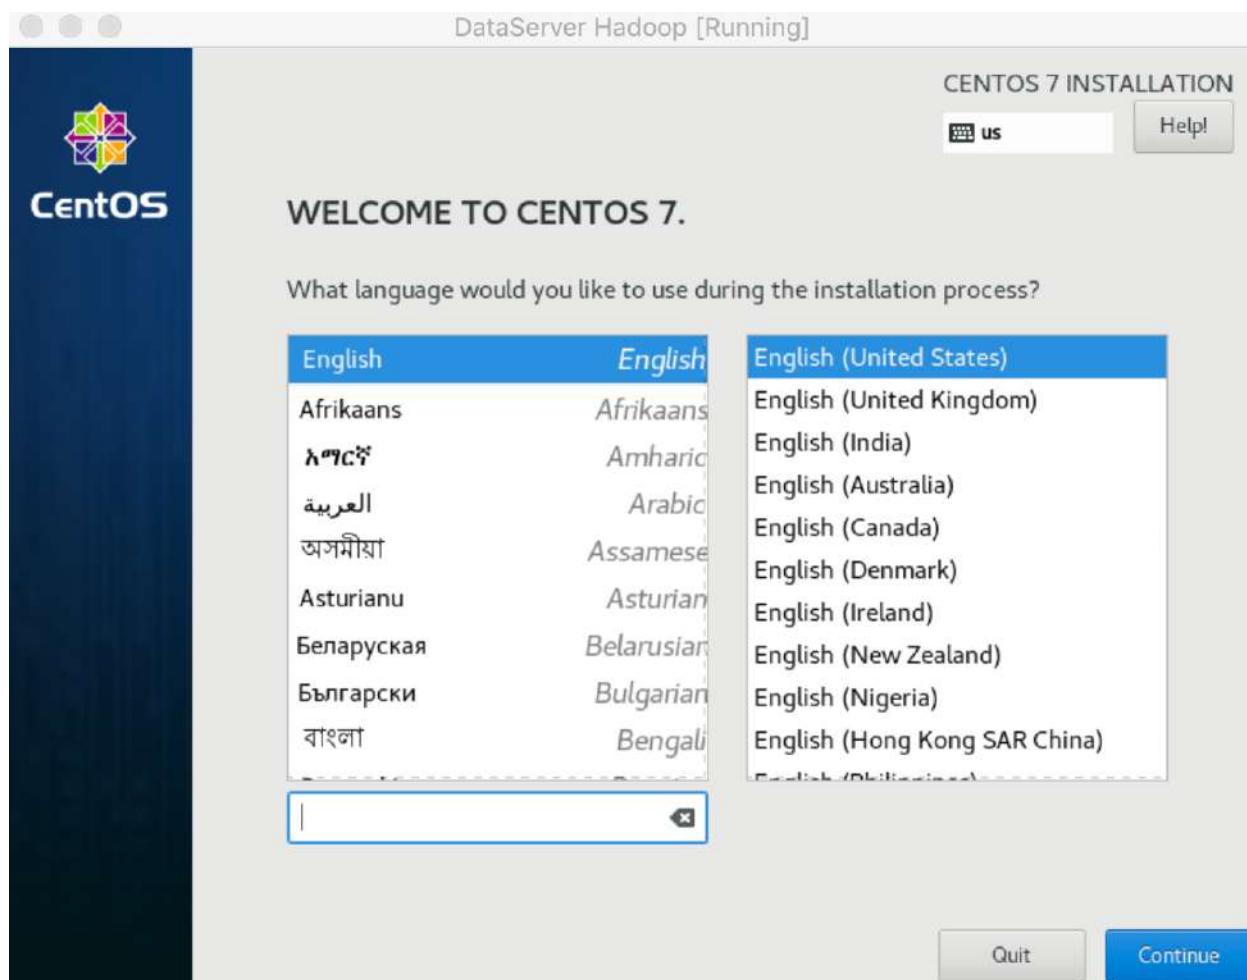

Seleção do idioma usado na instalação

## Instalação e Configuração do Ecossistema Hadoop

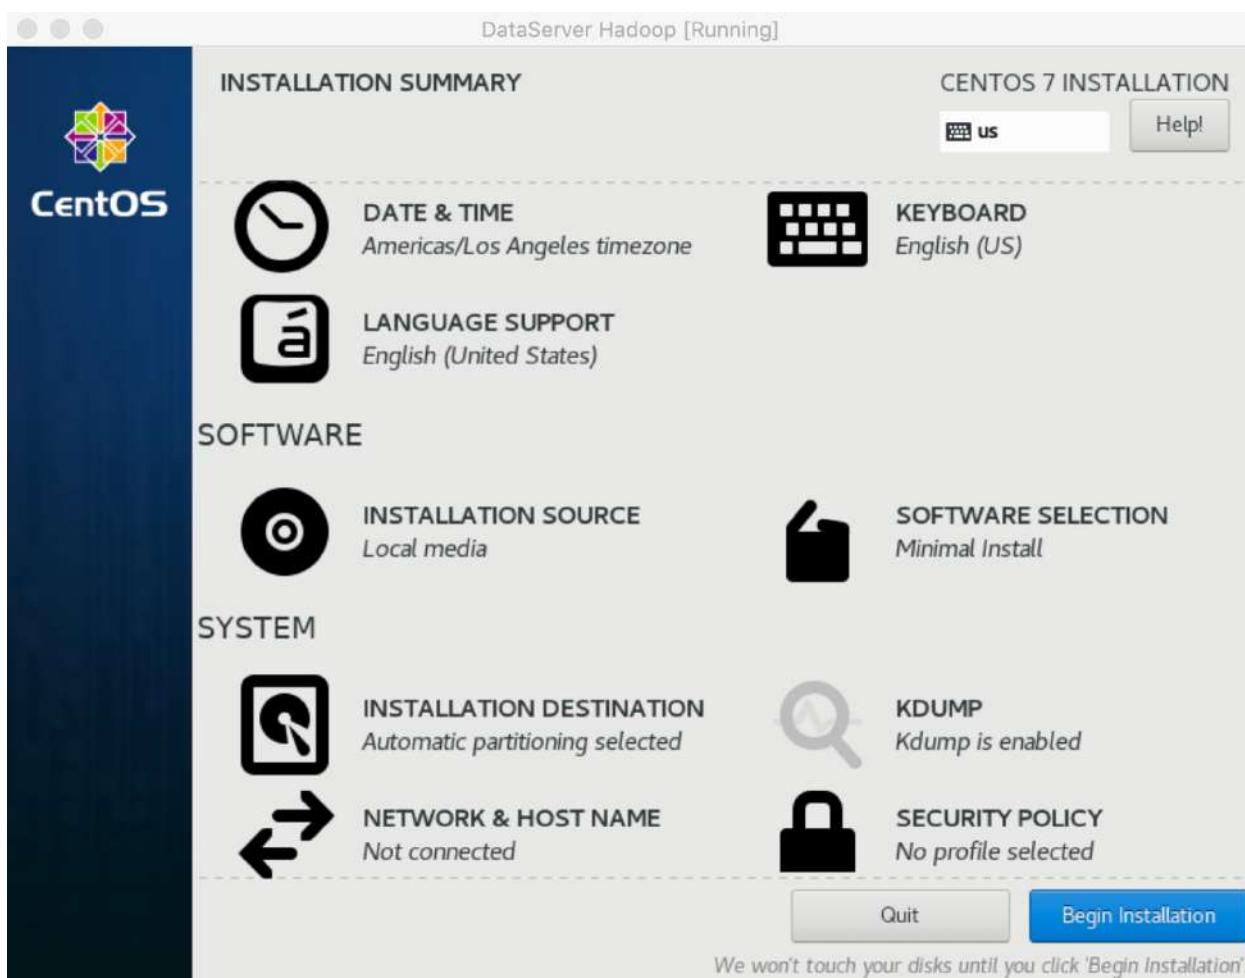


## Instalação e Configuração do Ecossistema Hadoop




Timezone

## Instalação e Configuração do Ecossistema Hadoop

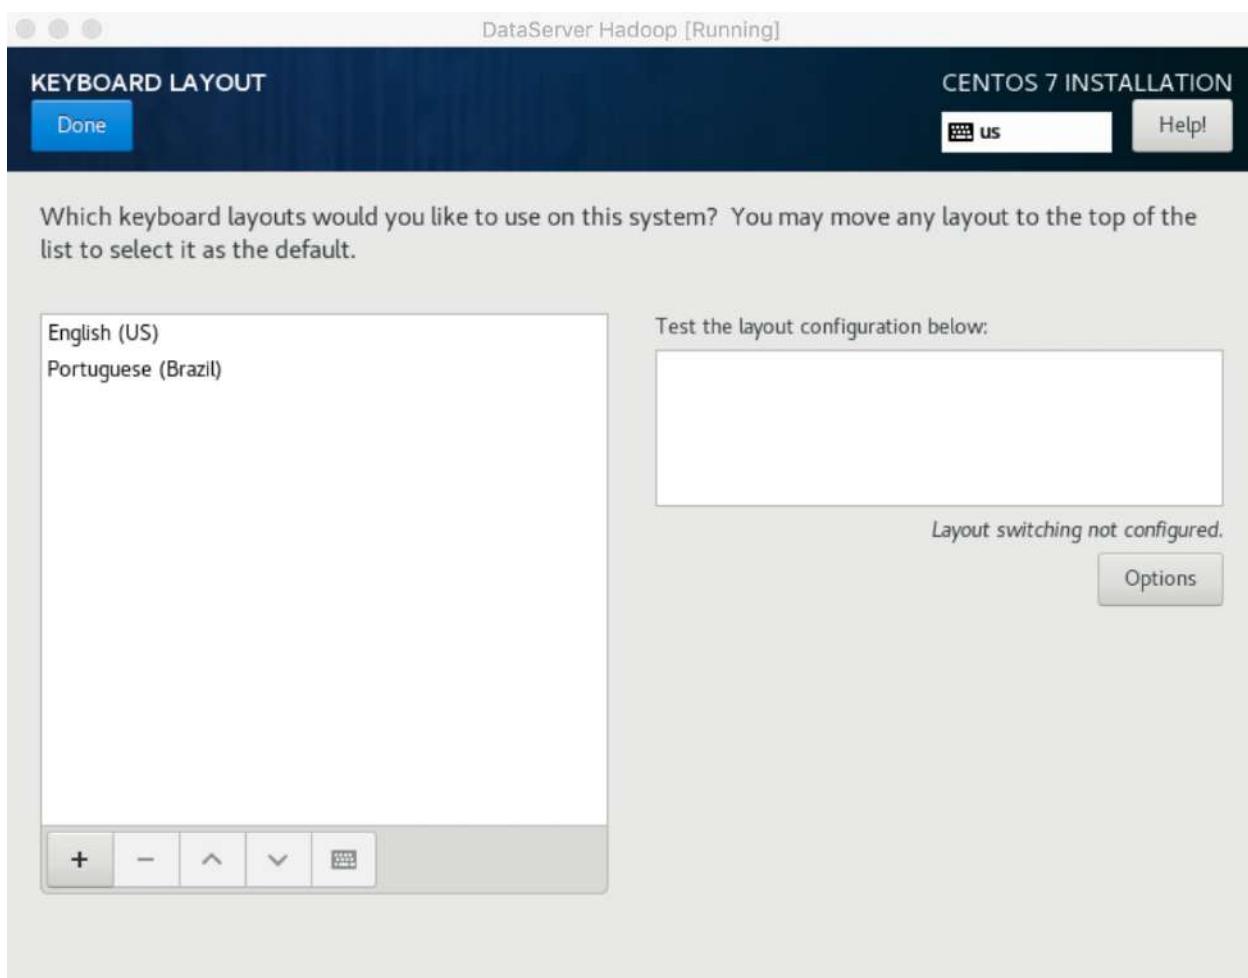


Layout do teclado

## Instalação e Configuração do Ecossistema Hadoop

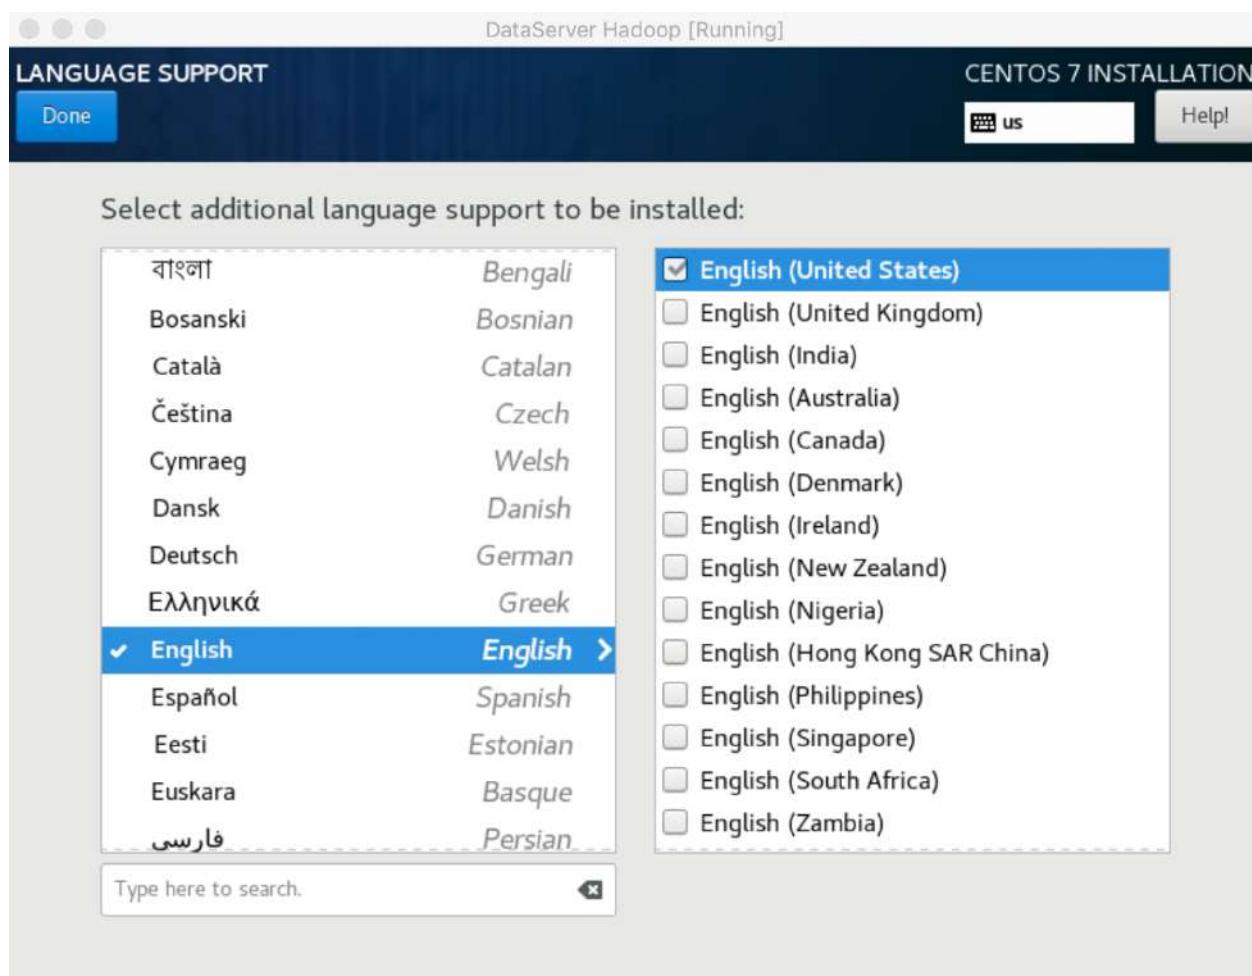

Idioma do sistema operacional

## Instalação e Configuração do Ecossistema Hadoop

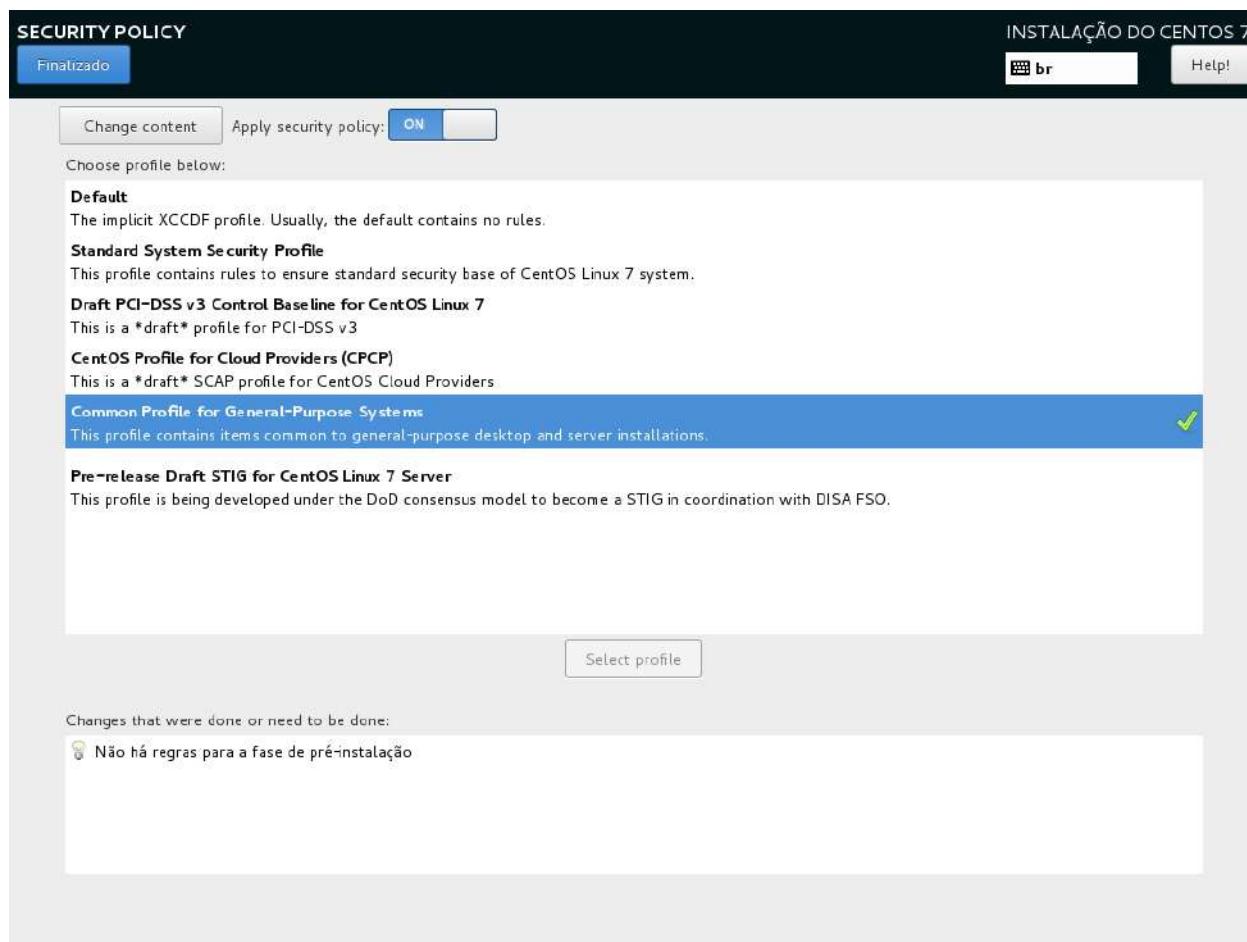


The screenshot shows the 'SECURITY POLICY' configuration interface for CentOS 7. At the top, there is a 'Finalizado' button and a language switch for 'br'. The main area displays several security profile options:

- Default**: The implicit XCCDF profile. Usually, the default contains no rules.
- Standard System Security Profile**: This profile contains rules to ensure standard security base of CentOS Linux 7 system.
- Draft PCI-DSS v3 Control Baseline for CentOS Linux 7**: This is a \*draft\* profile for PCI-DSS v3.
- CentOS Profile for Cloud Providers (CPCP)**: This is a \*draft\* SCAP profile for CentOS Cloud Providers.
- Common Profile for General-Purpose Systems**: This profile contains items common to general-purpose desktop and server installations. This profile is selected, indicated by a green checkmark.
- Pre-release Draft STIG for CentOS Linux 7 Server**: This profile is being developed under the DoD consensus model to become a STIG in coordination with DISA FSO.

Below the profiles, there is a 'Select profile' button and a section titled 'Changes that were done or need to be done:' which contains a note: 'Não há regras para a fase de pré-instalação'.

Política de segurança padrão

## Instalação e Configuração do Ecossistema Hadoop

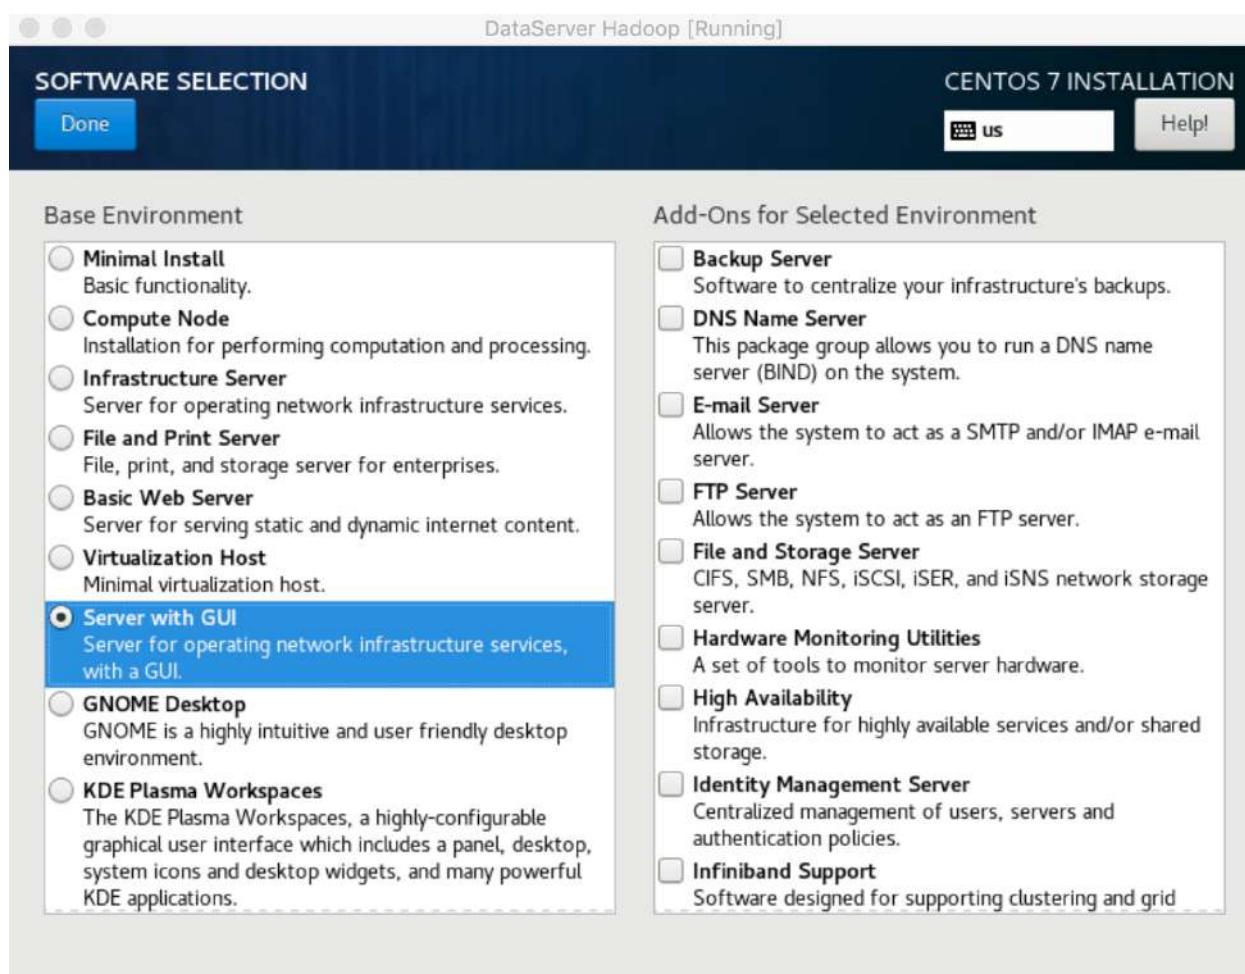

**SOFTWARE SELECTION**

**CENTOS 7 INSTALLATION**

**Done** **us** **Help!**

**Base Environment**


- Minimal Install**  
Basic functionality.
- Compute Node**  
Installation for performing computation and processing.
- Infrastructure Server**  
Server for operating network infrastructure services.
- File and Print Server**  
File, print, and storage server for enterprises.
- Basic Web Server**  
Server for serving static and dynamic internet content.
- Virtualization Host**  
Minimal virtualization host.
- Server with GUI**  
Server for operating network infrastructure services, with a GUI.
- GNOME Desktop**  
GNOME is a highly intuitive and user friendly desktop environment.
- KDE Plasma Workspaces**  
The KDE Plasma Workspaces, a highly-configurable graphical user interface which includes a panel, desktop, system icons and desktop widgets, and many powerful KDE applications.

**Add-Ons for Selected Environment**

- Backup Server**  
Software to centralize your infrastructure's backups.
- DNS Name Server**  
This package group allows you to run a DNS name server (BIND) on the system.
- E-mail Server**  
Allows the system to act as a SMTP and/or IMAP e-mail server.
- FTP Server**  
Allows the system to act as an FTP server.
- File and Storage Server**  
CIFS, SMB, NFS, iSCSI, iSER, and iSNS network storage server.
- Hardware Monitoring Utilities**  
A set of tools to monitor server hardware.
- High Availability**  
Infrastructure for highly available services and/or shared storage.
- Identity Management Server**  
Centralized management of users, servers and authentication policies.
- Infiniband Support**  
Software designed for supporting clustering and grid


Selecione a opção Server with GUI

## Instalação e Configuração do Ecossistema Hadoop

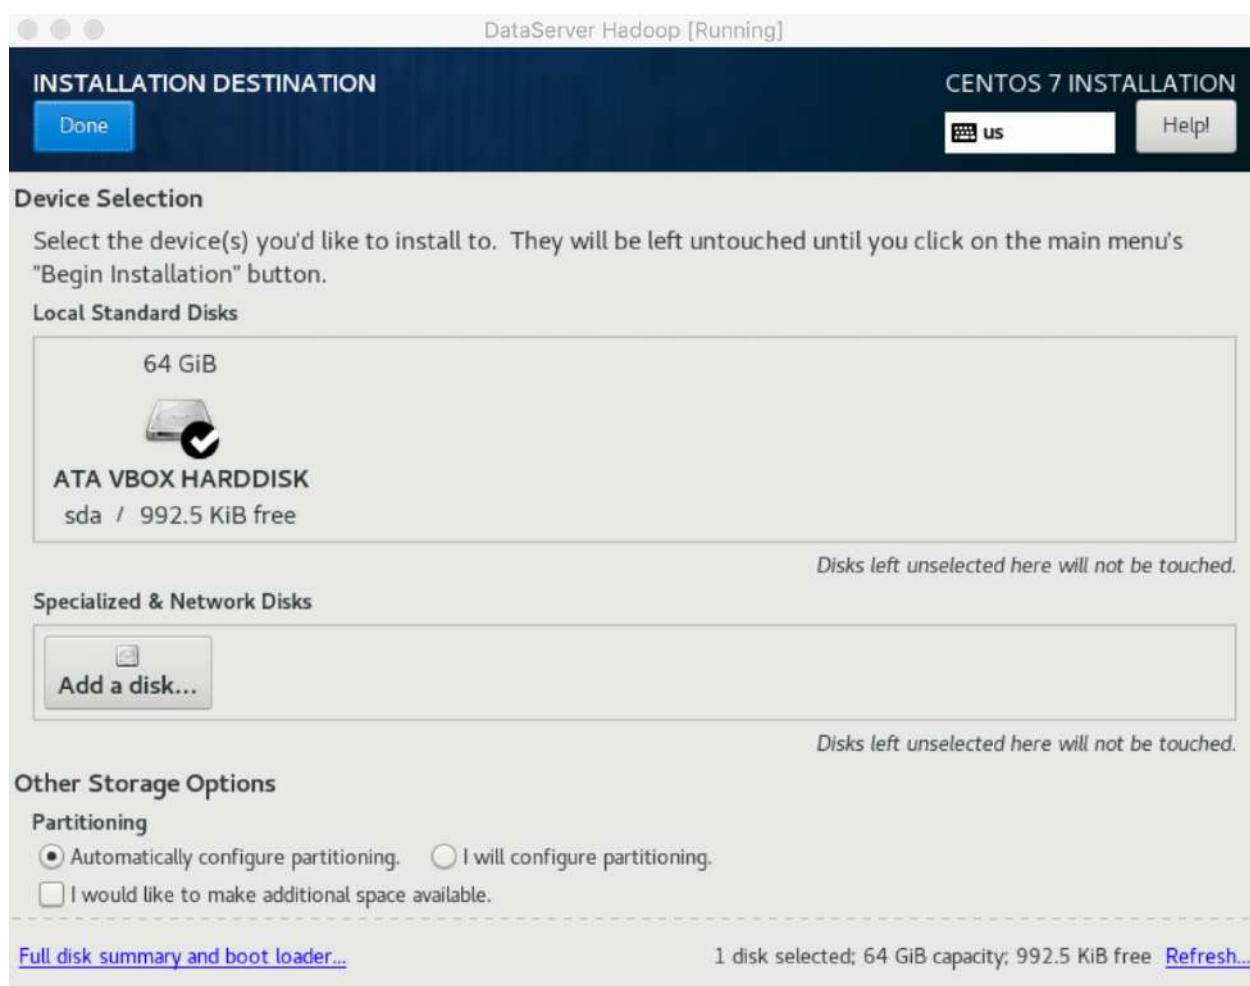


Disco

## Instalação e Configuração do Ecossistema Hadoop

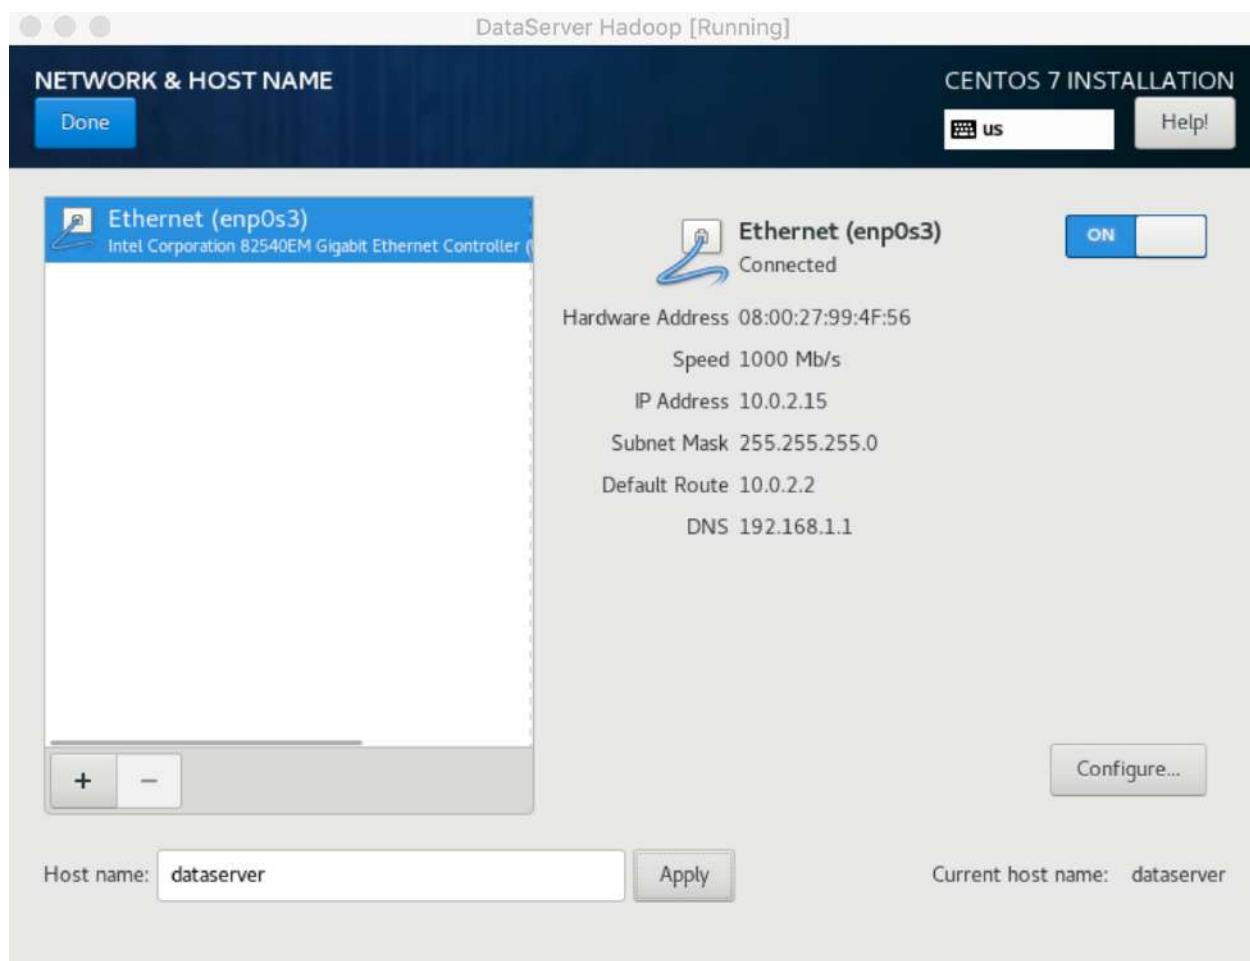


Configuração de rede e nome do servidor – **dataserver** – Clique em Apply  
Certifique-se de habilitar a opção de ativar a Ethernet (botão on)

## Instalação e Configuração do Ecossistema Hadoop

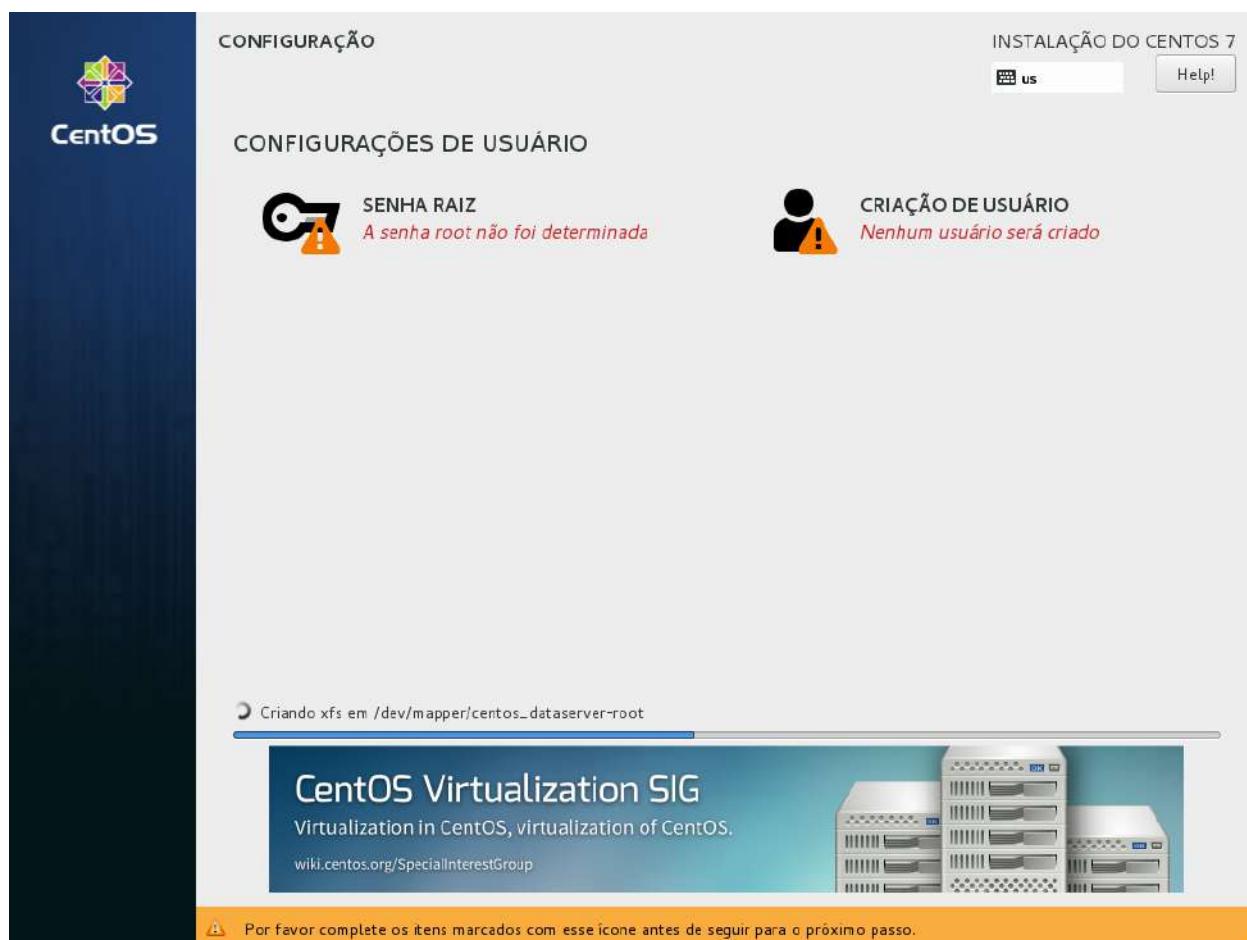

Definir senha do root e criar um novo usuário

## Instalação e Configuração do Ecossistema Hadoop

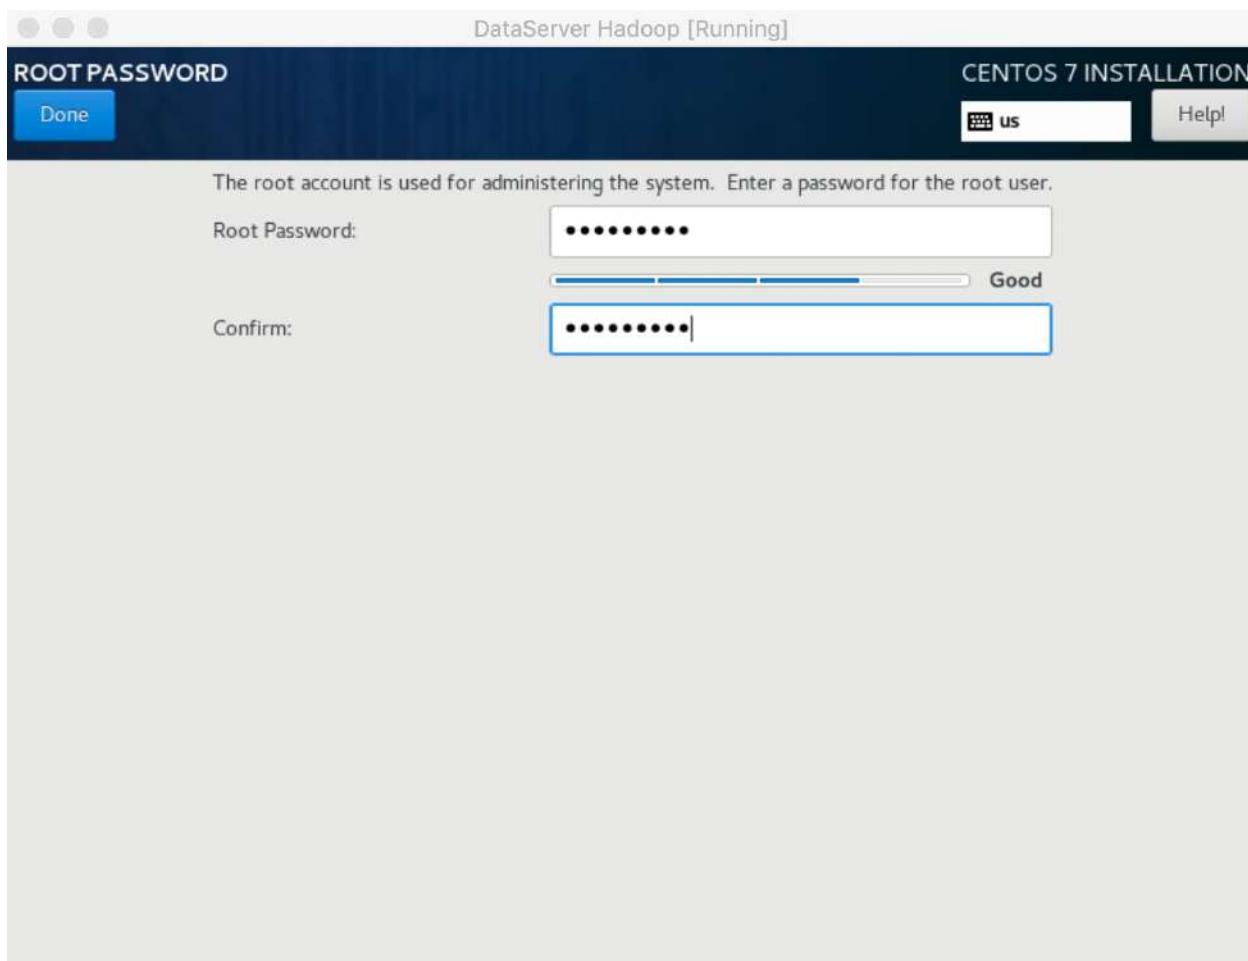

Definir senha do root – usuário administrador

Senha: **dsahadoop**

## Instalação e Configuração do Ecossistema Hadoop

CREATE USER

Done

DataServer Hadoop [Running]

CENTOS 7 INSTALLATION

us Help!

Full name: Aluno

User name: aluno

Tip: Keep your user name shorter than 32 characters and do not use spaces.

Make this user administrator


Require a password to use this account

Password: ••••••••

Confirm password: •••••••|


Advanced...

Good

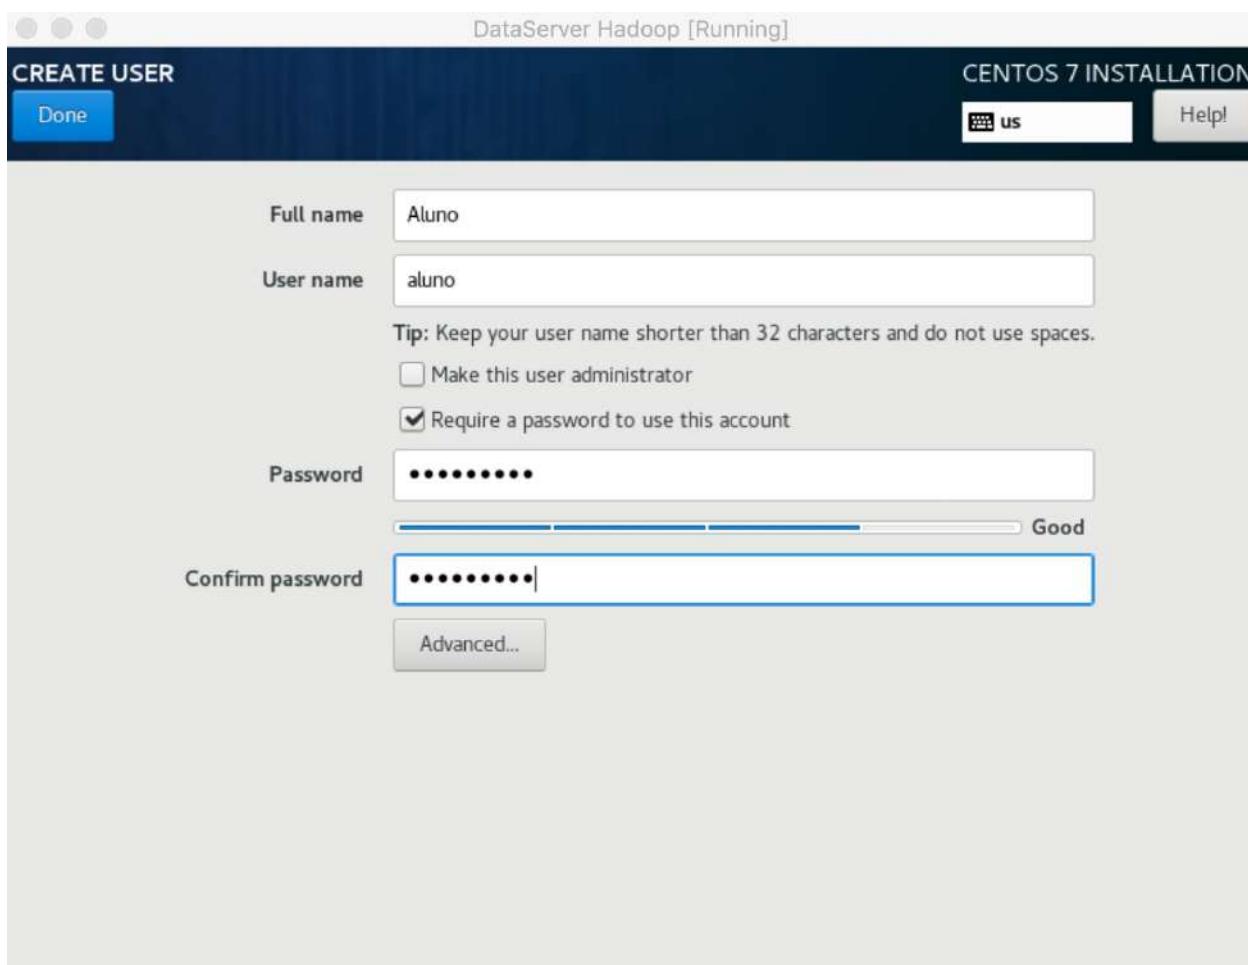


Criação de um usuário – Aluno  
(username: aluno, senha: **dsahadoop**)

## Instalação e Configuração do Ecossistema Hadoop

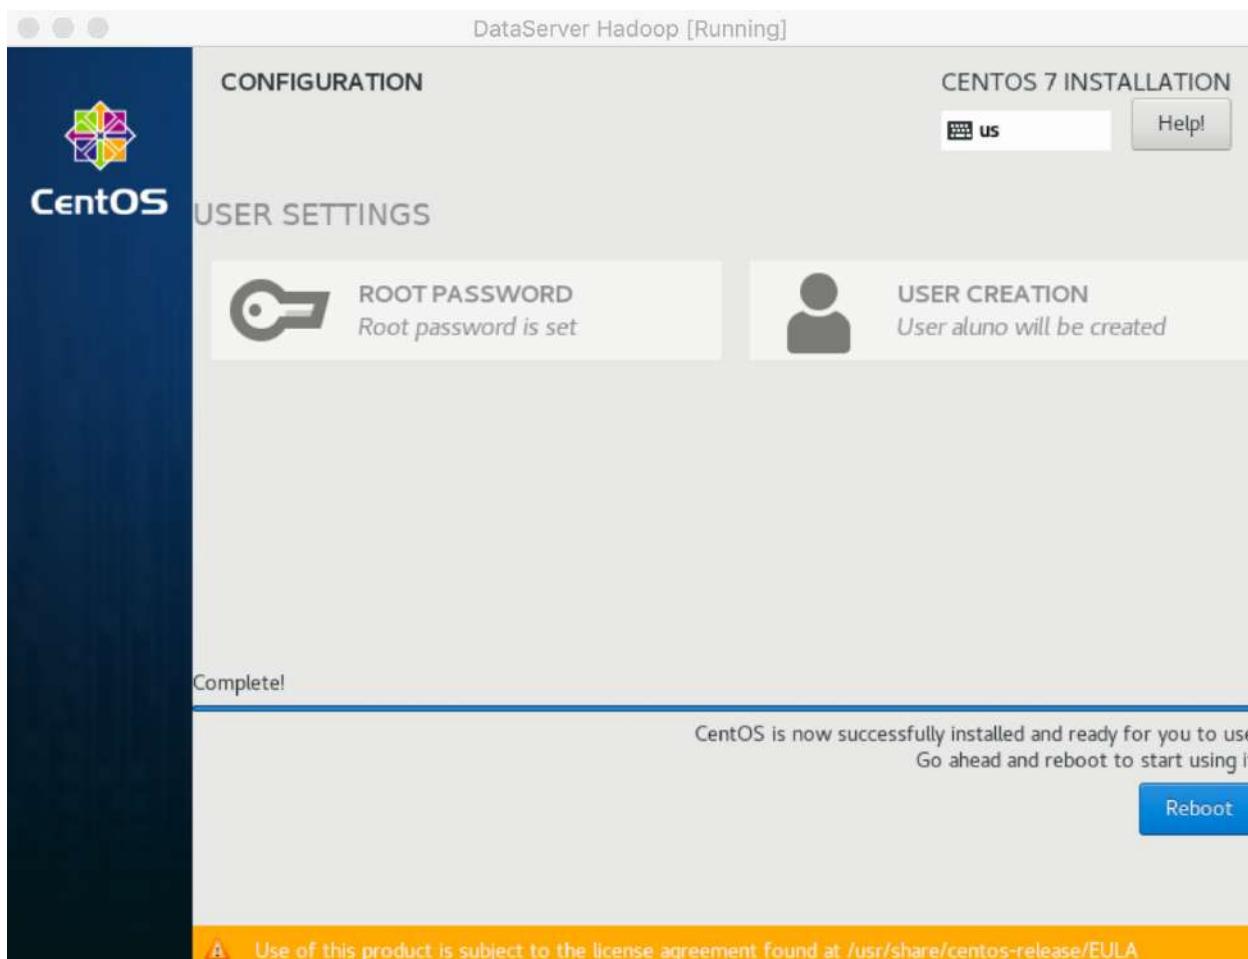


Conclusão da instalação. Clique no botão Reboot.

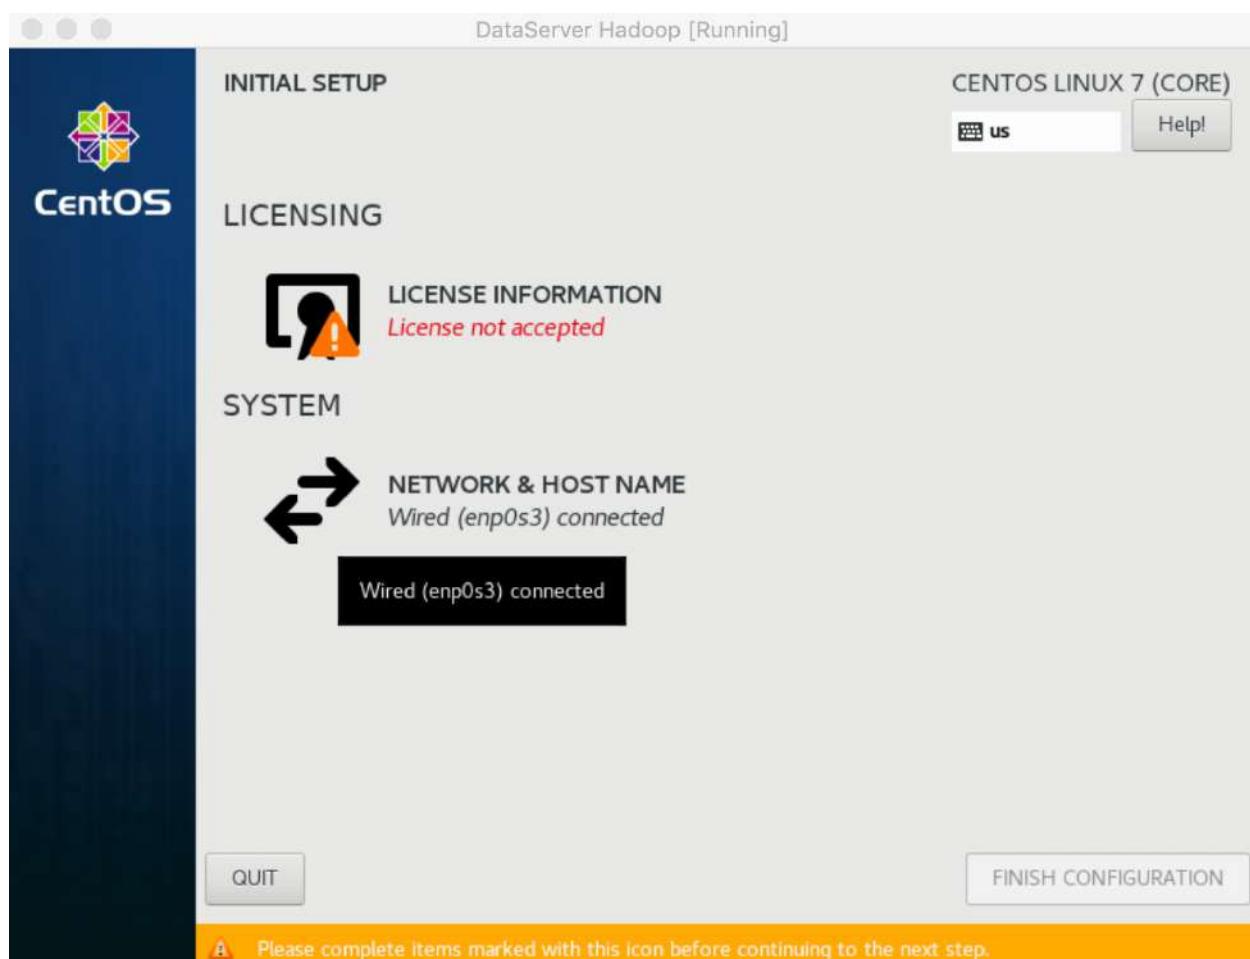


Clique em License Information para aceitar os termos de uso

## Instalação e Configuração do Ecossistema Hadoop

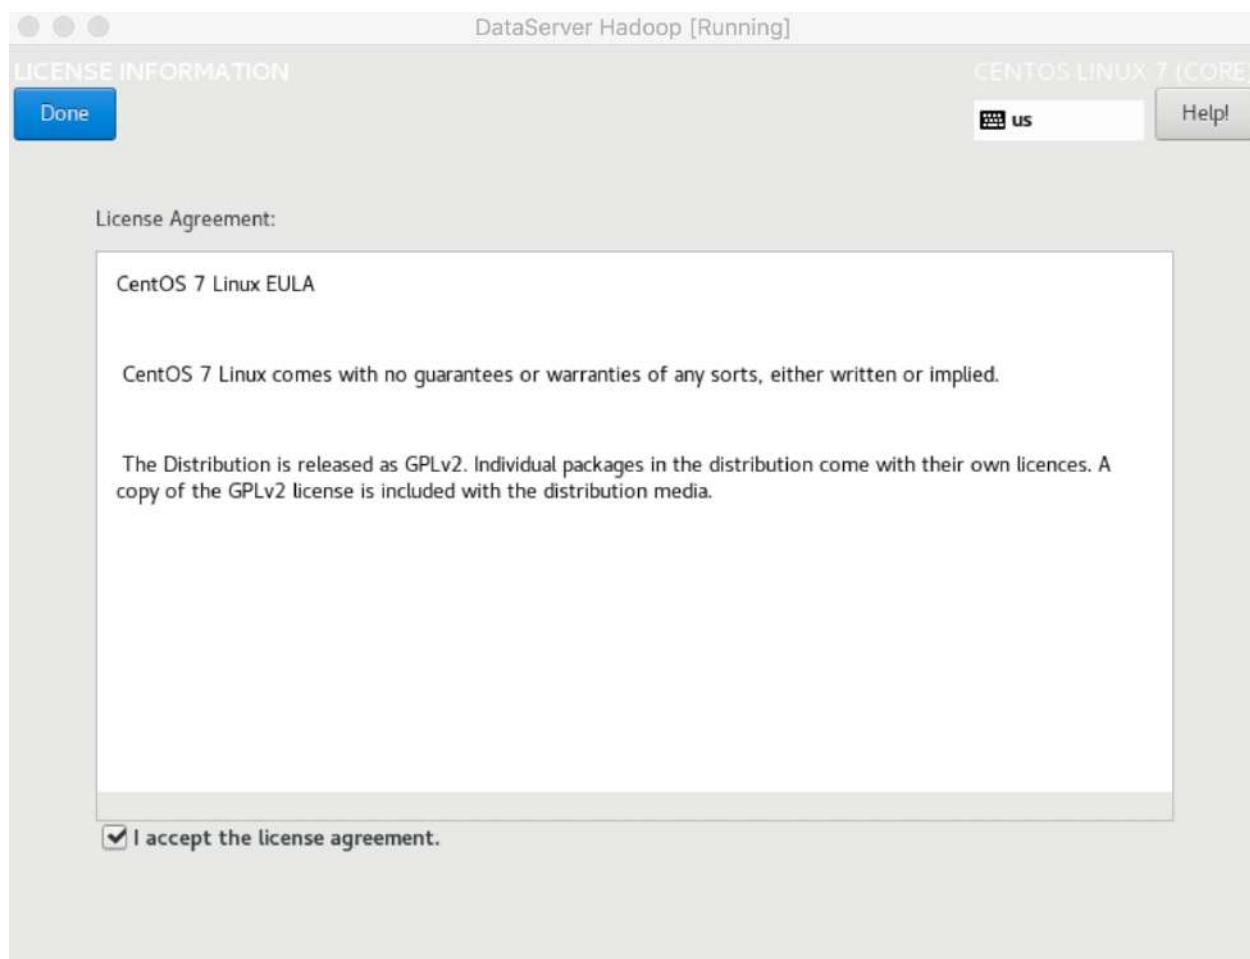


Marque a caixa e pressione Done.

## Instalação e Configuração do Ecossistema Hadoop

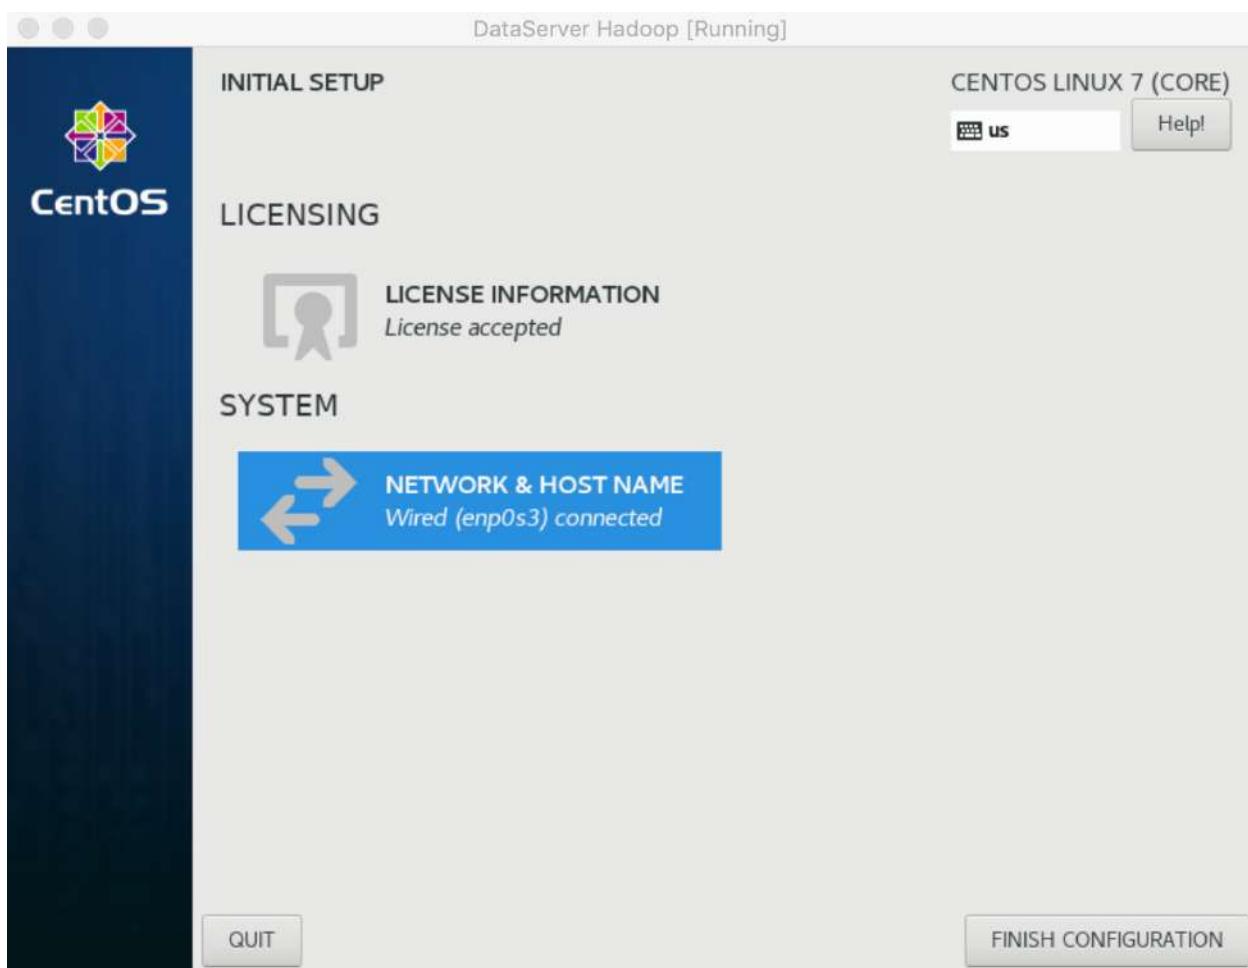


Se necessário, revise se o nome da máquina está correto e se a rede está ativada e pressione  
“Finish Configuration”

## Instalação e Configuração do Ecossistema Hadoop

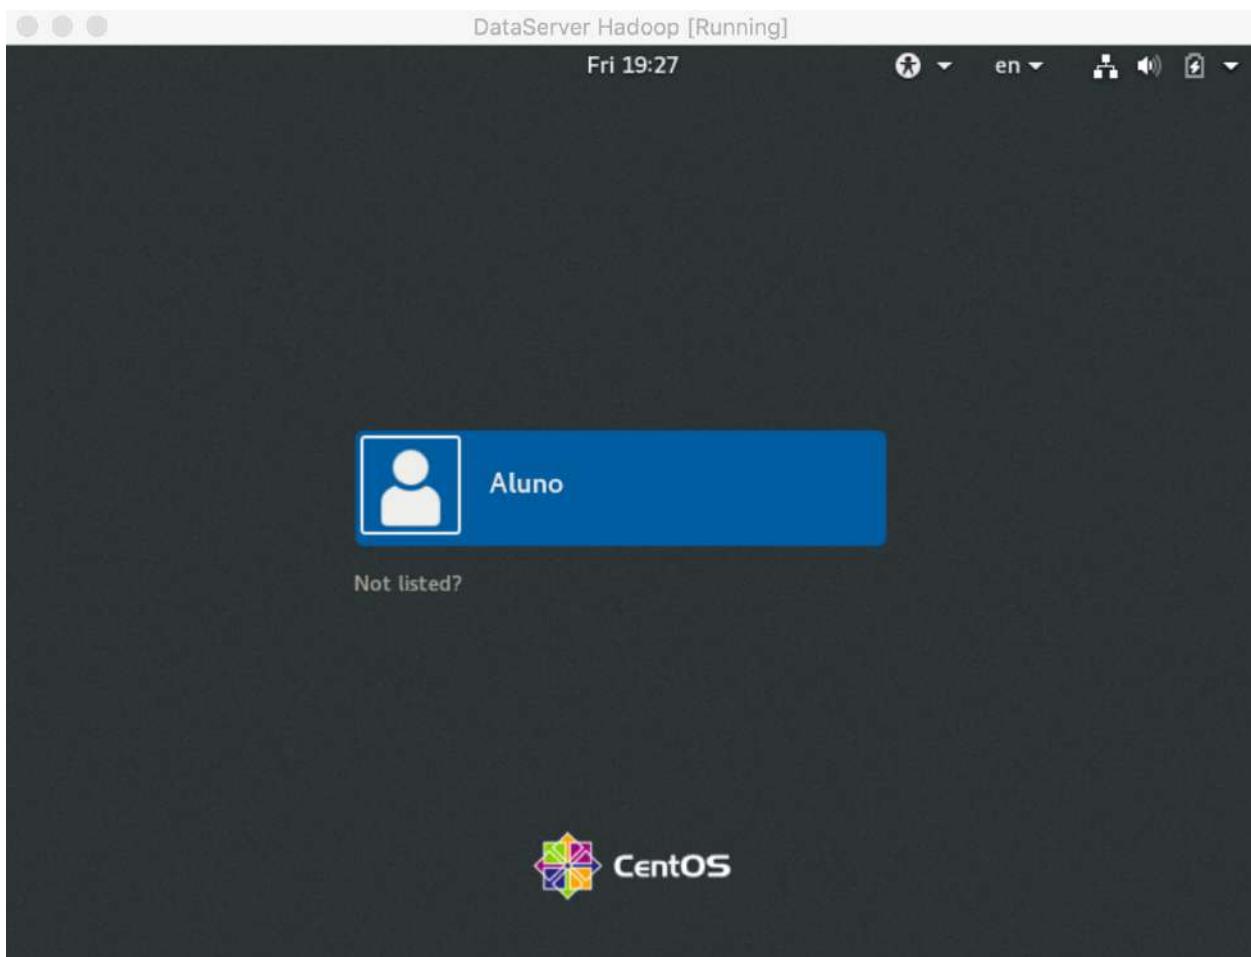


Clique no usuário Aluno

## Instalação e Configuração do Ecossistema Hadoop

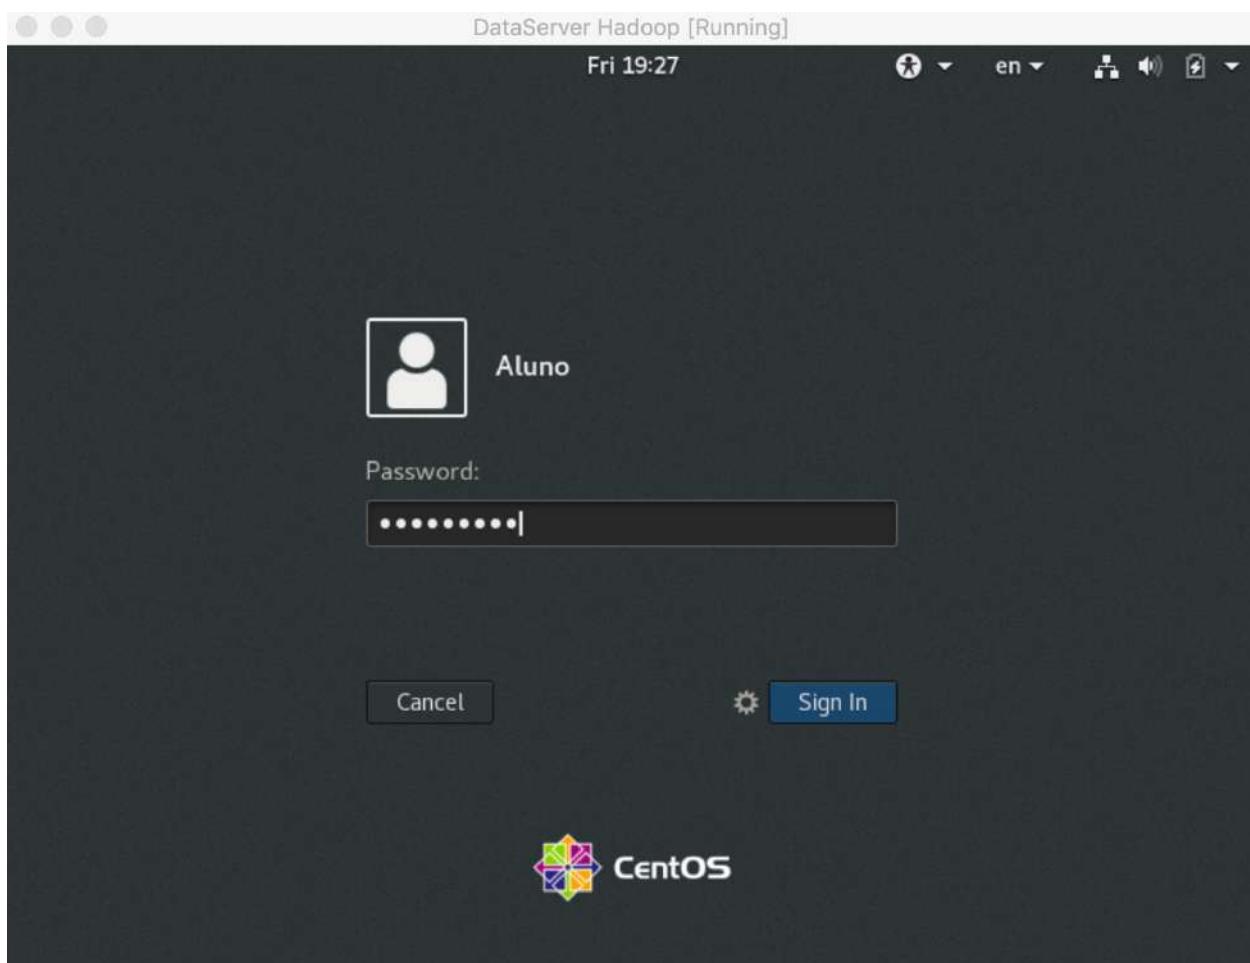

Usuário/Senha (**dsahadoop**)

## Instalação e Configuração do Ecossistema Hadoop

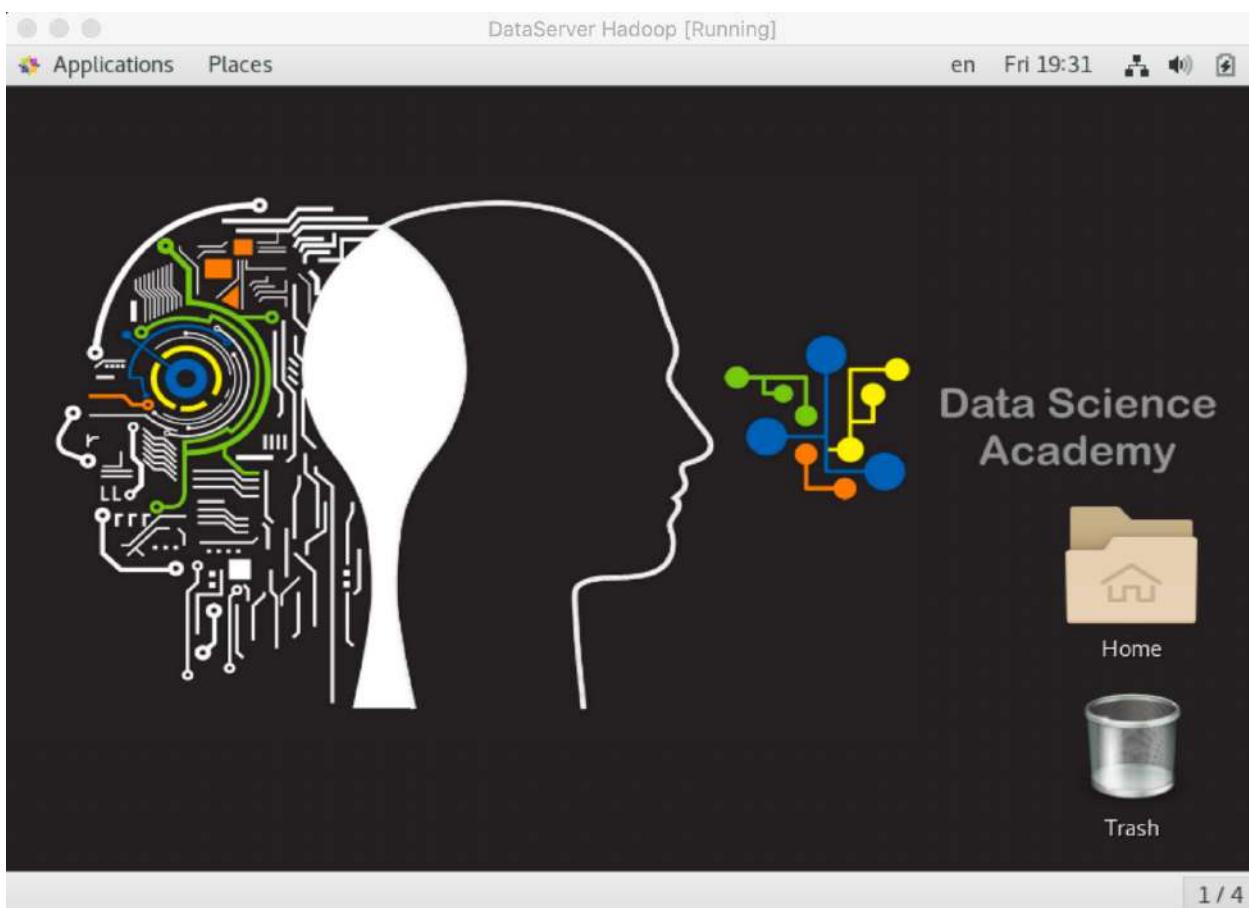


Instalação concluída com sucesso

Primeiro checkpoint:

Desligue a VM (clique no ícone da bateria e então em desligar).  
Clique no menu File do VirtualBox e clique em Export Appliance.  
Será gerada uma cópia de segurança da sua máquina virtual.


→ VM: **DataServer-Hadoop-v1.0.ova** (Apenas SO)

### 2.3. Instalação de Utilitários do Sistema Operacional

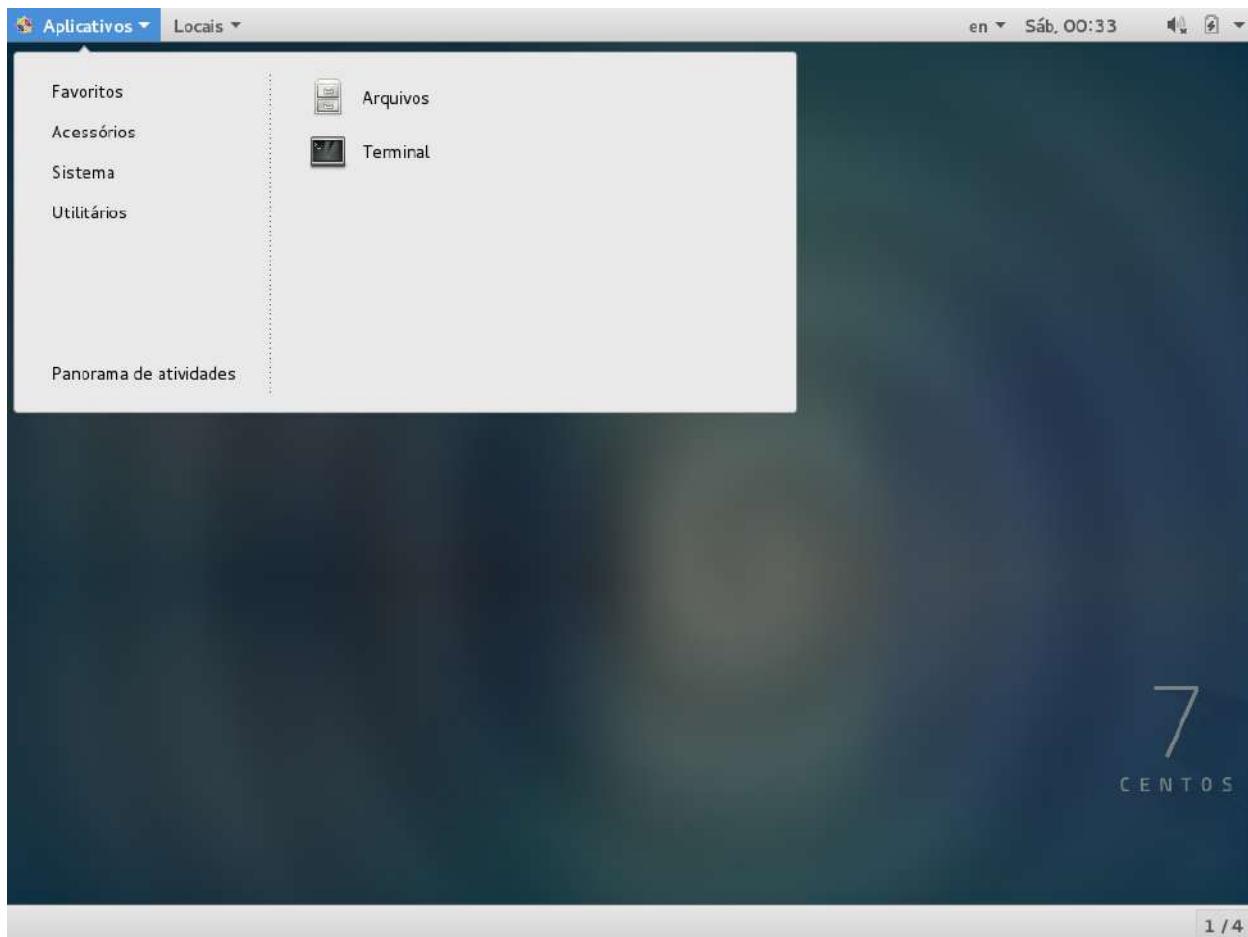

Abrindo o terminal


## Instalação e Configuração do Ecossistema Hadoop

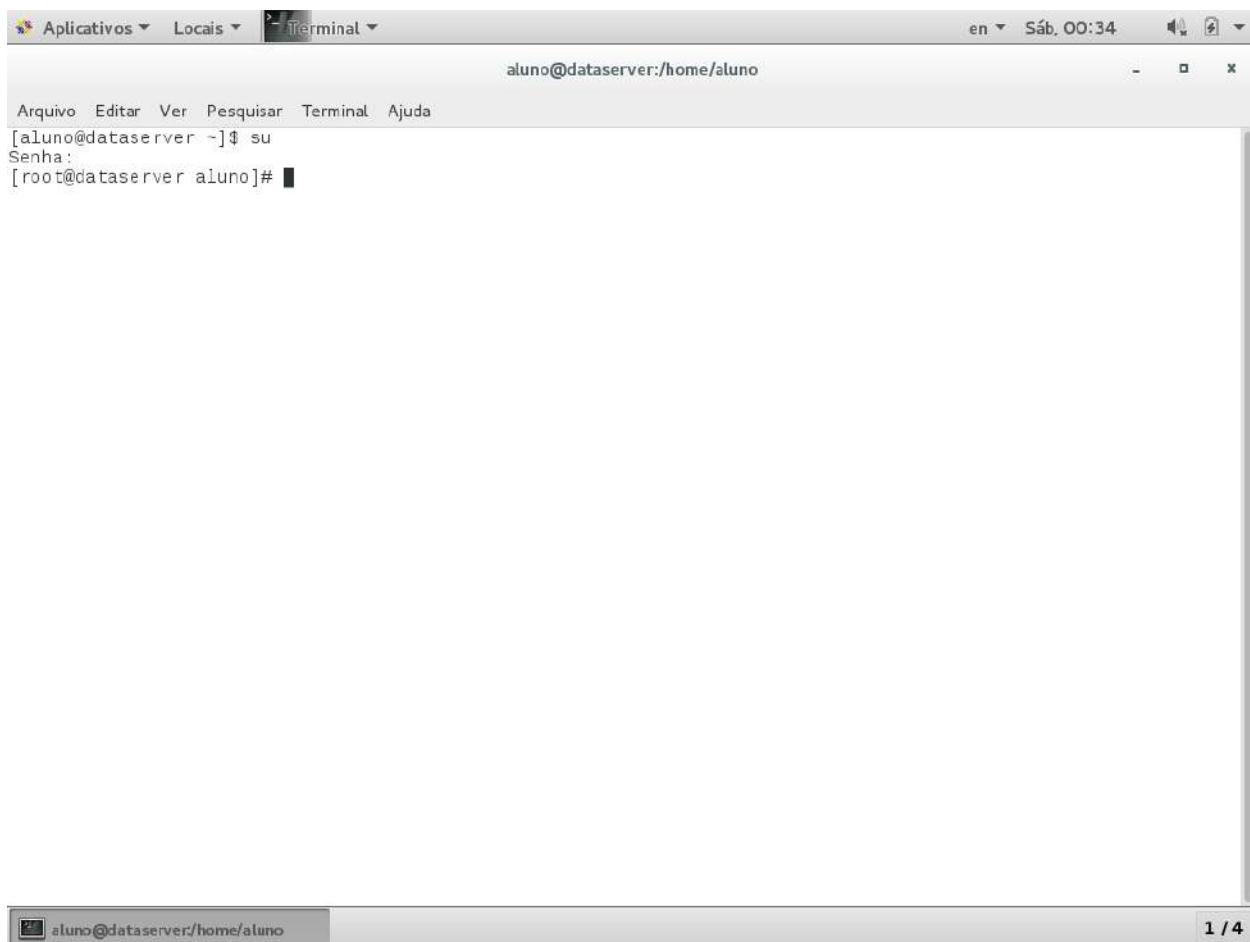

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:/home/aluno". The user has typed the command "[aluno@dataserver ~]\$ su" followed by their password "Senha:". The terminal shows the user has successfully switched to root mode, indicated by the "#>" prompt.

Efetuar login como root, usando o comando su. Senha: **dsahadoop**


## Instalação e Configuração do Ecossistema Hadoop

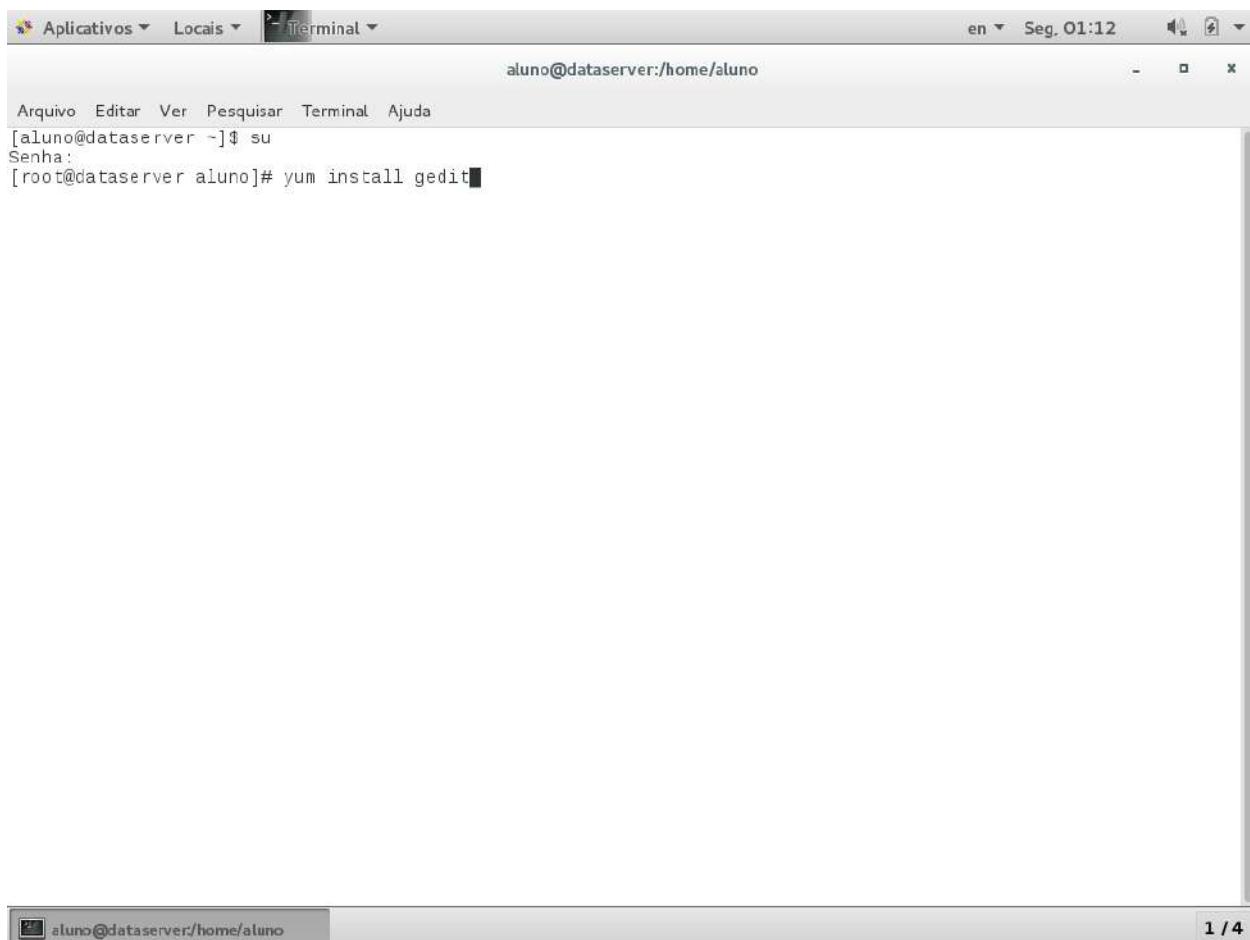

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:/home/aluno". The user has typed the command "[root@dataserver aluno]# yum install gedit" and is awaiting a response. The terminal interface includes a menu bar with "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The status bar at the bottom shows "aluno@dataserver:/home/aluno" and "1 / 4".

Instalar o editor de texto gedit, com o comando **yum install gedit**

## Instalação e Configuração do Ecossistema Hadoop

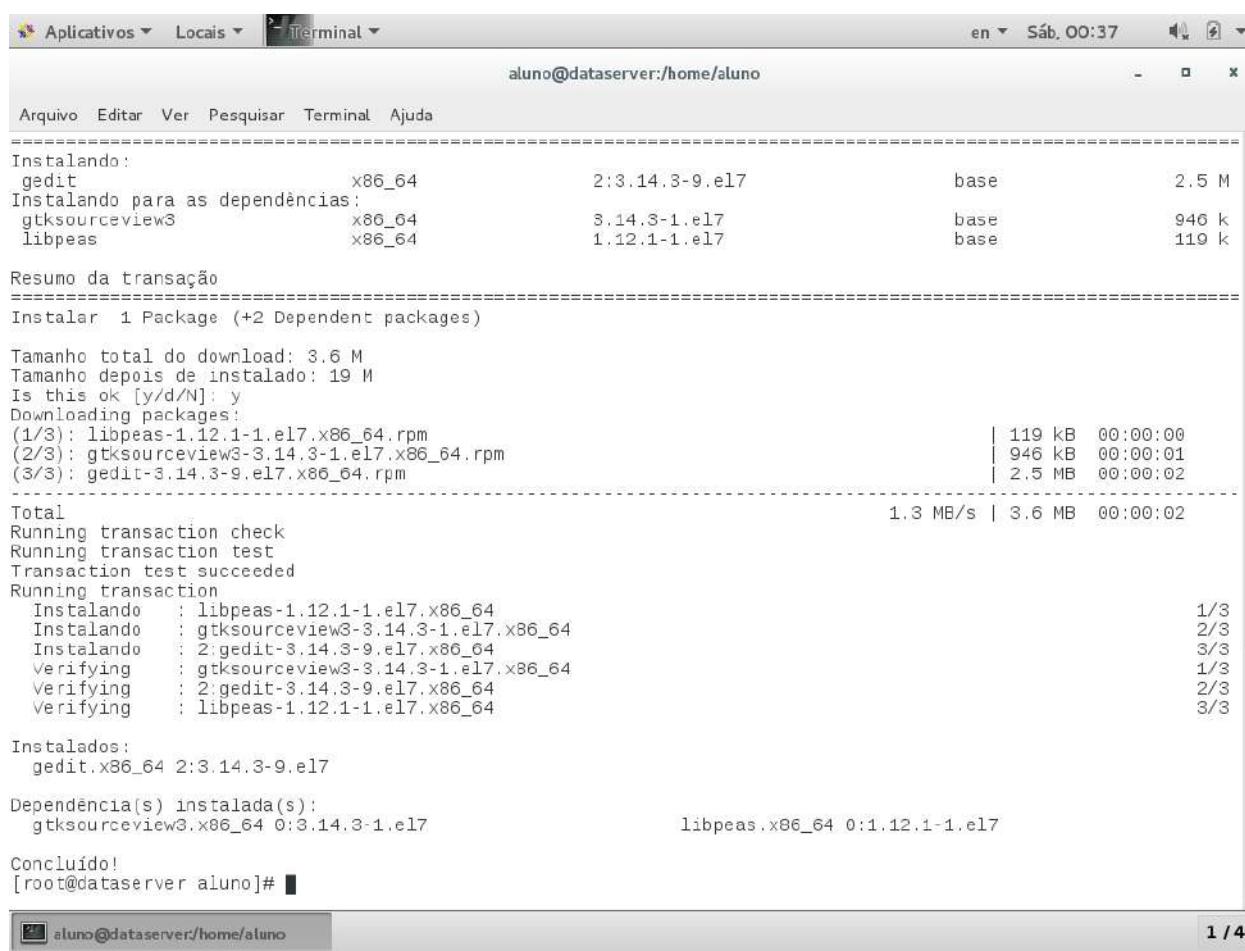

```

Aplicativos Locais Terminal
aluno@dataserver:/home/aluno
Arquivo Editar Ver Pesquisar Terminal Ajuda
=====
Instalando:
gedit           x86_64      2:3.14.3-9.el7          base       2.5 M
Instalando para as dependências:
gtksourceview3  x86_64      3.14.3-1.el7          base       946 k
libpeas         x86_64      1.12.1-1.el7          base       119 k
Resumo da transação
=====
Instalar 1 Package (+2 Dependent packages)

Tamanho total do download: 3.6 M
Tamanho depois de instalado: 19 M
Is this ok [y/d/N]: y
Downloading packages:
(1/3): libpeas-1.12.1-1.el7.x86_64.rpm | 119 kB 00:00:00
(2/3): gtksourceview3-3.14.3-1.el7.x86_64.rpm | 946 kB 00:00:01
(3/3): gedit-3.14.3-9.el7.x86_64.rpm | 2.5 MB 00:00:02
Total                                         1.3 MB/s | 3.6 MB 00:00:02

Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Instalando : libpeas-1.12.1-1.el7.x86_64          1/3
  Instalando : gtksourceview3-3.14.3-1.el7.x86_64    2/3
  Instalando : 2:gedit-3.14.3-9.el7.x86_64          3/3
  Verificando: gtksourceview3-3.14.3-1.el7.x86_64    1/3
  Verificando: 2:gedit-3.14.3-9.el7.x86_64          2/3
  Verificando: libpeas-1.12.1-1.el7.x86_64          3/3

Instalados:
  gedit.x86_64 2:3.14.3-9.el7

Dependência(s) instalada(s):
  gtksourceview3.x86_64 0:3.14.3-1.el7               libpeas.x86_64 0:1.12.1-1.el7


Concluido!
[root@dataserver aluno]# 

```

1 / 4

gedit instalado


## Instalação e Configuração do Ecossistema Hadoop

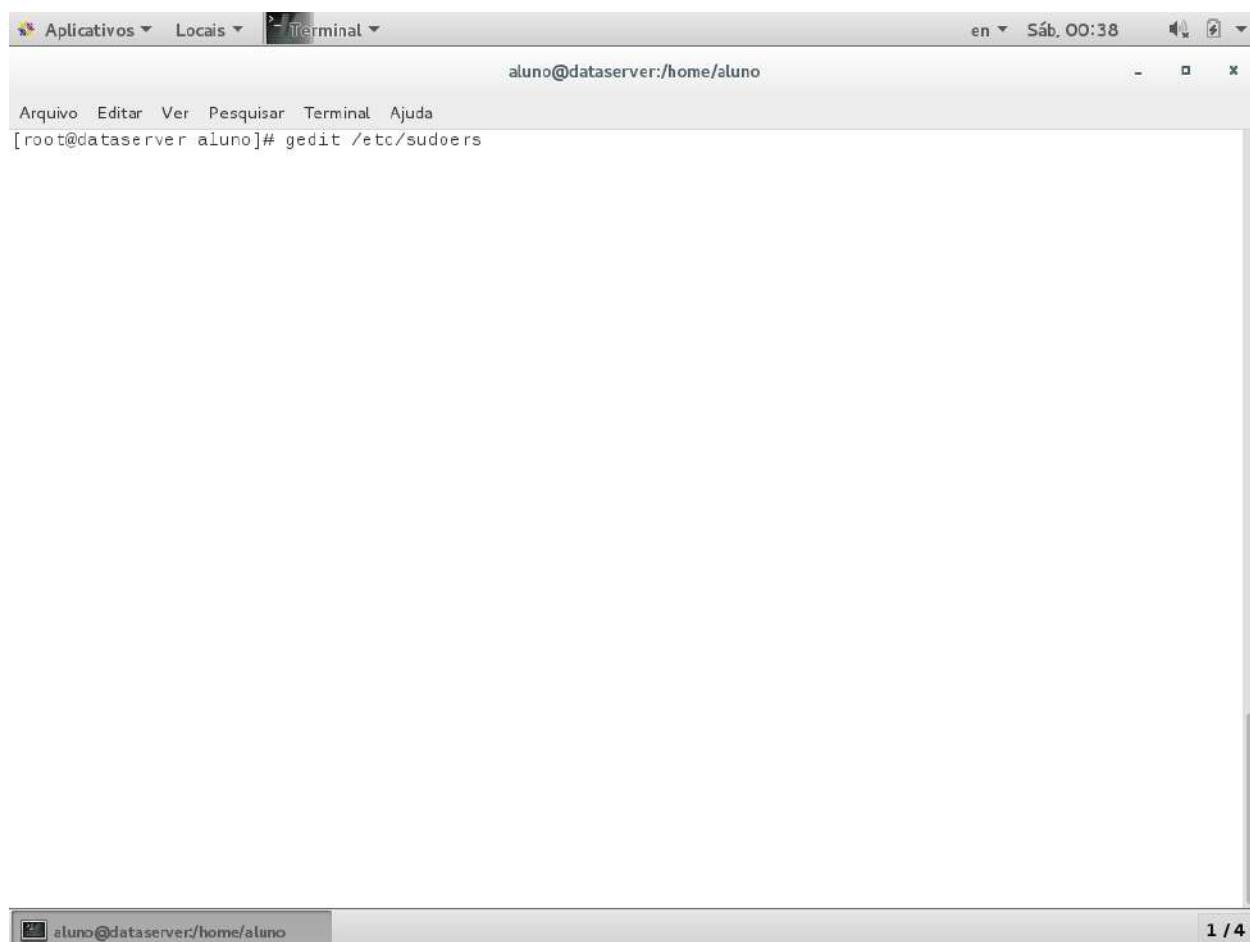

Editar o arquivo /etc/sudoers usando o gedit

1 / 4

## Instalação e Configuração do Ecossistema Hadoop

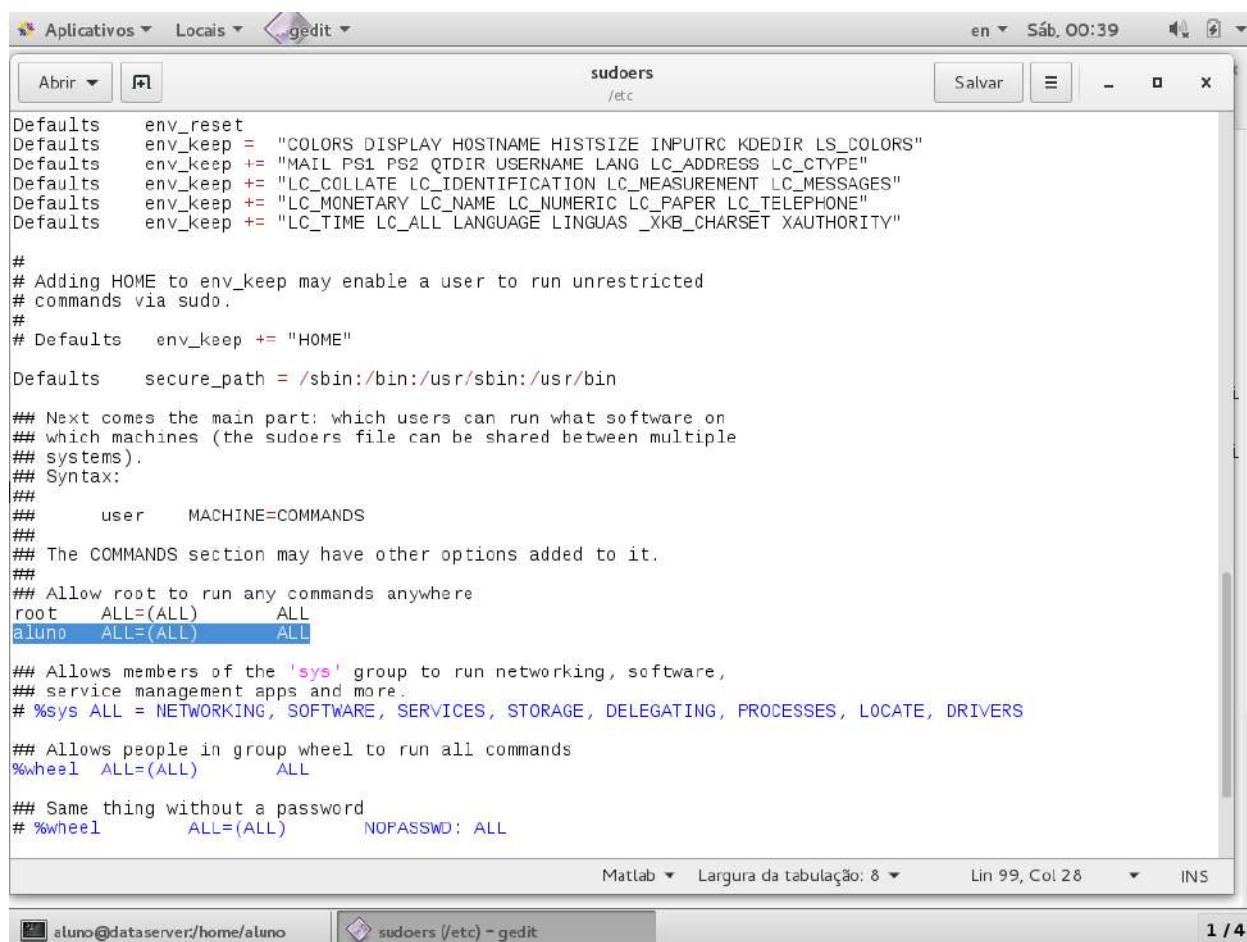

```

Defaults env_reset
Defaults env_keep = "COLORS DISPLAY HOSTNAME HISTSIZE INPUTRC KDEDIR LS_COLORS"
Defaults env_keep += "MAIL PS1 PS2 QTDIR USERNAME LANG LC_ADDRESS LC_CTYPE"
Defaults env_keep += "LC_COLLATE LC_IDENTIFICATION LC_MEASUREMENT LC_MESSAGES"
Defaults env_keep += "LC_MONETARY LC_NAME LC_NUMERIC LC_PAPER LC_TELEPHONE"
Defaults env_keep += "LC_TIME LC_ALL LANGUAGE LINGUAS _XKB_CHARSET XAUTHORITY"

#
# Adding HOME to env_keep may enable a user to run unrestricted
# commands via sudo.
#
# Defaults env_keep += "HOME"

Defaults secure_path = /sbin:/bin:/usr/sbin:/usr/bin

## Next comes the main part: which users can run what software on
## which machines (the sudoers file can be shared between multiple
## systems).
## Syntax:
##
##       user      MACHINE=COMMANDS
##
## The COMMANDS section may have other options added to it.
##
## Allow root to run any commands anywhere
root    ALL=(ALL)      ALL
aluno   ALL=(ALL)      ALL

## Allows members of the 'sys' group to run networking, software,
## service management apps and more.
# %sys  ALL = NETWORKING, SOFTWARE, SERVICES, STORAGE, DELEGATING, PROCESSES, LOCATE, DRIVERS

## Allows people in group wheel to run all commands
%wheel  ALL=(ALL)      ALL

## Same thing without a password
# %wheel      ALL=(ALL)      NOPASSWD: ALL


```

Matlab ▾ Largura da tabela: 8 ▾ Lin 99, Col 28 ▾ INS

aluno@dataserver:/home/aluno gedit /etc/sudoers 1 / 4

Incluir no arquivo a linha marcada acima e salvar o arquivo. Isso permitirá o usuário aluno executar comandos de administrador (root).

## Instalação e Configuração do Ecossistema Hadoop

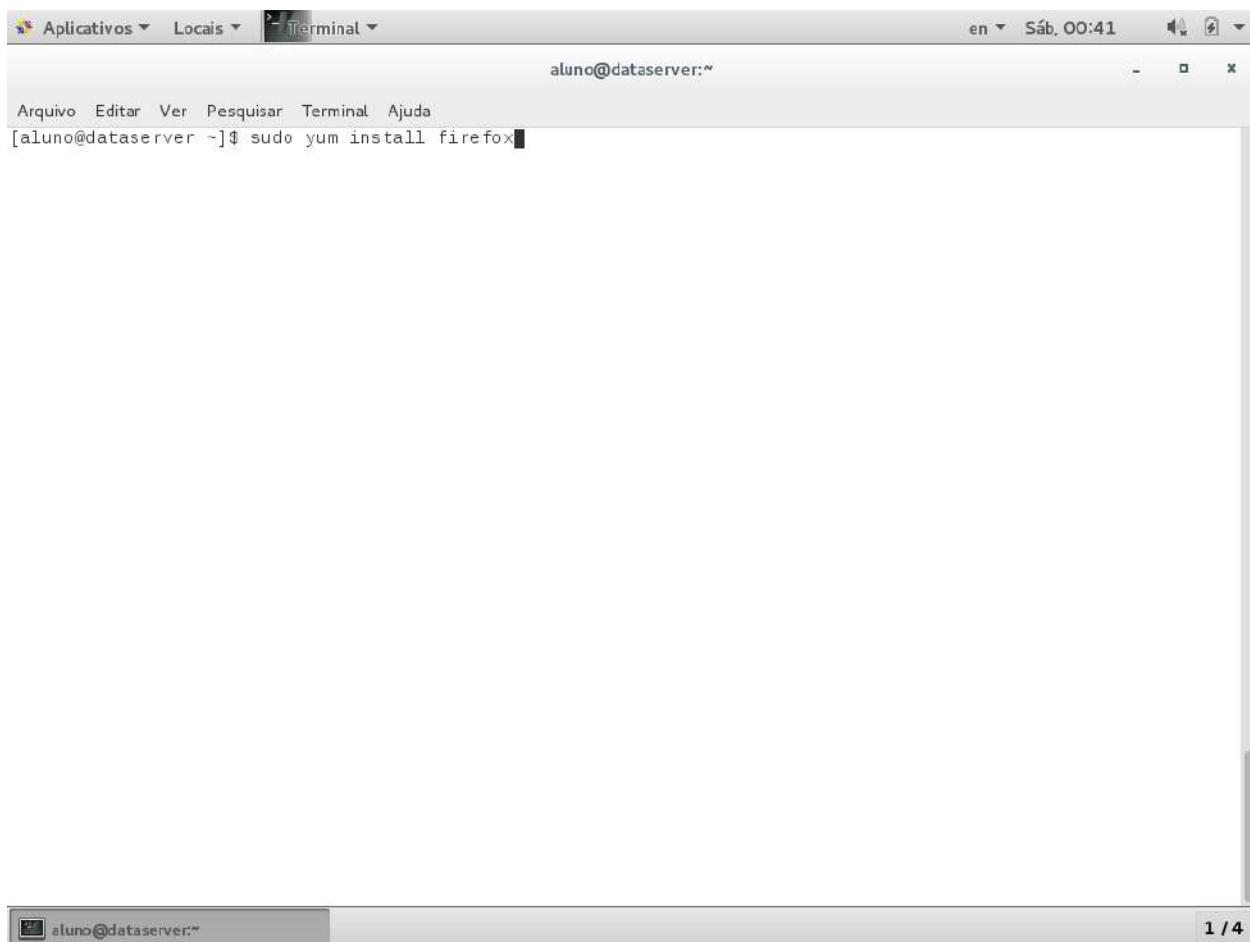

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". Below the prompt, the command "sudo yum install firefox" is visible. The desktop interface includes a menu bar with "Aplicativos", "Locais", and "Terminal". The status bar at the bottom shows "en" and "Sáb, 00:41". A small thumbnail of the terminal window is visible in the bottom-left corner of the desktop.

Conectado como usuário aluno, instalar o Firefox com o comando: **sudo yum install firefox**

## Instalação e Configuração do Ecossistema Hadoop

Aplicativos ▾ Locais ▾ Terminal ▾ aluno@dataserver:~

en ▾ Sáb, 00:45

```

Arquivo Editar Ver Pesquisar Terminal Ajuda
liberation-sans-fonts      noarch      1:1.07.2-15.el7      base      279 k
libvpx                      x86_64     1.3.0-5.el7_0       base      498 k

Resumo da transação
=====
Instalar 1 Package (+3 Dependent packages)

Tamanho total do download: 72 M
Tamanho depois de instalado: 133 M
Is this ok [y/d/N]: y
Downloading packages:
(1/4): centos-indexhtml-7-9.el7.centos.noarch.rpm | 92 kB 00:00:00
(2/4): liberation-sans-fonts-1.07.2-15.el7.noarch.rpm | 279 kB 00:00:00
(3/4): libvpx-1.3.0-5.el7_0.x86_64.rpm           | 498 kB 00:00:01
(4/4): firefox-38.6.0-1.el7.centos.x86_64.rpm    | 72 MB 00:00:25

Total                                         2.9 MB/s | 72 MB 00:00:25

Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Instalando : 1:liberation-sans-fonts-1.07.2-15.el7.noarch          1/4
  Instalando : centos-indexhtml-7-9.el7.centos.noarch                2/4
  Instalando : libvpx-1.3.0-5.el7_0.x86_64                         3/4
  Instalando : firefox-38.6.0-1.el7.centos.x86_64                  4/4
  Verifying  : libvpx-1.3.0-5.el7_0.x86_64                         1/4
  Verifying  : centos-indexhtml-7-9.el7.centos.noarch                2/4
  Verifying  : firefox-38.6.0-1.el7.centos.x86_64                  3/4
  Verifying  : 1:liberation-sans-fonts-1.07.2-15.el7.noarch          4/4

Instalados:
  firefox.x86_64 0:38.6.0-1.el7.centos


Dependência(s) instalada(s):
  centos-indexhtml.noarch 0:7-9.el7.centos          liberation-sans-fonts.noarch 1:1.07.2-15.el7
  libvpx.x86_64 0:1.3.0-5.el7_0

Concluido!
[aluno@dataserver ~]$
```

aluno@dataserver:~ 1 / 4


Instalação concluída

## Instalação e Configuração do Ecossistema Hadoop

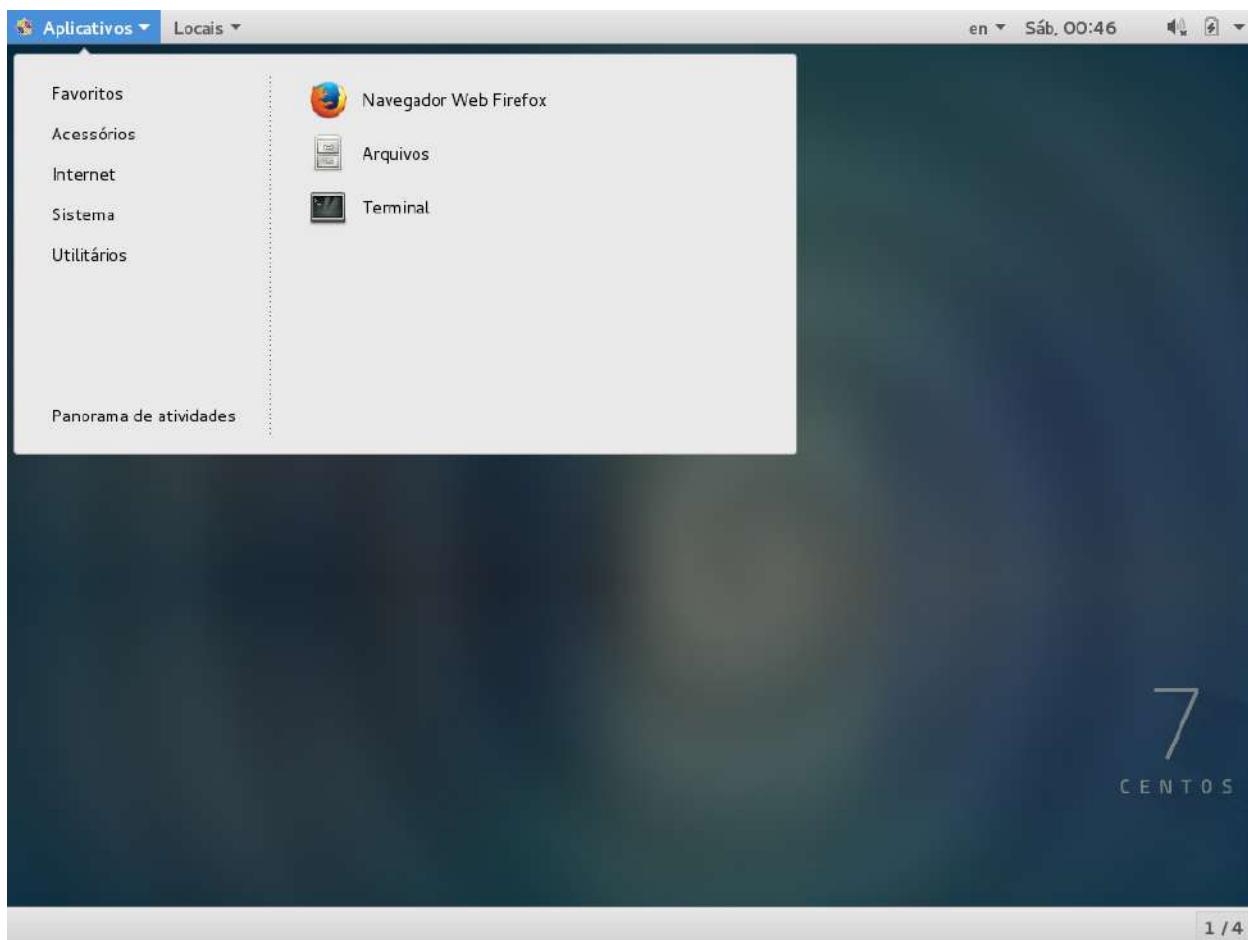

Firefox instalado

## Instalação e Configuração do Ecossistema Hadoop

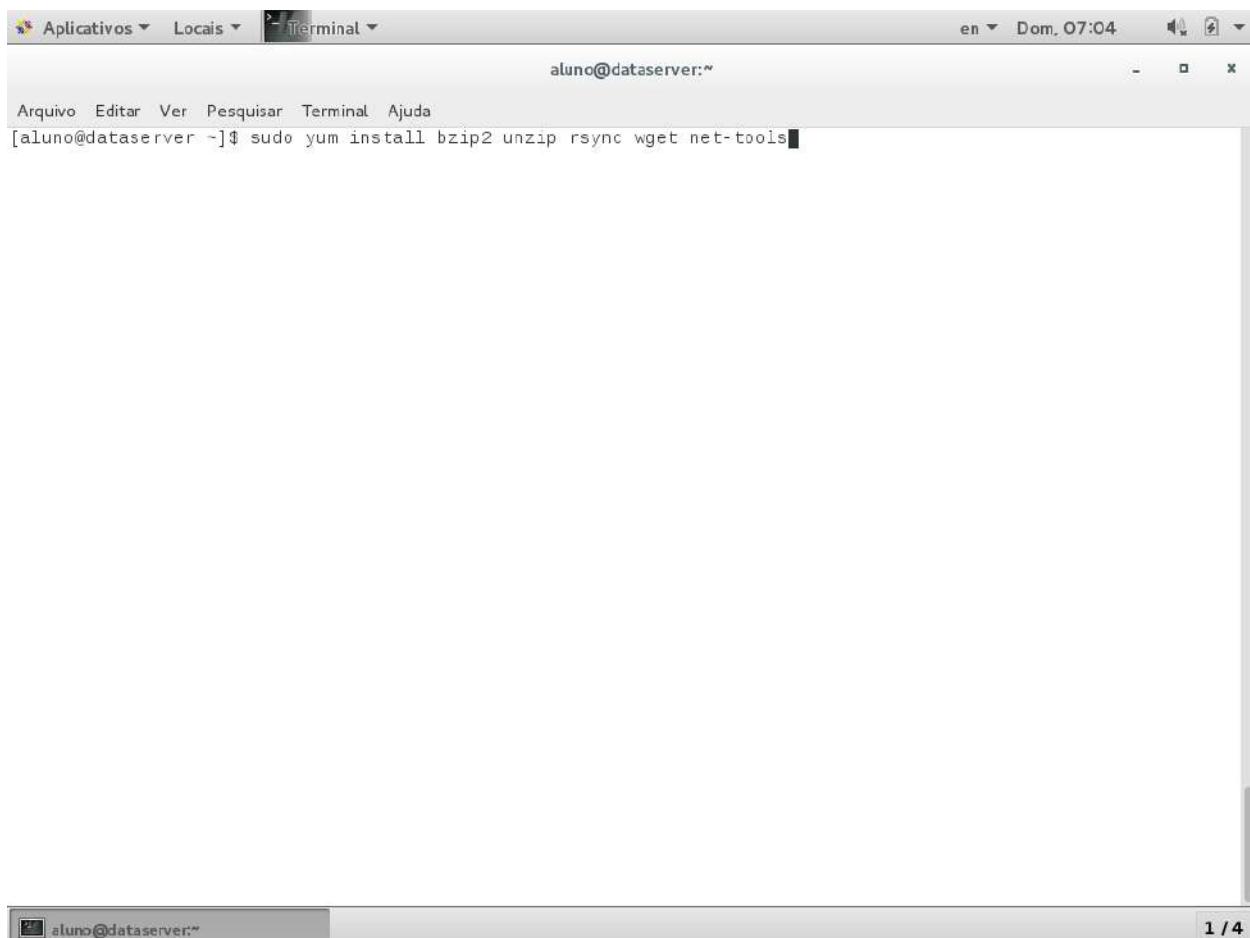

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". The user has typed the command "sudo yum install bzip2 unzip rsync wget net-tools" into the terminal. The window has a standard Linux window title bar with icons for application, location, and terminal, and status icons for language (en), date (Dom, 07:04), and volume. The bottom of the screen shows the desktop environment with a taskbar containing icons for the terminal and other applications.

Instalar outros aplicativos: bzip2, unzip, rsync, wget e net-tools

## Instalação e Configuração do Ecossistema Hadoop

**Alunos** Aplicativos Locais Terminal en Dom, 07:04

```
aluno@dataserver:~
```

Arquivo Editar Ver Pesquisar Terminal Ajuda

unzip	x86_64	6.0-15.el7	base	166 k
wget	x86_64	1.14-10.el7_0.1	base	545 k

Resumo da transação  
=====

Instalar 5 Packages


Tamanho total do download: 1.4 M  
Tamanho depois de instalado: 4.0 M  
Is this ok [y/d/N]: y  
Downloading packages:  
(1/5): bzip2-1.0.6-13.el7.x86\_64.rpm | 52 kB 00:00:00  
(2/5): wget-1.14-10.el7\_0.1.x86\_64.rpm | 545 kB 00:00:00  
(3/5): unzip-6.0-15.el7.x86\_64.rpm | 166 kB 00:00:00  
(4/5): net-tools-2.0-0.17.20131004git.el7.x86\_64.rpm | 304 kB 00:00:01  
(5/5): rsync-3.0.9-17.el7.x86\_64.rpm | 360 kB 00:00:02  
-----  
Total | 666 kB/s | 1.4 MB 00:00:02  
Running transaction check  
Running transaction test  
Transaction test succeeded  
Running transaction  
Instalando : bzip2-1.0.6-13.el7.x86\_64 1/5  
Instalando : net-tools-2.0-0.17.20131004git.el7.x86\_64 2/5  
Instalando : wget-1.14-10.el7\_0.1.x86\_64 3/5  
Instalando : rsync-3.0.9-17.el7.x86\_64 4/5  
Instalando : unzip-6.0-15.el7.x86\_64 5/5  
Verifying : unzip-6.0-15.el7.x86\_64 1/5  
Verifying : rsync-3.0.9-17.el7.x86\_64 2/5  
Verifying : wget-1.14-10.el7\_0.1.x86\_64 3/5  
Verifying : net-tools-2.0-0.17.20131004git.el7.x86\_64 4/5  
Verifying : bzip2-1.0.6-13.el7.x86\_64 5/5  
  
Instalados:  
bzip2.x86\_64 0:1.0.6-13.el7 net-tools.x86\_64 0:2.0-0.17.20131004git.el7 rsync.x86\_64 0:3.0.9-17.el7  
unzip.x86\_64 0:6.0-15.el7 wget.x86\_64 0:1.14-10.el7\_0.1  
  
Concluido!  
[aluno@dataserver ~]\$

aluno@dataserver:~ 1 / 4

### Aplicativos instalados

## 2.4. Instalação do MySQL

A instalação do MySQL pode ser feita via linha de comando com o seguinte procedimento:

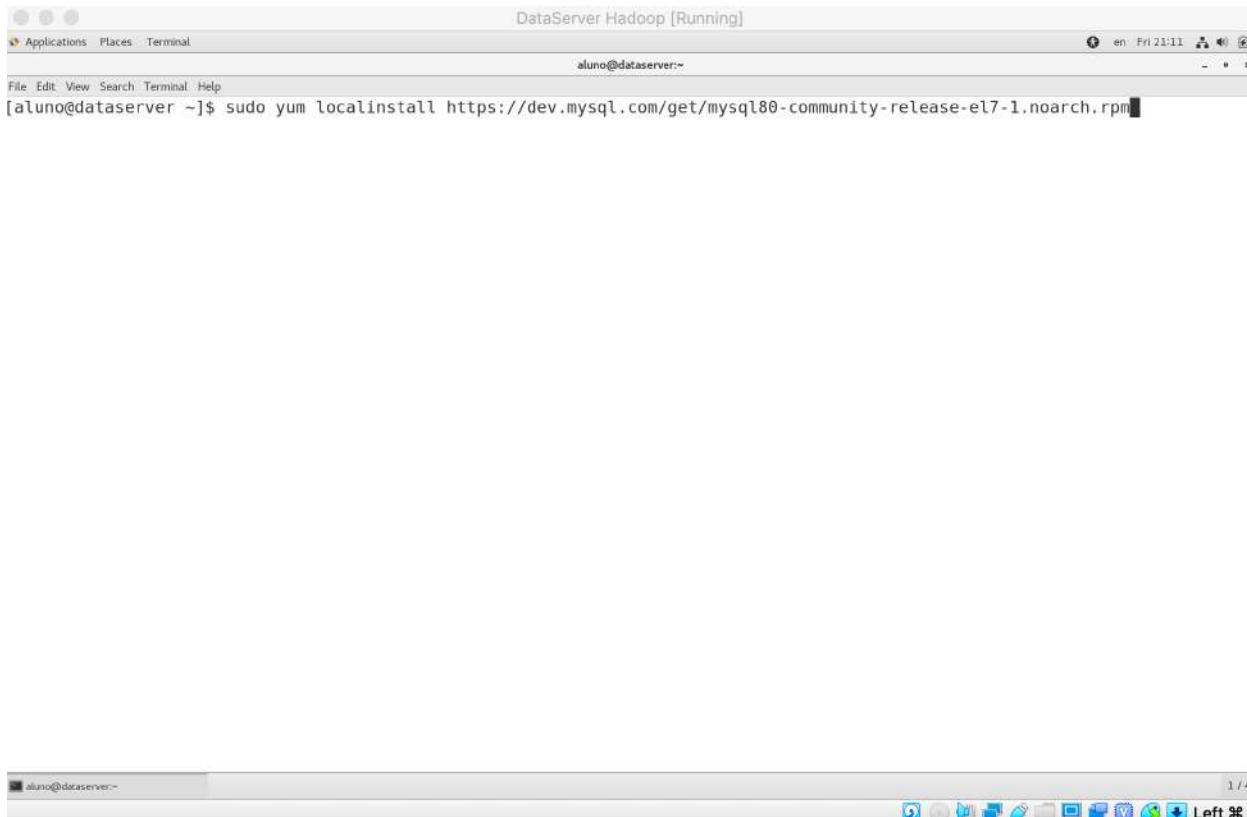

```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ sudo yum localinstall https://dev.mysql.com/get/mysql80-community-release-el7-1.noarch.rpm
```

Execute o comando abaixo para baixar o pacote de instalação do MySQL para o CentOS:


```
sudo yum localinstall https://dev.mysql.com/get/mysql80-community-release-el7-1.noarch.rpm
```

## Instalação e Configuração do Ecossistema Hadoop

aluno@dataserver [~]\$ sudo yum localinstall https://dev.mysql.com/get/mysql80-community-release-el7-1.noarch.rpm  
[sudo] password for aluno:  
Loaded plugins: fastestmirror, langpacks  
mysql80-community-release-el7-1.noarch.rpm | 25 kB 00:00:00  
Examining /var/tmp/yum-root-MYqprl/mysql80-community-release-el7-1.noarch.rpm: mysql80-community-release-el7-1.noarch  
Marking /var/tmp/yum-root-MYqprl/mysql80-community-release-el7-1.noarch.rpm to be installed  
Resolving Dependencies  
--> Running transaction check  
--> Package mysql80-community-release.noarch 0:el7-1 will be installed  
--> Finished Dependency Resolution  
Dependencies Resolved  
=====  
Package Arch Version Repository Size  
=====  
Installing:  
mysql80-community-release noarch el7-1 /mysql80-community-release-el7-1.noarch 31 k  
Transaction Summary  
=====  
Install 1 Package  
Total size: 31 k  
Installed size: 31 k  
Is this ok [y/d/N]:

Pressione y

## Instalação e Configuração do Ecossistema Hadoop

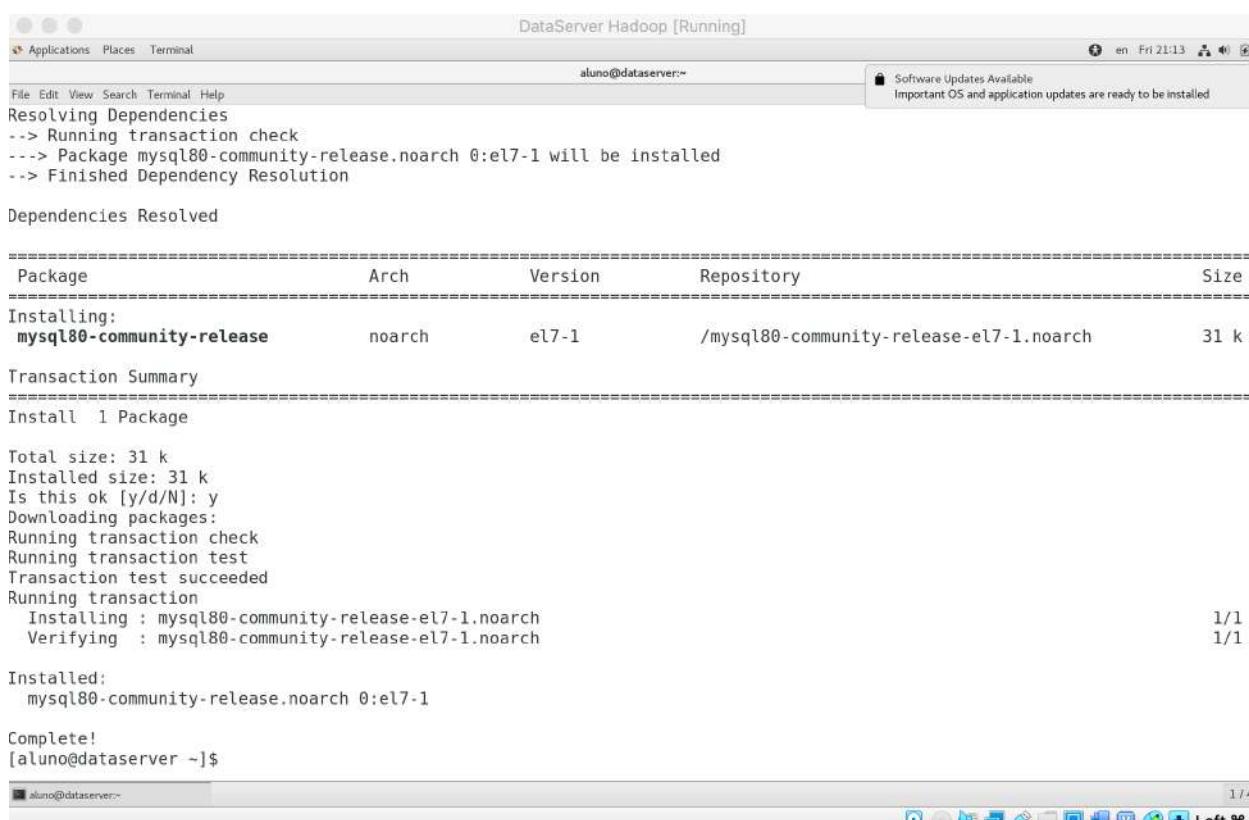

```

DataServer Hadoop [Running]
aluno@dataserver:~ Software Updates Available
File Edit View Search Terminal Help
Resolving Dependencies
--> Running transaction check
--> Package mysql80-community-release.noarch 0:el7-1 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package           Arch      Version       Repository   Size
=====
Installing:
mysql80-community-release    noarch    el7-1        /mysql80-community-release-el7-1.noarch 31 k

Transaction Summary
=====
Install 1 Package

Total size: 31 k
Installed size: 31 k
Is this ok [y/d/N]: y
Downloading packages:
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : mysql80-community-release-el7-1.noarch          1/1
  Verifying  : mysql80-community-release-el7-1.noarch          1/1


Installed:
  mysql80-community-release.noarch 0:el7-1

Complete!
[aluno@dataserver ~]$

```

Download do pacote concluído

## Instalação e Configuração do Ecossistema Hadoop

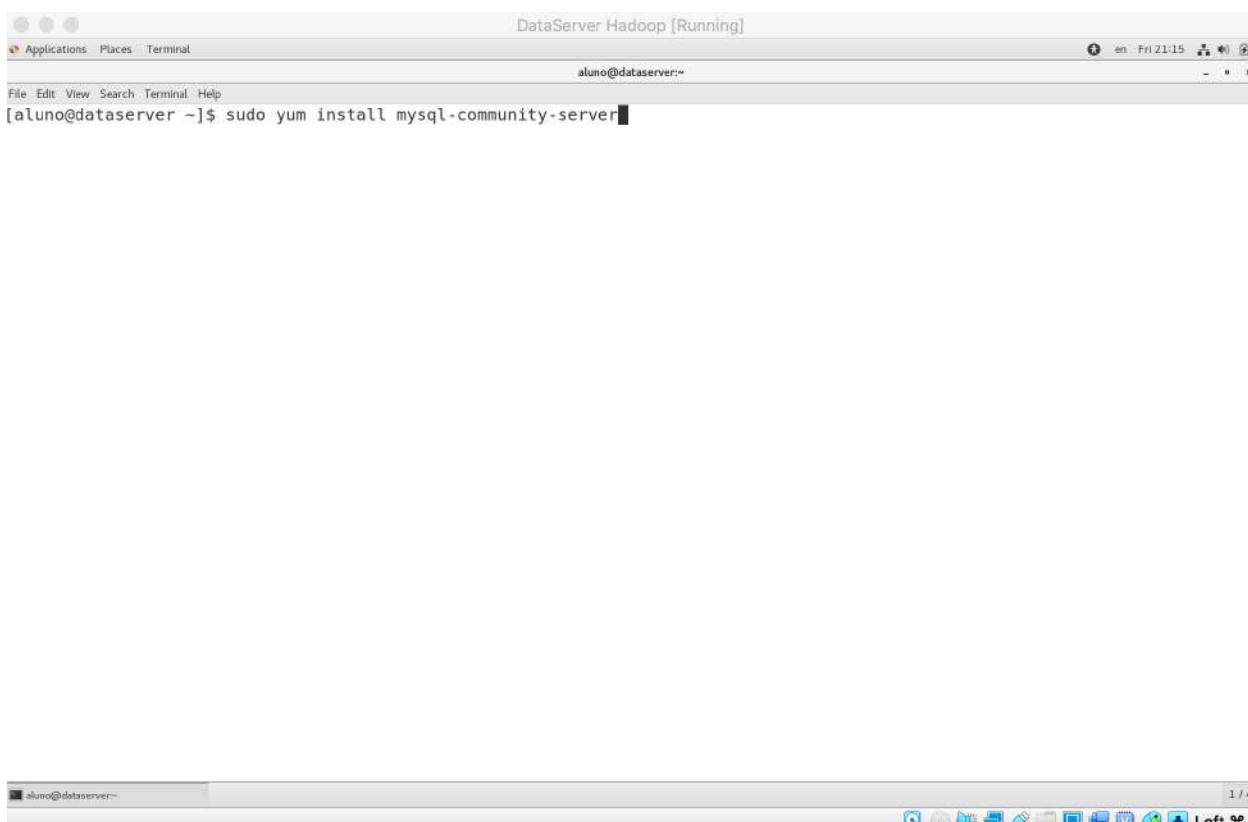

The screenshot shows a terminal window titled "DataServer Hadoop [Running]". The window has a standard Linux desktop interface with icons for Applications, Places, and Terminal at the top. The status bar at the bottom right shows "en Fri 21:15". The terminal itself has a light gray background and a dark gray border. It displays the command "[aluno@dataserver ~]\$ sudo yum install mysql-community-server" in white text. The cursor is positioned after the command. Below the terminal window, there is a dock with various application icons.

Esse comando inicia a instalação do MySQL:

```
sudo yum install mysql-community-server
```

## Instalação e Configuração do Ecossistema Hadoop

```

DataServer Hadoop [Running]
aluno@dataserver:~>

File Edit View Search Terminal Help
--> Package mysql-community-client.x86_64 0:8.0.16-2.el7 will be installed
--> Processing Dependency: mysql-community-libs(x86-64) >= 8.0.11 for package: mysql-community-client-8.0.16-2.el7.x86_64
--> Package mysql-community-common.x86_64 0:8.0.16-2.el7 will be installed
--> Running transaction check
--> Package mariadb-libs.x86_64 1:5.5.60-1.el7_5 will be obsoleted
--> Processing Dependency: libmysqlclient.so.18()(64bit) for package: 2:postfix-2.10.1-7.el7.x86_64
--> Processing Dependency: libmysqlclient.so.18(libmysqlclient_18)(64bit) for package: 2:postfix-2.10.1-7.el7.x86_64
--> Package mysql-community-libs.x86_64 0:8.0.16-2.el7 will be obsoleting
--> Running transaction check
--> Package mysql-community-libs-compat.x86_64 0:8.0.16-2.el7 will be obsoleting
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package           Arch      Version            Repository        Size
=====
Installing:
mysql-community-libs      x86_64    8.0.16-2.el7      mysql80-community   3.0 M
  replacing mariadb-libs.x86_64 1:5.5.60-1.el7_5
mysql-community-libs-compat x86_64    8.0.16-2.el7      mysql80-community   2.1 M
  replacing mariadb-libs.x86_64 1:5.5.60-1.el7_5
mysql-community-server     x86_64    8.0.16-2.el7      mysql80-community   403 M
Installing for dependencies:
mysql-community-client     x86_64    8.0.16-2.el7      mysql80-community   32 M
mysql-community-common     x86_64    8.0.16-2.el7      mysql80-community   575 k

Transaction Summary
=====
Install 3 Packages (+2 Dependent packages)

Total download size: 441 M
Is this ok [y/d/N]: 

aluno@dataserver:~
```

Pressione y

## Instalação e Configuração do Ecossistema Hadoop

```

  Applications Places Terminal
  aluno@dataserver:~ Fri 21:18
  File Edit View Search Terminal Help
  Fingerprint: a4a9 4068 76fc bd3c 4567 70c8 8c71 8d3b 5072 e1f5
  Package      : mysql80-community-release-el7-1.noarch (installed)
  From        : /etc/pki/rpm-gpg/RPM-GPG-KEY-mysql
  Is this ok [y/N]: y
  Running transaction check
  Running transaction test
  Transaction test succeeded
  Running transaction
    Installing : mysql-community-common-8.0.16-2.el7.x86_64          1/6
    Installing : mysql-community-libs-8.0.16-2.el7.x86_64          2/6
    Installing : mysql-community-client-8.0.16-2.el7.x86_64         3/6
    Installing : mysql-community-server-8.0.16-2.el7.x86_64         4/6
    Installing : mysql-community-libs-compat-8.0.16-2.el7.x86_64      5/6
    Erasing   : 1:mariadb-libs-5.5.60-1.el7_5.x86_64          6/6
    Verifying  : mysql-community-libs-8.0.16-2.el7.x86_64          1/6
    Verifying  : mysql-community-libs-compat-8.0.16-2.el7.x86_64      2/6
    Verifying  : mysql-community-client-8.0.16-2.el7.x86_64         3/6
    Verifying  : mysql-community-common-8.0.16-2.el7.x86_64         4/6
    Verifying  : mysql-community-server-8.0.16-2.el7.x86_64         5/6
    Verifying  : 1:mariadb-libs-5.5.60-1.el7_5.x86_64          6/6

  Installed:
    mysql-community-libs.x86_64 0:8.0.16-2.el7           mysql-community-libs-compat.x86_64 0:8.0.16-2.el7
    mysql-community-server.x86_64 0:8.0.16-2.el7


  Dependency Installed:
    mysql-community-client.x86_64 0:8.0.16-2.el7           mysql-community-common.x86_64 0:8.0.16-2.el7

  Replaced:
    mariadb-libs.x86_64 1:5.5.60-1.el7_5

  Complete!
  [aluno@dataserver ~]$ 
  
```

Instalação concluída

## Instalação e Configuração do Ecossistema Hadoop

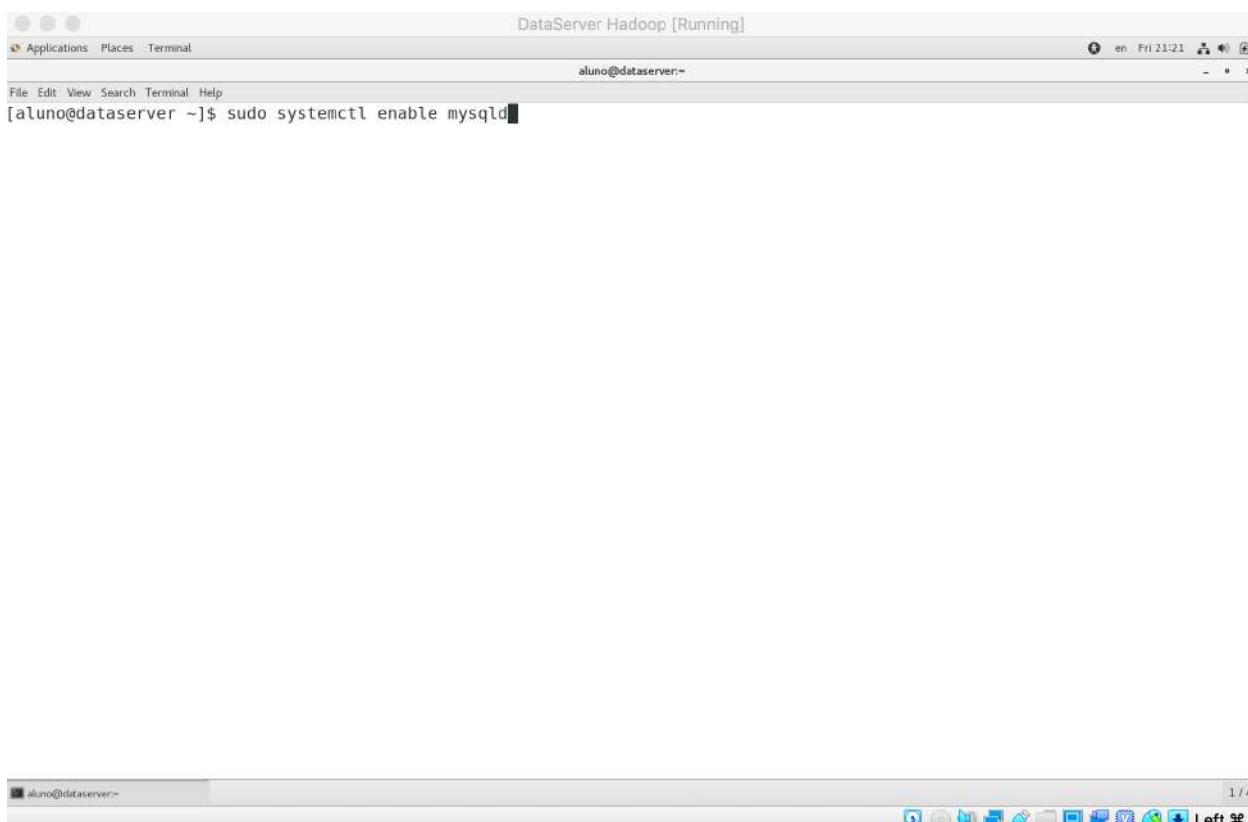


```
[aluno@dataserver ~]$ sudo systemctl enable mysqld
```

Ativando o serviço do MySQL

`sudo systemctl enable mysqld`

## Instalação e Configuração do Ecossistema Hadoop

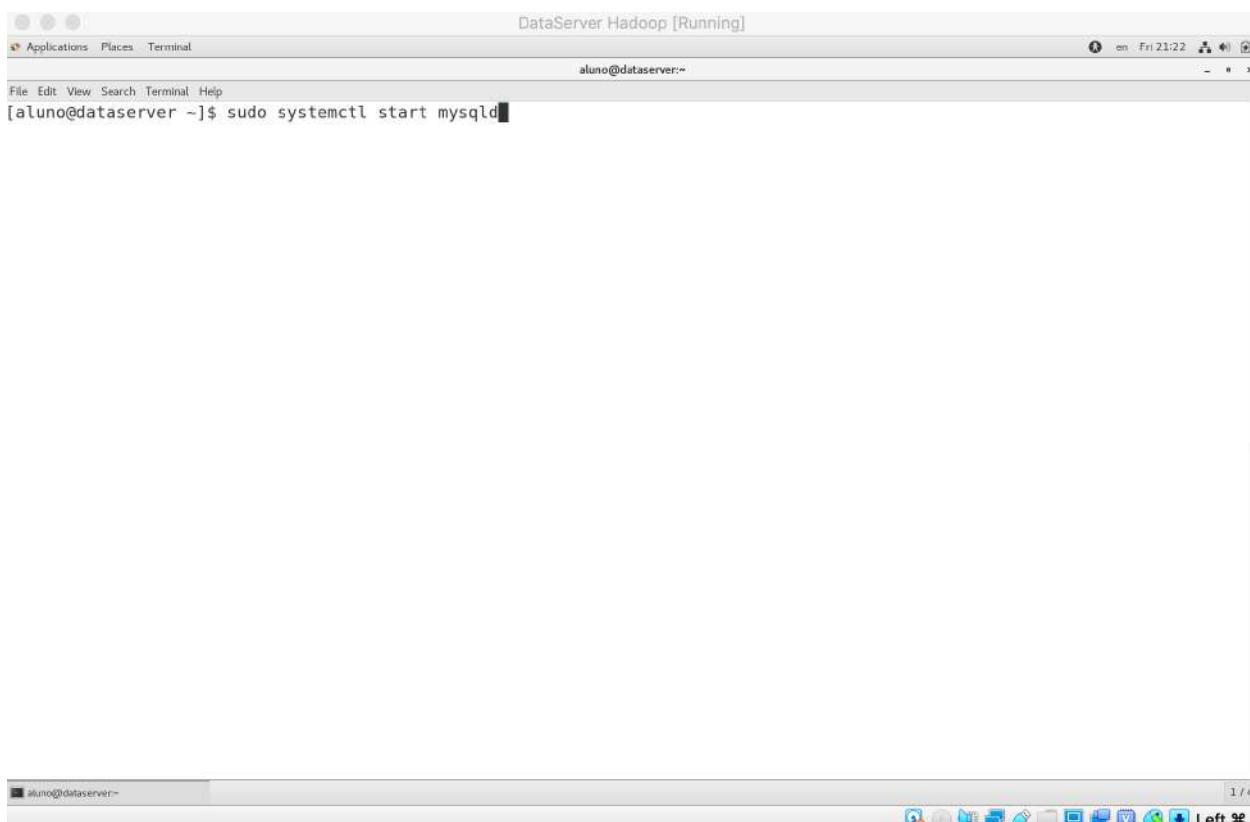


```
[aluno@dataserver ~]$ sudo systemctl start mysqld
```

Inicia o MySQL

`sudo systemctl start mysqld`

## Instalação e Configuração do Ecossistema Hadoop

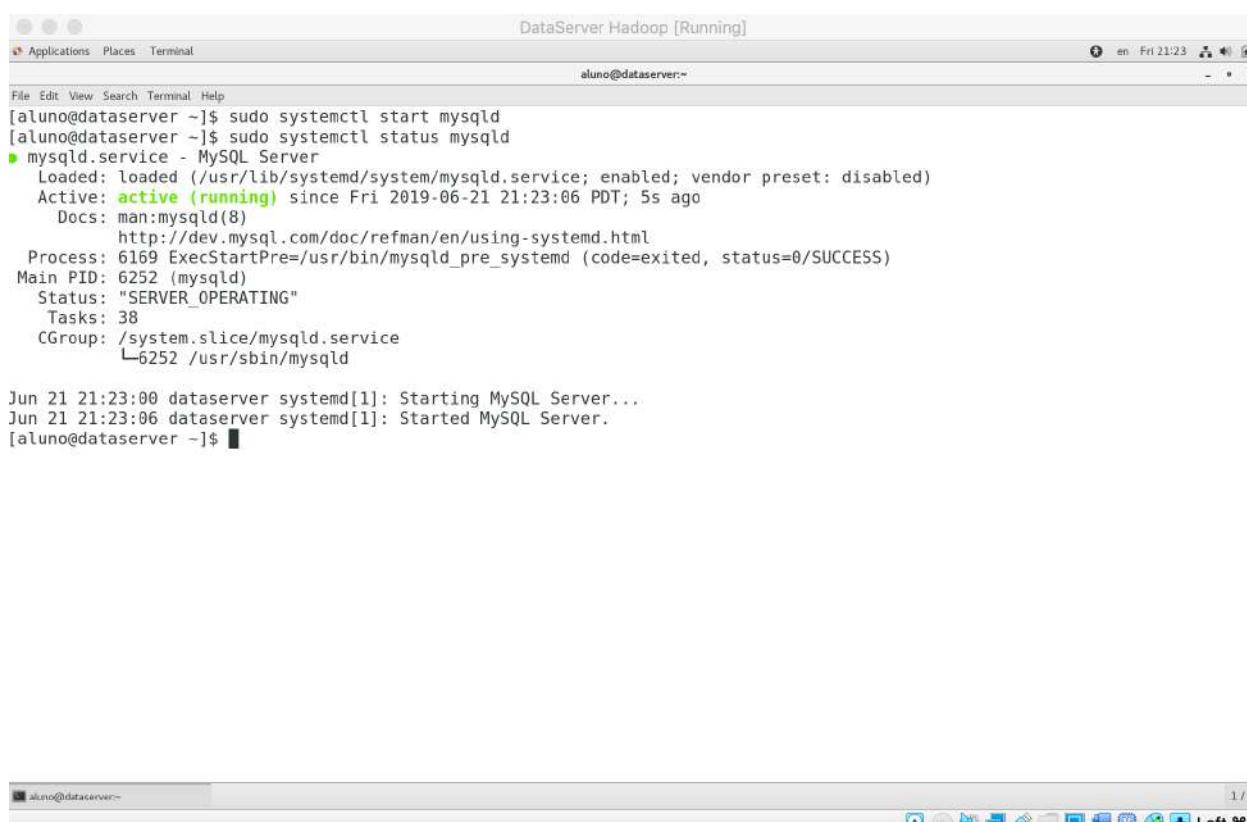


```
DataServer Hadoop [Running]
aluno@dataserver:~$ sudo systemctl start mysqld
[aluno@dataserver ~]$ sudo systemctl status mysqld
● mysqld.service - MySQL Server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled; vendor preset: disabled)
   Active: active (running) since Fri 2019-06-21 21:23:06 PDT; 5s ago
     Docs: man:mysqld(8)
           http://dev.mysql.com/doc/refman/en/using-systemd.html
  Process: 6169 ExecStartPre=/usr/bin/mysql_pre_systemd (code=exited, status=0/SUCCESS)
 Main PID: 6252 (mysqld)
   Status: "SERVER_OPERATING"
    Tasks: 38
   CGroup: /system.slice/mysqld.service
           └─6252 /usr/sbin/mysqld

Jun 21 21:23:00 dataserver systemd[1]: Starting MySQL Server...
Jun 21 21:23:06 dataserver systemd[1]: Started MySQL Server.
[aluno@dataserver ~]$
```


MySQL em execução

### 3. Instalação do servidor ssh

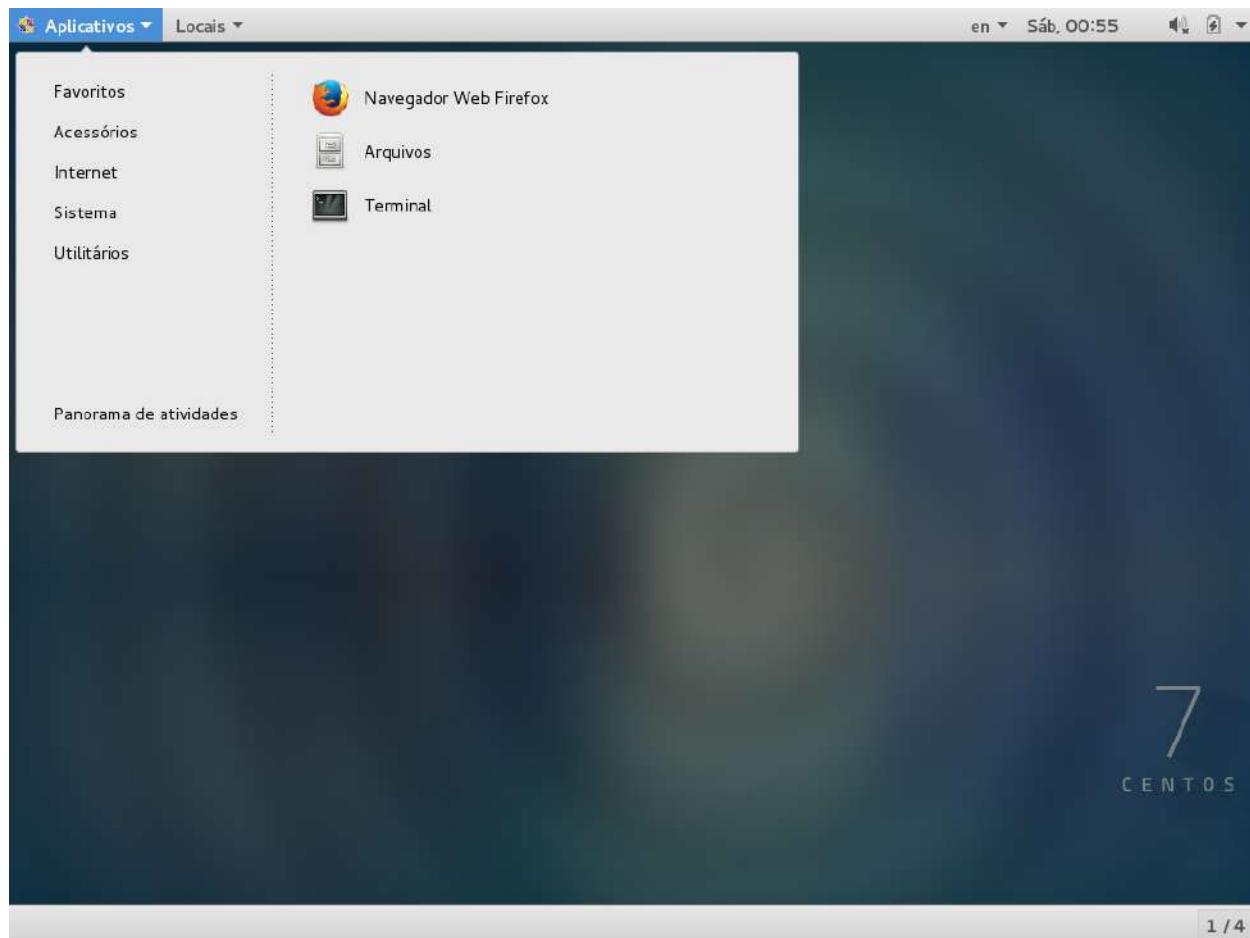

Abrindo o terminal

## Instalação e Configuração do Ecossistema Hadoop

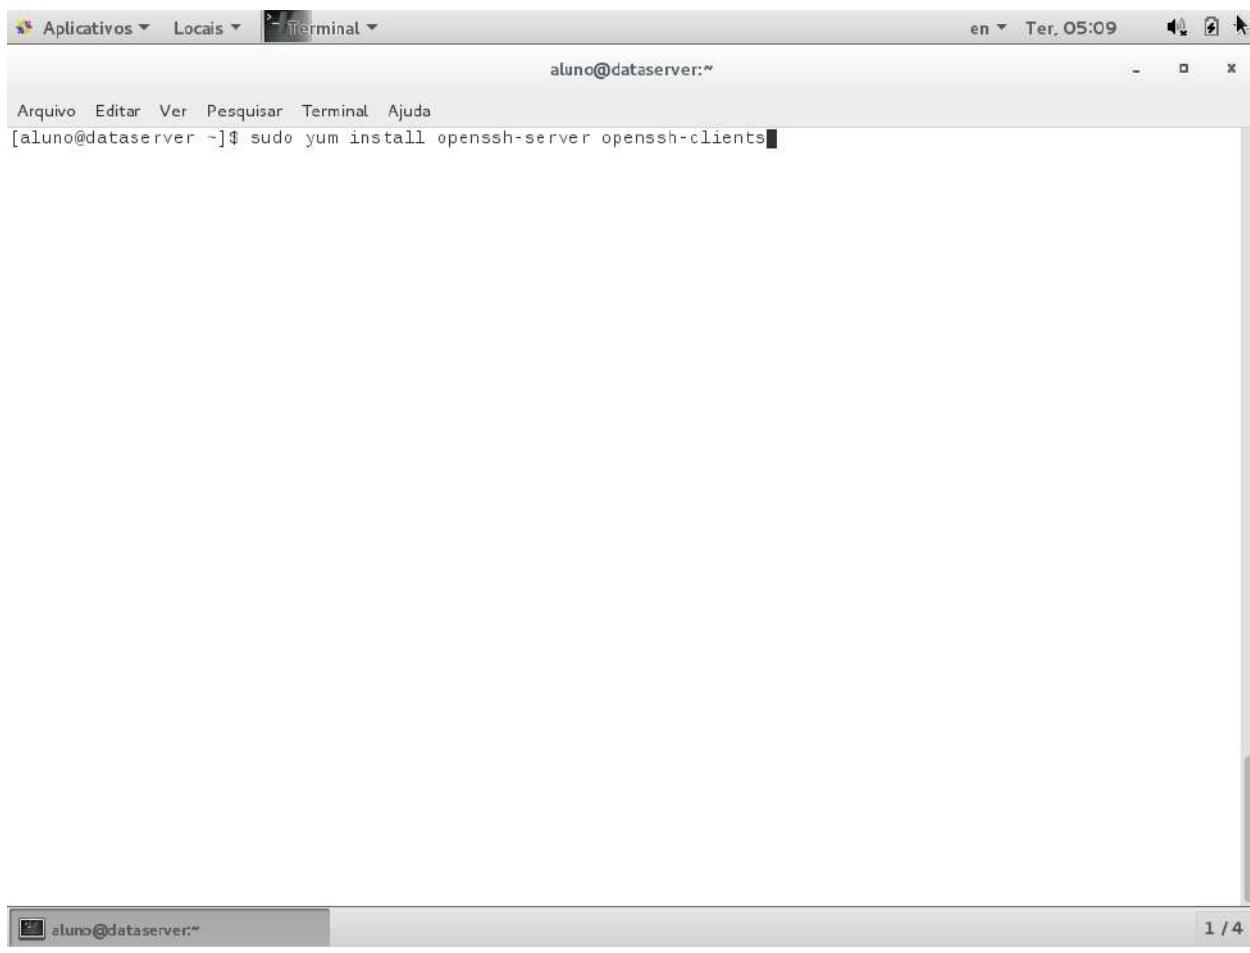

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". Below the prompt, the command "sudo yum install openssh-server openssh-clients" is visible. The window has standard Linux window controls (minimize, maximize, close) at the top right. The background shows other application icons in the dock.

sudo yum install openssh-server openssh-clients

## Instalação e Configuração do Ecossistema Hadoop

Aplicativos ▾ Locais ▾ Terminal ▾ en ▾ Ter, 05:10

aluno@dataserver:~

Arquivo Editar Ver Pesquisar Terminal Ajuda

Resumo da transação

=====
 Upgrade 2 Packages (+1 Dependent package)

```
Tamanho total do download: 1.5 M
Is this ok [y/d/N]: y
Downloading packages:
Delta RPMs disabled because /usr/bin/applydeltarpm not installed.
(1/3): openssh-6.6.1p1-23.el7_2.x86_64.rpm | 435 kB 00:00:00
(2/3): openssh-server-6.6.1p1-23.el7_2.x86_64.rpm | 436 kB 00:00:01
(3/3): openssh-clients-6.6.1p1-23.el7_2.x86_64.rpm | 639 kB 00:00:02
-----
Total                                         598 kB/s | 1.5 MB 00:00:02

Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Atualizando : openssh-6.6.1p1-23.el7_2.x86_64          1/6
  Atualizando : openssh-server-6.6.1p1-23.el7_2.x86_64    2/6
  Atualizando : openssh-clients-6.6.1p1-23.el7_2.x86_64   3/6
  Limpeza      : openssh-clients-6.6.1p1-22.el7.x86_64   4/6
  Limpeza      : openssh-server-6.6.1p1-22.el7.x86_64    5/6
  Limpeza      : openssh-6.6.1p1-22.el7.x86_64          6/6
  Verificando : openssh-server-6.6.1p1-23.el7_2.x86_64   1/6
  Verificando : openssh-clients-6.6.1p1-23.el7_2.x86_64  2/6
  Verificando : openssh-6.6.1p1-23.el7_2.x86_64          3/6
  Verificando : openssh-clients-6.6.1p1-22.el7.x86_64    4/6
  Verificando : openssh-6.6.1p1-22.el7.x86_64          5/6
  Verificando : openssh-server-6.6.1p1-22.el7.x86_64    6/6

Atualizados:
  openssh-clients.x86_64 0:6.6.1p1-23.el7_2           openssh-server.x86_64 0:6.6.1p1-23.el7_2

Dependência(s) atualizada(s):
  openssh.x86_64 0:6.6.1p1-23.el7_2


Concluído!
[aluno@dataserver ~]$
```

aluno@dataserver:~

1 / 4

Concluído

## Instalação e Configuração do Ecossistema Hadoop

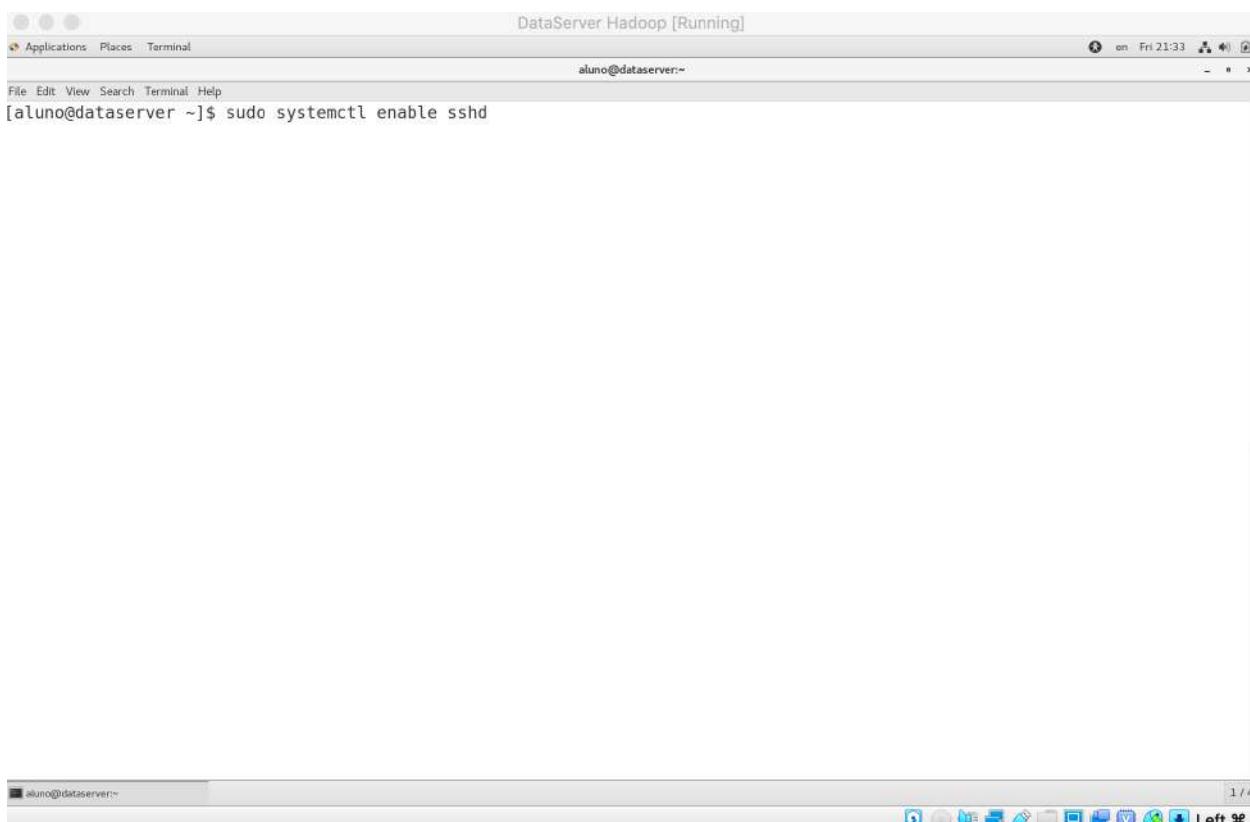


```
[aluno@dataserver ~]$ sudo systemctl enable sshd
```

Habilitando o serviço

**sudo systemctl enable sshd**

## Instalação e Configuração do Ecossistema Hadoop

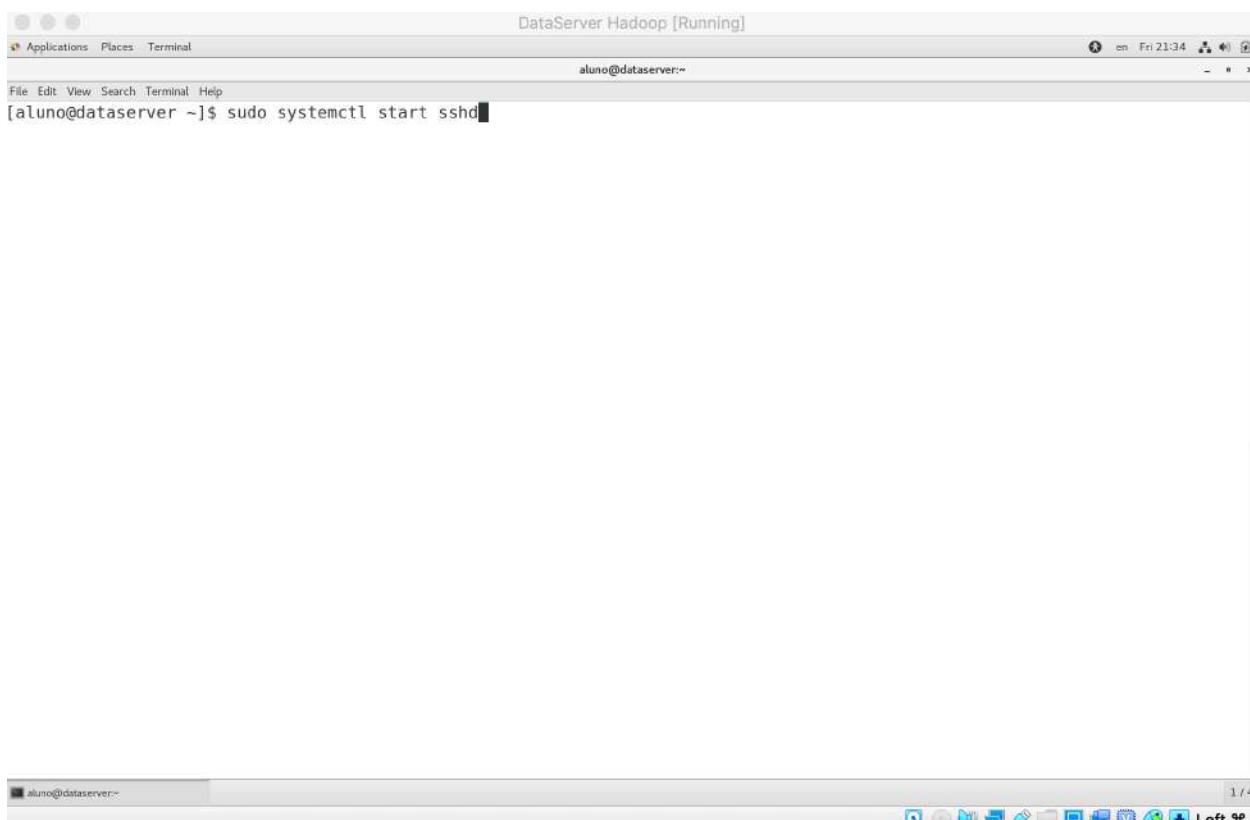


```
aluno@dataserver ~]$ sudo systemctl start sshd
```

Iniciando o serviço

`sudo systemctl start sshd`

## Instalação e Configuração do Ecossistema Hadoop

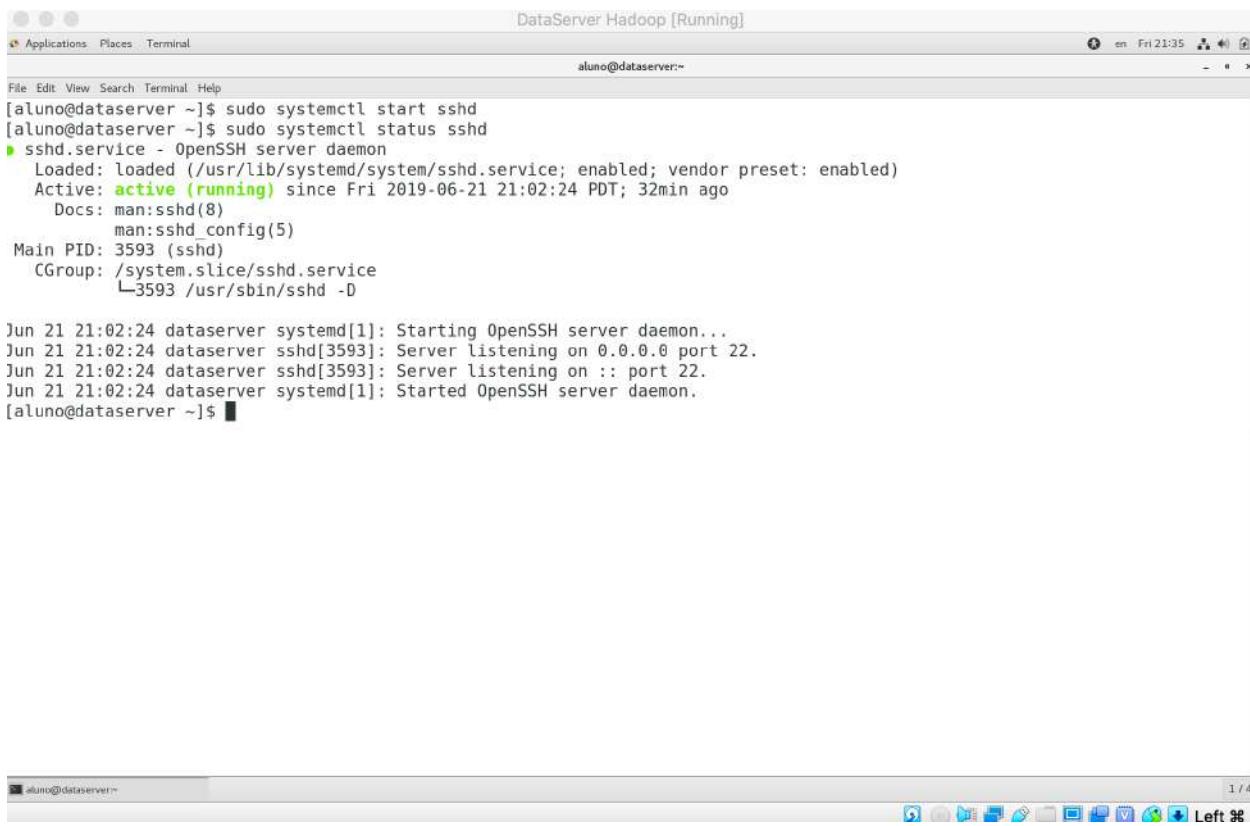


```
DataServer Hadoop [Running]
File Edit View Search Terminal Help
aluno@dataserver ~$ sudo systemctl start sshd
[aluno@dataserver ~]$ sudo systemctl status sshd
● sshd.service - OpenSSH server daemon
  Loaded: loaded (/usr/lib/systemd/system/sshd.service; enabled; vendor preset: enabled)
  Active: active (running) since Fri 2019-06-21 21:02:24 PDT; 32min ago
    Docs: man:sshd(8)
          man:sshd_config(5)
  Main PID: 3593 (sshd)
  CGroup: /system.slice/sshd.service
          └─3593 /usr/sbin/sshd -D

Jun 21 21:02:24 dataserver systemd[1]: Starting OpenSSH server daemon...
Jun 21 21:02:24 dataserver sshd[3593]: Server listening on 0.0.0.0 port 22.
Jun 21 21:02:24 dataserver sshd[3593]: Server listening on :: port 22.
Jun 21 21:02:24 dataserver systemd[1]: Started OpenSSH server daemon.
[aluno@dataserver ~]$
```

1 / 4

Serviço em execução


## Instalação e Configuração do Ecossistema Hadoop

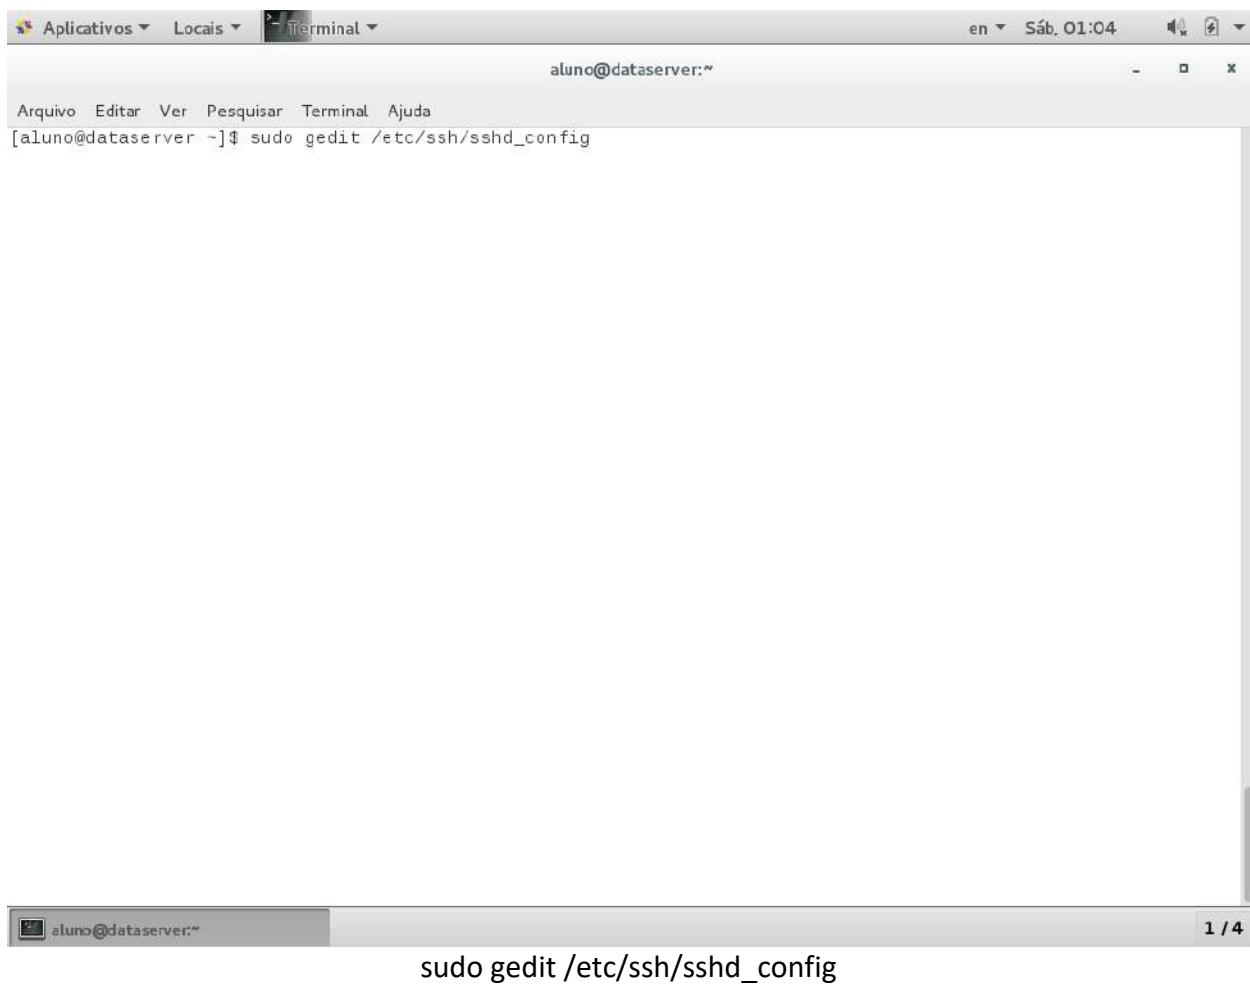

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt shows "aluno@dataserver:~". Below the prompt, the command "sudo gedit /etc/ssh/sshd\_config" is visible. The status bar at the bottom of the terminal window displays "aluno@dataserver:~" and "1 / 4".

```
sudo gedit /etc/ssh/sshd_config
```

## Instalação e Configuração do Ecossistema Hadoop

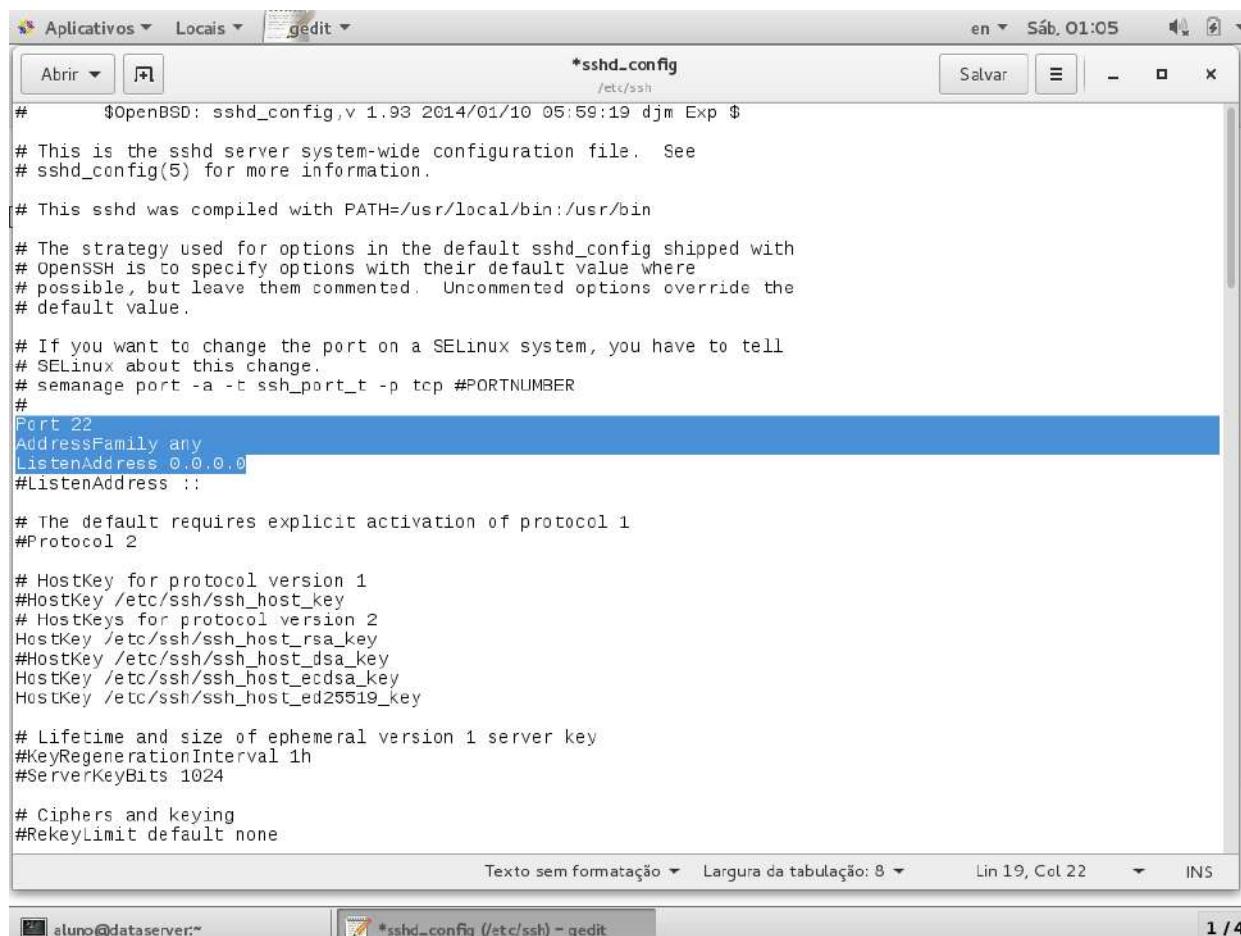

```
*sshd_config
/etc/ssh
#
# OpenBSD: sshd_config,v 1.93 2014/01/10 05:59:19 djm Exp $
#
# This is the sshd server system-wide configuration file. See
# sshd_config(5) for more information.
#
# This sshd was compiled with PATH=/usr/local/bin:/usr/bin
#
# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented. Uncommented options override the
# default value.
#
# If you want to change the port on a SELinux system, you have to tell
# SELinux about this change.
# semanage port -a -t ssh_port_t -p tcp #PORTNUMBER
#
Port 22
AddressFamily any
ListenAddress 0.0.0.0
#ListenAddress ::

# The default requires explicit activation of protocol 1
#Protocol 2

# HostKey for protocol version 1
#HostKey /etc/ssh/ssh_host_key
# HostKeys for protocol version 2
HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_dsa_key
HostKey /etc/ssh/ssh_host_ecdsa_key
HostKey /etc/ssh/ssh_host_ed25519_key


# Lifetime and size of ephemeral version 1 server key
#KeyRegenerationInterval 1h
#ServerKeyBits 1024

# Ciphers and keying
#RekeyLimit default none
```

Primeira parte da configuração ssh.

Remova o símbolo (#) de comentário das 3 linhas marcadas acima.

## Instalação e Configuração do Ecossistema Hadoop

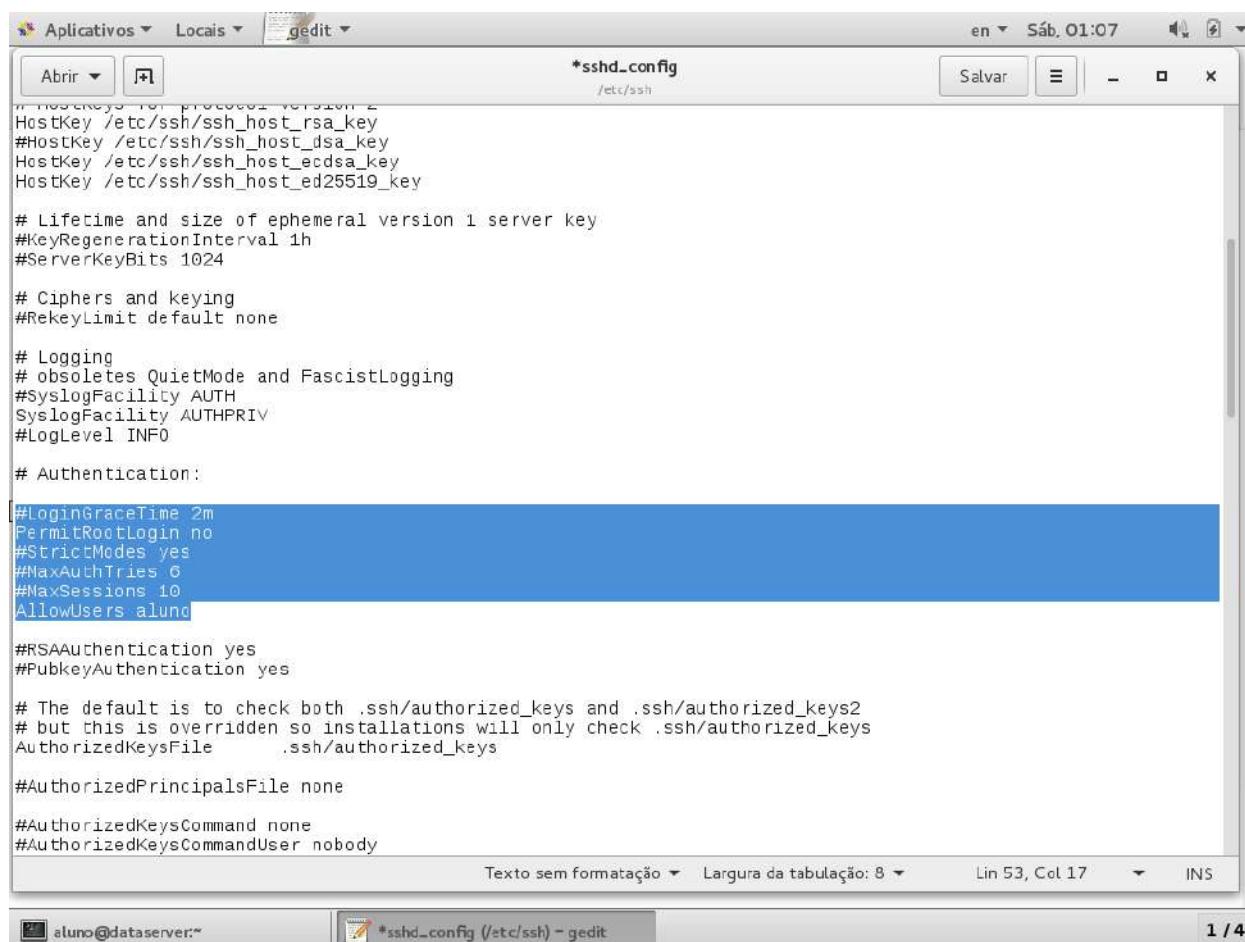

```
*sshd_config
/etc/ssh

HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_dsa_key
HostKey /etc/ssh/ssh_host_ecdsa_key
HostKey /etc/ssh/ssh_host_ed25519_key

# Lifetime and size of ephemeral version 1 server key
#KeyRegenerationInterval 1h
#ServerKeyBits 1024

# Ciphers and keying
#RekeyLimit default none

# Logging
# obsoletes QuietMode and FascistLogging
#SyslogFacility AUTH
SyslogFacility AUTHPRIV
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
PermitRootLogin no
#StrictModes yes
##MaxAuthTries 6
##MaxSessions 10
AllowUsers aluno

#RSAAuthentication yes
#PubkeyAuthentication yes

# The default is to check both .ssh/authorized_keys and .ssh/authorized_keys2
# but this is overridden so installations will only check .ssh/authorized_keys
AuthorizedKeysFile      .ssh/authorized_keys


#AuthorizedPrincipalsFile none

#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody

```

Segunda parte da configuração do ssh

## Instalação e Configuração do Ecossistema Hadoop

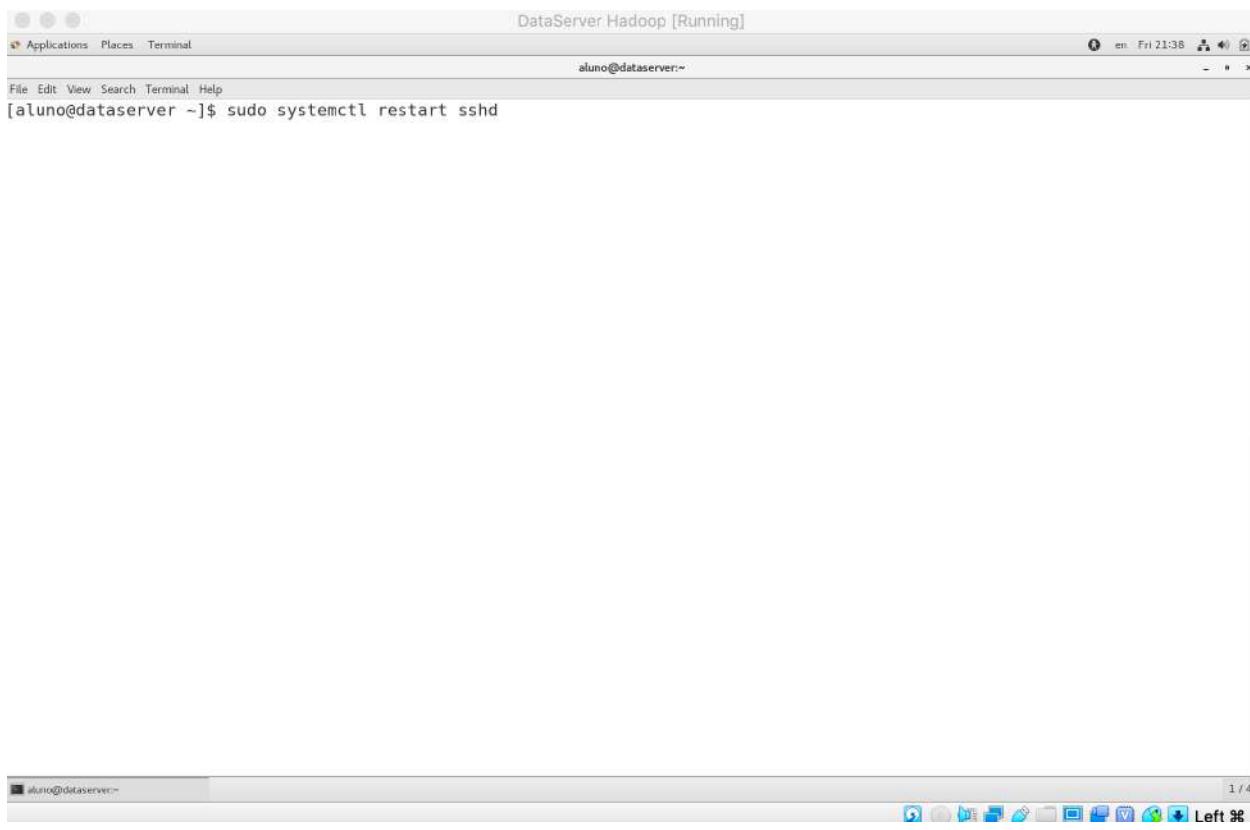


```
[aluno@dataserver ~]$ sudo systemctl restart sshd
```

**sudo systemctl restart sshd**

## 4. Instalação do Java 8

### 4.1. Removendo o OpenJDK

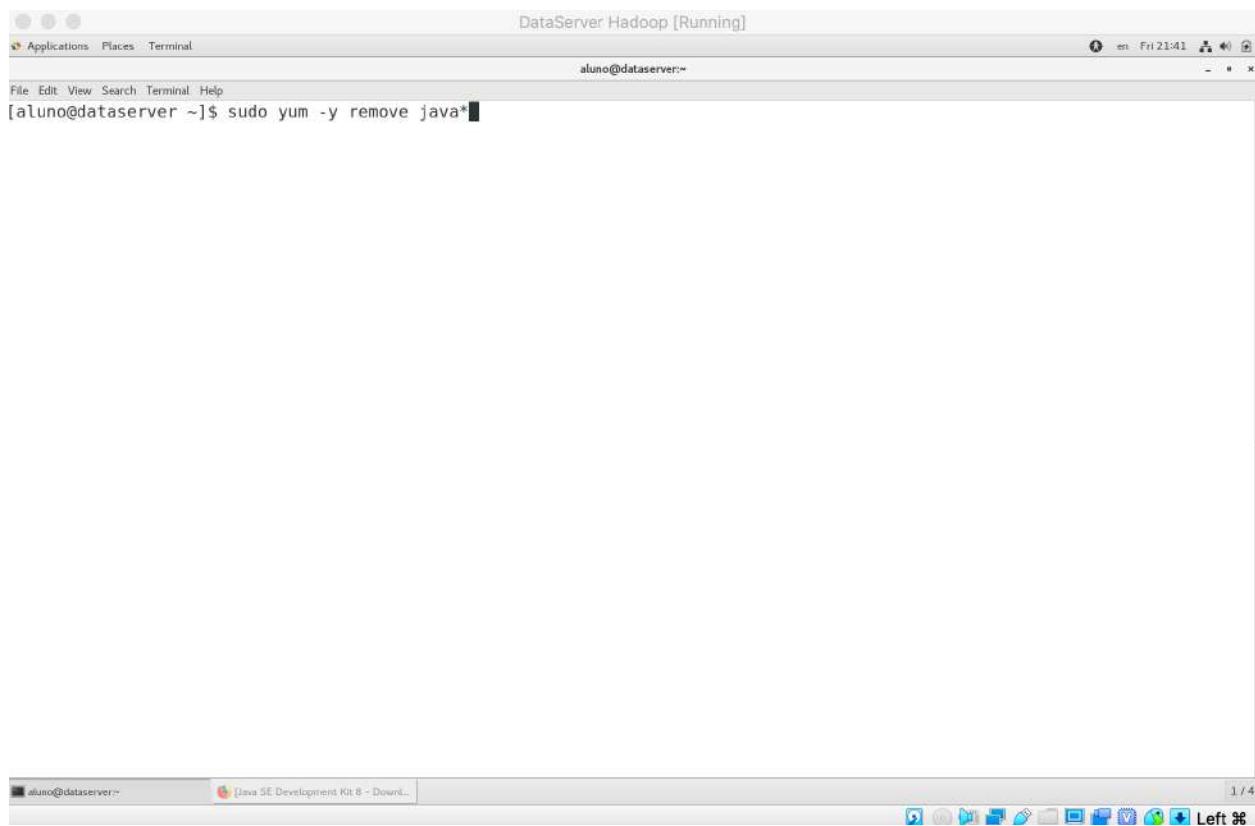

Removendo o OpenJDK

**sudo yum -y remove java\***

## Instalação e Configuração do Ecossistema Hadoop

```

  Applications Places Terminal
  aluno@dataserver:~ Fri 21:42
=====
Remove 3 Packages (+4 Dependent packages)

Installed size: 108 M
Downloading packages:
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
Erasing   : icedtea-web-1.7.1-1.el7.x86_64          1/7
Erasing   : rhino-1.7R5-1.el7.noarch                2/7
Erasing   : jline-1.0-8.el7.noarch                  3/7
Erasing   : tagsoup-1.2.1-8.el7.noarch              4/7
Erasing   : 1:java-1.8.0-openjdk-1.8.0.181-7.b13.el7.x86_64 5/7
Erasing   : 1:java-1.8.0-openjdk-headless-1.8.0.181-7.b13.el7.x86_64 6/7
Erasing   : javapackages-tools-3.4.1-11.el7.noarch 7/7
Verifying  : tagsoup-1.2.1-8.el7.noarch              1/7
Verifying  : 1:java-1.8.0-openjdk-1.8.0.181-7.b13.el7.x86_64 2/7
Verifying  : javapackages-tools-3.4.1-11.el7.noarch 3/7
Verifying  : icedtea-web-1.7.1-1.el7.x86_64          4/7
Verifying  : jline-1.0-8.el7.noarch                  5/7
Verifying  : rhino-1.7R5-1.el7.noarch                6/7
Verifying  : 1:java-1.8.0-openjdk-headless-1.8.0.181-7.b13.el7.x86_64 7/7

Removed:
java-1.8.0-openjdk.x86_64 1:1.8.0.181-7.b13.el7      java-1.8.0-openjdk-headless.x86_64 1:1.8.0.181-7.b13.el7
javapackages-tools.noarch 0:3.4.1-11.el7

Dependency Removed:
icedtea-web.x86_64 0:1.7.1-1.el7  jline.noarch 0:1.0-8.el7  rhino.noarch 0:1.7R5-1.el7  tagsoup.noarch 0:1.2.1-8.el7

Complete!
[aluno@dataserver ~]$ 
  
```

Java SE Development Kit 8 - Download


Left %

Concluído

**Agora acesse o site da Oracle e faça download do Java JDK 1.8 para Linux**

## Instalação e Configuração do Ecossistema Hadoop

### 4.2. Instalação do JDK

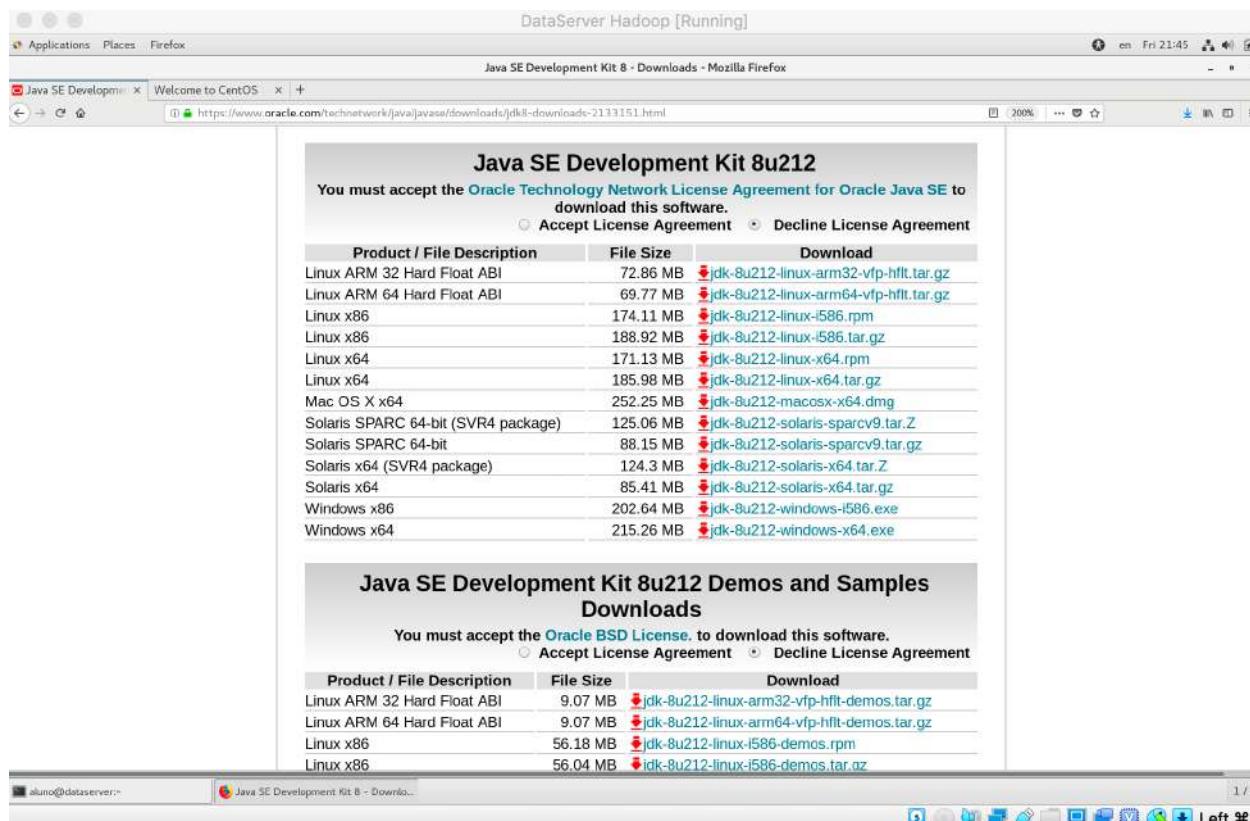

**Java SE Development Kit 8u212**

You must accept the [Oracle Technology Network License Agreement](#) for Oracle Java SE to download this software.

Accept License Agreement  Decline License Agreement

Product / File Description	File Size	Download
Linux ARM 32 Hard Float ABI	72.86 MB	<a href="#">jdk-8u212-linux-arm32-vfp-hflt.tar.gz</a>
Linux ARM 64 Hard Float ABI	69.77 MB	<a href="#">jdk-8u212-linux-arm64-vfp-hflt.tar.gz</a>
Linux x86	174.11 MB	<a href="#">jdk-8u212-linux-i586.rpm</a>
Linux x86	188.92 MB	<a href="#">jdk-8u212-linux-i586.tar.gz</a>
Linux x64	171.13 MB	<a href="#">jdk-8u212-linux-x64.rpm</a>
Linux x64	185.98 MB	<a href="#">jdk-8u212-linux-x64.tar.gz</a>
Mac OS X x64	252.25 MB	<a href="#">jdk-8u212-macosx-x64.dmg</a>
Solaris SPARC 64-bit (SVR4 package)	125.06 MB	<a href="#">jdk-8u212-solaris-sparcv9.tar.gz</a>
Solaris SPARC 64-bit	88.15 MB	<a href="#">jdk-8u212-solaris-sparcv9.tar.Z</a>
Solaris x64 (SVR4 package)	124.3 MB	<a href="#">jdk-8u212-solaris-x64.tar.Z</a>
Solaris x64	85.41 MB	<a href="#">jdk-8u212-solaris-x64.tar.gz</a>
Windows x86	202.64 MB	<a href="#">jdk-8u212-windows-i586.exe</a>
Windows x64	215.26 MB	<a href="#">jdk-8u212-windows-x64.exe</a>

**Java SE Development Kit 8u212 Demos and Samples Downloads**


You must accept the [Oracle BSD License](#) to download this software.

Accept License Agreement  Decline License Agreement

Product / File Description	File Size	Download
Linux ARM 32 Hard Float ABI	9.07 MB	<a href="#">jdk-8u212-linux-arm32-vfp-hflt-demos.tar.gz</a>
Linux ARM 64 Hard Float ABI	9.07 MB	<a href="#">jdk-8u212-linux-arm64-vfp-hflt-demos.tar.gz</a>
Linux x86	56.18 MB	<a href="#">jdk-8u212-linux-i586-demos.rpm</a>
Linux x86	56.04 MB	<a href="#">jdk-8u212-linux-i586-demos.tar.gz</a>

No site da Oracle, fazer o download do JDK


## Instalação e Configuração do Ecossistema Hadoop

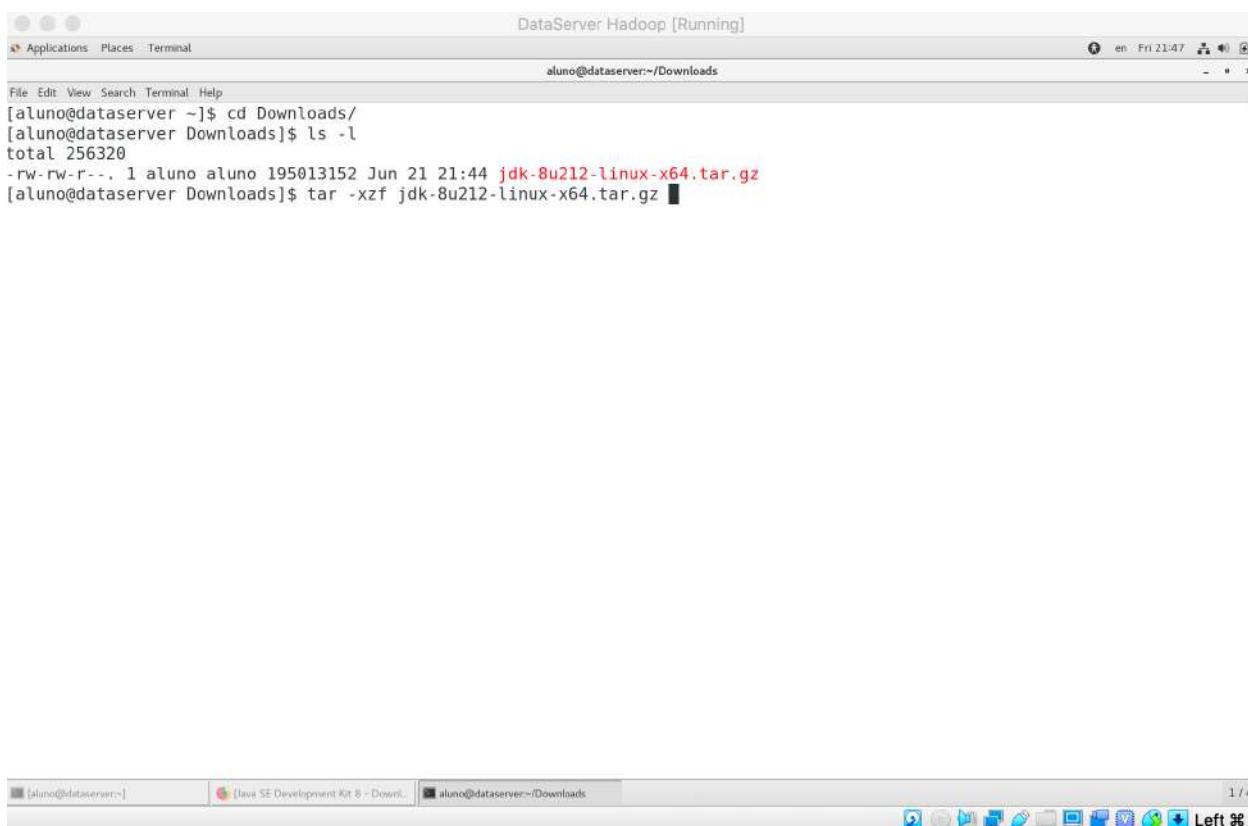

```
[aluno@dataserver ~]$ cd Downloads/  
[aluno@dataserver Downloads]$ ls -l  
total 256320  
-rw-rw-r--. 1 aluno aluno 195013152 Jun 21 21:44 jdk-8u212-linux-x64.tar.gz  
[aluno@dataserver Downloads]$ tar -xzf jdk-8u212-linux-x64.tar.gz
```

Executar o comando tar para descompactar o arquivo: **tar -xzf jdk-8u212-linux-x64.tar.gz**

## Instalação e Configuração do Ecossistema Hadoop

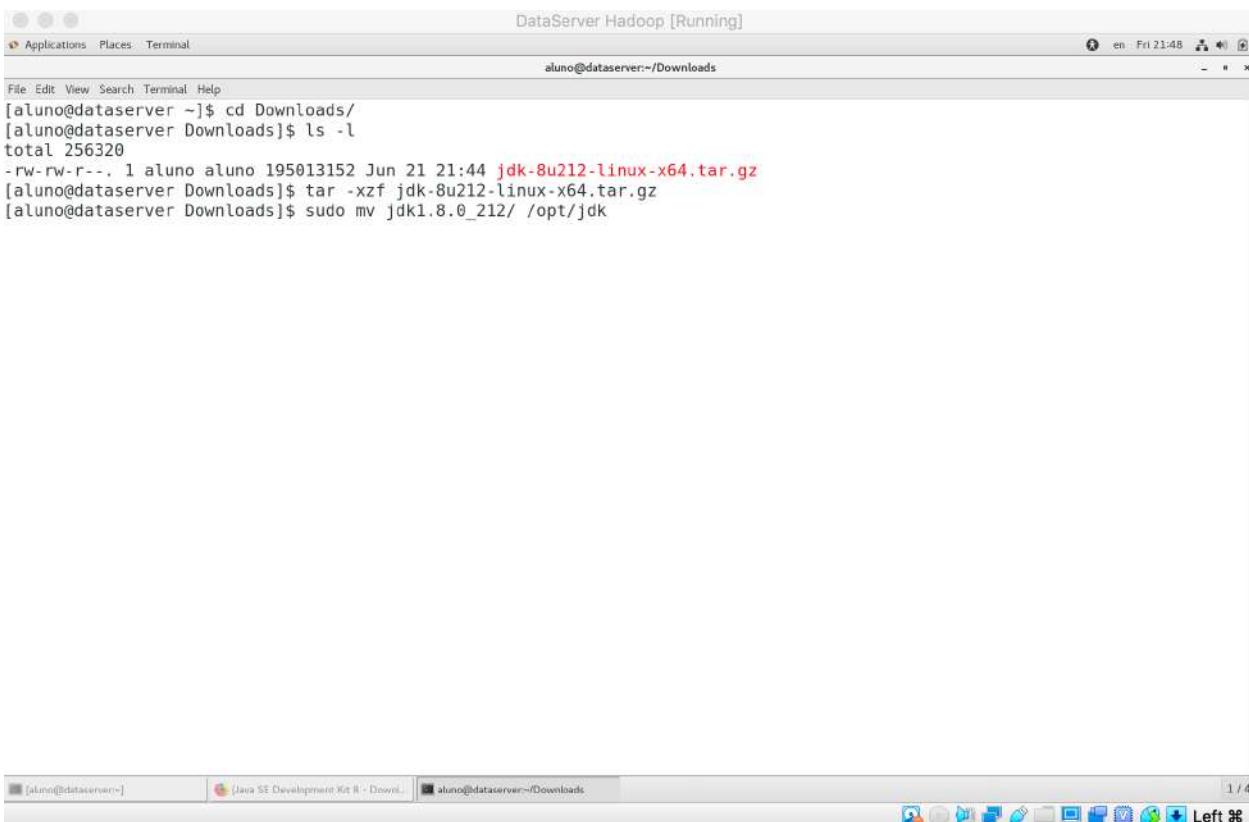

```
[aluno@dataserver ~]$ cd Downloads/  
[aluno@dataserver Downloads]$ ls -l  
total 256320  
-rw-rw-r-- 1 aluno aluno 195013152 Jun 21 21:44 jdk-8u212-linux-x64.tar.gz  
[aluno@dataserver Downloads]$ tar -xzf jdk-8u212-linux-x64.tar.gz  
[aluno@dataserver Downloads]$ sudo mv jdk1.8.0_212/ /opt/jdk
```

Mover o diretório do JDK

## Instalação e Configuração do Ecossistema Hadoop




The screenshot shows a Linux terminal window titled "Terminal". The window has a menu bar with "Aplicativos", "Locais", and "Terminal". The status bar at the top right shows "en Ter. 03:31". The terminal prompt is "aluno@dataserver:~". The user has typed the command "cd ~" and pressed Enter. The window title bar also displays "Terminal". At the bottom of the window, there is a toolbar with icons for file operations and a status bar showing "1 / 4".

```
aluno@dataserver:~$ cd ~
[aluno@dataserver ~]$
```

cd ~

## Instalação e Configuração do Ecossistema Hadoop

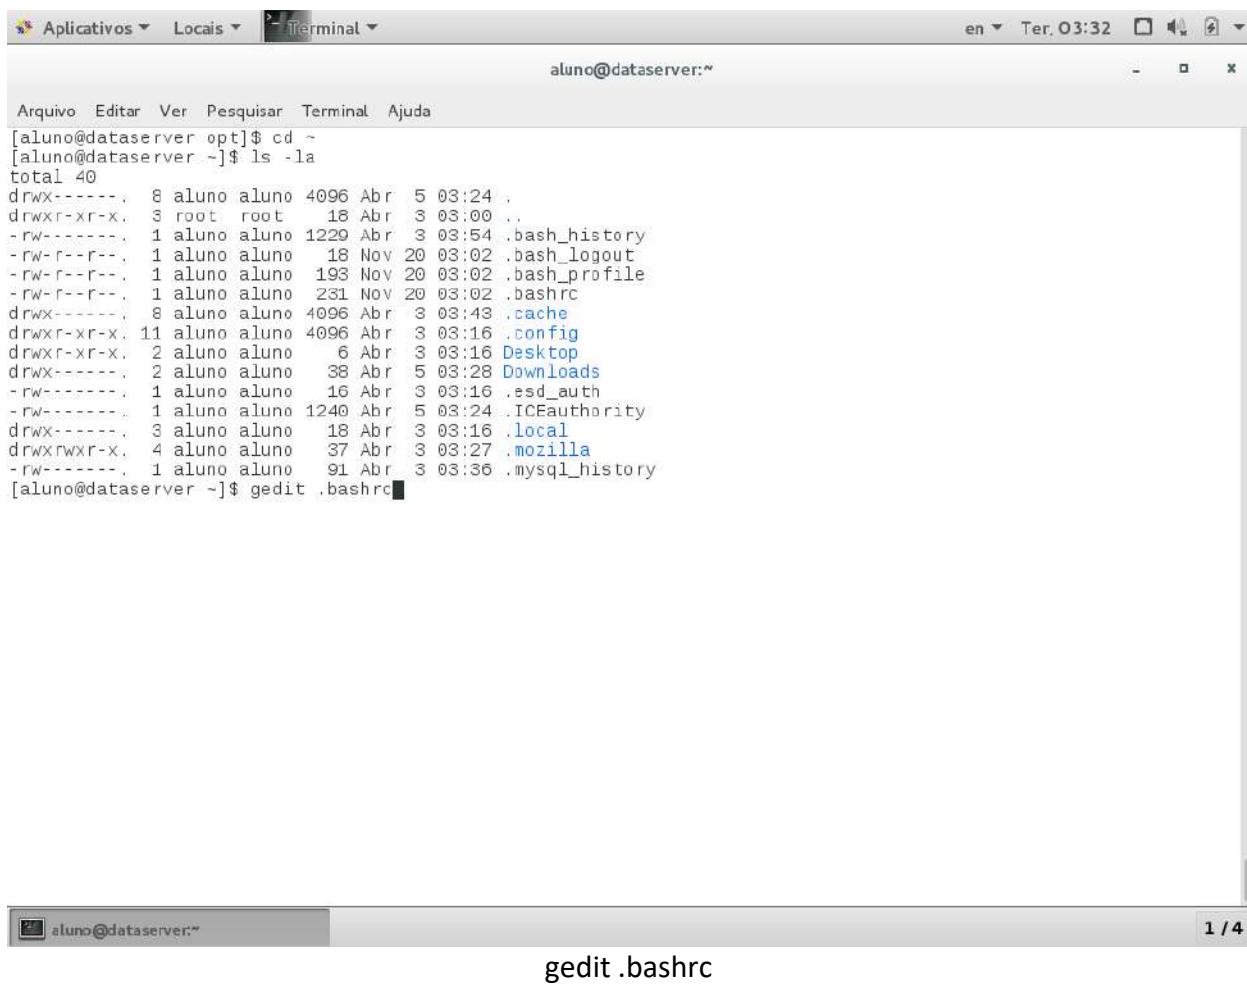


The screenshot shows a Linux desktop environment with a terminal window open. The terminal title is "Terminal" and the user is "aluno@dataserver:~". The terminal displays the following command and output:

```
[aluno@dataserver opt]$ cd ~  
[aluno@dataserver ~]$ ls -la  
total 40  
drwx-----, 8 aluno aluno 4096 Abr  5 03:24 .  
drwxr-xr-x,  3 root  root  18 Abr  3 03:00 ..  
-rw-----,  1 aluno aluno 1220 Abr  3 03:54 .bash_history  
-rw-r--r--,  1 aluno aluno  18 Nov 20 03:02 .bash_logout  
-rw-r--r--,  1 aluno aluno 193 Nov 20 03:02 .bash_profile  
-rw-r--r--,  1 aluno aluno 231 Nov 20 03:02 .bashrc  
drwxr-xr-x, 11 aluno aluno 4096 Abr  3 03:16 .cache  
drwxr-xr-x,  2 aluno aluno   6 Abr  3 03:16 Desktop  
drwx-----,  2 aluno aluno  38 Abr  5 03:28 Downloads  
-rw-----,  1 aluno aluno  16 Abr  3 03:16 .esd_auth  
-rw-----,  1 aluno aluno 1240 Abr  5 03:24 .ICEauthority  
drwx-----,  3 aluno aluno  18 Abr  3 03:16 .local  
drwxrwxr-x,  4 aluno aluno  37 Abr  3 03:27 mozilla  
-rw-----,  1 aluno aluno  91 Abr  3 03:36 .mysql_history  
[aluno@dataserver ~]$ gedit .bashrc
```

Below the terminal window, a status bar shows "aluno@dataserver:~" and "1 / 4".

## Instalação e Configuração do Ecossistema Hadoop

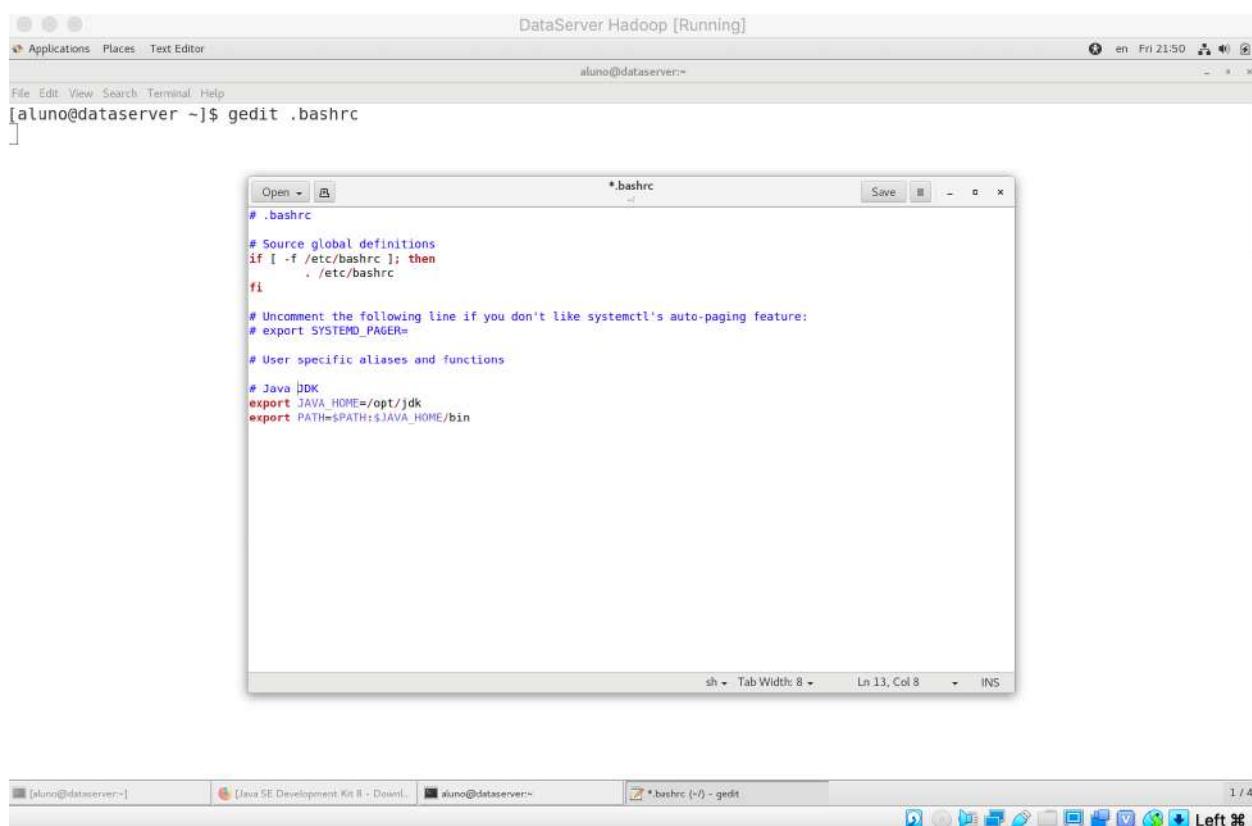

```
# .bashrc
#
# Source global definitions
if [ -f /etc/bashrc ]; then
    . /etc/bashrc
fi

# Uncomment the following line if you don't like systemctl's auto-paging feature:
# export SYSTEMD_PAGER=less

# User specific aliases and functions
#
# Java JDK
export JAVA_HOME=/opt/jdk
export PATH=$PATH:$JAVA_HOME/bin
```

Editar as variáveis de ambiente conforme acima e salvar o arquivo


## Instalação e Configuração do Ecossistema Hadoop



A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". The menu bar includes "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The command entered in the terminal is "[aluno@dataserver ~]\$ source .bashrc". The status bar at the bottom shows "aluno@dataserver:~" and "1 / 4".

```
source .bashrc
```

## Instalação e Configuração do Ecossistema Hadoop

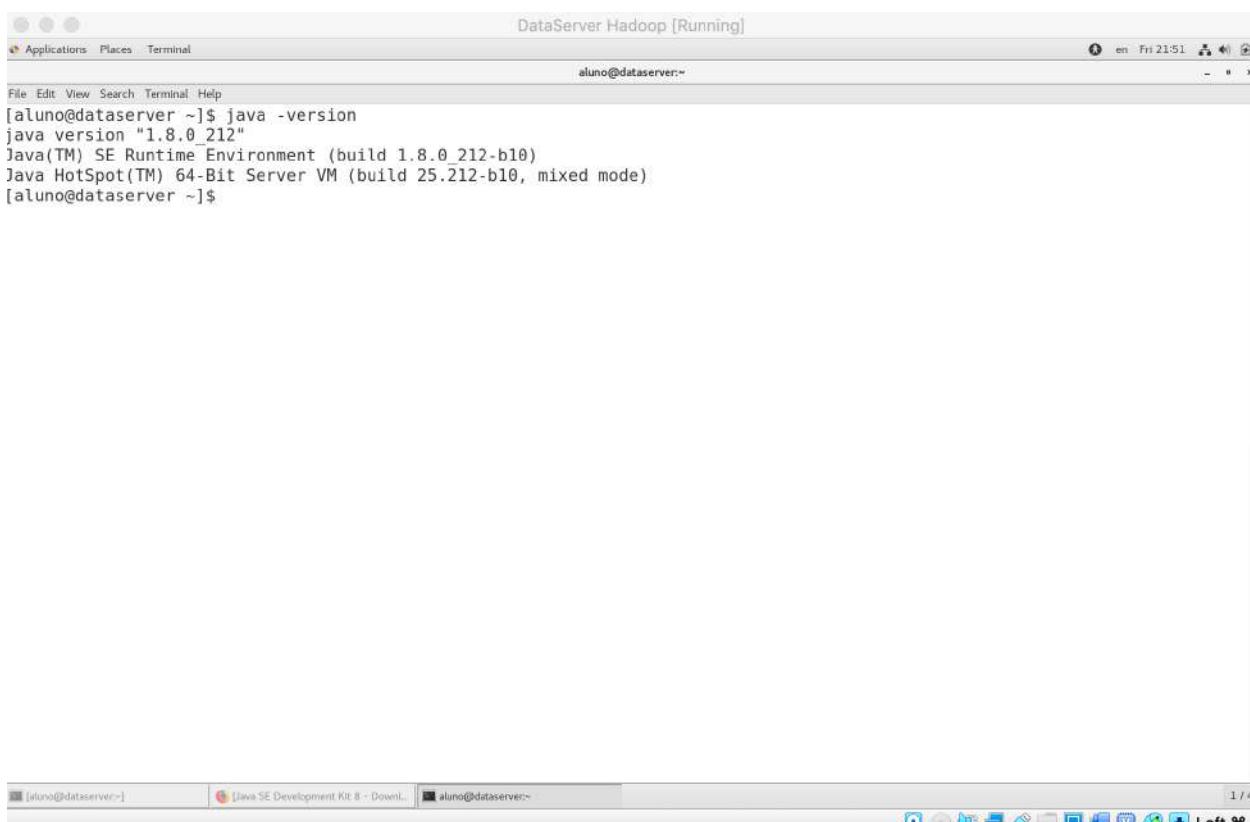

```
[aluno@dataserver ~]$ java -version
java version "1.8.0_212"
Java(TM) SE Runtime Environment (build 1.8.0_212-b10)
Java HotSpot(TM) 64-Bit Server VM (build 25.212-b10, mixed mode)
[aluno@dataserver ~]$
```

Checando a versão do Java JDK


Segundo checkpoint:

Desligue a VM (clique no ícone da bateria e então em desligar).  
Clique no menu File do VirtualBox e clique em Export Appliance.  
Será gerada uma cópia de segurança da sua máquina virtual.

→ VM: **DataServer-Hadoop-v2.0.ova**

## 5. Instalação e Configuração do Hadoop


### 5.1. Criando o usuário hadoop

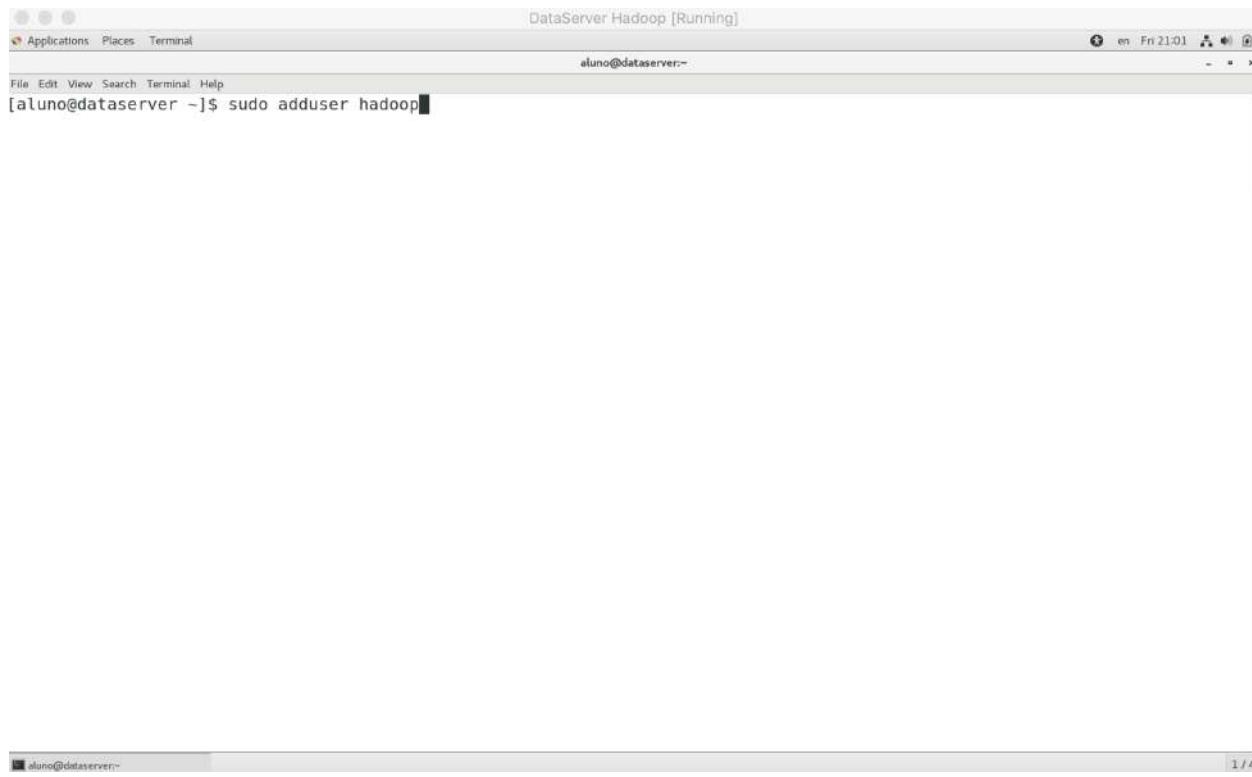

```
aluno@dataserver:~$ sudo adduser hadoop
```

**sudo adduser hadoop – para criar o usuário hadoop**


## Instalação e Configuração do Ecossistema Hadoop

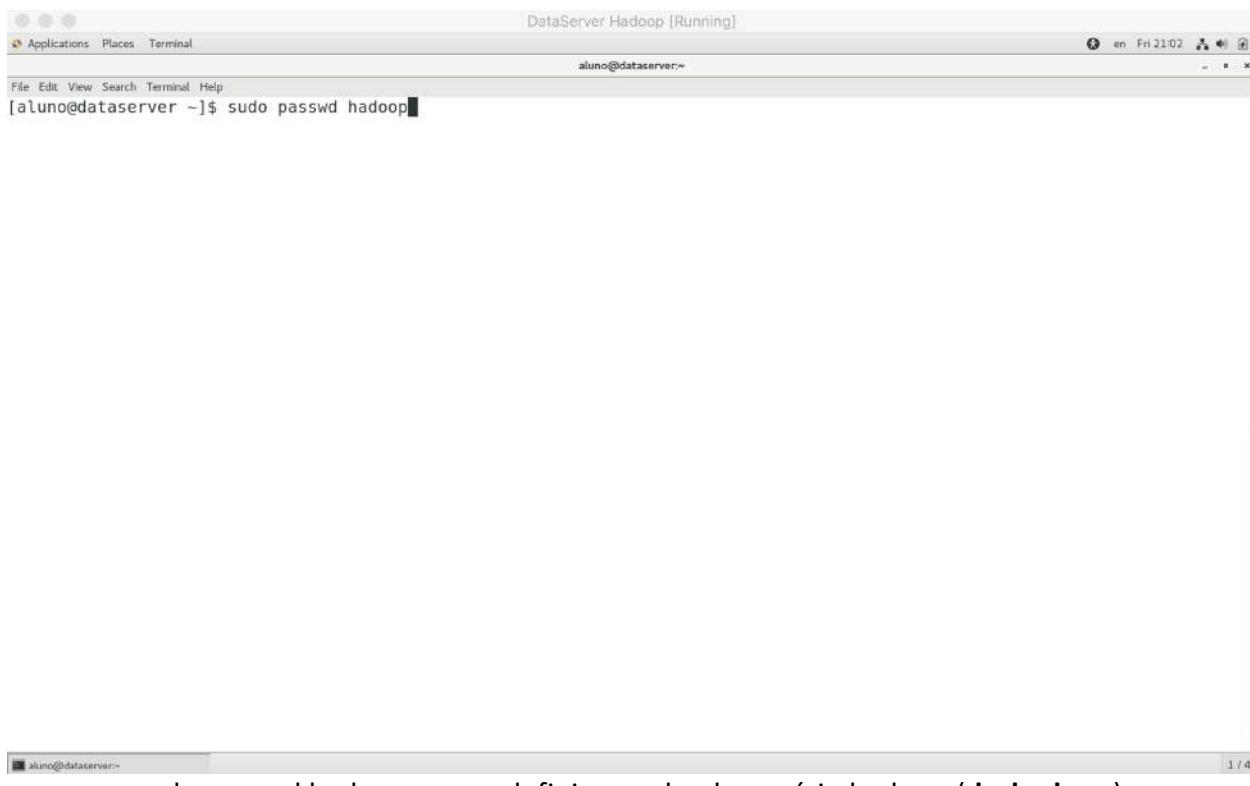


```
[aluno@dataserver ~]$ sudo passwd hadoop
```

**sudo passwd hadoop – para definir a senha do usuário hadoop (**dsahadoop**)**

## Instalação e Configuração do Ecossistema Hadoop

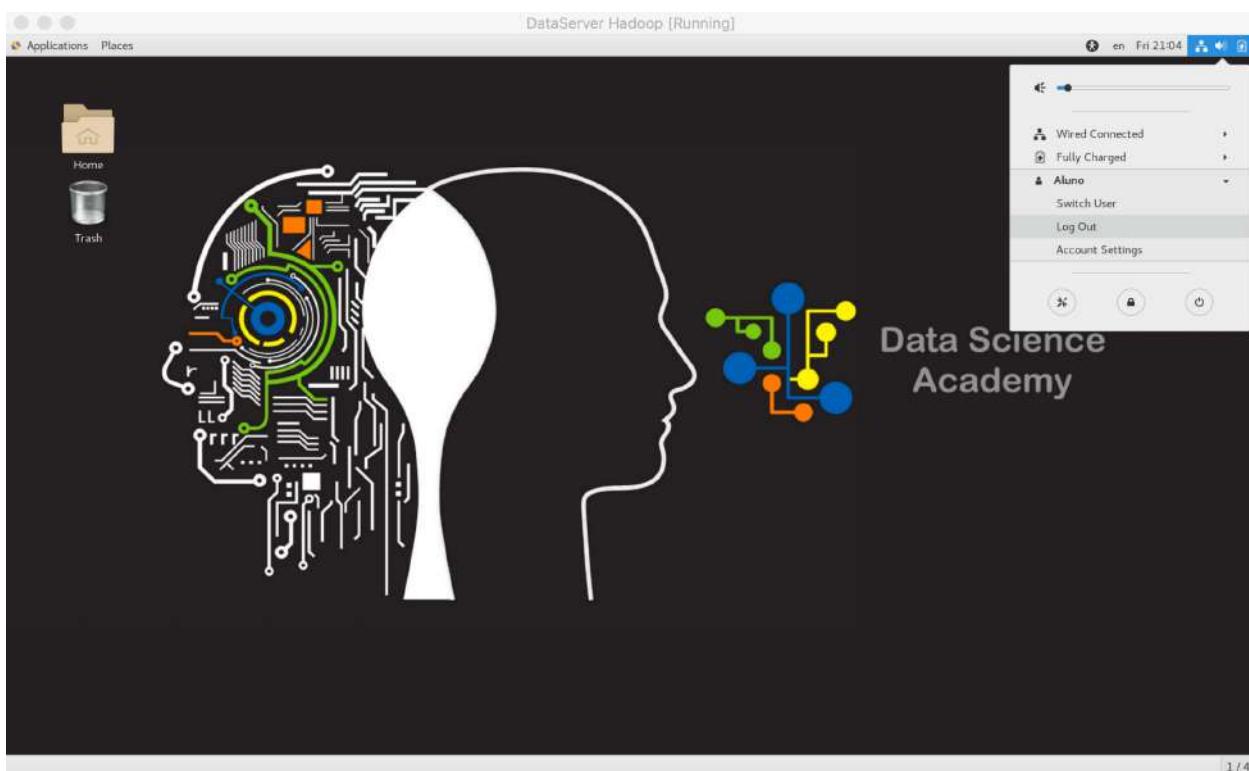


Efetue logout como usuário aluno

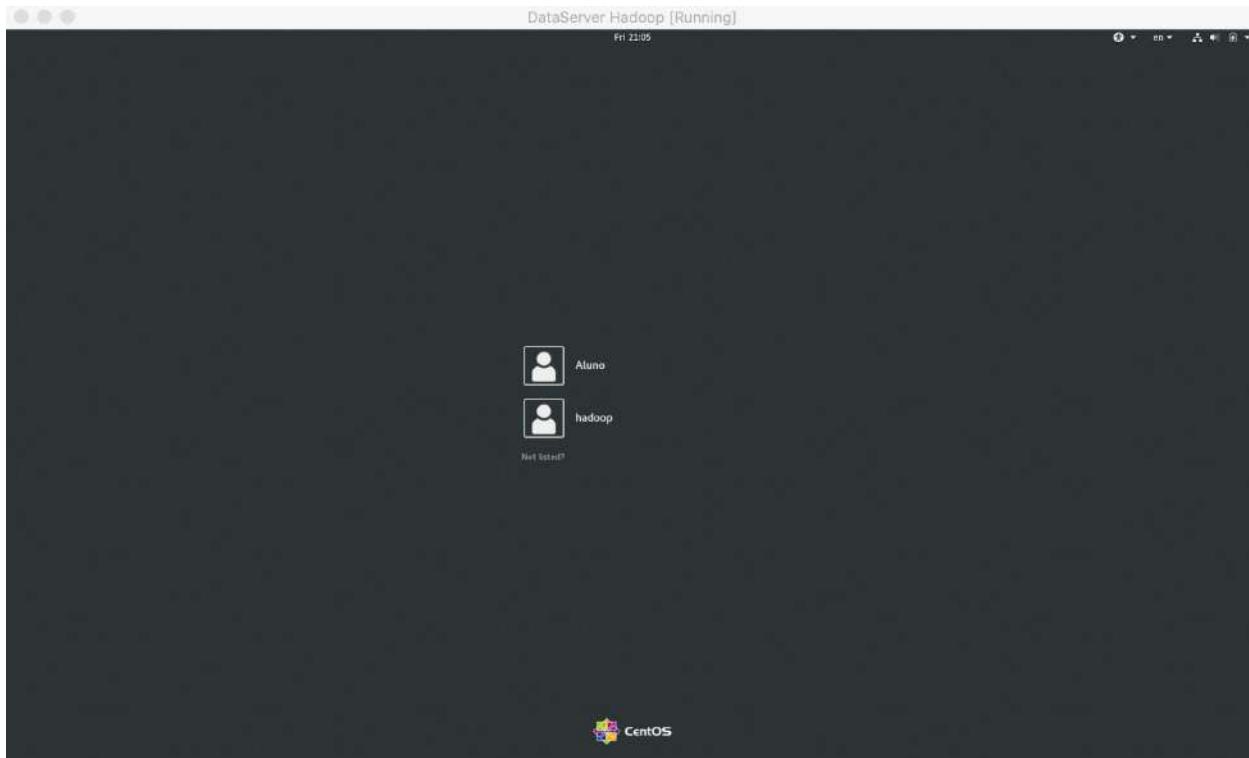

E efetue login como usuário hadoop

Adicione o usuário hadoop no arquivo /etc/sudoers conforme você fez com o usuário aluno


## 5.2. Configuração do ssh sem senha

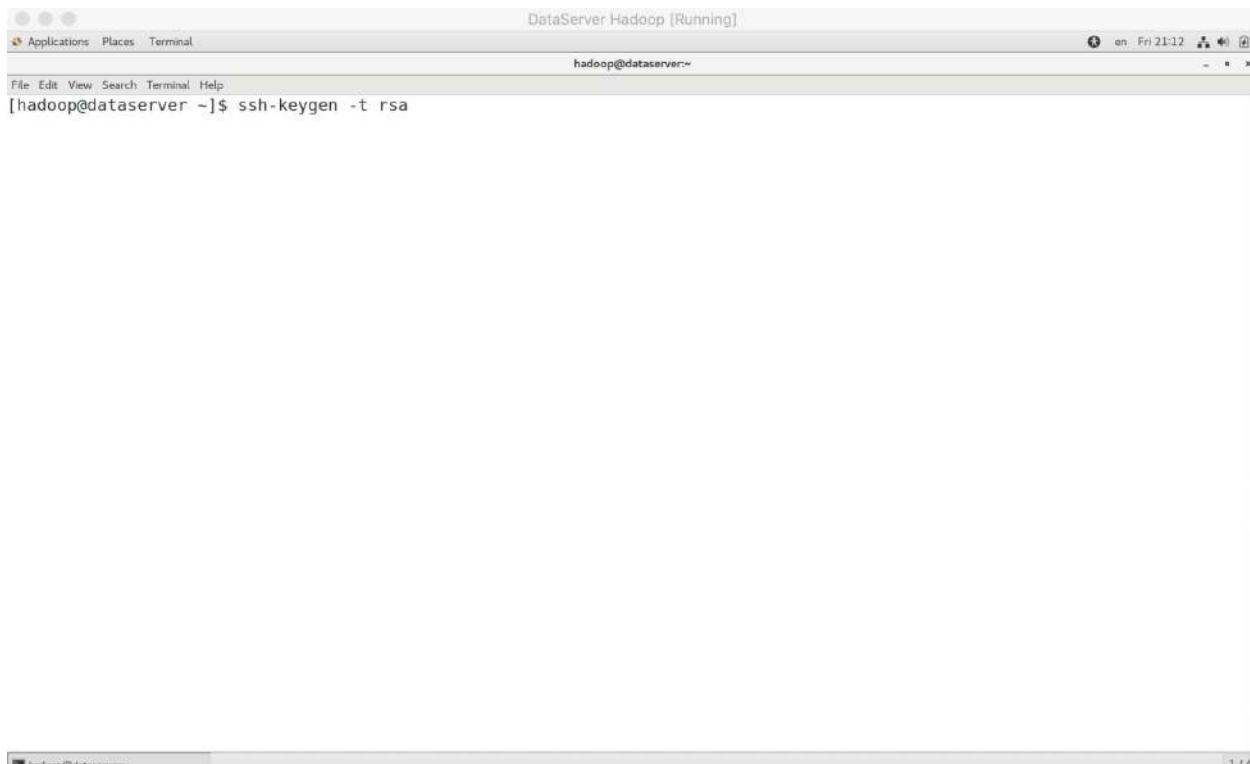

```
[hadoop@dataserver ~]$ ssh-keygen -t rsa
```




```
[hadoop@dataserver ~]$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Enter file in which to save the key (/home/hadoop/.ssh/id_rsa):
```



```
[hadoop@dataserver ~]$
```


Pressionar Enter para confirmar o diretório onde as chaves serão geradas

## Instalação e Configuração do Ecossistema Hadoop

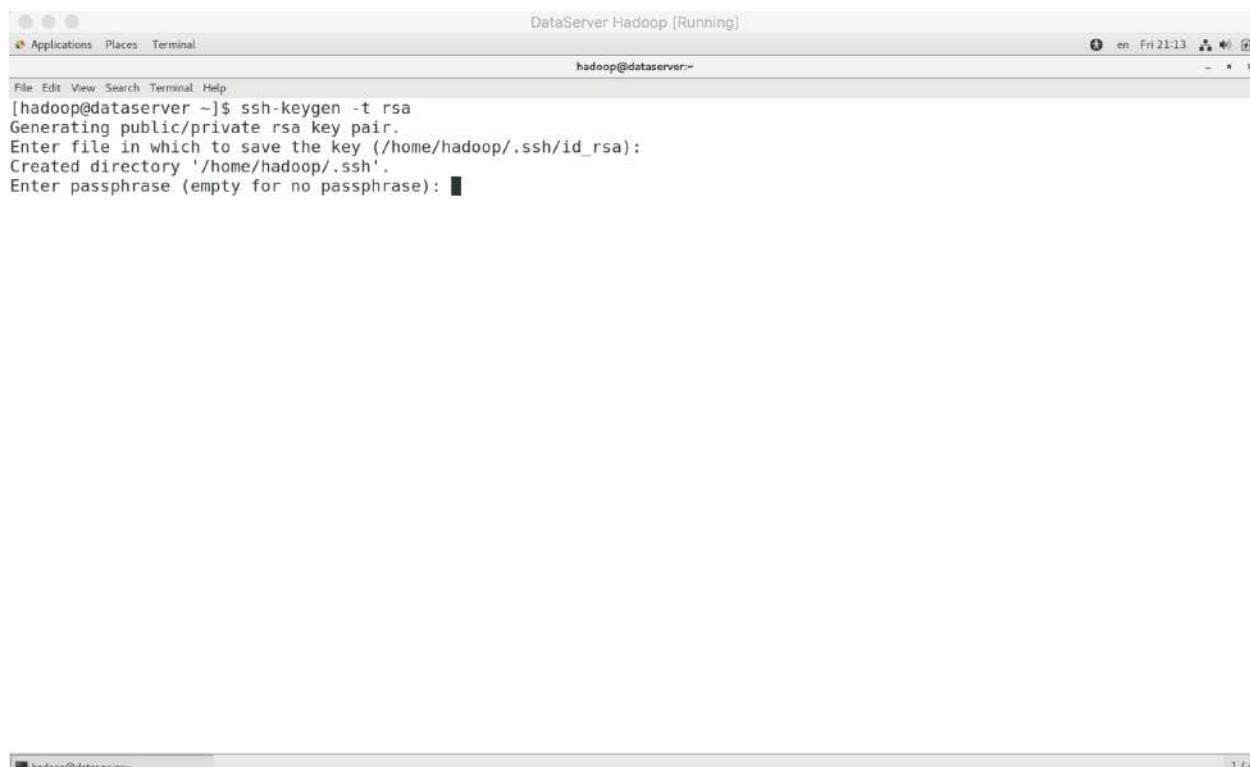

```
[hadoop@dataserver ~]$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Enter file in which to save the key (/home/hadoop/.ssh/id_rsa):
Created directory '/home/hadoop/.ssh'.
Enter passphrase (empty for no passphrase):
```

Pressionar Enter

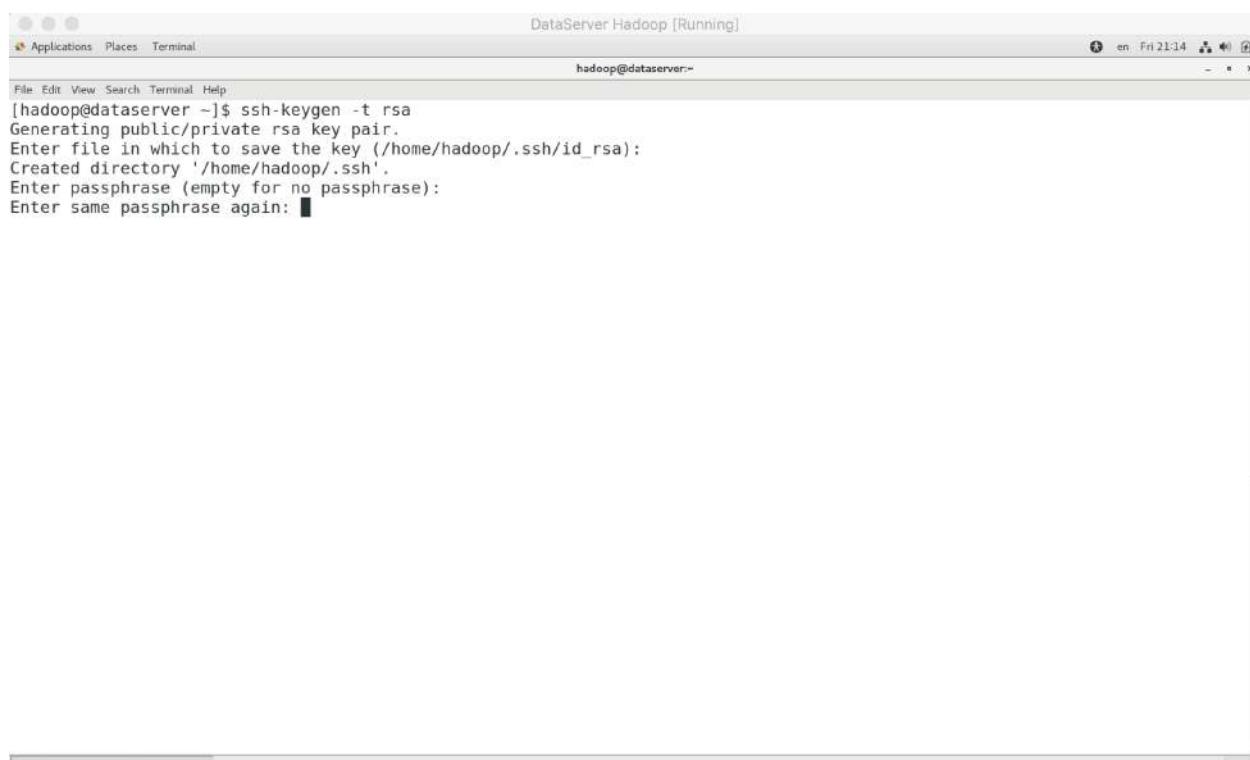

```
[hadoop@dataserver ~]$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Enter file in which to save the key (/home/hadoop/.ssh/id_rsa):
Created directory '/home/hadoop/.ssh'.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
```


Pressionar Enter novamente

## Instalação e Configuração do Ecossistema Hadoop



```
[hadoop@dataserver ~]$ ssh-keygen -t rsa
Generating public/private rsa key pair.
Enter file in which to save the key (/home/hadoop/.ssh/id_rsa):
Created directory '/home/hadoop/.ssh'.
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /home/hadoop/.ssh/id_rsa.
Your public key has been saved in /home/hadoop/.ssh/id_rsa.pub.
The key fingerprint is:
SHA256:8aiwd7k6fxuy25ljIBB4tY0Fqef23V5es+/n8u47CFM hadoop@dataserver
The key's randomart image is:
+---[RSA 2048]----+
|   .00.
|   .0 =
|   .00 o
|   o . + E
|   .+ S . .
|   o+... o
|   ..0o+o..o..
|   ....==+.+o+
|   .+=+=+. .X%
+---[SHA256]----+
[hadoop@dataserver ~]$
```

Chaves de segurança geradas

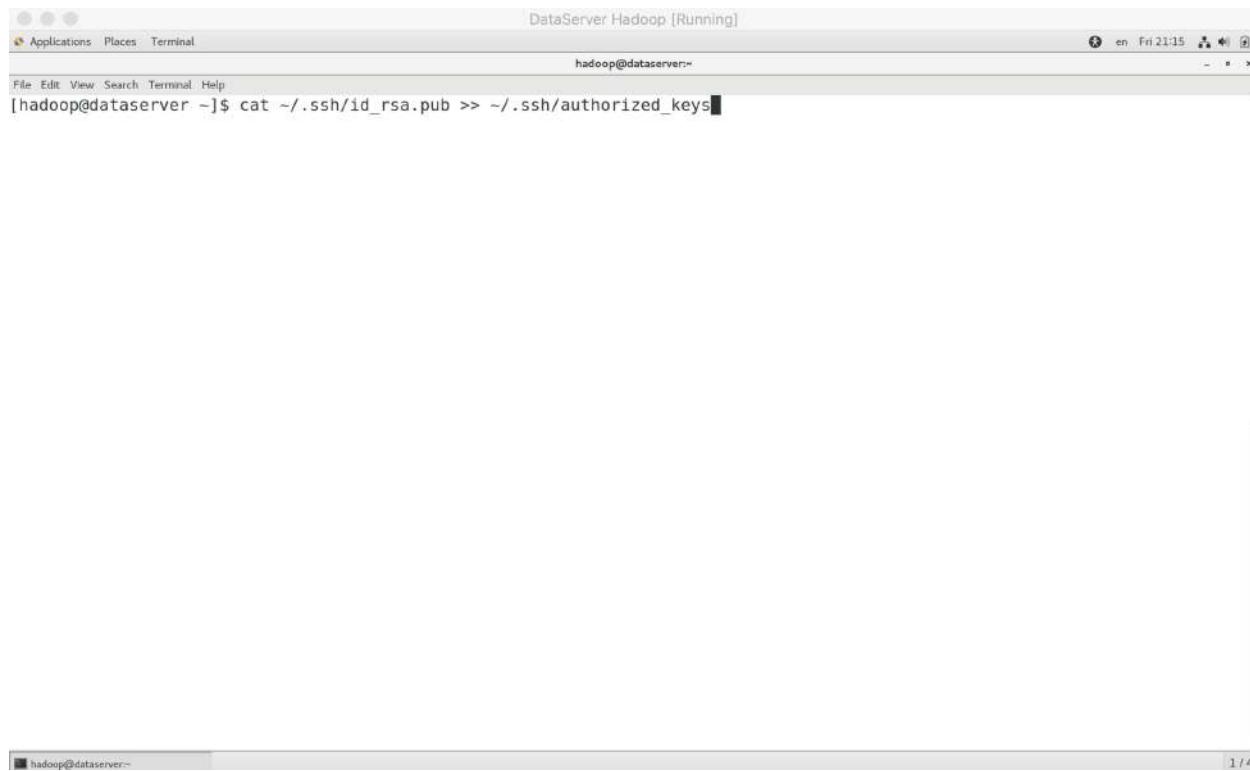


```
[hadoop@dataserver ~]$ cat ~/.ssh/id_rsa.pub >> ~/.ssh/authorized_keys
```

`cat ~/ssh/id_rsa.pub >> ~/ssh/authorized_keys`


Esse comando cópia a chave pública para o arquivo `authorized_keys` do ssh

## Instalação e Configuração do Ecossistema Hadoop

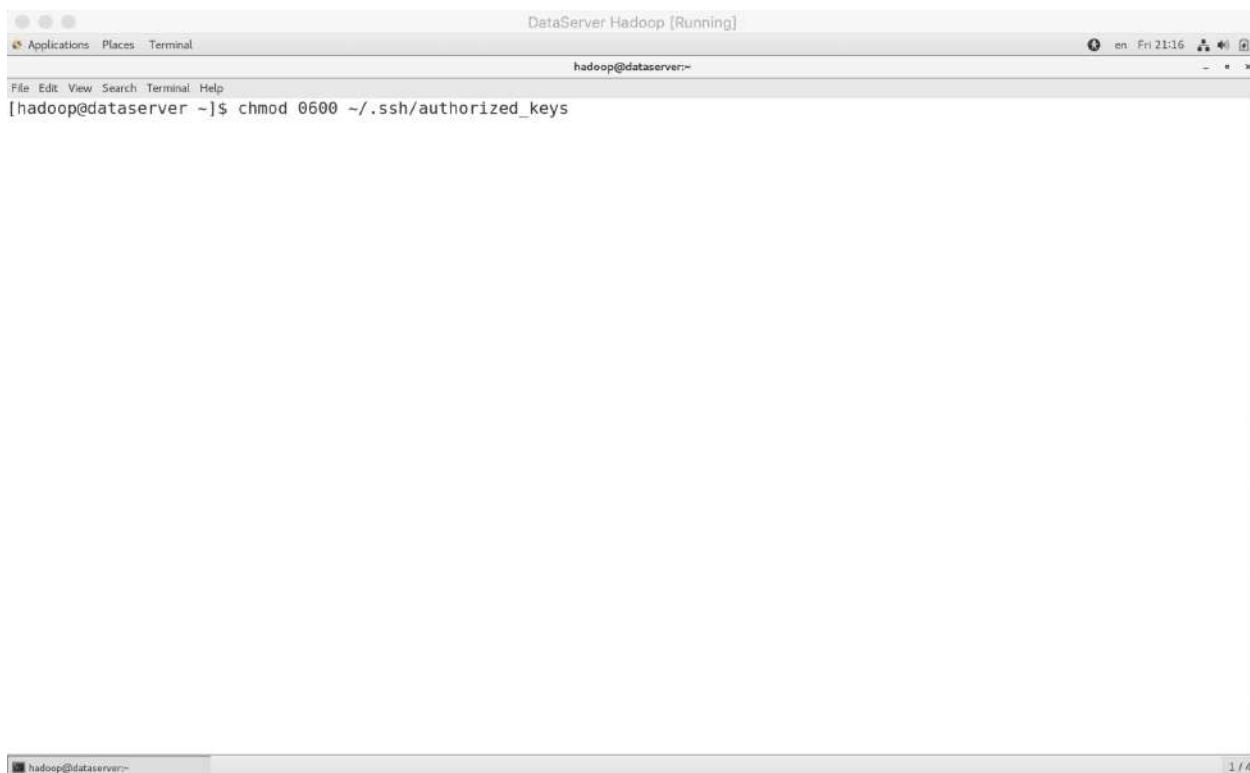

```
[hadoop@dataserver ~]$ chmod 0600 ~/.ssh/authorized_keys
```

Esse comando define a permissão do arquivo `authorized_keys`

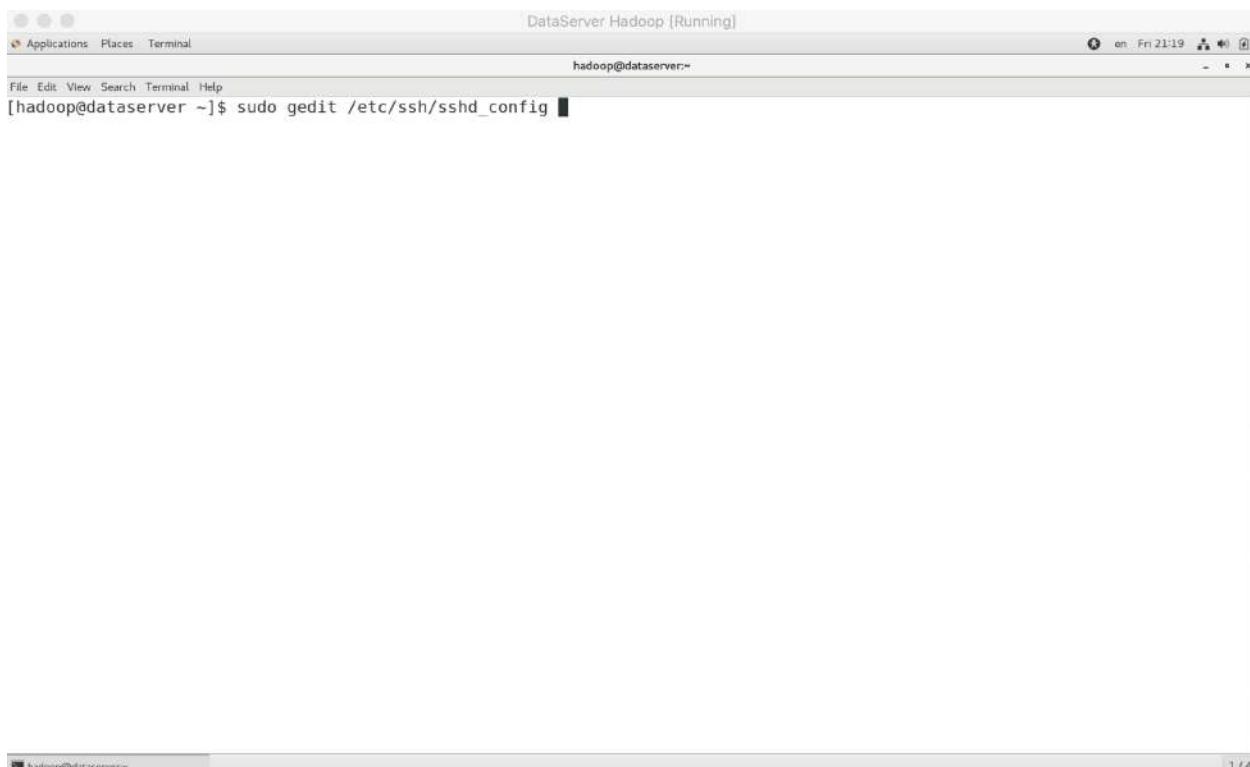

```
[hadoop@dataserver ~]$ sudo gedit /etc/ssh/sshd_config
```

Edite o arquivo de configuração do ssh

## Instalação e Configuração do Ecossistema Hadoop

Screenshot of a terminal window titled "DataServer Hadoop [Running]" showing the contents of the "/etc/ssh/sshd\_config" file in a text editor. The configuration file includes various SSH daemon settings such as port 22, host keys, ciphers, logging, authentication, and user permissions.

```

# This sshd was compiled with PATH=/usr/local/bin:/usr/bin

# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented. Uncommented options override the
# default value.

# If you want to change the port on a SELinux system, you have to tell
# SELinux about this change.
# semanage port -a -t ssh_port_t -p tcp #PORTNUMBER
#
Port 22
AddressFamily any
ListenAddress 0.0.0.0
#ListenAddress ::

HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_dsa_key
HostKey /etc/ssh/ssh_host_ecdsa_key
HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
SyslogFacility AUTHPRIV
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
PermitRootLogin no
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10
AllowUsers aluno hadoop

#PubkeyAuthentication yes

# The default is to check both .ssh/authorized_keys and .ssh/authorized_keys2
# but this is overridden so installations will only check .ssh/authorized_keys
AuthorizedKeysFile .ssh/authorized_keys

#AuthorizedPrincipalsFile none

```

Inclua o usuário hadoop na linha AllowUsers, salve o arquivo e feche-o

Screenshot of a terminal window titled "DataServer Hadoop [Running]" showing the command "[hadoop@datavserver ~]\$ sudo systemctl restart sshd" being run. The terminal window title changes to "hadoop@datavserver:~".


```

[hadoop@datavserver ~]$ sudo systemctl restart sshd

```

**sudo systemctl restart sshd**  
Reinicie o serviço ssh

## Instalação e Configuração do Ecossistema Hadoop

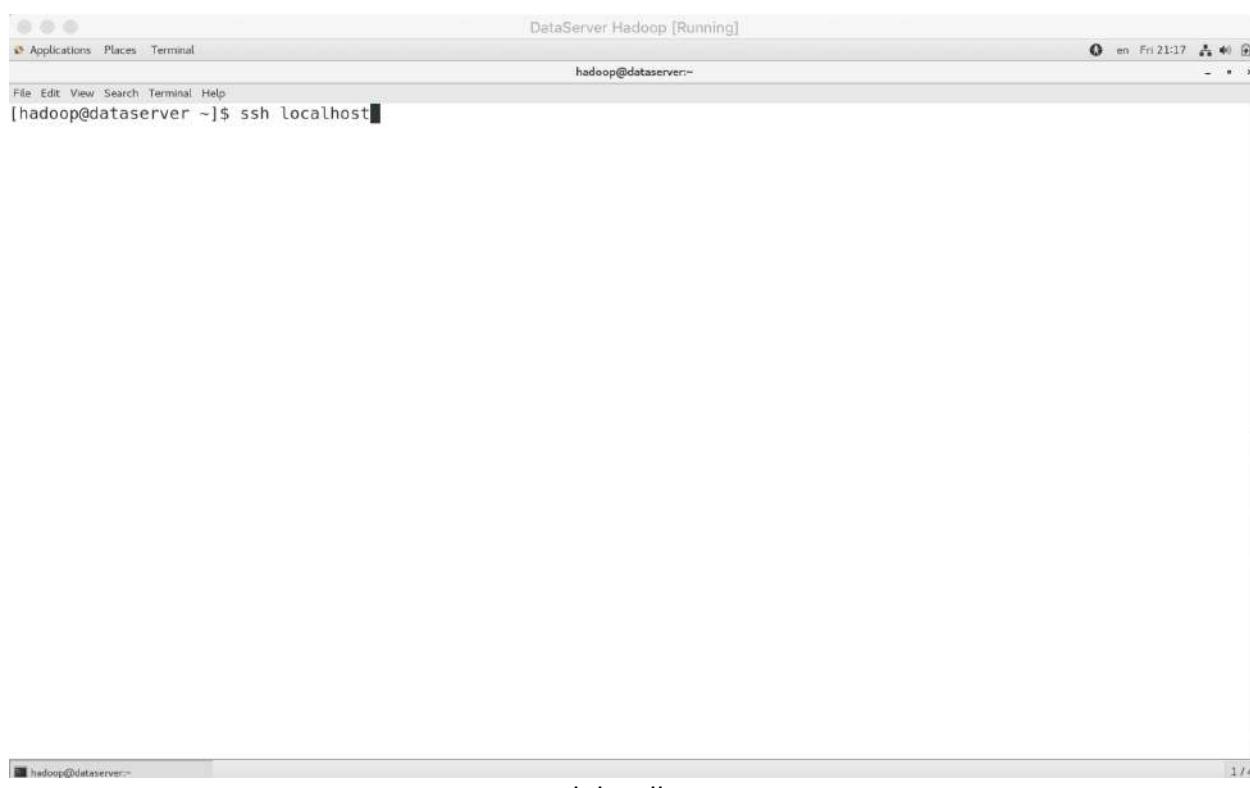

```
[hadoop@dataserver ~]$ ssh localhost
```


ssh localhost



```
[hadoop@dataserver ~]$ ssh localhost
The authenticity of host 'localhost (127.0.0.1)' can't be established.
ECDSA key fingerprint is SHA256:f6xshsQ3TVQjHuqnSc4eoJg7wm2t04Uo5LUK8BMzIPo.
ECDSA key fingerprint is MD5:8b:8e:f5:c5:cf:89:30:69:c5:17:e7:39:9a:5f:2a:c6.
Are you sure you want to continue connecting (yes/no)?
```

Yes

## Instalação e Configuração do Ecossistema Hadoop

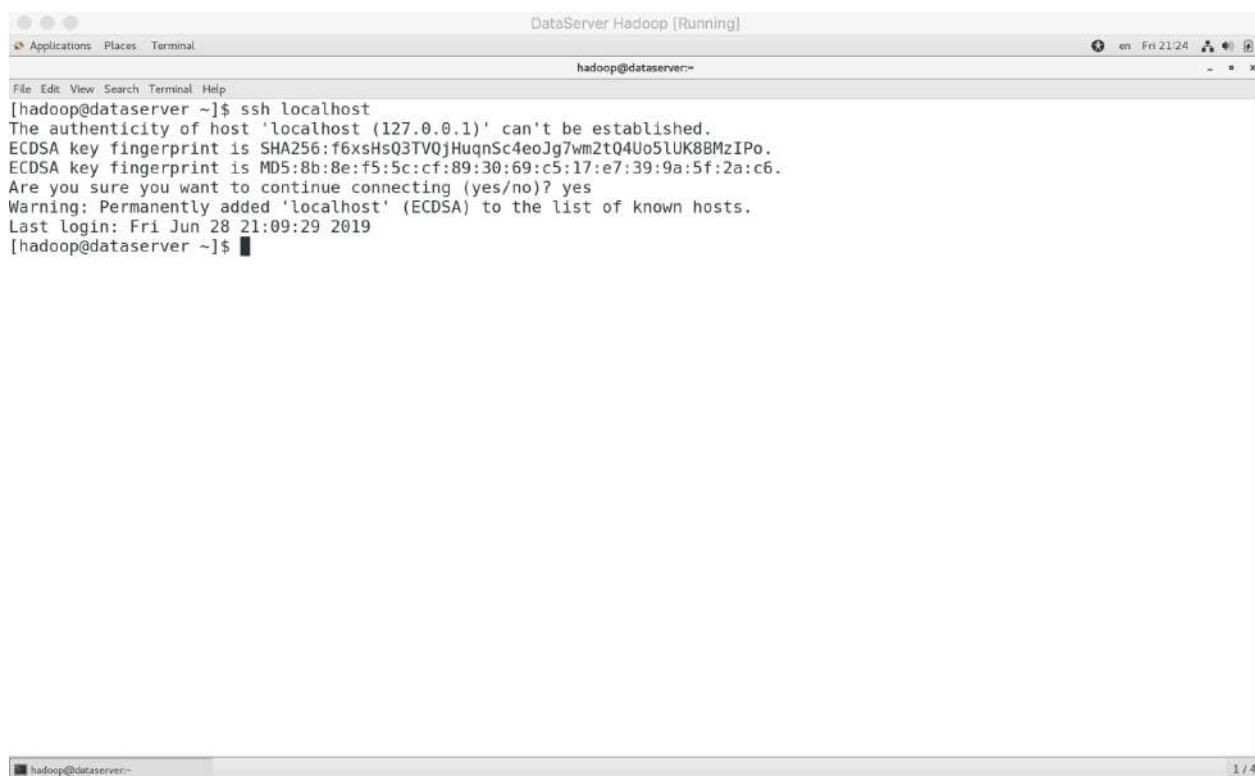


```
[hadoop@dataserver ~]$ ssh localhost
The authenticity of host 'localhost (127.0.0.1)' can't be established.
ECDSA key fingerprint is SHA256:f6xshsQ3TVQjHuqnSc4eoJg7wm2tQ4Uo5lUK8BMzIPo.
ECDSA key fingerprint is MD5:8b:8e:f5:5c:cf:89:30:69:c5:17:e7:39:9a:5f:2a:c6.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added 'localhost' (ECDSA) to the list of known hosts.
Last login: Fri Jun 28 21:09:29 2019
[hadoop@dataserver ~]$
```

Conexão ssh sem senha efetuada com sucesso. Digite exit e pressione Enter.

Parabéns, seu ambiente está pronto para receber o Hadoop!!

## 5.3. Download e Instalação do Hadoop

### 5.3.1. Editando o arquivo hosts

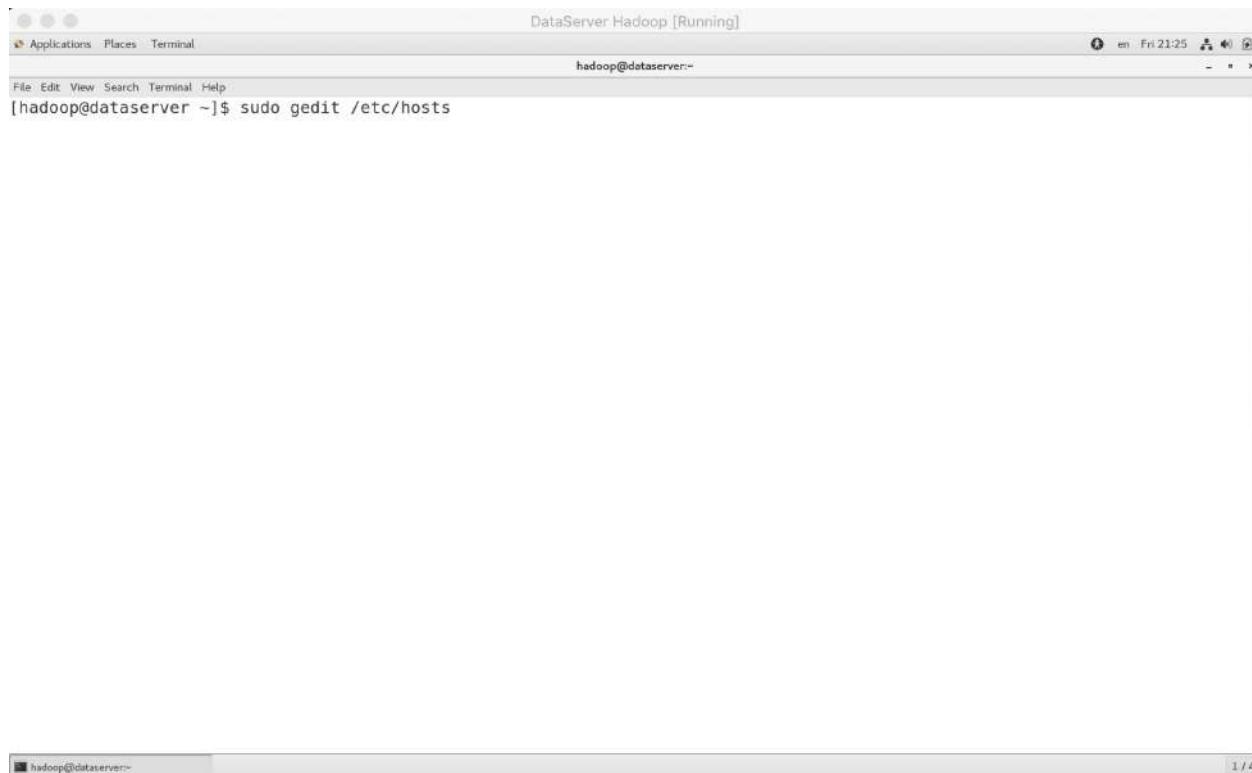


```
DataServer Hadoop [Running]
Applications Places Terminal
hadoop@dataserver:~$ sudo gedit /etc/hosts
[hadoop@dataserver ~]$ 1 / 4
```

Editar o arquivo hosts

## Instalação e Configuração do Ecossistema Hadoop



```
hosts
/etc
127.0.0.1 localhost localhost.localdomain localhost4 localhost4.localdomain4
::1 localhost localhost.localdomain localhost6 localhost6.localdomain6
127.0.0.1 dataserver
```




```
aluno@dataserver:~$ hosts (/etc) - gedit
1 / 4
```

Incluir a última linha conforme acima

## Instalação e Configuração do Ecossistema Hadoop

### 5.3.2. Download do Hadoop

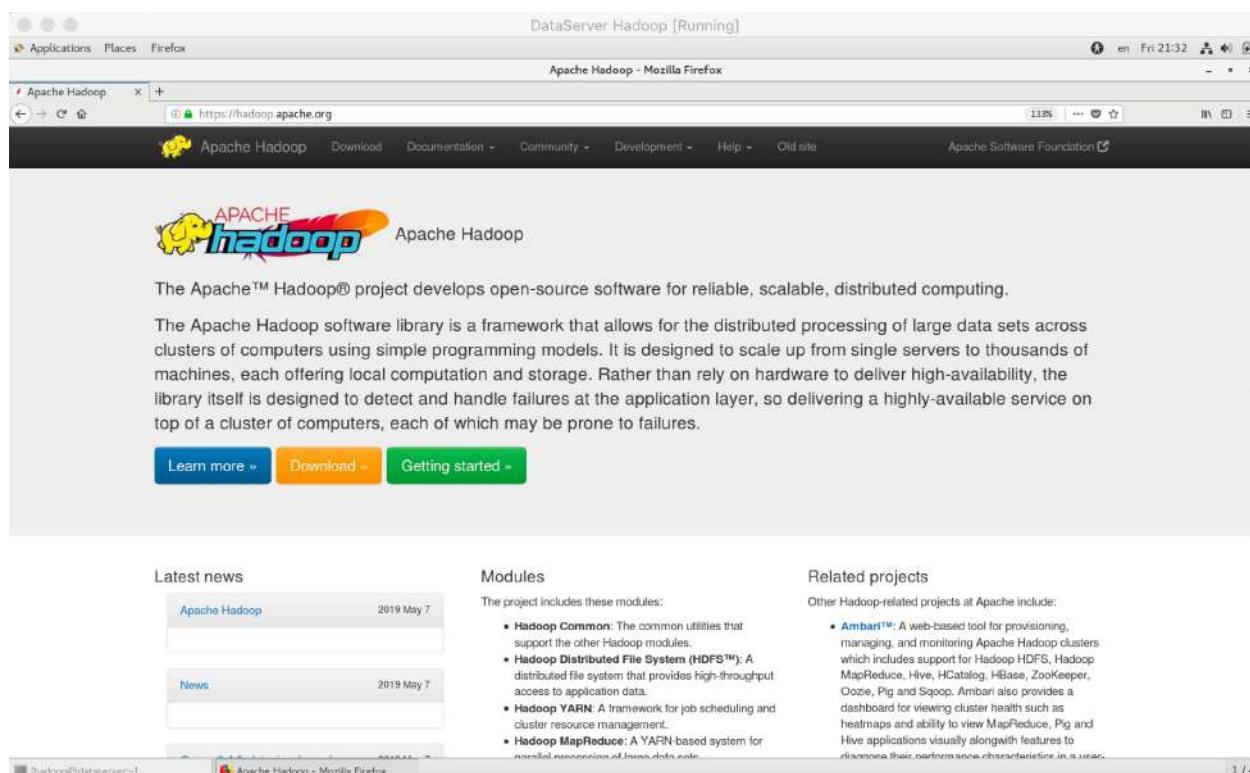

The screenshot shows a Mozilla Firefox browser window displaying the Apache Hadoop website. The title bar says "DataServer Hadoop [Running]". The address bar shows "https://hadoop.apache.org". The main content area features the Apache Hadoop logo and a brief introduction: "The Apache™ Hadoop® project develops open-source software for reliable, scalable, distributed computing. The Apache Hadoop software library is a framework that allows for the distributed processing of large data sets across clusters of computers using simple programming models. It is designed to scale up from single servers to thousands of machines, each offering local computation and storage. Rather than rely on hardware to deliver high-availability, the library itself is designed to detect and handle failures at the application layer, so delivering a highly-available service on top of a cluster of computers, each of which may be prone to failures." Below this are three buttons: "Learn more >" (blue), "Download >" (orange), and "Getting started >" (green). The bottom of the page includes sections for "Latest news", "Modules", and "Related projects".

Acesse a página do Hadoop e clique em Download

## Instalação e Configuração do Ecossistema Hadoop

**Download**

Hadoop is released as source code tarballs with corresponding binary tarballs for convenience. The downloads are distributed via mirror sites and should be checked for tampering using GPG or SHA-256.

Version	Release date	Source download	Binary download	Release notes
3.1.2	2019 Feb 6	source (checksum signature)	binary (checksum signature)	Announcement
3.2.0	2019 Jan 16	source (checksum signature)	binary (checksum signature)	Announcement
2.9.2	2018 Nov 19	source (checksum signature)	binary (checksum signature)	Announcement
2.8.5	2018 Sep 15	source (checksum signature)	binary (checksum signature)	Announcement
2.7.7	2018 May 31	source (checksum signature)	binary (checksum signature)	Announcement

To verify Hadoop releases using GPG:

1. Download the release hadoop-X.Y.Z-src.tar.gz from a [mirror site](#).
2. Download the signature file hadoop-X.Y.Z-src.tar.gz.asc from [Apache](#).
3. Download the Hadoop KEYS file.
4. gpg --import KEYS
5. gpg --verify hadoop-X.Y.Z-src.tar.gz.asc

To perform a quick check using SHA-256:

1. Download the release hadoop-X.Y.Z-src.tar.gz from a [mirror site](#).
2. Download the checksum hadoop-X.Y.Z-src.tar.gz.mds from [Apache](#).
3. shasum -a 256 hadoop-X.Y.Z-src.tar.gz

All previous releases of Hadoop are available from the [Apache release archive](#) site.

Many third parties distribute products that include Apache Hadoop and related tools. Some of these are listed on the [Distributions](#) wiki page.


**License**

Faça o download da versão 3.2, opção binary.  
O arquivo será baixado no diretório /home/hadoop/Downloads

```
DataServer Hadoop [Running]
Applications Places Terminal
hadoop@dataserver:~$ cd Downloads/
[hadoop@dataserver Downloads]$ tar -xvf hadoop-3.2.0.tar.gz
```


Descompacte o arquivo

## Instalação e Configuração do Ecossistema Hadoop

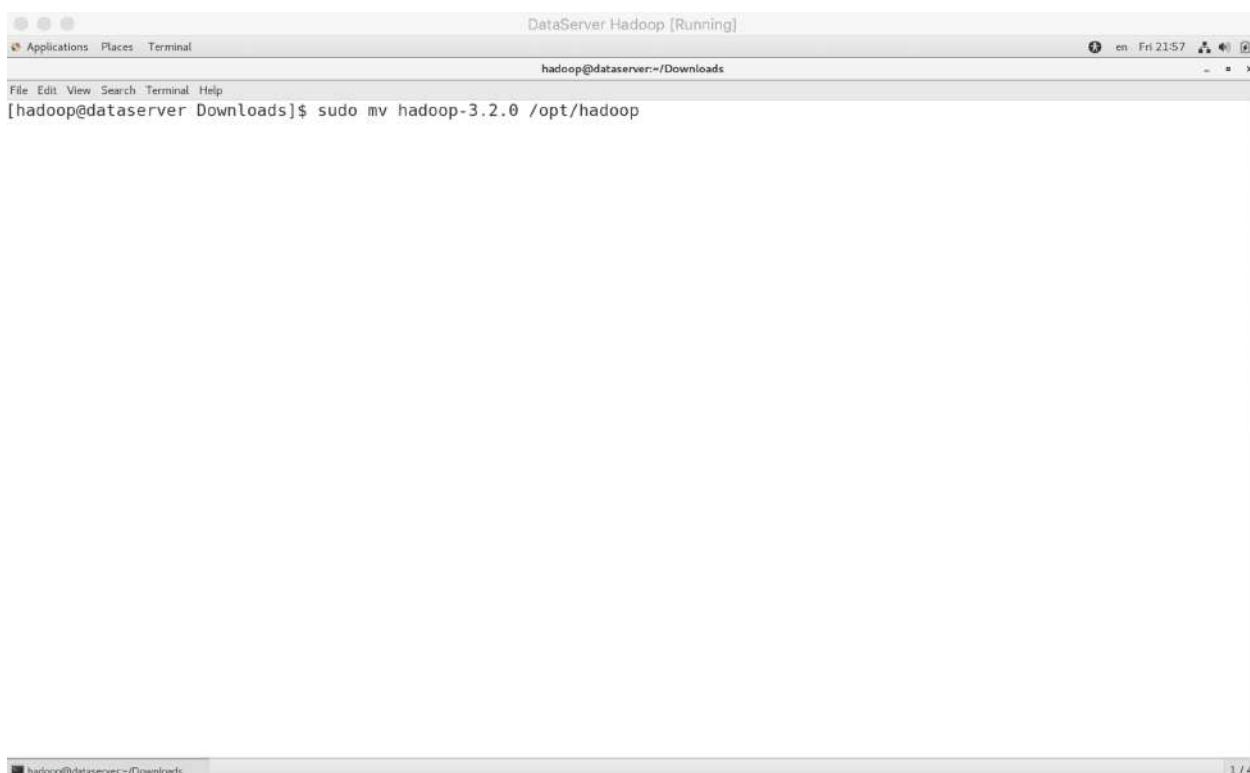

```
[hadoop@dataserver Downloads]$ sudo mv hadoop-3.2.0 /opt/hadoop
```


Mover o diretório para /opt/hadoop

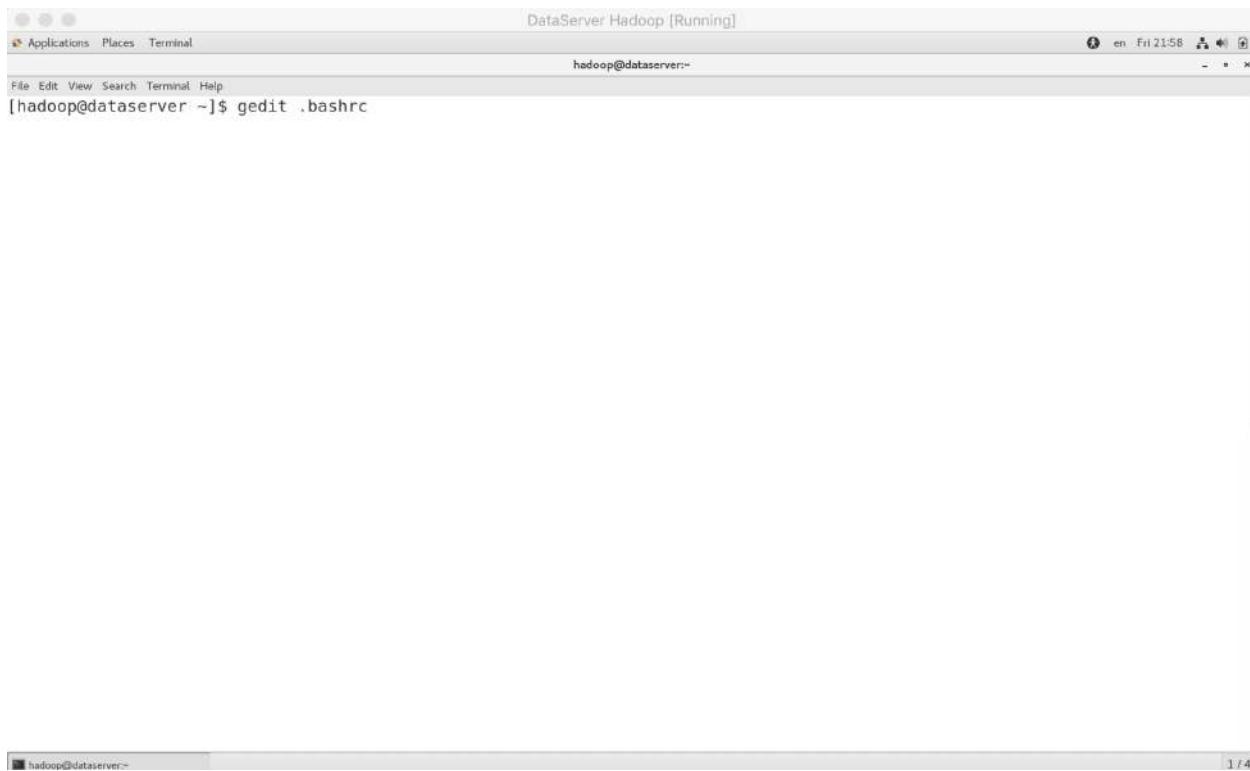

```
[hadoop@dataserver ~]$ gedit .bashrc
```

Abrir o arquivo de profile do usuário hadoop

## Instalação e Configuração do Ecossistema Hadoop

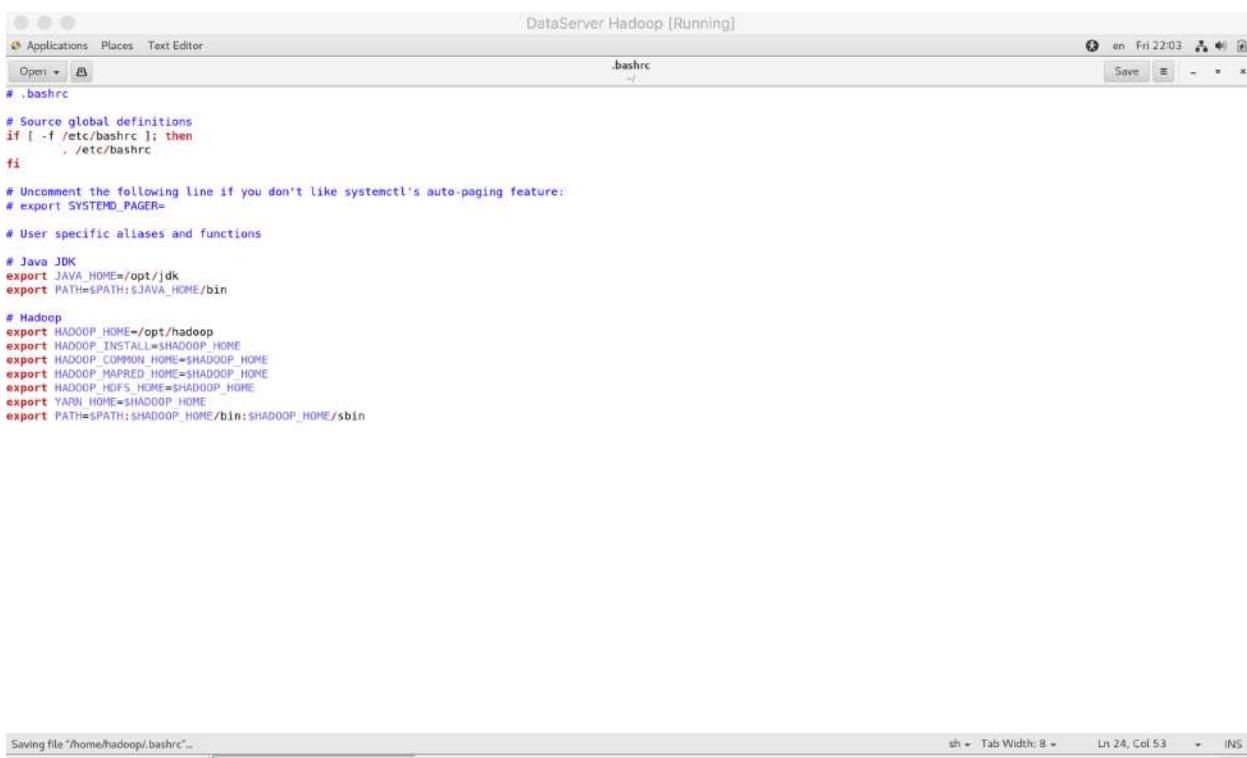

```

# Source global definitions
if [ -f /etc/bashrc ]; then
    . /etc/bashrc
fi


# Uncomment the following line if you don't like systemctl's auto-paging feature:
# export SYSTEMD_PAGER=

# User specific aliases and functions

# Java JDK
export JAVA_HOME=/opt/jdk
export PATH=$PATH:$JAVA_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin
  
```

Configure as variáveis de ambiente conforme mostrado na imagem acima e salve o arquivo

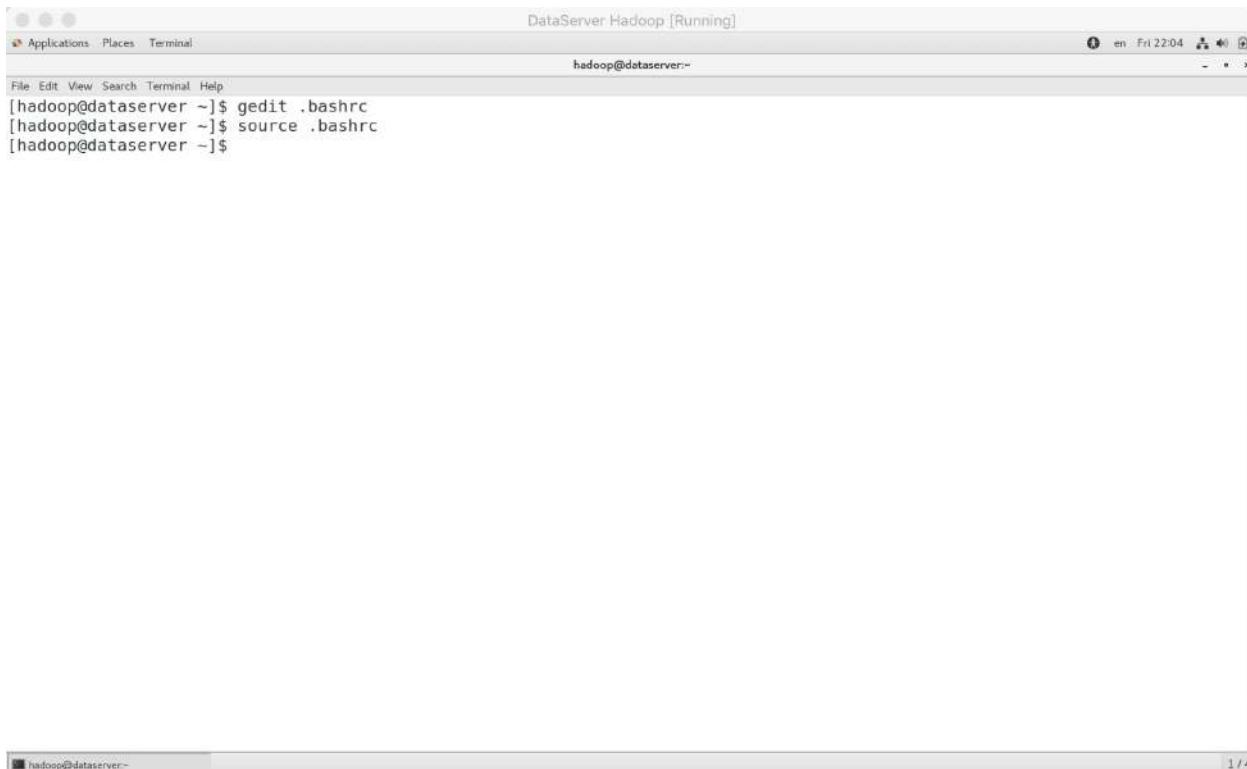


```

Saving file "/home/hadoop/.bashrc"...
hadoop@dataserver:~$ gedit .bashrc
hadoop@dataserver:~$ source .bashrc
hadoop@dataserver:~$ 
  
```

Execute source .bashrc para efetivar as mudanças das variáveis no SO

## Instalação e Configuração do Ecossistema Hadoop

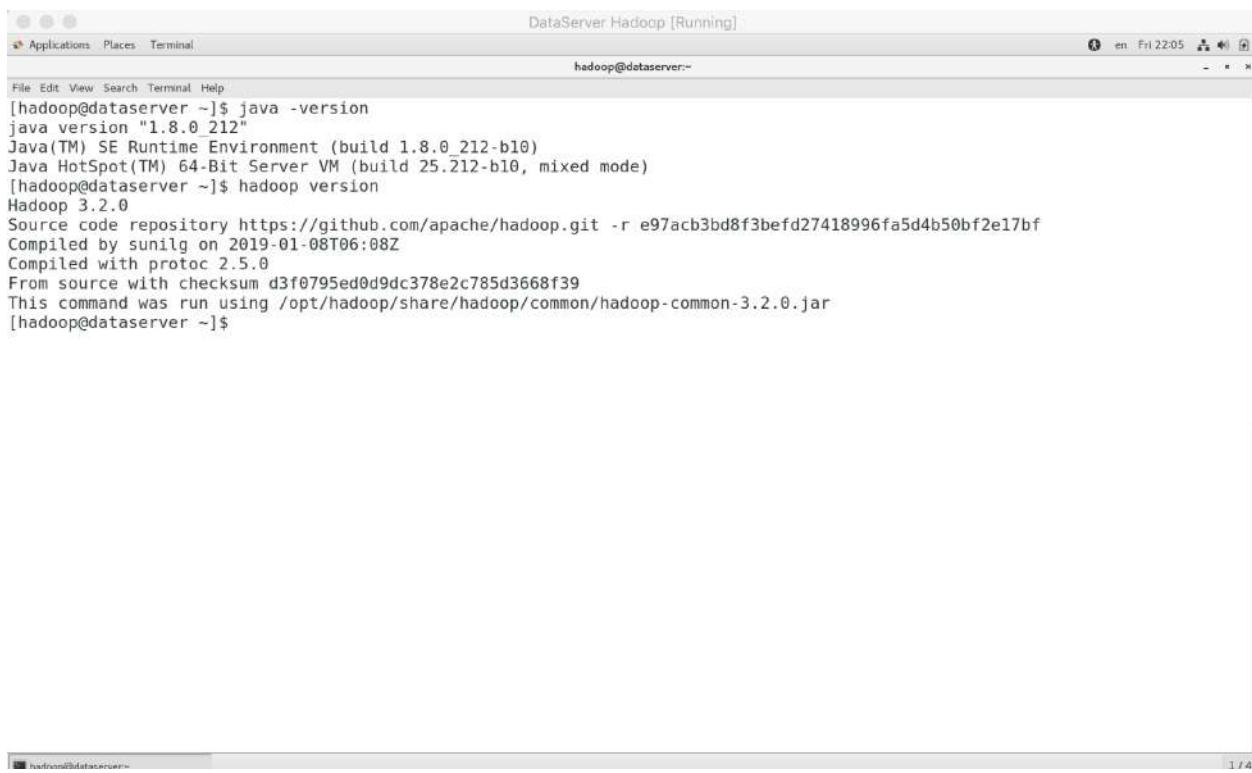


```
[hadoop@dataserver ~]$ java -version
java version "1.8.0_212"
Java(TM) SE Runtime Environment (build 1.8.0_212-b10)
Java HotSpot(TM) 64-Bit Server VM (build 25.212-b10, mixed mode)

[hadoop@dataserver ~]$ hadoop version
Hadoop 3.2.0
Source code repository https://github.com/apache/hadoop.git -r e97acb3bd8f3befd27418996fa5d4b50bf2e17bf
Compiled by sunilg on 2019-01-08T06:08Z
Compiled with protoc 2.5.0
From source with checksum d3f0795ed0d9dc378e2c785d3668f39
This command was run using /opt/hadoop/share/hadoop/common/hadoop-common-3.2.0.jar
```

Java e Hadoop instalados e configurados com sucesso!!!

## 5.4. Configuração do Hadoop


### 5.4.1. Editar arquivos de configuração do Hadoop

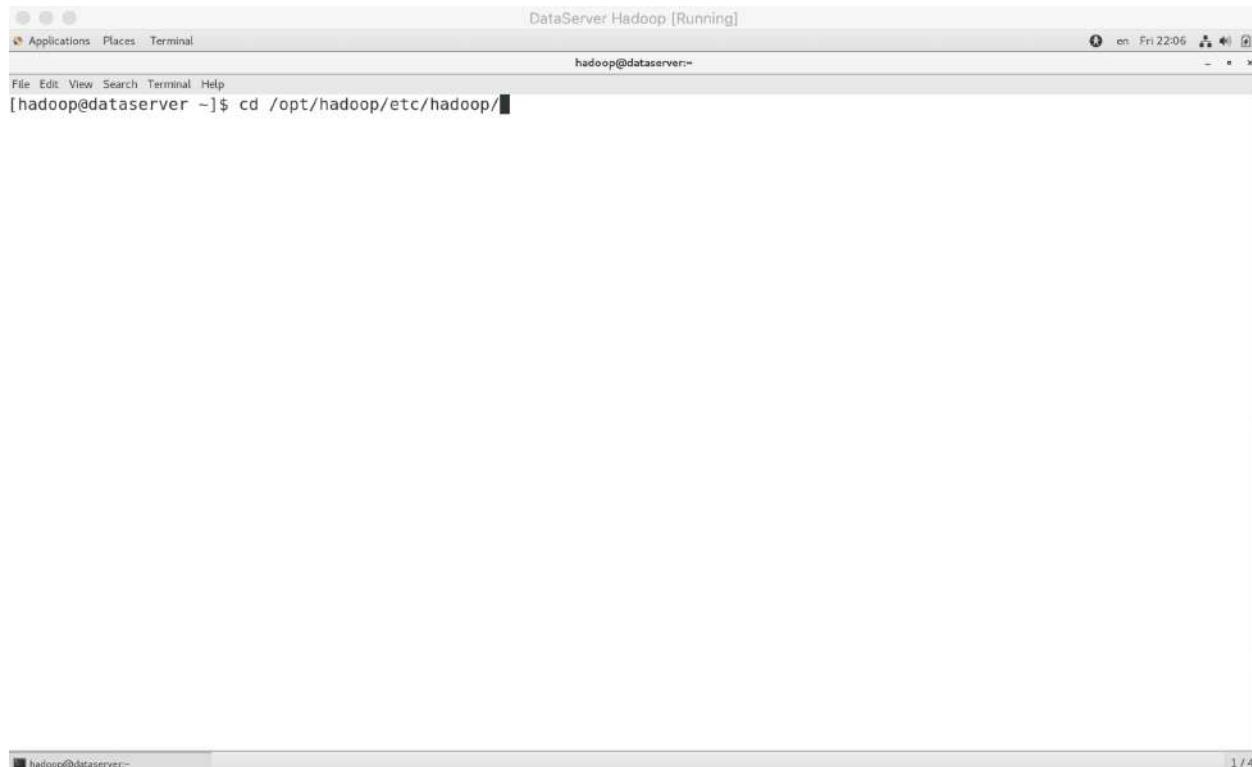

```
DataServer Hadoop [Running]
hadoop@datavm:~$ cd /opt/hadoop/etc/hadoop/
```

Os arquivos de configuração do Hadoop estão em  
[Diretório de instalação do Hadoop]/etc/hadoop  
Nesse caso: /opt/hadoop/etc/hadoop

## Instalação e Configuração do Ecossistema Hadoop

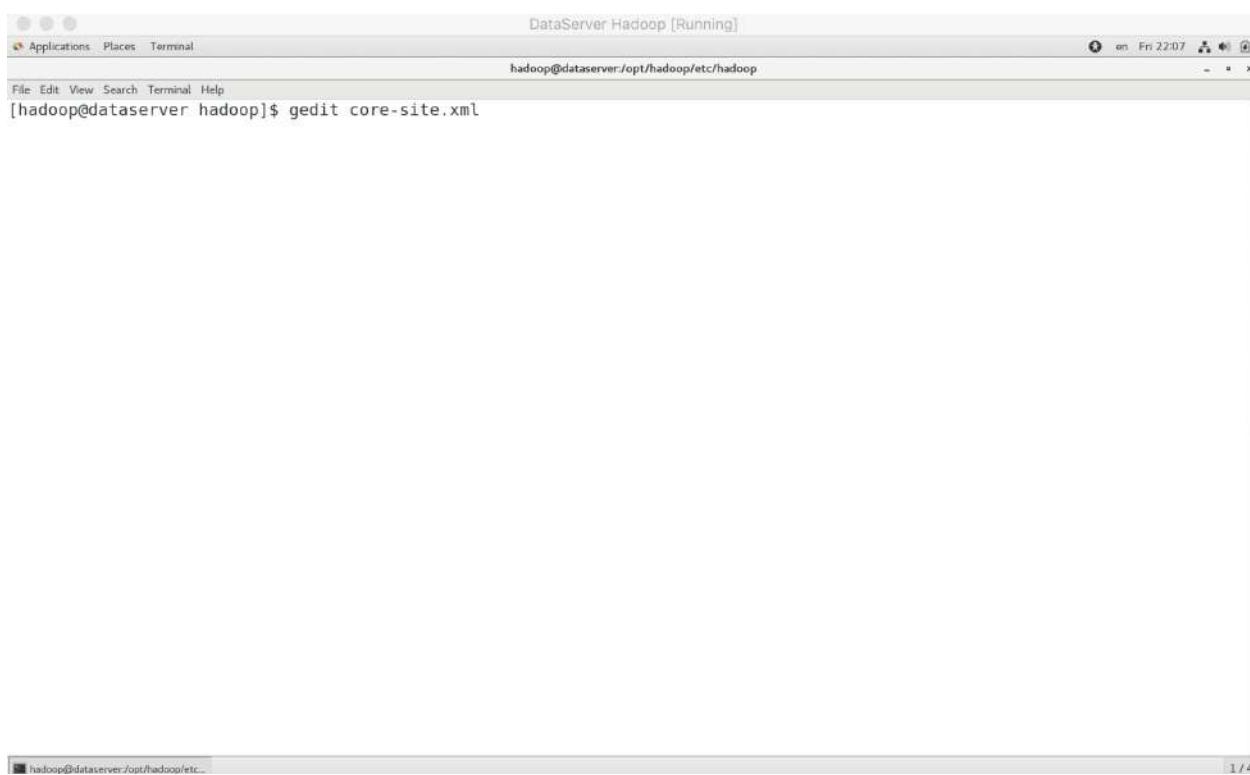

[hadoop@dataserver hadoop]\$ gedit core-site.xml

### Editar o arquivo core-site.xml



```
<?xml version='1.0' encoding='UTF-8'?>
<xslstylesheet type="text/xsl" href="configuration.xsl"?>
<!--
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

http://www.apache.org/licenses/LICENSE-2.0

Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License. See accompanying LICENSE file.
-->

<!-- Put site-specific property overrides in this file. -->
<configuration>
<property>
<name>fs.defaultFS</name>
<value>hdfs://localhost:9000</value>
</property>
</configuration>
```

Saving file "/opt/hadoop/etc/hadoop/core-site.xml" ...


hadoop@dataserver:/opt/hadoop/etc... core-site.xml (/opt/hadoop/etc/hado...

1 / 4

Acrescentar as propriedades conforme acima e salvar o arquivo.


Essa propriedade indica o endereço do HDFS.

## Instalação e Configuração do Ecossistema Hadoop

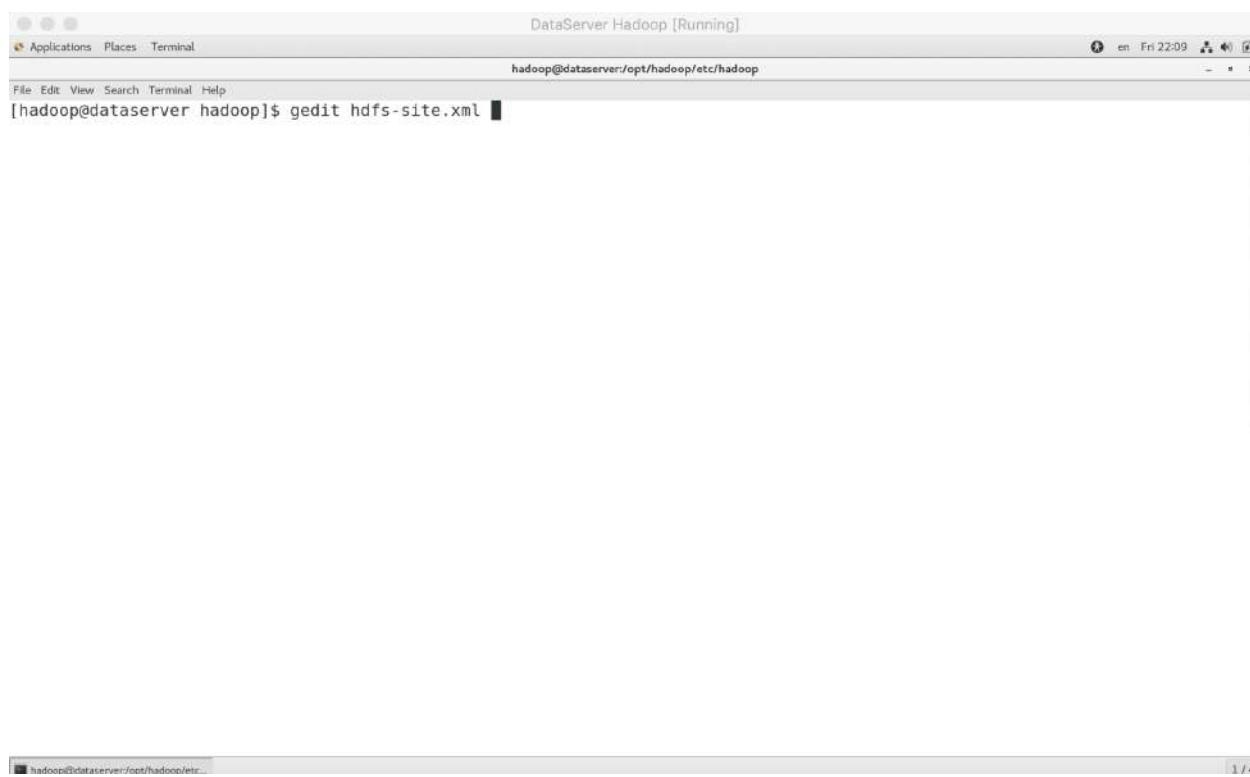

```
[hadoop@dataserver hadoop]$ gedit hdfs-site.xml
```

Editar o arquivo hdfs-site.xml

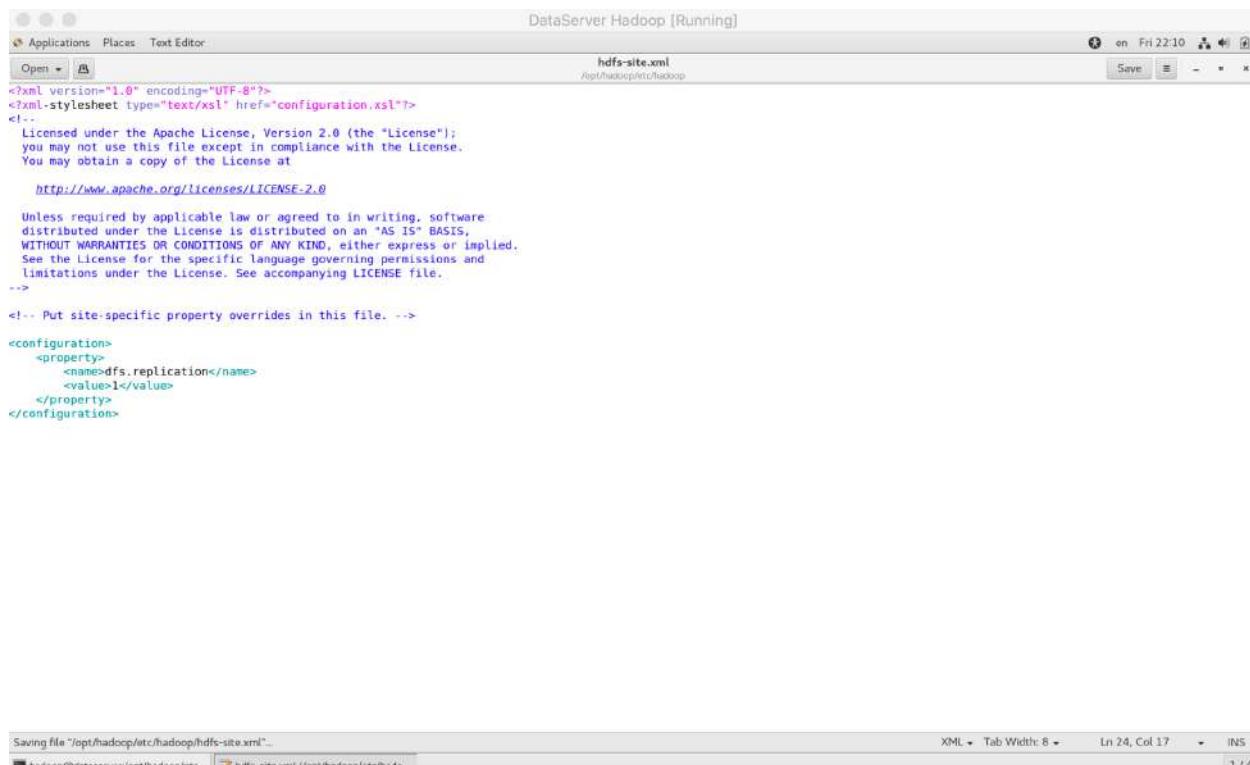

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet type="text/xsl" href="configuration.xsl"?>
<!--
  Licensed under the Apache License, Version 2.0 (the "License");
  you may not use this file except in compliance with the License.
  You may obtain a copy of the License at

  http://www.apache.org/licenses/LICENSE-2.0

  Unless required by applicable law or agreed to in writing, software
  distributed under the License is distributed on an "AS IS" BASIS,
  WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
  See the License for the specific language governing permissions and
  limitations under the License. See accompanying LICENSE file.
-->
<!-- Put site-specific property overrides in this file. -->
<configuration>
  <property>
    <name>dfs.replication</name>
    <value>1</value>
  </property>
</configuration>
```

Saving file "/opt/hadoop/etc/hadoop/hdfs-site.xml"...

Acrecentar as propriedades conforme acima e salvar o arquivo.

## Instalação e Configuração do Ecossistema Hadoop

### 5.4.2. Formatando o Namenode


hadoop@dataserver ~]\$ hdfs namenode -format

hdfs namenode –format


```
2019-06-28 22:13:00,489 INFO namenode.FSDirectory: ACLs enabled? false
2019-06-28 22:13:00,489 INFO namenode.FSDirectory: POSIX ACL inheritance enabled? true
2019-06-28 22:13:00,490 INFO namenode.FSDirectory: XAttrs enabled? true
2019-06-28 22:13:00,490 INFO namenode.NameNode: Caching file names occurring more than 10 times
2019-06-28 22:13:00,495 INFO snapshot.SnapshotManager: Loaded config captureOpenFiles: false, skipCaptureAccessTimeOnlyChange: false, snapshotDiffAllowSnapRootDescendant: true, maxSnapshotLimit: 65536
2019-06-28 22:13:00,496 INFO snapshot.SnapshotManager: SkipList is disabled
2019-06-28 22:13:00,525 INFO util.GSet: Computing capacity for map cachedBlocks
2019-06-28 22:13:00,525 INFO util.GSet: VM type      = 64-bit
2019-06-28 22:13:00,526 INFO util.GSet: 0.25% max memory 1.8 GB = 4.7 MB
2019-06-28 22:13:00,526 INFO util.GSet: capacity      = 2^19 = 524288 entries
2019-06-28 22:13:00,532 INFO metrics.TopMetrics: NNTop conf: dfs.namenode.top.window.num.buckets = 10
2019-06-28 22:13:00,532 INFO metrics.TopMetrics: NNTop conf: dfs.namenode.top.num.users = 10
2019-06-28 22:13:00,532 INFO metrics.TopMetrics: NNTop conf: dfs.namenode.top.windows.minutes = 1,5,25
2019-06-28 22:13:00,563 INFO namenode.FSNamesystem: Retry cache on namenode is enabled
2019-06-28 22:13:00,564 INFO namenode.FSNamesystem: Retry cache will use 0.03 of total heap and retry cache entry expiry time is 600000 millis
2019-06-28 22:13:00,566 INFO util.GSet: Computing capacity for map NameNodeRetryCache
2019-06-28 22:13:00,566 INFO util.GSet: VM type      = 64-bit
2019-06-28 22:13:00,566 INFO util.GSet: 0.029999999329447746% max memory 1.8 GB = 580.9 KB
2019-06-28 22:13:00,566 INFO util.GSet: capacity      = 2^16 = 65536 entries
2019-06-28 22:13:00,647 INFO namenode.FSImage: Allocated new BlockPoolId: BP-1867265039-127.0.0.1-1561785180618
2019-06-28 22:13:00,734 INFO common.Storage: Storage directory /tmp/hadoop-hadoop/dfs/name has been successfully formatted.
2019-06-28 22:13:00,744 INFO namenode.FSImageFormatProtobuf: Saving image file /tmp/hadoop-hadoop/dfs/name/current/fsimage.ckpt_00000000000000000000 using no compression
2019-06-28 22:13:00,902 INFO namenode.FSImageFormatProtobuf: Image file /tmp/hadoop-hadoop/dfs/name/current/fsimage.ckpt_0000000000000000 of size 401 bytes saved in 0 seconds .
2019-06-28 22:13:00,914 INFO namenode.NNStorageRetentionManager: Going to retain 1 images with txid >= 0
2019-06-28 22:13:00,927 INFO namenode.NameNode: SHUTDOWN_MSG:
*****SHUTDOWN_MSG: Shutting down NameNode at localhost/127.0.0.1*****
[hadoop@dataserver ~]$
```

Formatação realizada com sucesso

## 5.4.3. Iniciando o Hadoop

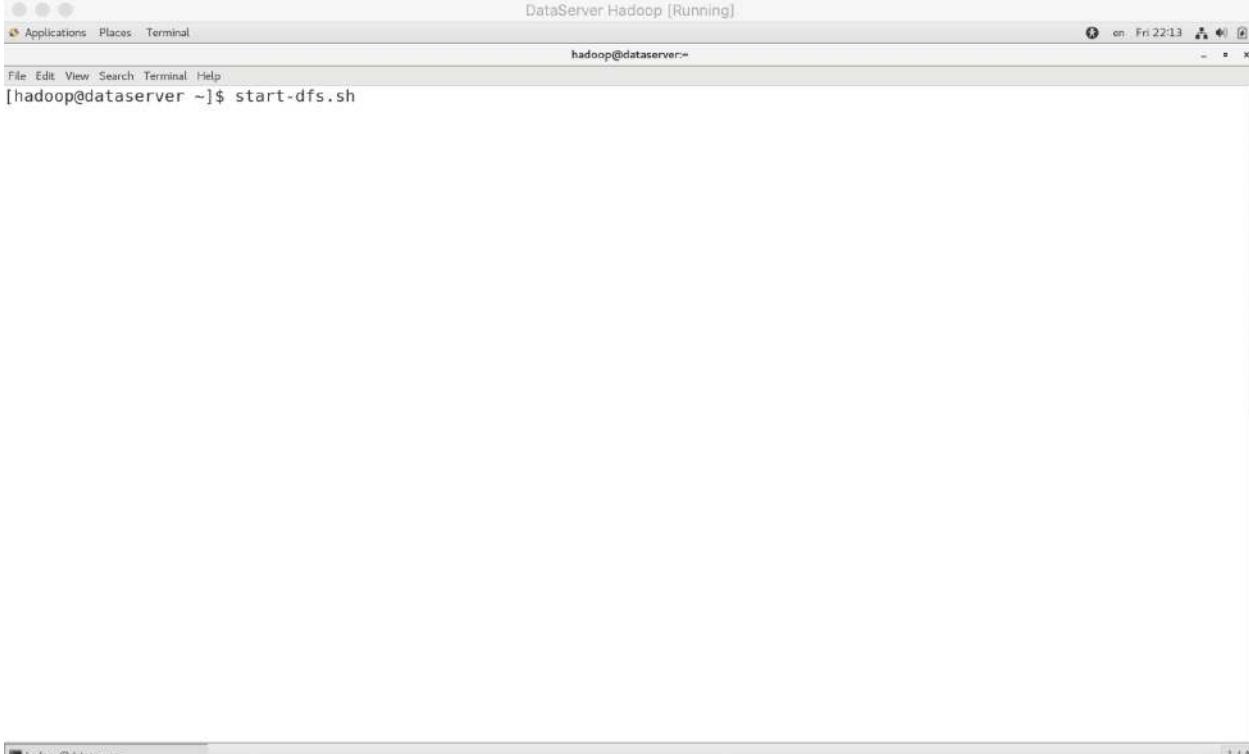


start-dfs.sh

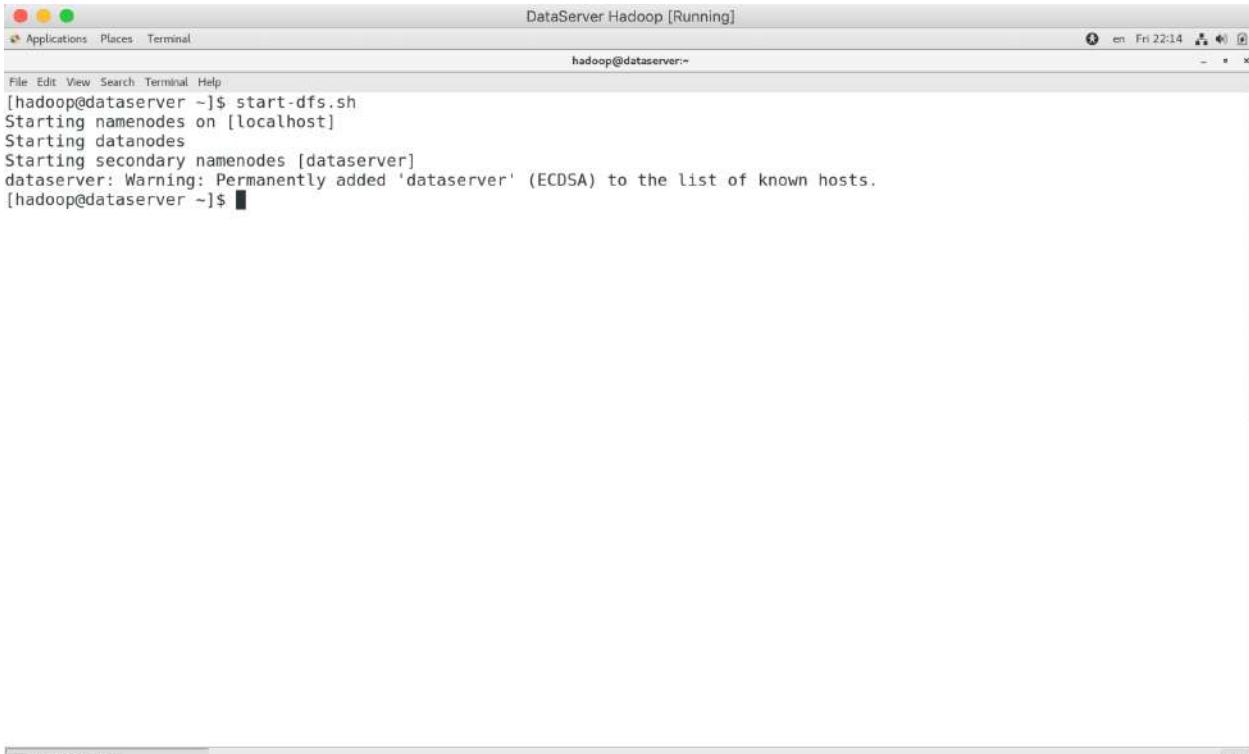

Hadoop iniciado


## Instalação e Configuração do Ecossistema Hadoop

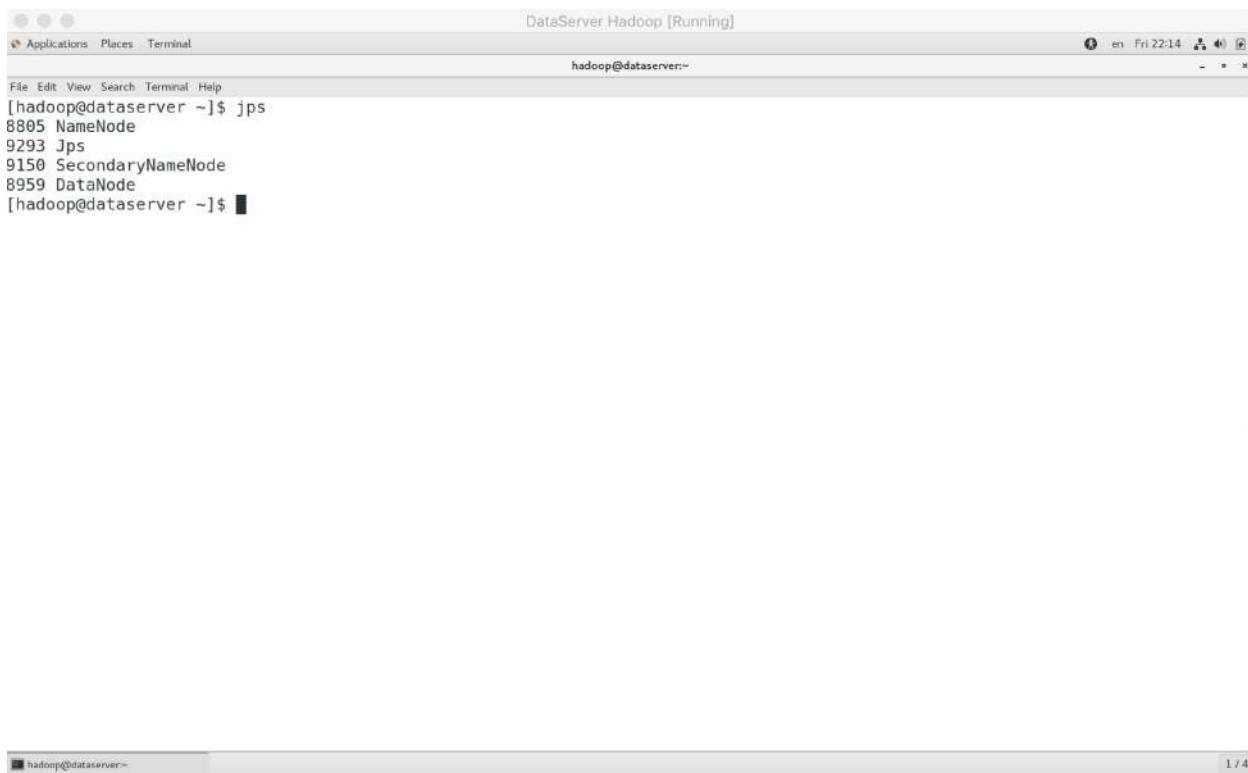


```
DataServer Hadoop [Running]
hadoop@dataserver:~$ jps
8805 NameNode
9293 Jps
9150 SecondaryNameNode
8959 DataNode
[hadoop@dataserver ~]$
```

Checkando os serviços inicializados com o comando **jps**

#### 5.4.4. Iniciando o Yarn

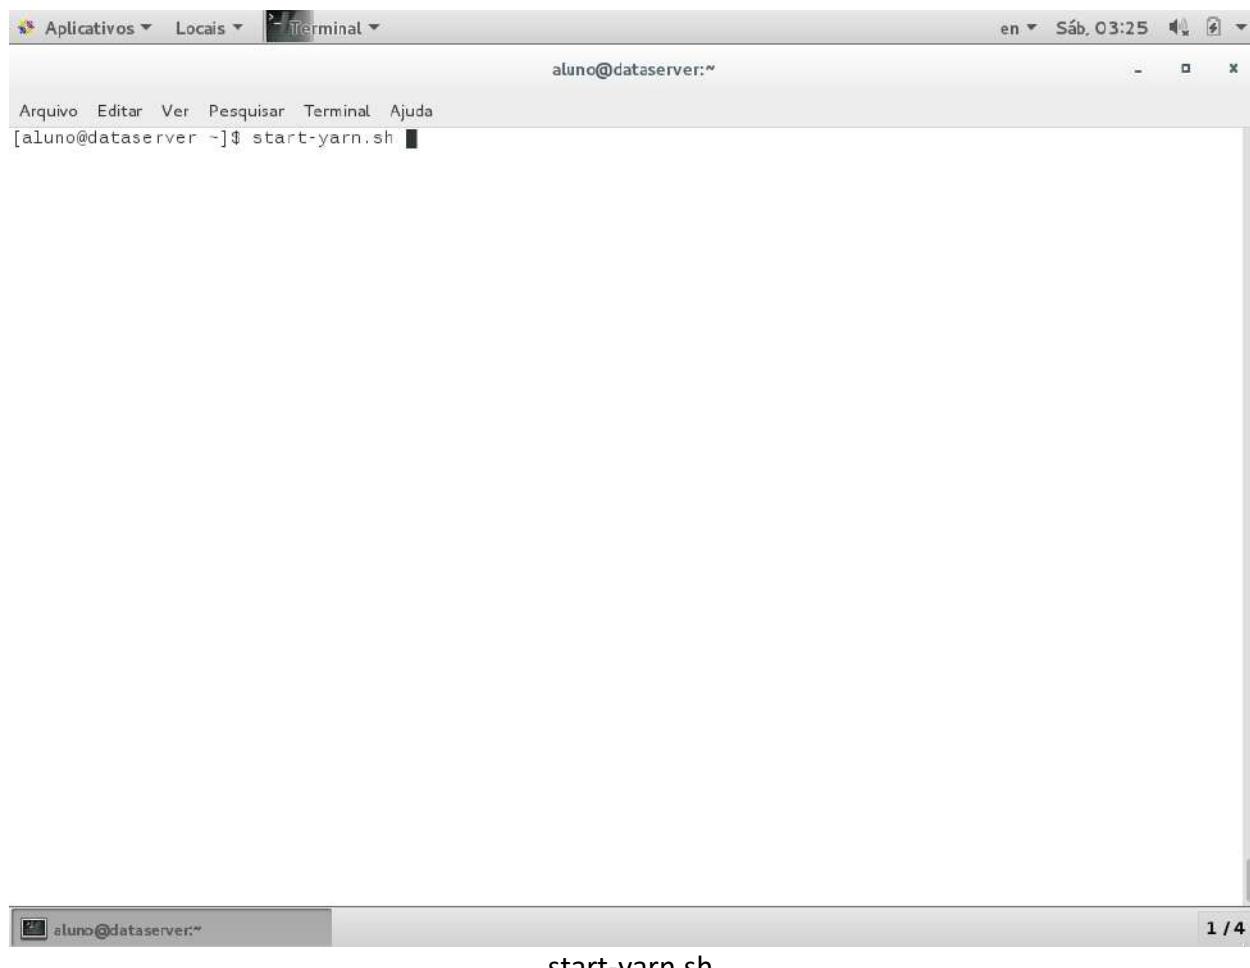

## Instalação e Configuração do Ecossistema Hadoop

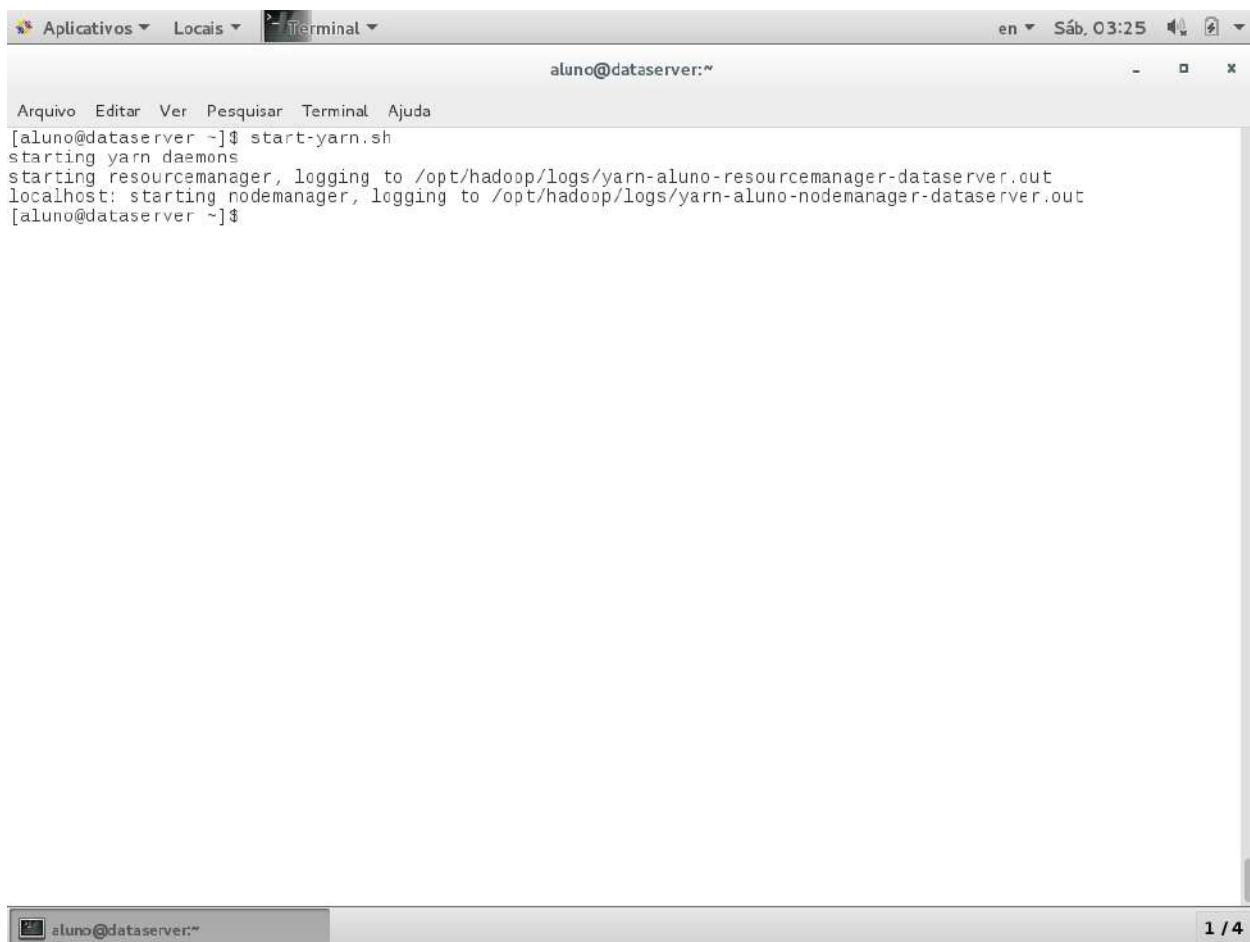

```
aluno@dataserver:~$ start-yarn.sh
starting yarn daemons
starting resourcemanager, logging to /opt/hadoop/logs/yarn-aluno-resourcemanager-dataserver.out
localhost: starting nodemanager, logging to /opt/hadoop/logs/yarn-aluno-nodemanager-dataserver.out
[aluno@dataserver ~]$
```

Yarn iniciado

1 / 4

## Instalação e Configuração do Ecossistema Hadoop




A screenshot of a Linux terminal window titled "Terminal". The window shows the user's session: "aluno@dataserver:~". The terminal displays the following command and its output:

```
[aluno@dataserver ~]$ start-yarn.sh
starting yarn daemons
starting resourcemanager, logging to /opt/hadoop/logs/yarn-aluno-resourcemanager-dataserver.out
localhost: starting nodemanager, logging to /opt/hadoop/logs/yarn-aluno-nodemanager-dataserver.out
[aluno@dataserver ~]$ jps
13329 NameNode
14037 ResourceManager
13782 SecondaryNameNode
13527 DataNode
14524 Jps
14189 NodeManager
[aluno@dataserver ~]$
```

Checando os serviços com o comando **jps**

1 / 4

## Instalação e Configuração do Ecossistema Hadoop

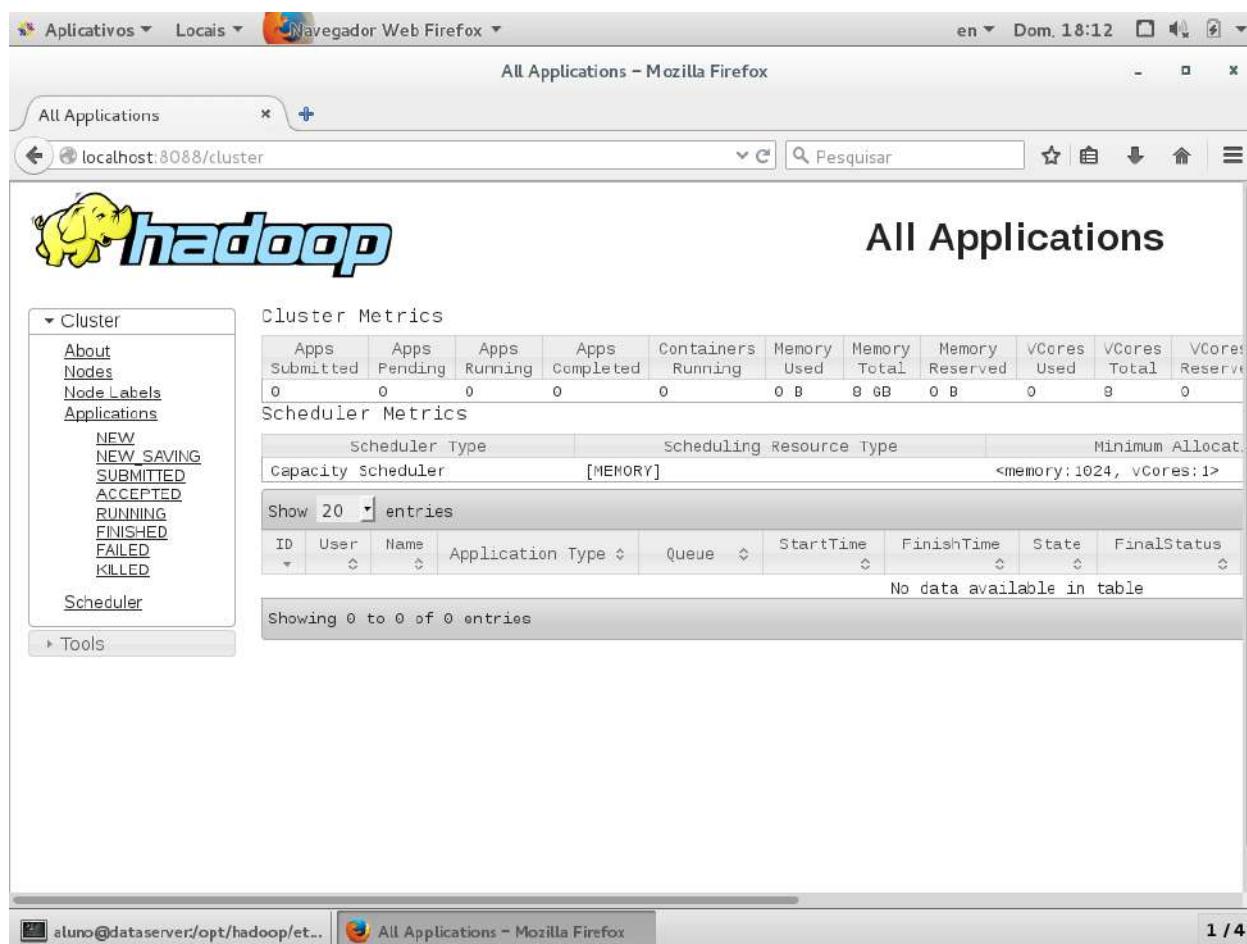

The screenshot shows the Hadoop Web UI running in Mozilla Firefox. The URL in the address bar is <http://localhost:8088/cluster>. The main page title is "All Applications". On the left, there's a sidebar with a yellow elephant icon and a navigation menu:

- Cluster
  - About
  - Nodes
  - Node Labels
  - Applications
    - NEW
    - NEW\_SAVING
    - SUBMITTED
    - ACCEPTED
    - RUNNING
    - FINISHED
    - FAILED
    - KILLED
  - Scheduler
  - Tools

The main content area displays two tables:

Apps Submitted	Apps Pending	Apps Running	Apps Completed	Containers Running	Memory Used	Memory Total	Memory Reserved	VCores Used	VCores Total	VCores Reserved
0	0	0	0	0	0 B	0 GB	0 B	0	0	0


Scheduler Metrics		Scheduler Type		Scheduling Resource Type		Minimum Allocat.	
Capacity Scheduler	[MEMORY]	<memory:1024, vcores:1>					
Show 20 entries							
ID	User	Name	Application Type	Queue	StartTime	FinishTime	State
No data available in table							

At the bottom of the main content area, it says "Showing 0 to 0 of 0 entries".

The browser status bar at the bottom shows the URL <http://localhost:8088/>.

Visualizando jobs – <http://localhost:8088>

## 5.5. Processando Big Data

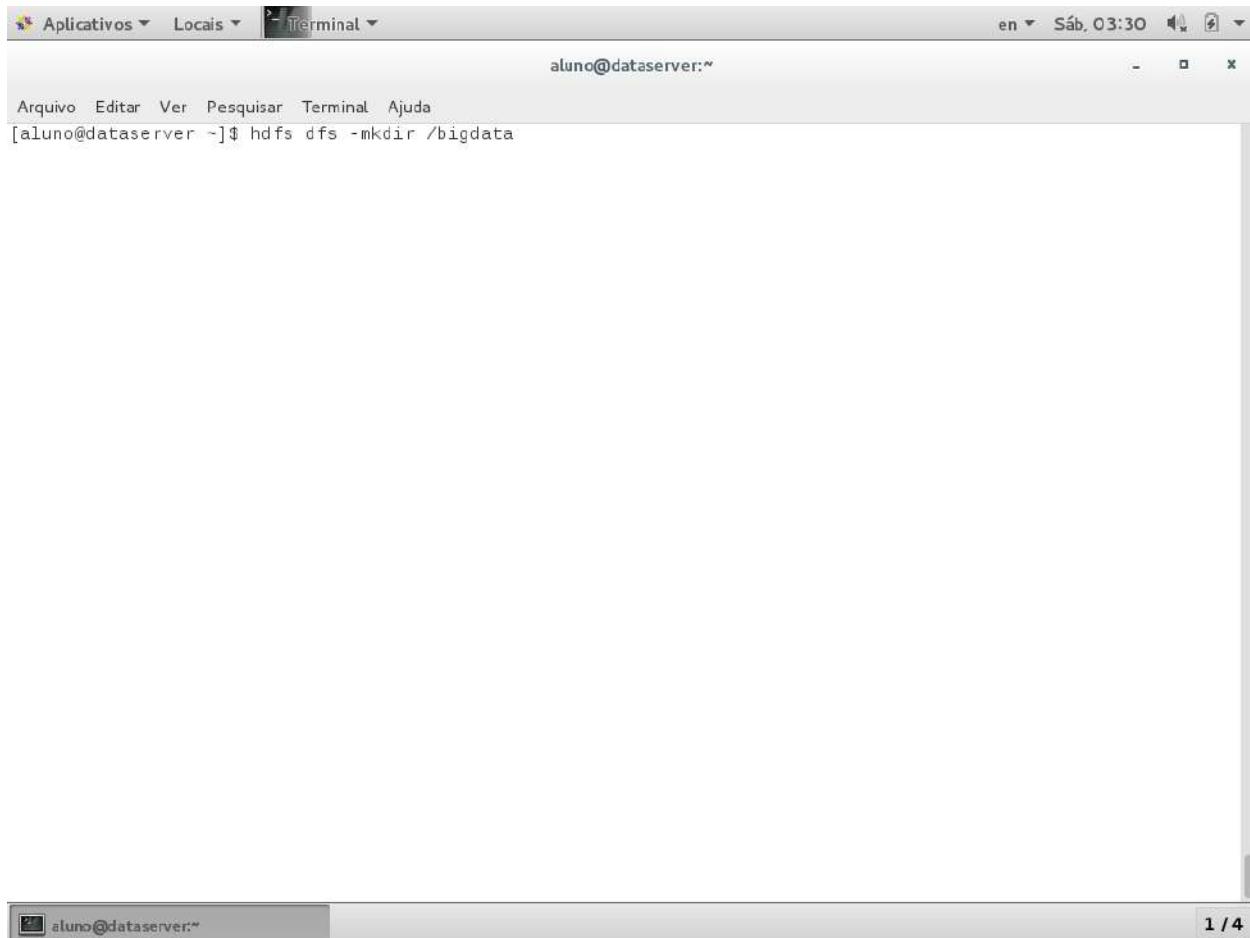

A screenshot of a Linux terminal window titled "Terminal". The window shows the command `hdfs dfs -mkdir /bigdata` being run by the user `aluno@dataserver:~`. The terminal interface includes a menu bar with "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The status bar at the bottom indicates "1 / 4".

Criar o diretório **bigdata** no HDFS

## Instalação e Configuração do Ecossistema Hadoop



```
aluno@dataserver:~$ Arquivo Editar Ver Pesquisar Terminal Ajuda
[aluno@dataserver ~]$ hadoop fs -ls /
Found 1 items
drwxr-xr-x - aluno supergroup 0 2016-01-30 03:30 /bigdata
[aluno@dataserver ~]$
```

1 / 4

Listar o HDFS e checar o diretório criado

## Instalação e Configuração do Ecossistema Hadoop



The screenshot shows the homepage of the [dados.gov.br](http://dados.gov.br) portal. At the top, there's a navigation bar with links for 'Aplicativos', 'Locais', and the browser info ('en', 'Sáb, 03:32'). Below that is a search bar and a menu bar with 'BRASIL', 'Acesso à informação', 'Participe', 'Serviços', 'Legislação', and 'Canais'. The main header 'dados.gov.br' is prominently displayed with a green background. A sidebar on the left lists 'Dados em destaque' including 'Compras públicas do governo federal', 'Ocorrências Aeronáuticas na Aviação Civil Brasileira', and 'Lista de Eleitores Filiados aos Partidos Políticos'. To the right, a box titled 'Publicações mais recentes' lists five entries:

Conjunto de dados	Autor	Quando
Aeroporto - 1º Balanço do PAC 2015	Sem Responsável	25 Jan
Cidades Digitais - 1º Balanço do PAC 2015	Sem Responsável	25 Jan
Centro de Iniciação ao Esporte - 1º ...	Sem Responsável	25 Jan
Base Cartográfica Contínua do Brasil - ...	Diretoria de ...	15 Dez
REGIÃO DE INFORMAÇÃO DE VOO - FIR	Divisão de Operações	15 Dez

Acessar o portal de dados abertos do governo federal

## Instalação e Configuração do Ecossistema Hadoop




The screenshot shows the homepage of the [dados.gov.br](http://dados.gov.br) portal. At the top, there's a search bar with the placeholder "Pesquisa ...". Below it, a message indicates there are 1068 datasets and 8685 resources. A sidebar on the left lists "Dados em destaque": "Compras públicas do governo federal" (with a link to [Dados Abertos do SIASG](#)), "Ocorrências Aeronáuticas na Aviação Civil Brasileira" (with a link to [CENIPA](#)), and "Lista de Eleitores Filiados aos Partidos Políticos" (with a link to [JusticaEleitoral.jus.br](#)). On the right, a box titled "Publicações mais recentes" lists five datasets:

Conjunto de dados	Autor	Quando
Aeroporto - 1º Balanço do PAC 2015	Sem Responsável	25 Jan
Cidades Digitais - 1º Balanço do PAC 2015	Sem Responsável	25 Jan
Centro de Iniciação ao Esporte - 1º ...	Sem Responsável	25 Jan
Base Cartográfica Contínua do Brasil - ...	Diretoria de ...	15 Dez
REGIÃO DE INFORMAÇÃO DE VOO - FIR	Divisão de Operações	15 Dez

Clicar no link de compras públicas

## Instalação e Configuração do Ecossistema Hadoop

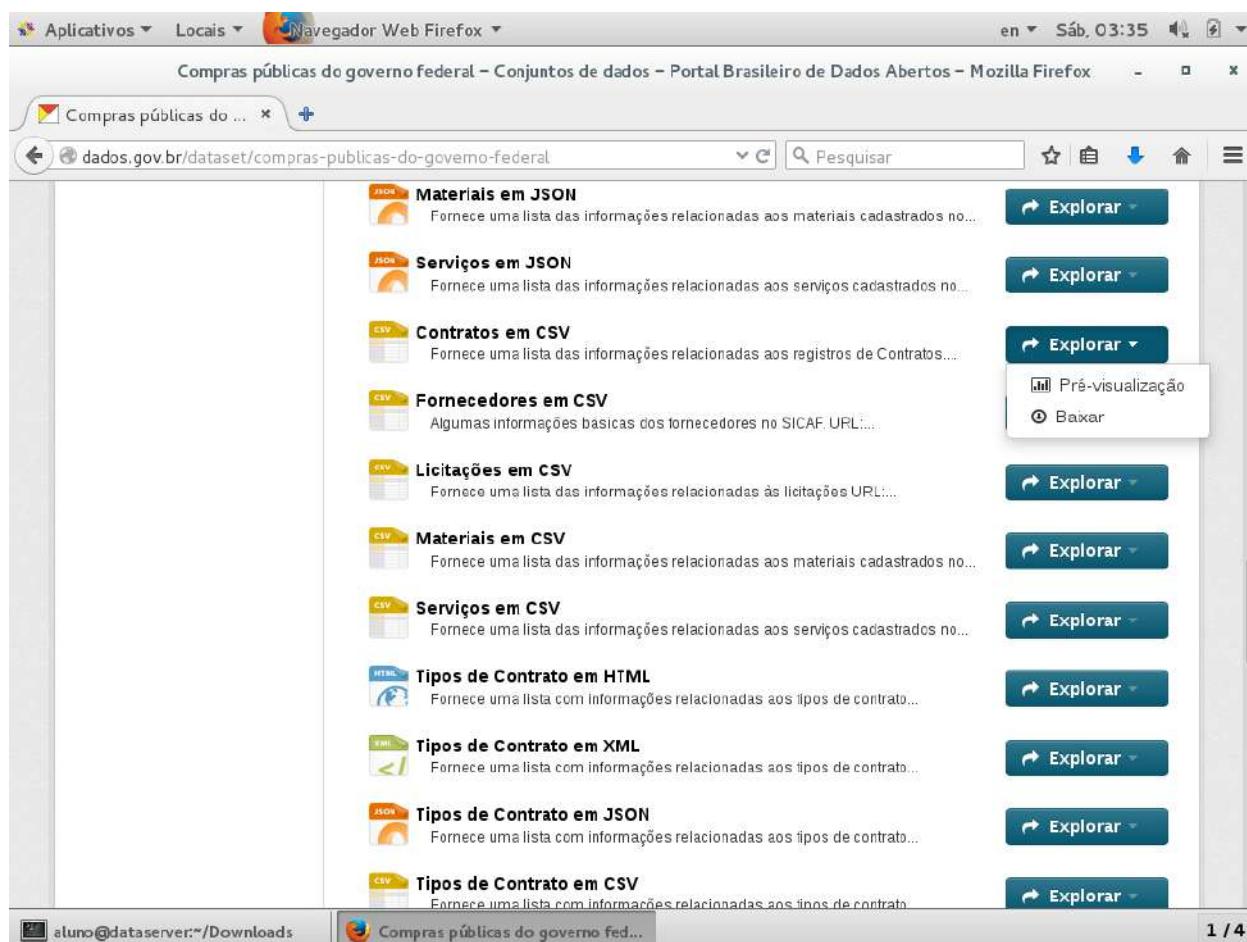

Compras públicas do governo federal – Conjuntos de dados – Portal Brasileiro de Dados Abertos – Mozilla Firefox

dados.gov.br/dataset/compras-publicas-do-governo-federal

Materiais em JSON  
Fornecem uma lista das informações relacionadas aos materiais cadastrados no...

Serviços em JSON  
Fornecem uma lista das informações relacionadas aos serviços cadastrados no...

Contratos em CSV  
Fornecem uma lista das informações relacionadas aos registros de Contratos...

Fornecedores em CSV  
Algumas informações básicas dos fornecedores no SICAF URL...

Licitações em CSV  
Fornecem uma lista das informações relacionadas às licitações URL...

Materiais em CSV  
Fornecem uma lista das informações relacionadas aos materiais cadastrados no...

Serviços em CSV  
Fornecem uma lista das informações relacionadas aos serviços cadastrados no...

Tipos de Contrato em HTML  
Fornecem uma lista com informações relacionadas aos tipos de contrato...


Tipos de Contrato em XML  
Fornecem uma lista com informações relacionadas aos tipos de contrato...

Tipos de Contrato em JSON  
Fornecem uma lista com informações relacionadas aos tipos de contrato...

Tipos de Contrato em CSV  
Fornecem uma lista com informações relacionadas aos tipos de contrato...

Baixar o arquivo de contratos em formato csv (pode ser qualquer um)

## Instalação e Configuração do Ecossistema Hadoop

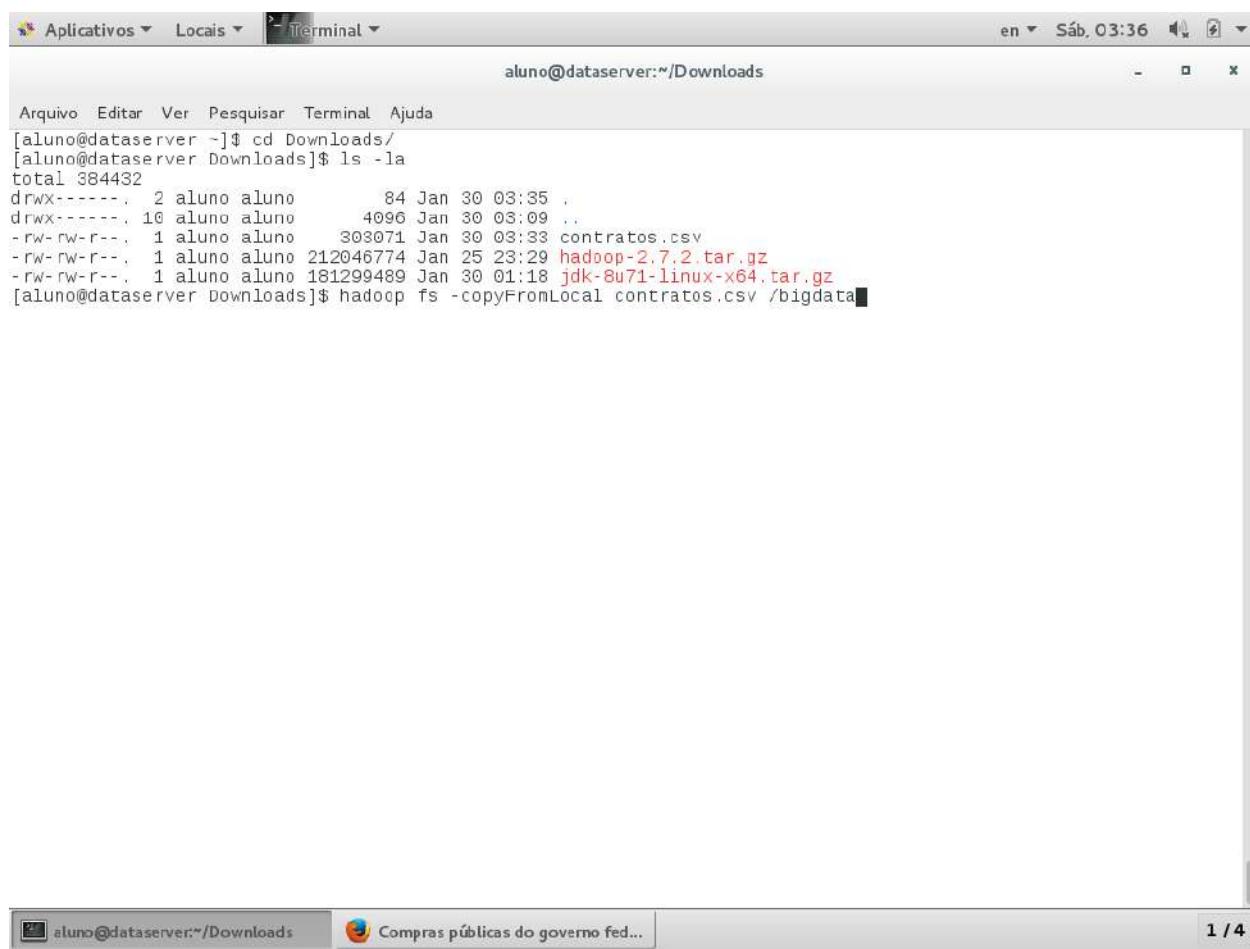


The screenshot shows a terminal window titled "Terminal" with the command prompt "aluno@dataserver:~/Downloads". The user has run the command "ls -la" to list files in the Downloads directory. The output shows several files, including "contratos.csv", "hadoop-2.7.2.tar.gz", and "jdk-8u71-linux-x64.tar.gz". Below this, the user has run the HDFS command "hadoop fs -copyFromLocal contratos.csv /bigdata".

```
[aluno@dataserver ~]$ cd Downloads/
[aluno@dataserver Downloads]$ ls -la
total 384432
drwx-----, 2 aluno aluno      84 Jan 30 03:35 .
drwx-----, 10 aluno aluno     4096 Jan 30 03:09 ..
-rw-rw-r--,  1 aluno aluno   303071 Jan 30 03:33 contratos.csv
-rw-rw-r--,  1 aluno aluno 212046774 Jan 25 23:29 hadoop-2.7.2.tar.gz
-rw-rw-r--,  1 aluno aluno 181299489 Jan 30 01:18 jdk-8u71-linux-x64.tar.gz
[aluno@dataserver Downloads]$ hadoop fs -copyFromLocal contratos.csv /bigdata
```

Copiar o arquivo para a pasta bigdata no HDFS

## Instalação e Configuração do Ecossistema Hadoop

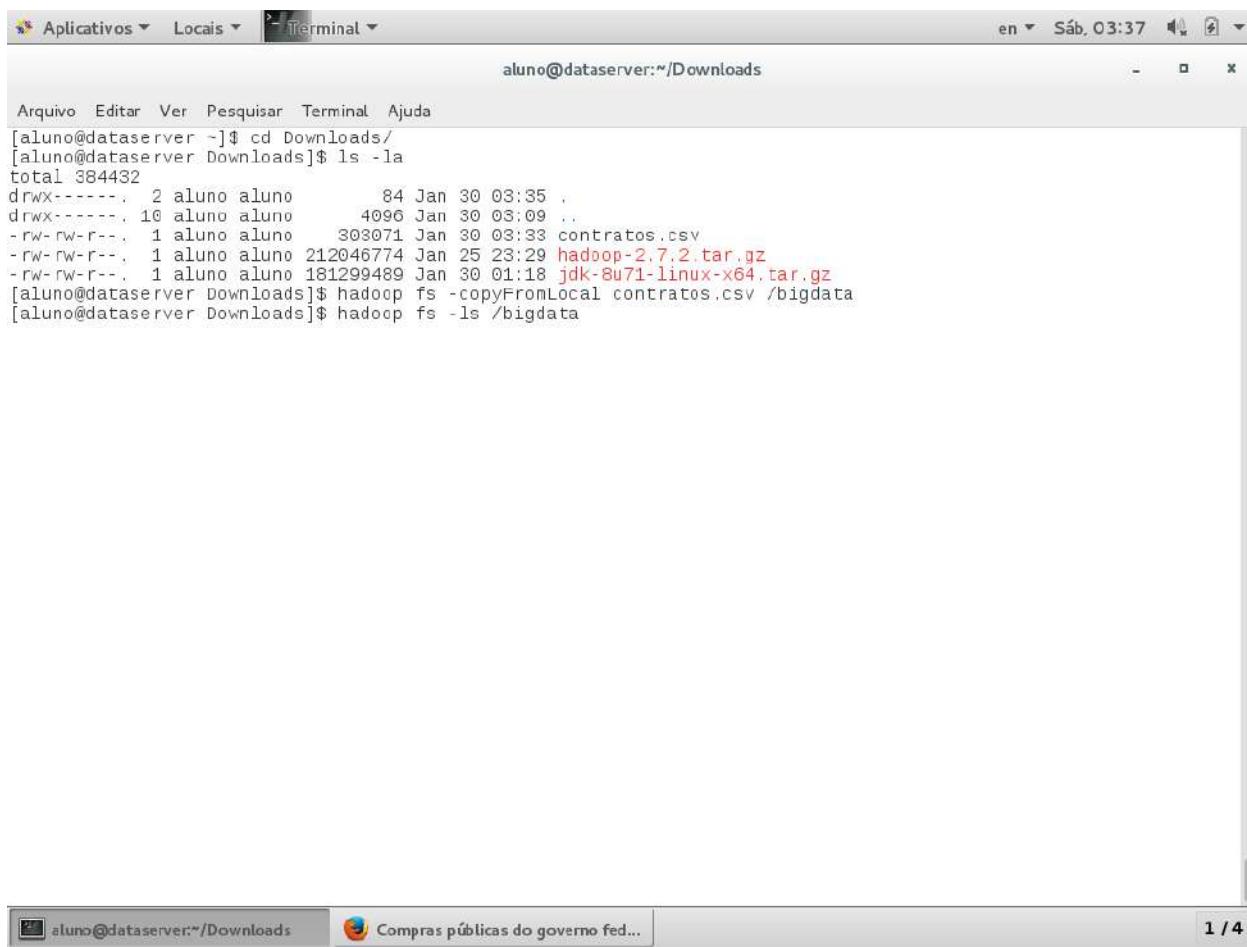


The screenshot shows a terminal window with the following session:

```
[aluno@dataserver ~]$ cd Downloads/
[aluno@dataserver Downloads]$ ls -la
total 384432
drwx-----, 2 aluno aluno      84 Jan 30 03:35 .
drwx-----, 10 aluno aluno     4096 Jan 30 03:09 ..
-rw-rw-r--, 1 aluno aluno    303071 Jan 30 03:33 contratos.csv
-rw-rw-r--, 1 aluno aluno 212046774 Jan 25 23:29 hadoop-2.7.2.tar.gz
-rw-rw-r--, 1 aluno aluno 181299489 Jan 30 01:18 jdk-8u71-linux-x64.tar.gz
[aluno@dataserver Downloads]$ hadoop fs -copyFromLocal contratos.csv /bigdata
[aluno@dataserver Downloads]$ hadoop fs -ls /bigdata
```

Listar o diretório bigdata

## Instalação e Configuração do Ecossistema Hadoop

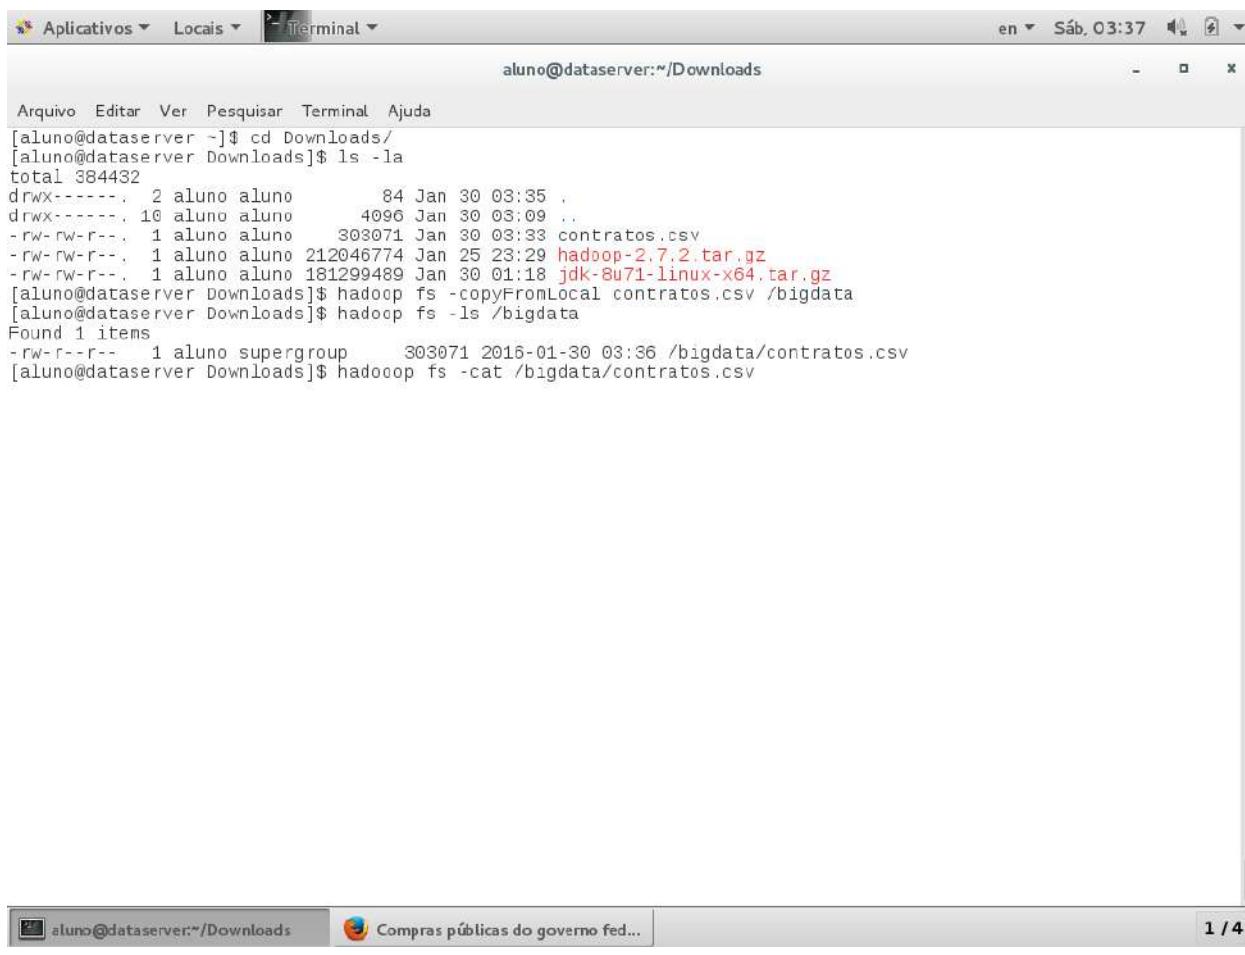

```
aluno@dataserver:~/Downloads
Arquivo Editar Ver Pesquisar Terminal Ajuda
[aluno@dataserver ~]$ cd Downloads/
[aluno@dataserver Downloads]$ ls -la
total 384432
drwx-----, 2 aluno aluno      84 Jan 30 03:35 .
drwx-----, 10 aluno aluno     4096 Jan 30 03:09 ..
-rw-rw-r--,  1 aluno aluno    303071 Jan 30 03:33 contratos.csv
-rw-rw-r--,  1 aluno aluno 212046774 Jan 25 23:29 hadoop-2.7.2.tar.gz
-rw-rw-r--,  1 aluno aluno 181299489 Jan 30 01:18 jdk-8u71-linux-x64.tar.gz
[aluno@dataserver Downloads]$ hadoop fs -copyFromLocal contratos.csv /bigdata
[aluno@dataserver Downloads]$ hadoop fs -ls /bigdata
Found 1 items
-rw-r--r--,  1 aluno supergroup    303071 2016-01-30 03:36 /bigdata/contratos.csv
[aluno@dataserver Downloads]$ hadoop fs -cat /bigdata/contratos.csv
```

[Ver o conteúdo do arquivo](#)

1 / 4

## Instalação e Configuração do Ecossistema Hadoop

```


Aplicativos Locais Terminal en Sáb, 03:38
aluno@dataserver:~/Downloads

Arquivo Editar Ver Pesquisar Terminal Ajuda
25 distrito do departamento nacional de producao mineral no estado de alagoas.,1,48425000080/97,,Fornecedor 70.0
05.657/0001-27: DINAMICA SERVICOS GERAIS LTDA,03/11/1997,lei/8.666/93., 03/11/1997,02/11/1998,"R$ 9,708.96",/contratos/id/contrato/32302750000011997/aditivos,/contratos/id/contrato/32302750000011997/apostilamentos,/contratos/id/contrato/32302750000011997/eventos
20006350000011997,200063: MJ-DFF-SUPERINTENDENCIA REGIONAL/RS,2: TOMADA DE PREÇOS,000019/1997,50: CONTRATO,Licitação 20006302000191997,,00001/1997,Contratação de empresa para realização de serviço de manutenção pre ventiva e corretiva nos equipamentos de informática pertencentes a SR/DPF/R S e suas Delegacias descentralizadas,2,084300 11006/97-04,,Fornecedor 82.885.112/0001-31: VR COMPUTADORES LTDA,01/01/1998,"Art. 22, II da Lei 8.666/93",01/01/1998,31/12/1998,"R$ 132,000.00",/contratos/id/contrato/20006350000011997/aditivos,/contratos/id/contrato/20006350000011997/apostilamentos,/contratos/id/contrato/20006350000011997/eventos
20009257000011997,200092: SUPERINTENDENCIA REG.DEP.POLICIA FEDERAL- PE,,0,57: CONVÉNIO,Licitação 200092null00000 0000,,00001/1997,"Prorrogação da vigência do Convênio de Cooperação recíproca entre as partes conveniadas, visan do o desenvolvimento de atividades conjuntas relacionadas ao estágio de estudantes",0,082000141519643,,,24/05/1999,"Decreto nº 87.497/82 e suas alterações; IN/SAF nº 07/92, alterada pelas IN/SAF nºs 01/93 e 06/94 e Lei nº 8. 666/93.",24/05/1999,23/05/2000,"R$ 150,000.00",/contratos/id/contrato/20009257000011997/aditivos,/contratos/id/contrato/20009257000011997/apostilamentos,/contratos/id/contrato/20009257000011997/eventos
15301054000011997,153010: MEC-CEFET-CENT.FED.ED.TEC.CELESO FONSECA/RJ,3: CONCORRÊNCIA,00003/1997,54: CONCESSÃO,Licitação 15301003000031997,,00001/1997,"Concessão de uso para instalação de 12 (doze ) outdoors, no tamanho 3m x 9m mediante remuneração na testada dos muros existentes não incluindo a ocupação interna.",5,23063001327/97-84 ,,Fornecedor 29.248.390/0001-03: Klimes Rio Propaganda ao Ar LivreLtda,15/12/1997,lei 8897/85 e lei 8666/93 e su as atualizações,15/12/1997,15/12/1998,"R$ 3,000.00",/contratos/id/contrato/15301054000011997/aditivos,/contratos /id/contrato/15301054000011997/apostilamentos,/contratos/id/contrato/15301054000011997/eventos
25442050000011997,254420: FUNDACAO OSWALDO CRUZ/RJ,4: CONCORRÊNCIA INTERNACIONAL,00008/1996,50: CONTRATO,Licitação 25442004000081996,,00001/1997,Pretação de serviços de operação do Espaço Museu da Vida da Fiocruz,4,25380011 6889663,,Fornecedor 31.880.164/0001-84: HOPE-CONSULTORIA DE RECURSOS HUMANOS LTDA,14/01/1997,Artigo 62 da Lei 8 .666/93,14/01/1997,14/01/1998,"R$ 1,485,188.05",/contratos/id/contrato/25442050000011997/aditivos,/contratos/id/contrato/25442050000011997/apostilamentos,/contratos/id/contrato/25442050000011997/eventos
19311250000011997,193112: IBAMA-SUPERINTENDENCIA ESTADUAL/MS,6: DISPENSA DE LICITAÇÃO,00001081/1997,50: CONTRATO ,Licitação 19311206010811997,,00001/1997,"Locação de imóvel situado à Rua Paranaiba, 272, centro, Três Lagoas MS , que a LOCADORA entregará ao LOCATÁRIO em perfeito estado de conservação e asseio, livre e desembaraçado de qua lquer ônus judicial ou extrajudicial, para sua utilização.",4,02014001081/97-74,***546088**,,01/08/1997,Inciso X do Art. 24 da Lei 8.666/93,01/08/1997,31/07/1998,"R$ 8,400.00",/contratos/id/contrato/19311250000011997/aditivos ,/contratos/id/contrato/19311250000011997/apostilamentos,/contratos/id/contrato/19311250000011997/eventos
25003850000011997,250038: GERENCIA ESTADUAL EM SERGIPER/MS/SE,2: TOMADA DE PREÇOS,00001/1997,50: CONTRATO,Licitação 25003802000011997,,00001/1997,Prestação de serviços de fornecimento de passagens aéreas domésticas,7,333591/ 0009141/97,,Fornecedor 32.705.949/0001-83: PONTAL TURISMO LTDA,23/05/1997,"Lei 8666/93, alterada pela lei 8883/9 3.",23/05/1997,31/12/1997,"R$ 53,353.60",/contratos/id/contrato/25003850000011997/aditivos,/contratos/id/contrat o/25003850000011997/apostilamentos,/contratos/id/contrato/25003850000011997/eventos
[aluno@dataserver Downloads]$
```




Conteúdo do arquivo já gravado no HDFS

## Instalação e Configuração do Ecossistema Hadoop

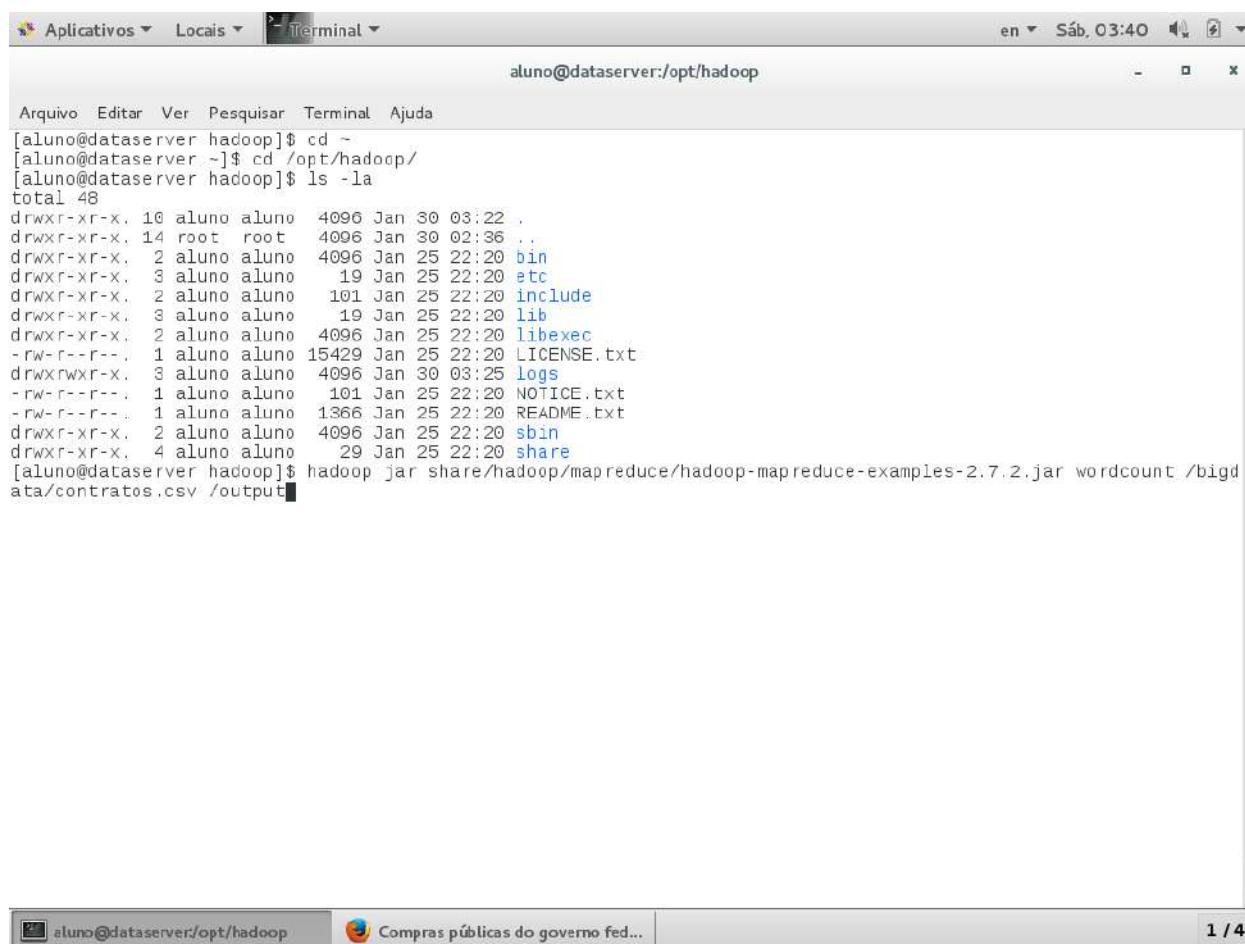


```
aluno@dataserver:/opt/hadoop
Arquivo Editar Ver Pesquisar Terminal Ajuda
[aluno@dataserver hadoop]$ cd ~
[aluno@dataserver ~]$ cd /opt/hadoop/
[aluno@dataserver hadoop]$ ls -la
total 48
drwxr-xr-x. 10 aluno aluno 4096 Jan 30 03:22 .
drwxr-xr-x. 14 root root 4096 Jan 30 02:36 ..
drwxr-xr-x.  2 aluno aluno 4096 Jan 25 22:20 bin
drwxr-xr-x.  3 aluno aluno 19 Jan 25 22:20 etc
drwxr-xr-x.  2 aluno aluno 101 Jan 25 22:20 include
drwxr-xr-x.  3 aluno aluno 19 Jan 25 22:20 lib
drwxr-xr-x.  2 aluno aluno 4096 Jan 25 22:20 libexec
-rw-r--r--.  1 aluno aluno 15429 Jan 25 22:20 LICENSE.txt
drwxrwxr-x.  3 aluno aluno 4096 Jan 30 03:25 logs
-rw-r--r--.  1 aluno aluno 101 Jan 25 22:20 NOTICE.txt
-rw-r--r--.  1 aluno aluno 1366 Jan 25 22:20 README.txt
drwxr-xr-x.  2 aluno aluno 4096 Jan 25 22:20 sbin
drwxr-xr-x.  4 aluno aluno 29 Jan 25 22:20 share
[aluno@dataserver hadoop]$ hadoop jar share/hadoop/mapreduce/hadoop-mapreduce-examples-2.7.2.jar wordcount /bigdata/contratos.csv /output
```

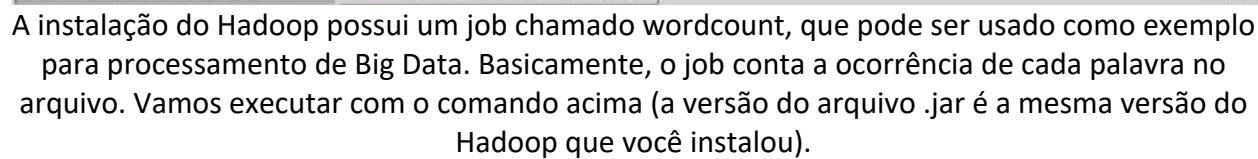

A instalação do Hadoop possui um job chamado wordcount, que pode ser usado como exemplo para processamento de Big Data. Basicamente, o job conta a ocorrência de cada palavra no arquivo. Vamos executar com o comando acima (a versão do arquivo .jar é a mesma versão do Hadoop que você instalou).

## Instalação e Configuração do Ecossistema Hadoop

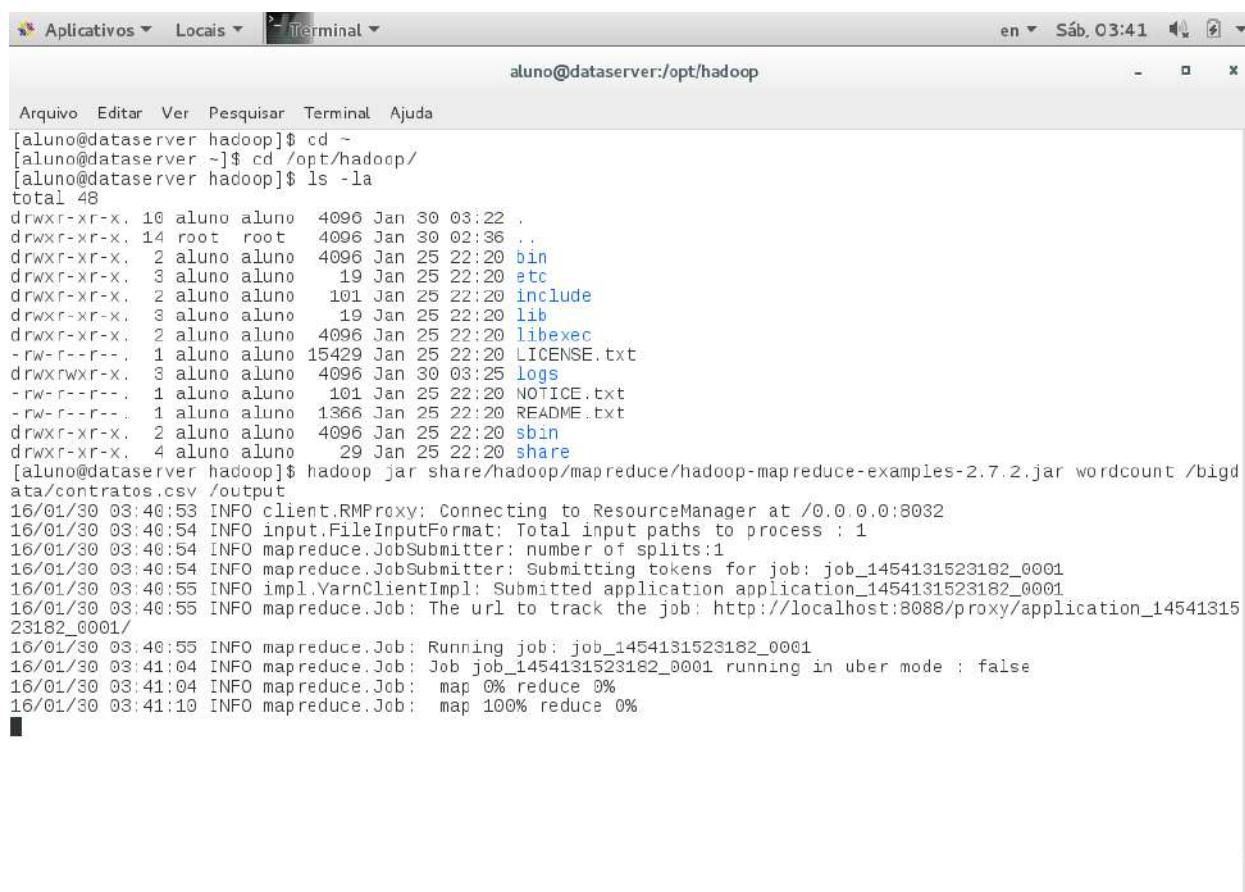


```
aluno@dataserver:/opt/hadoop
Arquivo Editar Ver Pesquisar Terminal Ajuda
[aluno@dataserver hadoop]$ cd ~
[aluno@dataserver ~]$ cd /opt/hadoop/
[aluno@dataserver hadoop]$ ls -la
total 48
drwxr-xr-x. 10 aluno aluno 4096 Jan 30 03:22 .
drwxr-xr-x. 14 root root 4096 Jan 30 02:36 ..
drwxr-xr-x.  2 aluno aluno 4096 Jan 25 22:20 bin
drwxr-xr-x.  3 aluno aluno 19 Jan 25 22:20 etc
drwxr-xr-x.  2 aluno aluno 101 Jan 25 22:20 include
drwxr-xr-x.  3 aluno aluno 19 Jan 25 22:20 lib
drwxr-xr-x.  2 aluno aluno 4096 Jan 25 22:20 libexec
-rw-r--r--.  1 aluno aluno 15429 Jan 25 22:20 LICENSE.txt
drwxrwxr-x.  3 aluno aluno 4096 Jan 30 03:25 logs
-rw-r--r--.  1 aluno aluno 101 Jan 25 22:20 NOTICE.txt
-rw-r--r--.  1 aluno aluno 1366 Jan 25 22:20 README.txt
drwxr-xr-x.  2 aluno aluno 4096 Jan 25 22:20 sbin
drwxr-xr-x.  4 aluno aluno 29 Jan 25 22:20 share
[aluno@dataserver hadoop]$ hadoop jar share/hadoop/mapreduce/hadoop-mapreduce-examples-2.7.2.jar wordcount /bigdata/contratos.csv /output
16/01/30 03:40:53 INFO client.RMProxy: Connecting to ResourceManager at /0.0.0.0:8032
16/01/30 03:40:54 INFO input.FileInputFormat: Total input paths to process : 1
16/01/30 03:40:54 INFO mapreduce.JobSubmitter: number of splits:1
16/01/30 03:40:54 INFO mapreduce.JobSubmitter: Submitting tokens for job: job_1454131523182_0001
16/01/30 03:40:55 INFO impl.YarnClientImpl: Submitted application application_1454131523182_0001
16/01/30 03:40:55 INFO mapreduce.Job: The url to track the job: http://localhost:8088/proxy/application_1454131523182_0001/
16/01/30 03:40:55 INFO mapreduce.Job: Running job: job_1454131523182_0001
16/01/30 03:41:04 INFO mapreduce.Job: Job job_1454131523182_0001 running in uber mode : false
16/01/30 03:41:04 INFO mapreduce.Job: map 0% reduce 0%
16/01/30 03:41:10 INFO mapreduce.Job: map 100% reduce 0%
```



Job sendo processado

## Instalação e Configuração do Ecossistema Hadoop

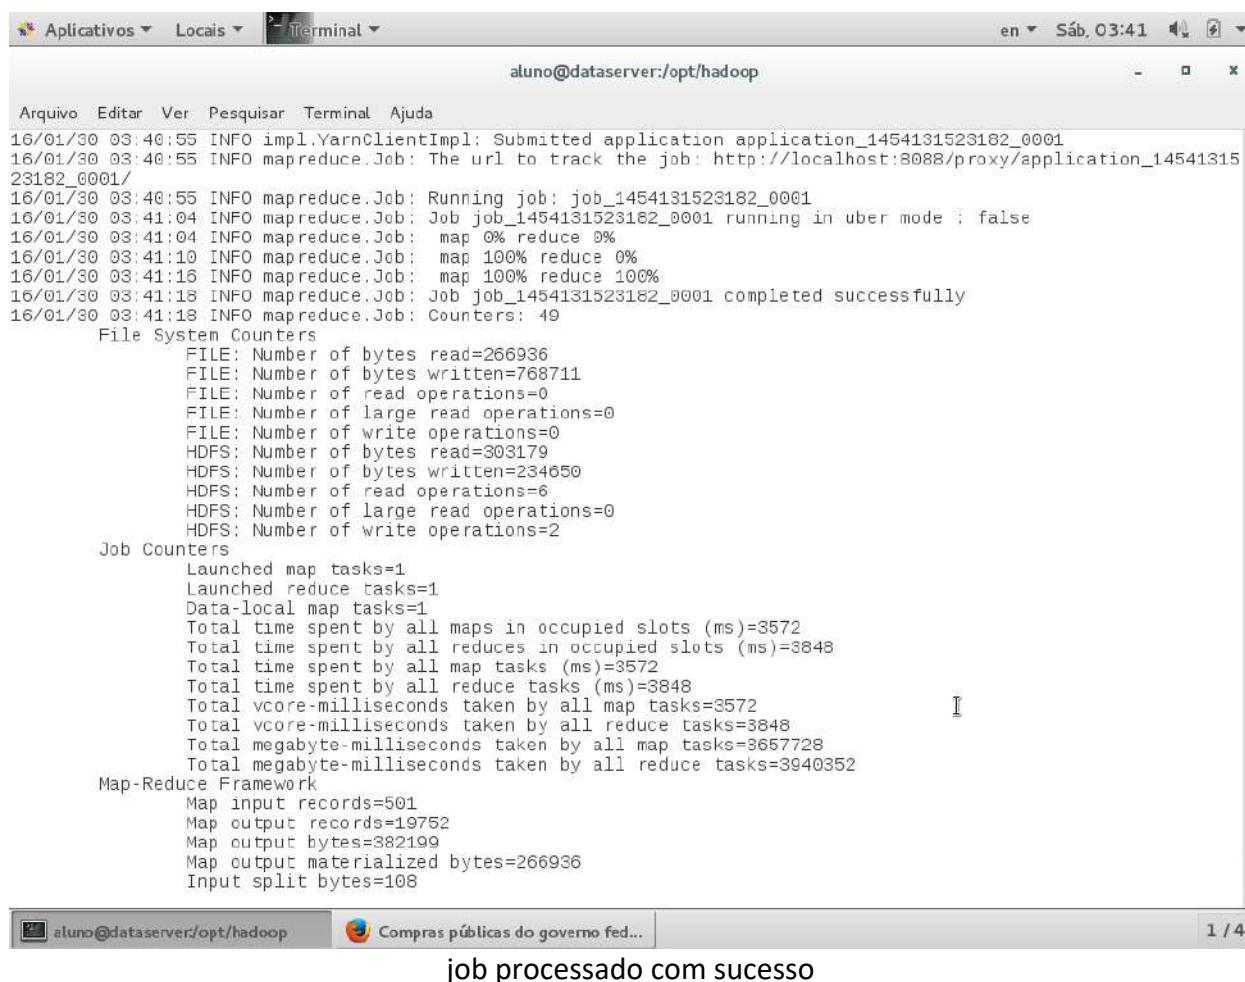


The terminal window shows the output of a Hadoop job. The logs indicate the job was submitted and tracked via a proxy at <http://localhost:8088/>. The job, named application\_1454131523182\_0001, was running in uber mode. It completed successfully with 49 counters. The logs also show system and job counters, and details about the Map-Reduce framework.

```
aluno@dataserver:/opt/hadoop
Arquivo Editar Ver Pesquisar Terminal Ajuda
16/01/30 03:40:55 INFO impl.YarnClientImpl: Submitted application application_1454131523182_0001
16/01/30 03:40:55 INFO mapreduce.Job: The url to track the job: http://localhost:8088/proxy/application_1454131523182_0001/
16/01/30 03:40:55 INFO mapreduce.Job: Running job: job_1454131523182_0001
16/01/30 03:41:04 INFO mapreduce.Job: Job job_1454131523182_0001 running in uber mode : false
16/01/30 03:41:04 INFO mapreduce.Job: map 0% reduce 0%
16/01/30 03:41:10 INFO mapreduce.Job: map 100% reduce 0%
16/01/30 03:41:16 INFO mapreduce.Job: map 100% reduce 100%
16/01/30 03:41:18 INFO mapreduce.Job: Job job_1454131523182_0001 completed successfully
16/01/30 03:41:18 INFO mapreduce.Job: Counters: 49
  File System Counters
    FILE: Number of bytes read=266936
    FILE: Number of bytes written=768711
    FILE: Number of read operations=0
    FILE: Number of large read operations=0
    FILE: Number of write operations=0
    HDFS: Number of bytes read=303179
    HDFS: Number of bytes written=234650
    HDFS: Number of read operations=6
    HDFS: Number of large read operations=0
    HDFS: Number of write operations=2
  Job Counters
    Launched map tasks=1
    Launched reduce tasks=1
    Data-local map tasks=1
    Total time spent by all maps in occupied slots (ms)=3572
    Total time spent by all reduces in occupied slots (ms)=3848
    Total time spent by all map tasks (ms)=3572
    Total time spent by all reduce tasks (ms)=3848
    Total vcore-milliseconds taken by all map tasks=3572
    Total vcore-milliseconds taken by all reduce tasks=3848
    Total megabyte-milliseconds taken by all map tasks=3657728
    Total megabyte-milliseconds taken by all reduce tasks=3940352
  Map-Reduce Framework
    Map input records=501
    Map output records=19752
    Map output bytes=382199
    Map output materialized bytes=266936
    Input split bytes=108
```

job processado com sucesso

## Instalação e Configuração do Ecossistema Hadoop

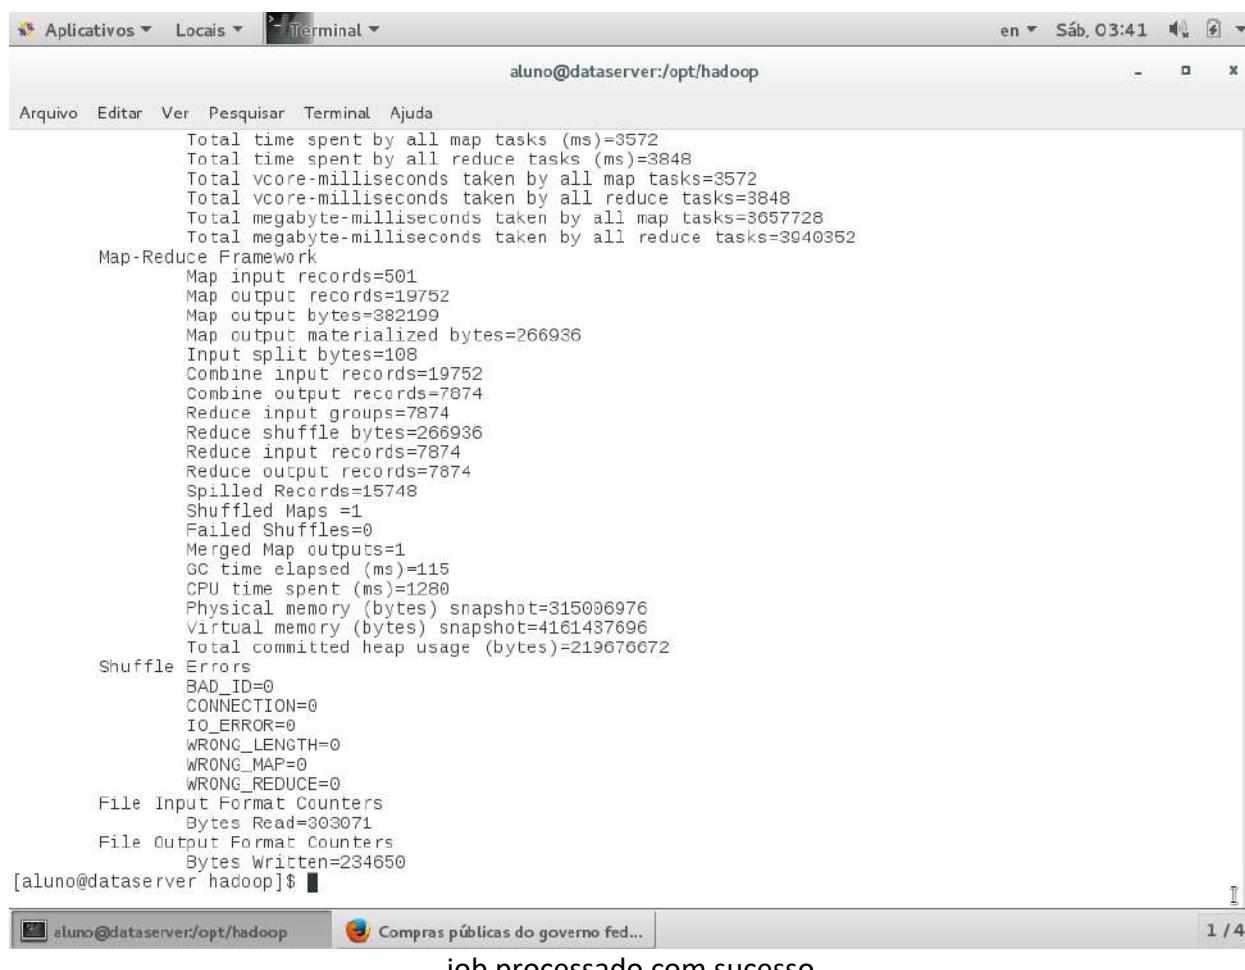


The screenshot shows a terminal window titled "Terminal" with the command "aluno@dataserver:/opt/hadoop". The window displays various Hadoop counters and metrics. Key sections include:

- Total time spent by all map tasks (ms)=3572**
- Total time spent by all reduce tasks (ms)=3848**
- Total vcore-milliseconds taken by all map tasks=3572**
- Total vcore-milliseconds taken by all reduce tasks=3848**
- Total megabyte-milliseconds taken by all map tasks=3657728**
- Total megabyte-milliseconds taken by all reduce tasks=3940352**
- Map-Reduce Framework**
  - Map input records=501
  - Map output records=19752
  - Map output bytes=382199
  - Map output materialized bytes=266936
  - Input split bytes=108
  - Combine input records=19752
  - Combine output records=7874
  - Reduce input groups=7874
  - Reduce shuffle bytes=266936
  - Reduce input records=7874
  - Reduce output records=7874
  - Spilled Records=15748
  - Shuffled Maps =1
  - Failed Shuffles=0
  - Merged Map outputs=1
  - GC time elapsed (ms)=115
  - CPU time spent (ms)=1280
  - Physical memory (bytes) snapshot=315006976
  - Virtual memory (bytes) snapshot=4161437696
  - Total committed heap usage (bytes)=219676672
- Shuffle Errors**
  - BAD\_ID=0
  - CONNECTION=0
  - IO\_ERROR=0
  - WRONG\_LENGTH=0
  - WRONG\_MAP=0
  - WRONG\_REDUCE=0
- File Input Format Counters**
  - Bytes Read=303071
- File Output Format Counters**
  - Bytes Written=234650

[aluno@dataserver hadoop]\$ █

job processado com sucesso


## Instalação e Configuração do Ecossistema Hadoop

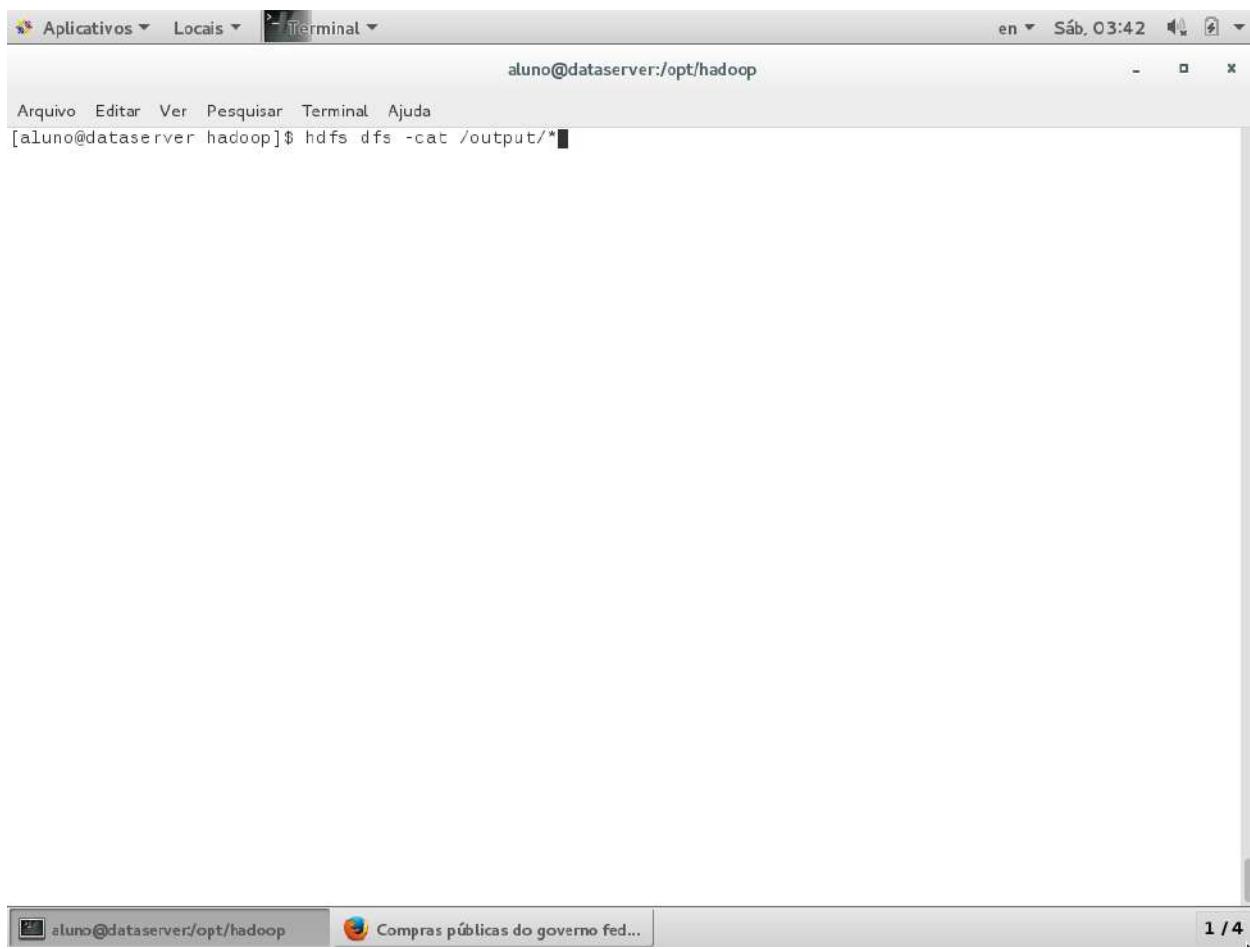

The screenshot shows a Linux desktop environment. At the top, there is a menu bar with "Aplicativos", "Locais", and "Terminal". The terminal window is active, showing the command: [aluno@dataserver hadoop]\$ hdfs dfs -cat /output/\*. The browser window in the background is titled "Compras públicas do governo fed...".

Vamos ver o resultado do processamento


## Instalação e Configuração do Ecossistema Hadoop

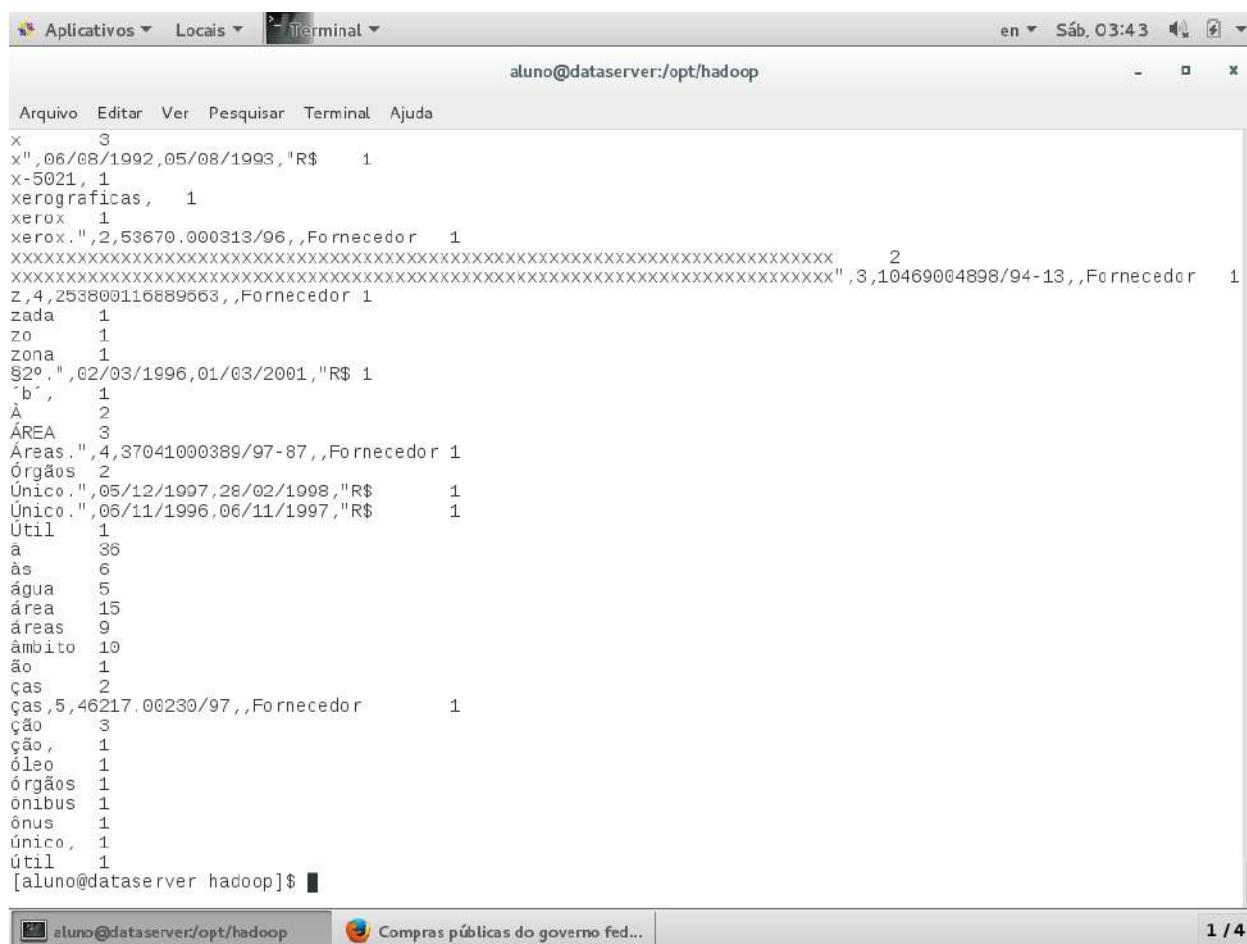

```
aluno@dataserver:/opt/hadoop
Arquivo Editar Ver Pesquisar Terminal Ajuda
x" ,06/08/1992,05/08/1993,"R$      1
x-5021, 1
xerograficas,  1
xerox 1
xerox.",2,53670.000313/96,,Fornecedor  1
xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx" ,3,10469004898/94-13,,Fornecedor  1
Z,4,253800116889063,,Fornecedor  1
zada 1
zo 1
zona 1
§2º.",02/03/1996,01/03/2001,"R$ 1
'b', 1
ÁREA 3
Áreas.",4,37041000389/97-87,,Fornecedor  1
Órgãos 2
Único.",05/12/1997,28/02/1998,"R$      1
Único.",06/11/1996,06/11/1997,"R$      1
Util 1
á 36
às 6
água 5
área 15
áreas 9
âmbito 10
ão 1
ças 2
ças,5,46217.00230/97,,Fornecedor  1
ção 3
ção, 1
óleo 1
órgãos 1
ônibus 1
ônus 1
único, 1
útil 1
[aluno@dataserver hadoop]$
```

Arquivo processado. Número de ocorrência de cada palavra/termo no arquivo.

## Instalação e Configuração do Ecossistema Hadoop

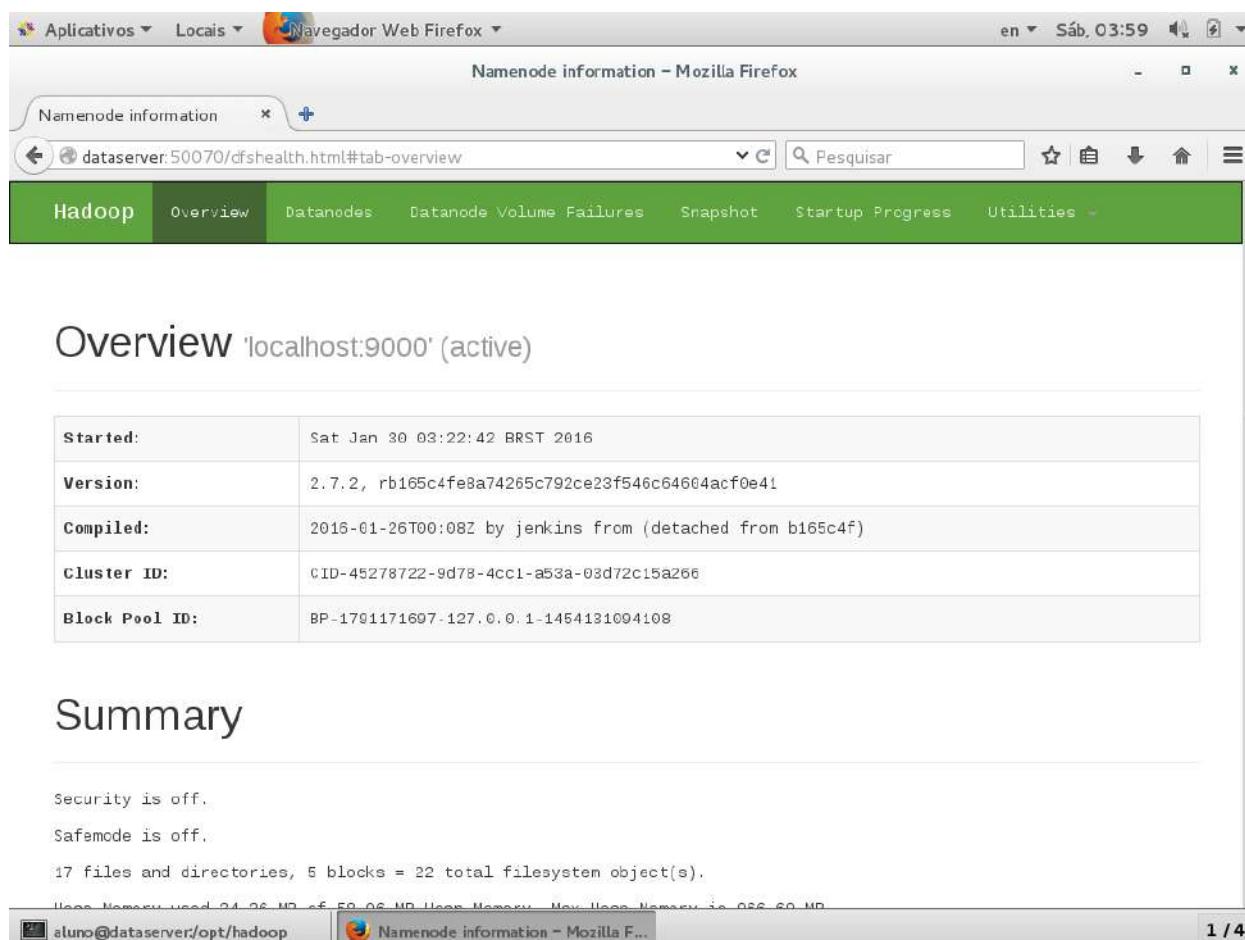

**Overview** 'localhost:9000' (active)

<b>Started:</b>	Sat Jan 30 03:22:42 BRST 2016
<b>Version:</b>	2.7.2, rb165c4fe8a74265c792ce23f546c64604acf0e41
<b>Compiled:</b>	2016-01-26T00:08Z by jenkins from (detached from b165c4f)
<b>Cluster ID:</b>	CID-45278722-9d78-4cc1-a53a-03d72c15a266
<b>Block Pool ID:</b>	BP-1701171697-127.0.0.1-1454131094108

**Summary**


Security is off.  
Safemode is off.  
17 files and directories, 5 blocks = 22 total filesystem object(s).

HDFS NameNode used 24.26 MB of 50.00 MB. Used NameSpace. New HDFS NameSpace is 0.00 MB.

aluno@dataserver:/opt/hadoop

Acesso ao Hadoop pelo browser: <http://dataserver:50070>


## Instalação e Configuração do Ecossistema Hadoop

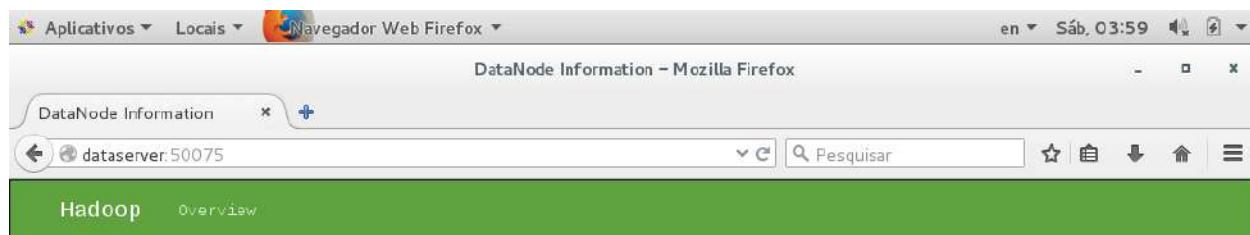

## DataNode on dataserver:50075

Hadoop, 2015.



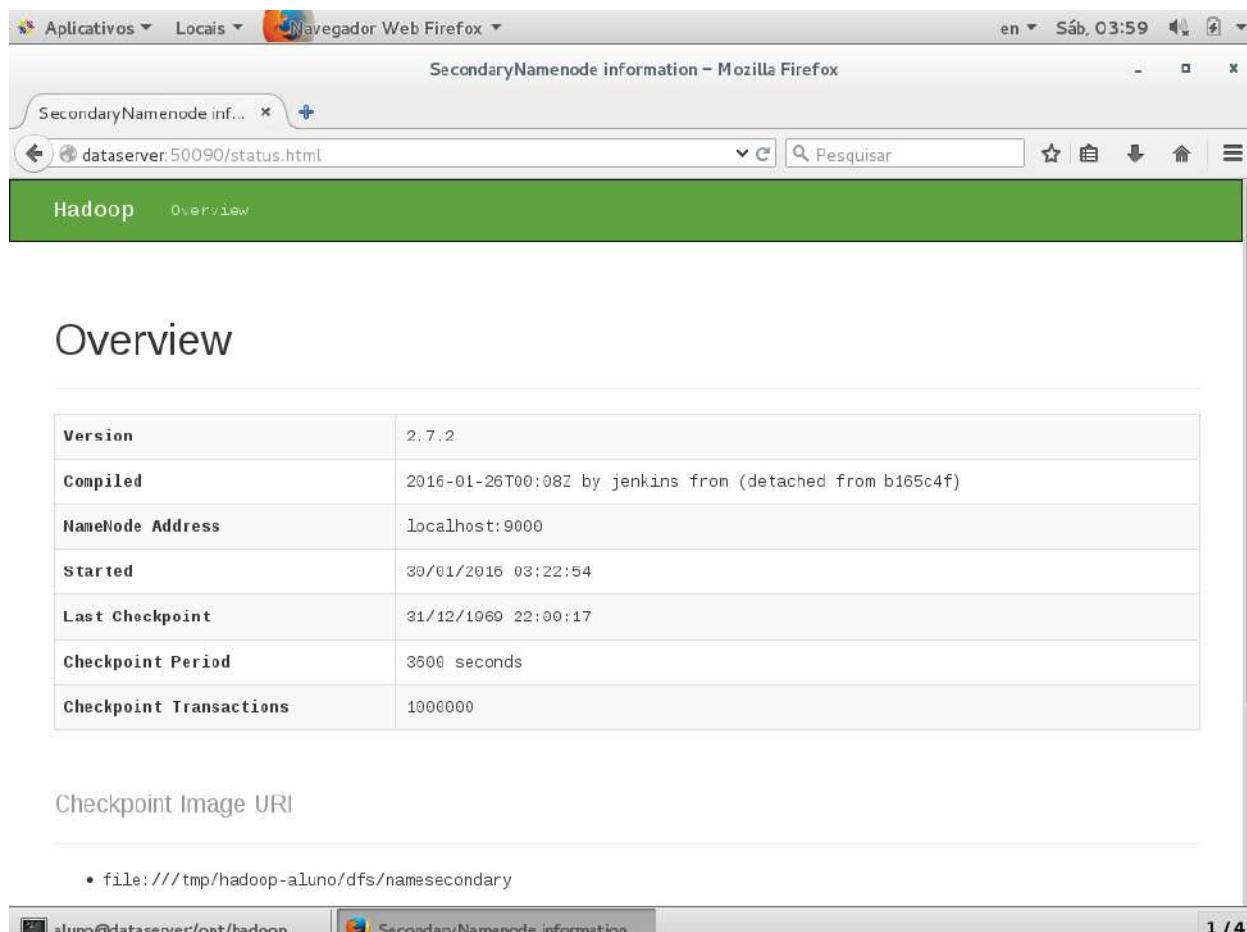

SecondaryNamenode inf... x +  
dataserver:50090/status.html Pesquisar

Hadoop Overview

Version	2.7.2
Compiled	2016-01-26T00:08Z by jenkins from (detached from b165c4f)
NameNode Address	localhost:9000
Started	30/01/2016 03:22:54
Last Checkpoint	31/12/1969 22:00:17
Checkpoint Period	3600 seconds
Checkpoint Transactions	1000000

Checkpoint Image URI

- file:///tmp/hadoop-aluno/dfs/namesecondary

aluno@dataserver:/opt/hadoop SecondaryNamenode information ... 1 / 4

Acesso ao Hadoop pelo browser: <http://dataserver:50090>


Terceiro checkpoint:

Clique no meu File – Export Appliance.  
Será gerada uma cópia de segurança da sua máquina virtual.

→ VM: DataServer-3.0.ova (Hadoop)

## 6. Instalação e Configuração do Zookeeper


### 6.1. Download e Instalação do Zookeeper

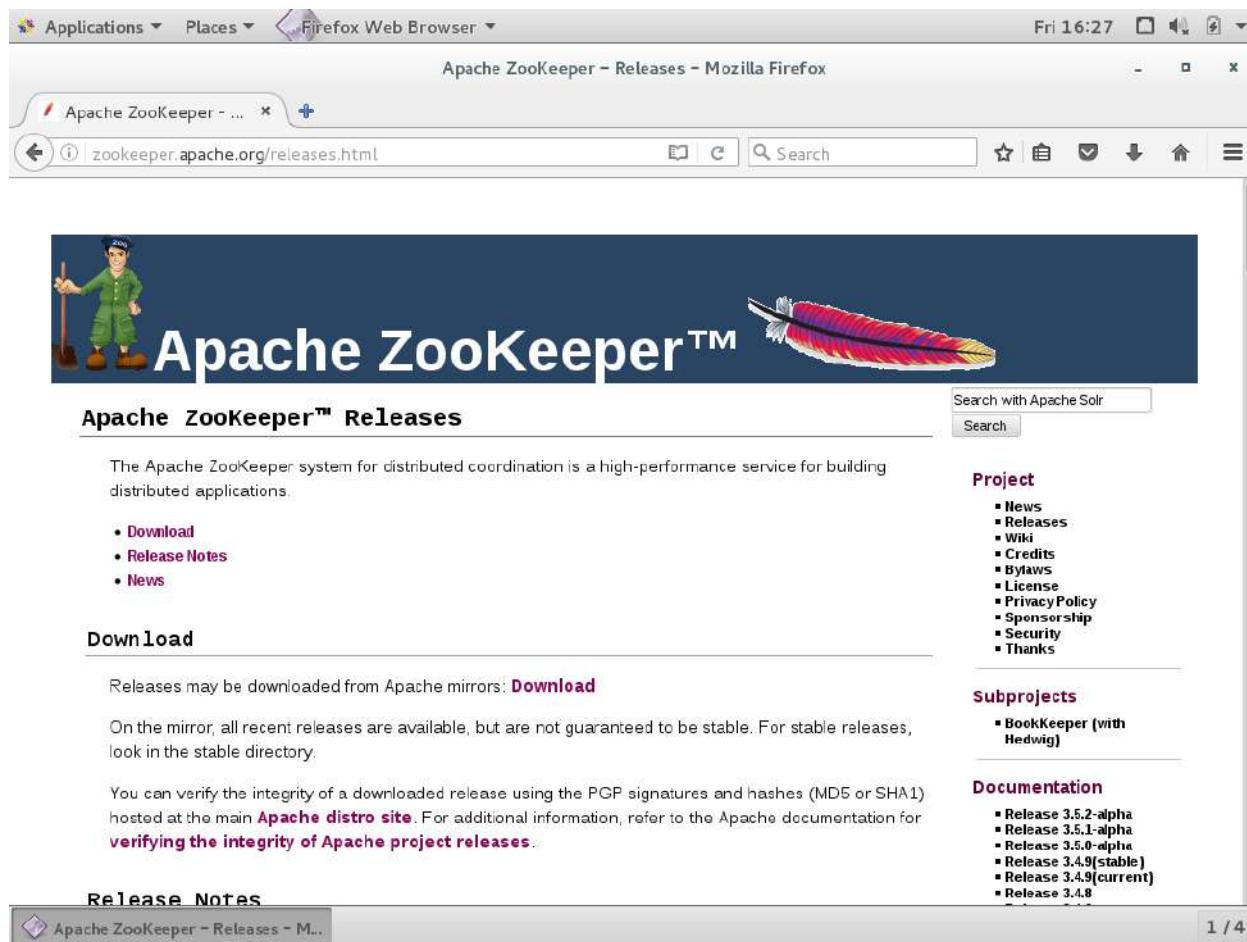

The screenshot shows a Firefox browser window with the title "Apache ZooKeeper - Releases - Mozilla Firefox". The address bar displays "zookeeper.apache.org/releases.html". The main content is the "Apache ZooKeeper™ Releases" page. At the top, there's a cartoon illustration of a character holding a broom next to a large feather. Below it, the text "Apache ZooKeeper™ Releases" is prominently displayed. A search bar on the right contains "Search with Apache Solr" and a "Search" button. To the right of the search bar is a "Project" sidebar with links to News, Releases, Wiki, Credits, Bylaws, License, Privacy Policy, Sponsorship, Security, and Thanks. Another sidebar on the right lists Subprojects (BookKeeper (with Hedwig)) and Documentation (Release 3.5.2-alpha, Release 3.5.1-alpha, Release 3.5.0-alpha, Release 3.4.9(stable), Release 3.4.9(current), and Release 3.4.8). At the bottom left, a "Release Notes" link is visible. The bottom of the browser window shows the status bar with "Apache ZooKeeper - Releases - M... 1 / 4".

Faça o download, descompacte o arquivo e mova o diretório para /opt/zookeeper da mesma forma como você fez com o Java JDK e com o Hadoop.


## 6.2. Configurando do Zookeeper

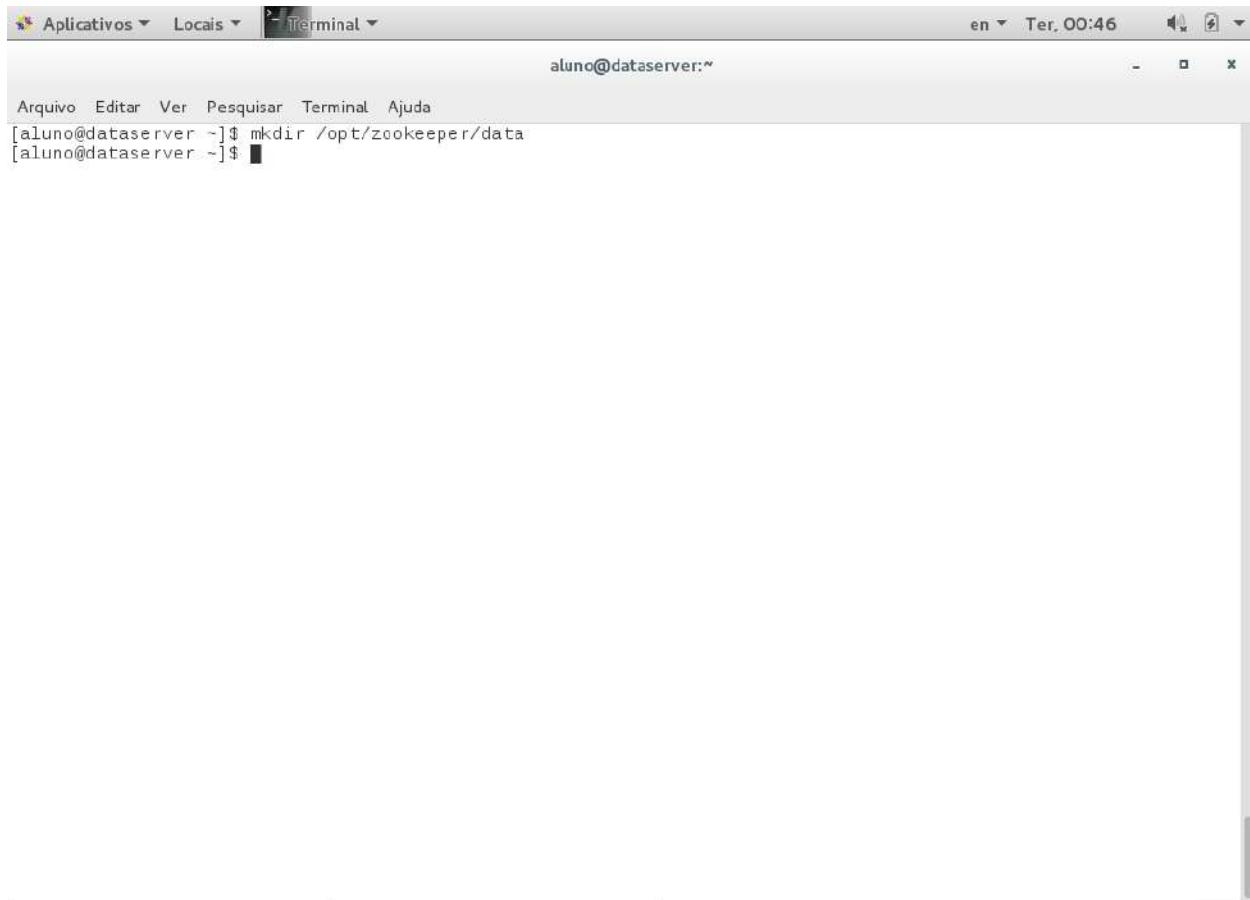

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". The user has typed the command "mkdir /opt/zookeeper/data" and pressed Enter. The terminal shows the command and its execution. Below the terminal window, the taskbar shows the terminal window is active and displays the URL "Index of /zookeeper/stable - Mozilla...". A status bar at the bottom right indicates "1 / 4".

Criar o diretório **data** dentro de **/opt/zookeeper**

## Instalação e Configuração do Ecossistema Hadoop

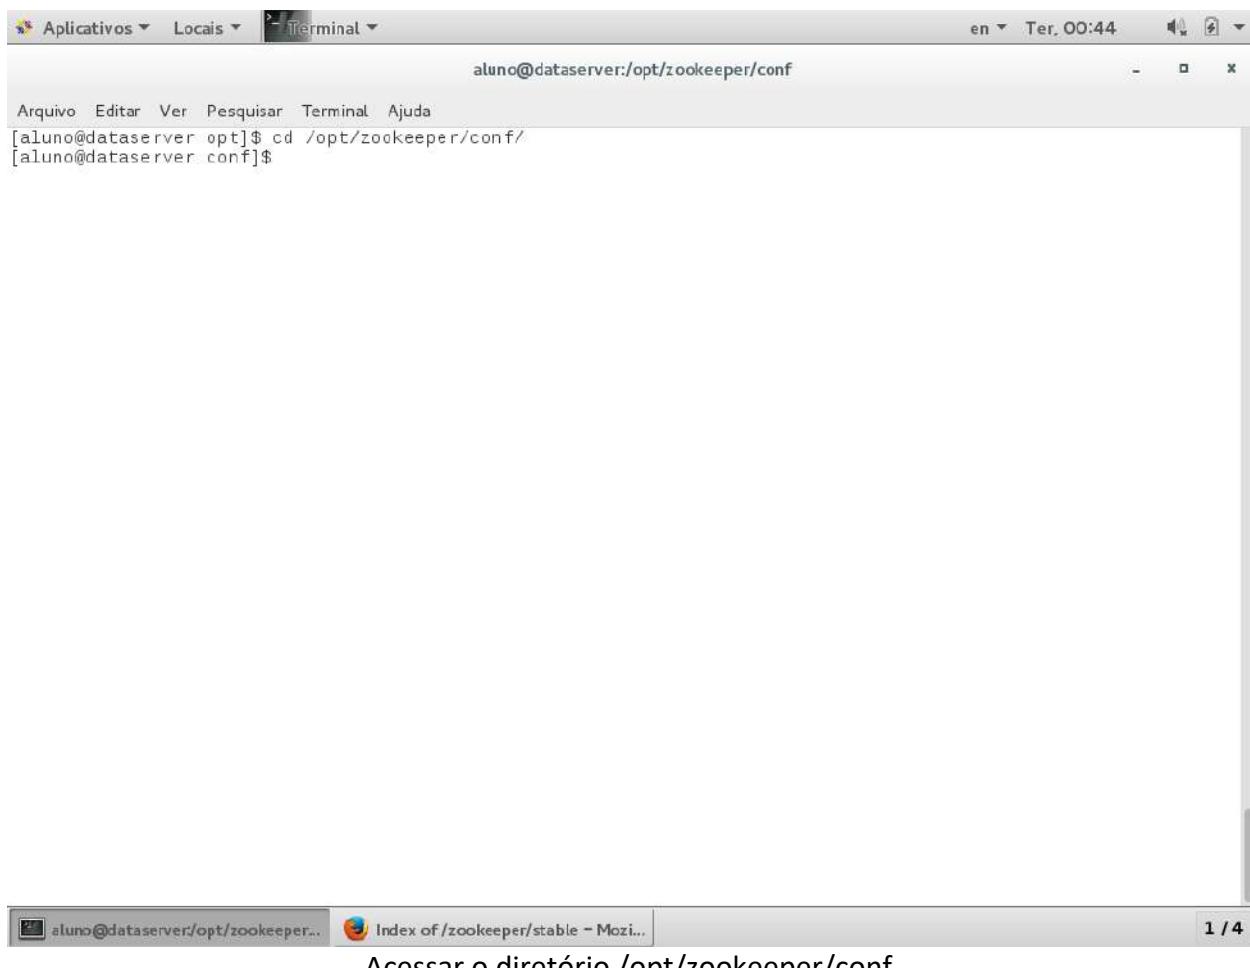

```
aluno@dataserver:~$ cd /opt/zookeeper/conf/
[aluno@dataserver conf]$
```

Acessar o diretório /opt/zookeeper/conf


## Instalação e Configuração do Ecossistema Hadoop



```
aluno@dataserver:~$ cd /opt/zookeeper/conf/
[aluno@dataserver conf]$ cp zoo_sample.cfg zoo.cfg
```

A partir do arquivo template, gerar o arquivo zoo.cfg

## Instalação e Configuração do Ecossistema Hadoop

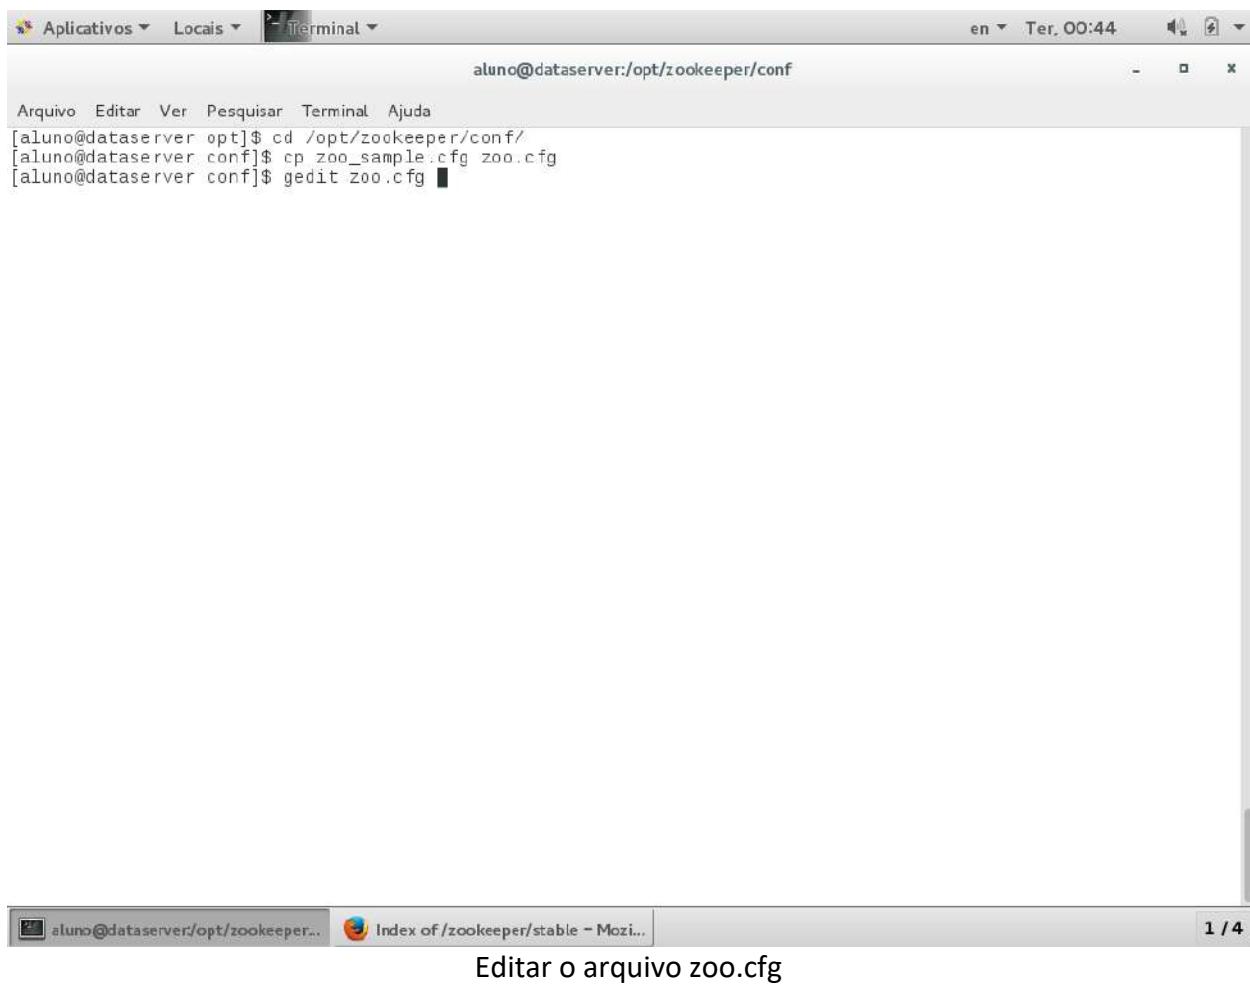


```
aluno@dataserver:/opt/zookeeper/conf
Arquivo Editar Ver Pesquisar Terminal Ajuda
[aluno@dataserver opt]$ cd /opt/zookeeper/conf/
[aluno@dataserver conf]$ cp zoo_sample.cfg zoo.cfg
[aluno@dataserver conf]$ gedit zoo.cfg
```

1 / 4

Editar o arquivo zoo.cfg

## Instalação e Configuração do Ecossistema Hadoop

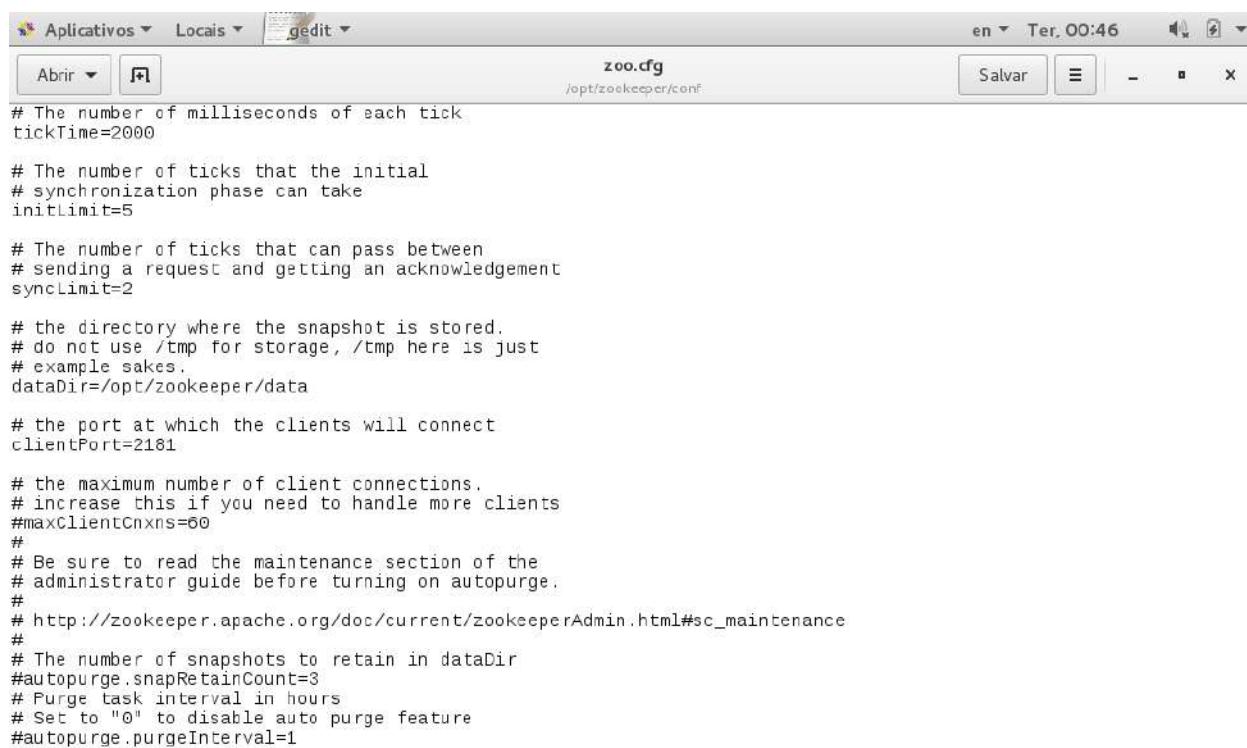

```
# The number of milliseconds of each tick
tickTime=2000


# The number of ticks that the initial
# synchronization phase can take
initLimit=5

# The number of ticks that can pass between
# sending a request and getting an acknowledgement
syncLimit=2

# the directory where the snapshot is stored.
# do not use /tmp for storage, /tmp here is just
# example sakes.
dataDir=/opt/zookeeper/data


# the port at which the clients will connect
clientPort=2181

# the maximum number of client connections.
# increase this if you need to handle more clients
#maxClientCnxns=60
#
# Be sure to read the maintenance section of the
# administrator guide before turning on autopurge.
#
# http://zookeeper.apache.org/doc/current/zookeeperAdmin.html#sc_maintenance
#
# The number of snapshots to retain in dataDir
#autopurge.snapRetainCount=3
# Purge task interval in hours
# Set to "0" to disable auto purge feature
#autopurge.purgeInterval=1
```



Editar o arquivo conforme tela acima


## Instalação e Configuração do Ecossistema Hadoop

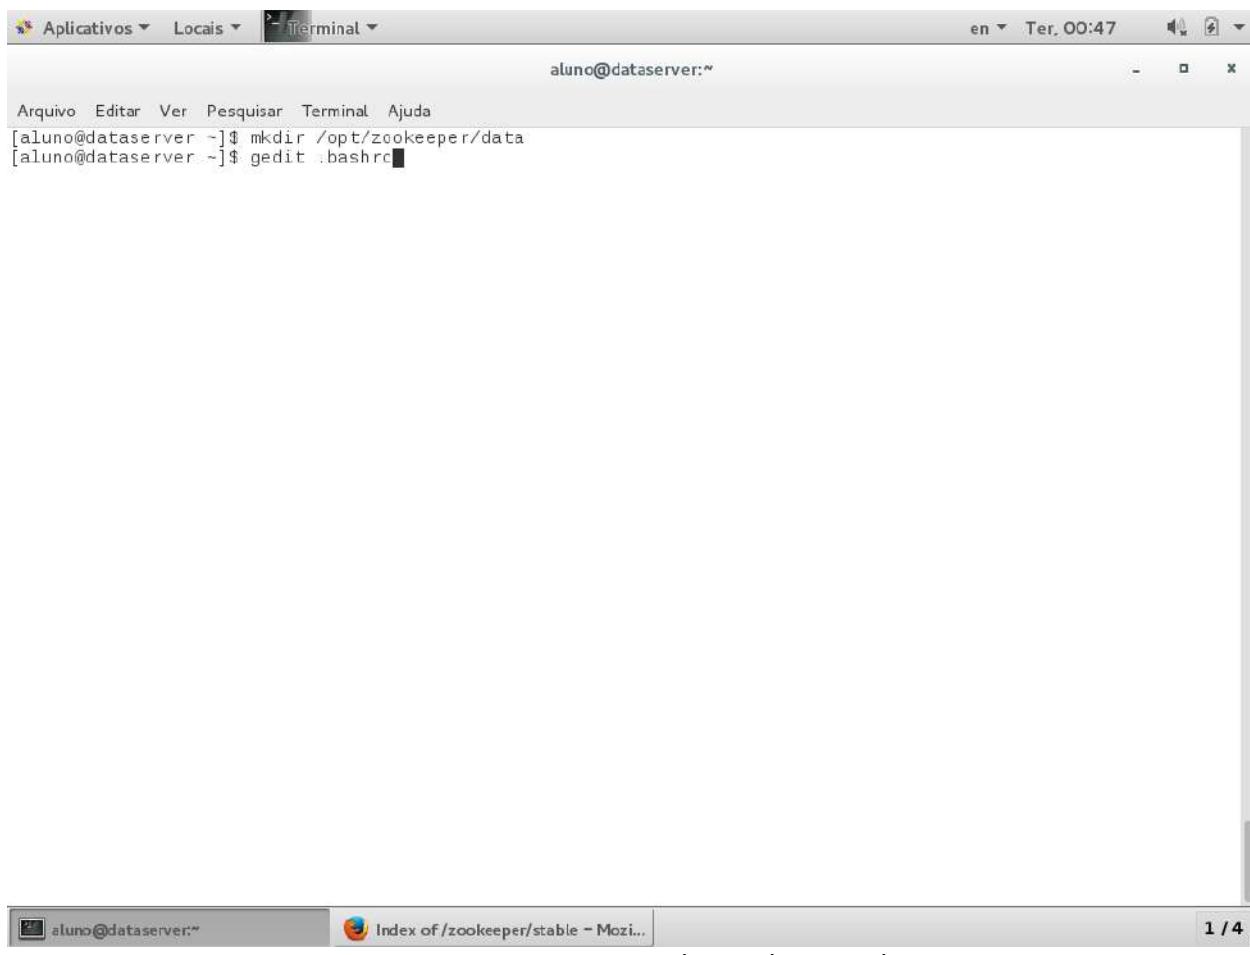

```
aluno@dataserver:~$ mkdir /opt/zookeeper/data
[aluno@dataserver ~]$ gedit .bashrc
```

Incluir variáveis Zookeeper no /home/hadoop/.bashrc

## Instalação e Configuração do Ecossistema Hadoop

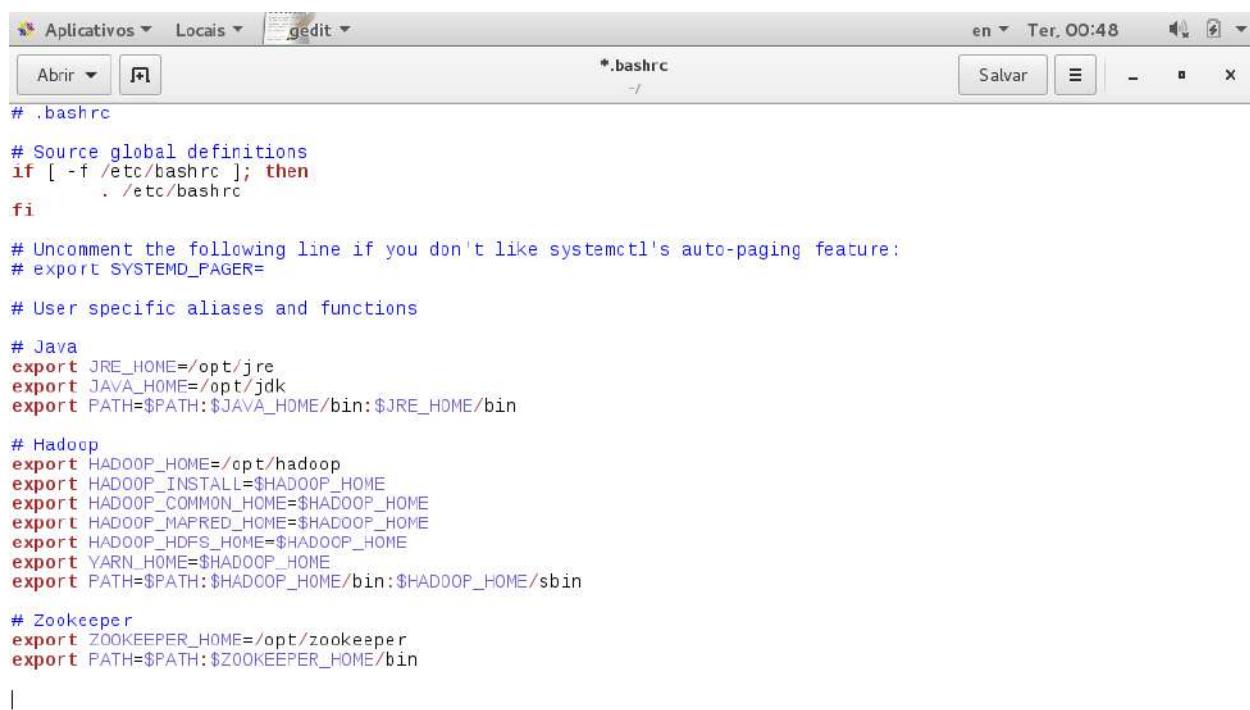

```

# Source global definitions
if [ -f /etc/bashrc ]; then
    . /etc/bashrc
fi

# Uncomment the following line if you don't like systemctl's auto-paging feature:
# export SYSTEMD_PAGER=


# User specific aliases and functions

# Java
export JRE_HOME=/opt/jre
export JAVA_HOME=/opt/jdk
export PATH=$PATH:$JAVA_HOME/bin:$JRE_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin


# Zookeeper
export ZOOKEEPER_HOME=/opt/zookeeper
export PATH=$PATH:$ZOOKEEPER_HOME/bin

```



Variáveis Zookeeper

## Instalação e Configuração do Ecossistema Hadoop

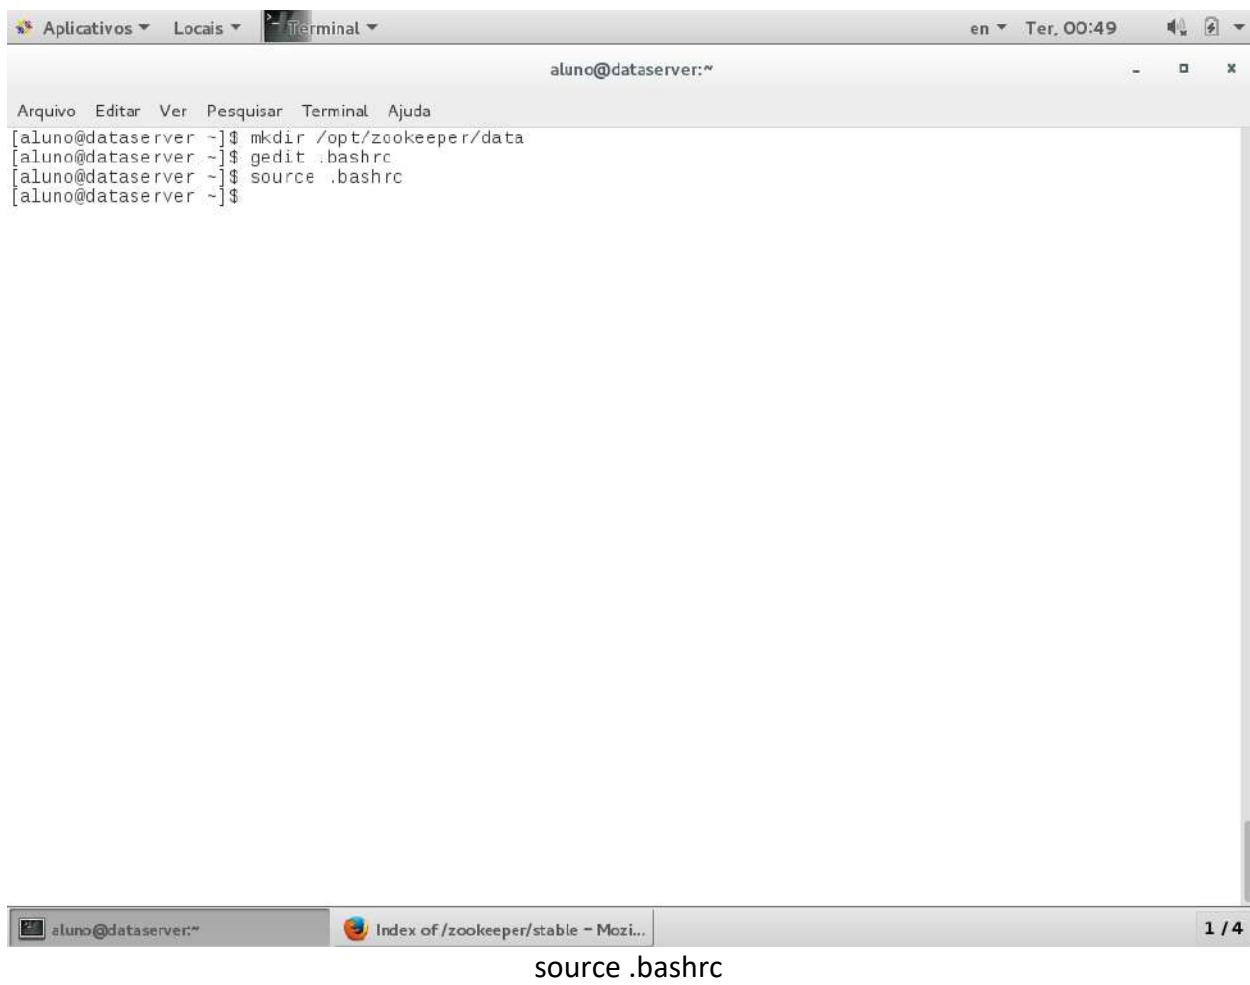


The screenshot shows a terminal window titled "Terminal" with the user "aluno@dataserver:~". The terminal history is as follows:

```
[aluno@dataserver ~]$ mkdir /opt/zookeeper/data
[aluno@dataserver ~]$ gedit .bashrc
[aluno@dataserver ~]$ source .bashrc
[aluno@dataserver ~]$
```


Below the terminal, the taskbar shows two open windows: "aluno@dataserver:~" and "Index of /zookeeper/stable - Mozilla...". The status bar at the bottom right indicates "1 / 4".

## Instalação e Configuração do Ecossistema Hadoop

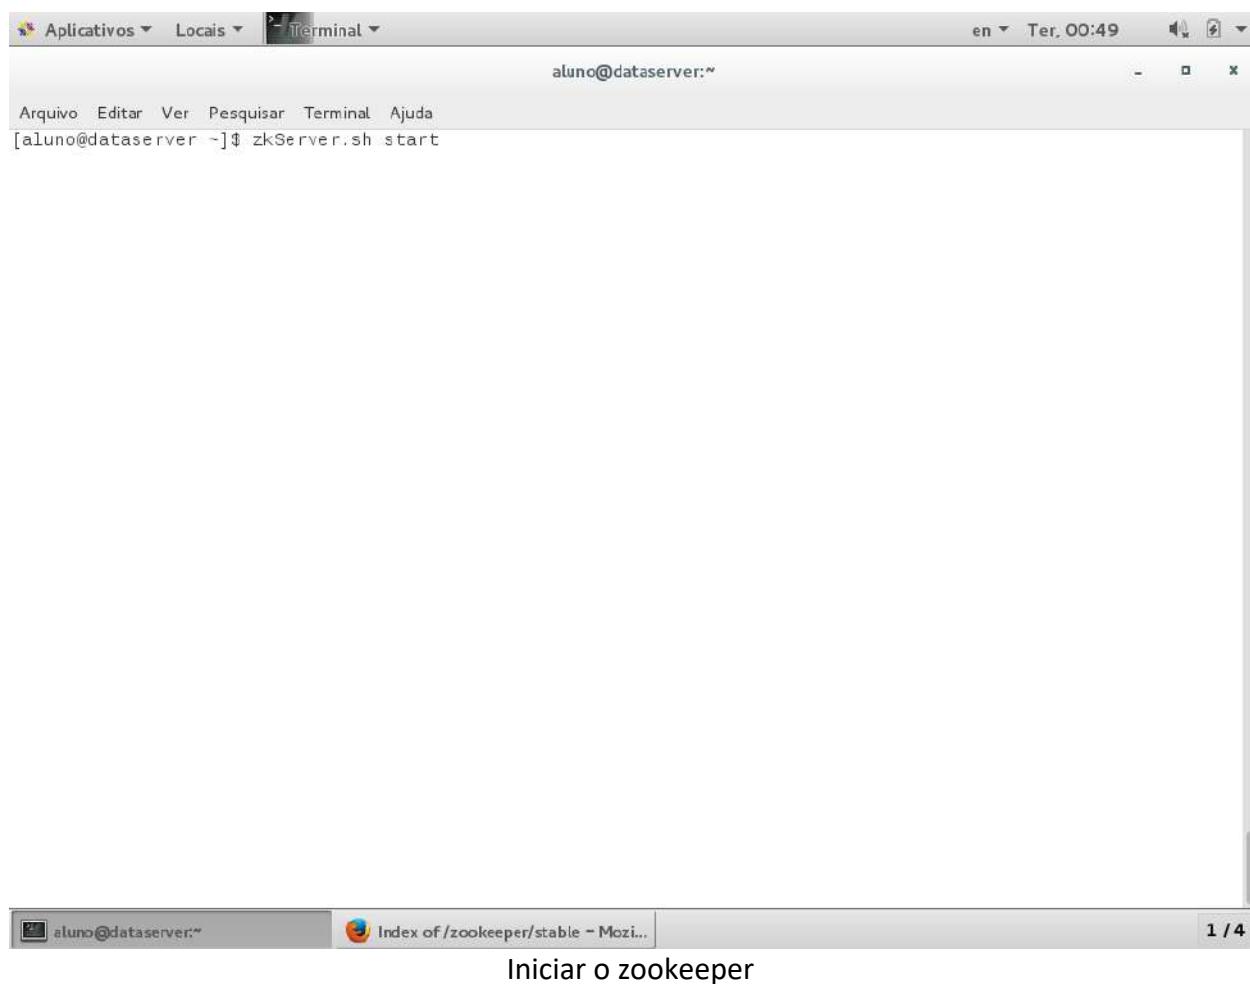

Iniciar o zookeeper


## Instalação e Configuração do Ecossistema Hadoop

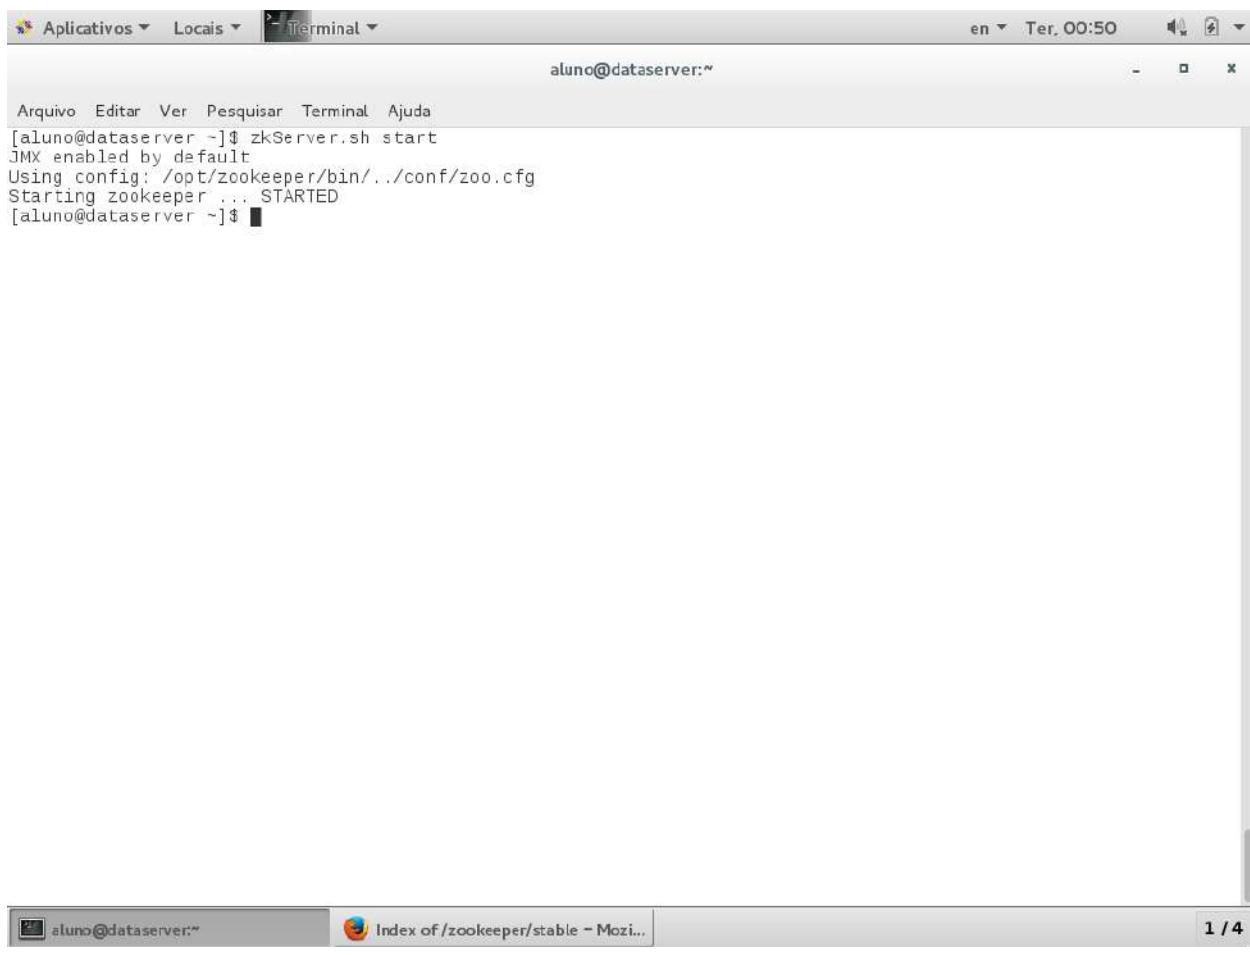

```
aluno@dataserver:~$ zkServer.sh start
JMX enabled by default
Using config: /opt/zookeeper/bin/../conf/zoo.cfg
Starting zookeeper ... STARTED
[aluno@dataserver ~]$
```

Serviço iniciado

## Instalação e Configuração do Ecossistema Hadoop

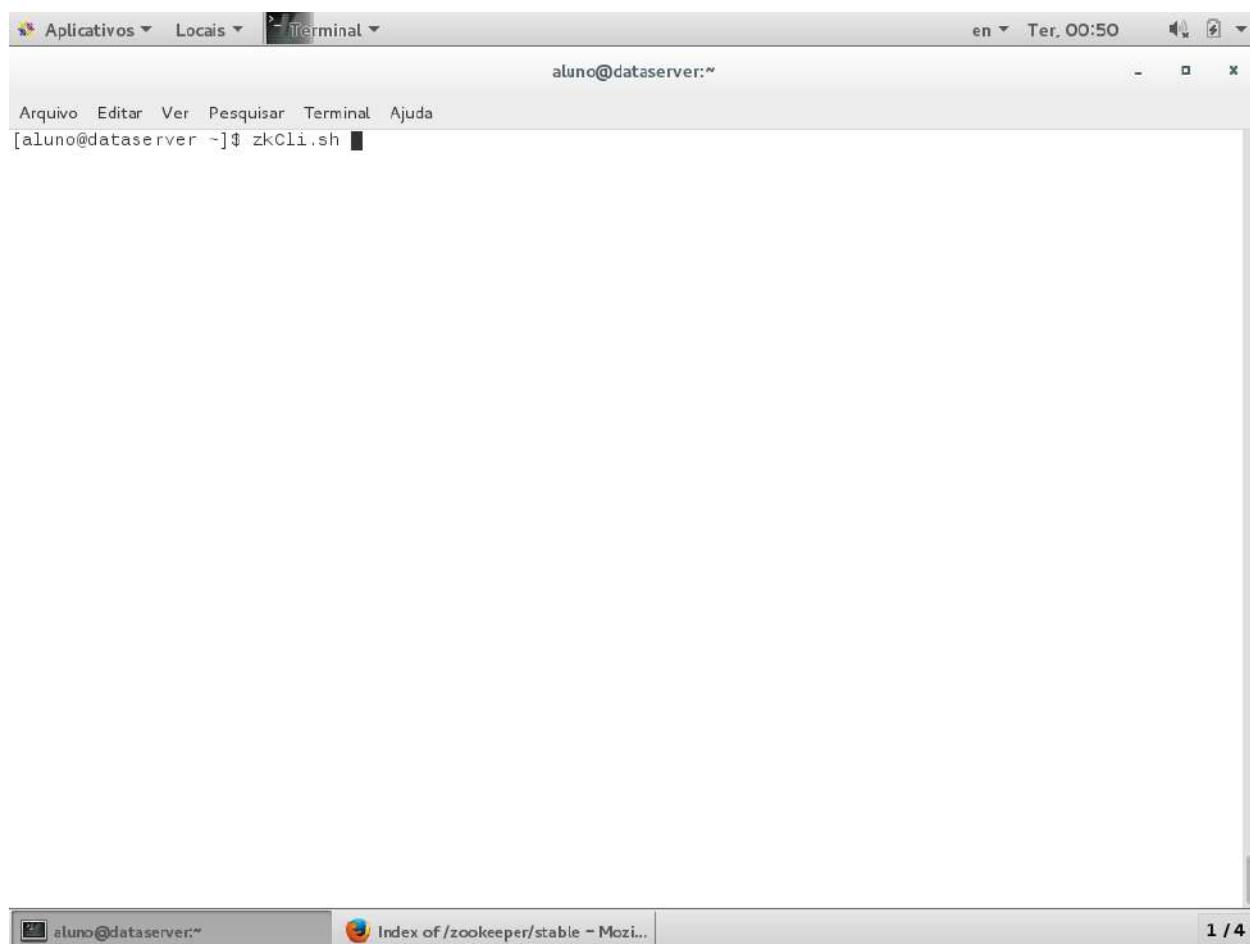

Iniciar o Zookeeper Command Line Interface (CLI)

## Instalação e Configuração do Ecossistema Hadoop

Aplicativos Locais Terminal en Ter, 00:51

```
aluno@dataserver:~
```

Arquivo Editar Ver Pesquisar Terminal Ajuda

```
.jar:/opt/hive/lib/geronimo-jaspic_1.0_spec-1.0.jar:/opt/hive/lib/geronimo-annotation_1.0_spec-1.1.1.jar:/opt/hive/lib/asm-commons-3.1.jar:/opt/hive/lib/asm-tree-3.1.jar:/opt/hive/lib/curator-recipes-2.6.0.jar:/opt/hive/lib/hive-jdbc-1.2.1.jar:/opt/hive/lib/hive-jdbc-1.2.1-standalone.jar:/opt/hive/lib/hive-beeline-1.2.1.jar:/opt/hive/lib/hive-super-csv-2.2.0.jar:/opt/hive/lib/hive-cli-1.2.1.jar:/opt/hive/lib/hive-contrib-1.2.1.jar:/opt/hive/lib/hive-hbase-handler-1.2.1.jar:/opt/hive/lib/hive-hwi-1.2.1.jar:/opt/hive/lib/jetty-all-server-7.6.0.v20120127.jar:/opt/hive/lib/hive-accumulo-handler-1.2.1.jar:/opt/hive/lib/accumulo-core-1.6.0.jar:/opt/hive/lib/jcommander-1.32.jar:/opt/hive/lib/commons-configuration-1.6.jar:/opt/hive/lib/accumulo-fate-1.6.0.jar:/opt/hive/lib/commons-beanutils-1.7.0.jar:/opt/hive/lib/commons-beanutils-core-1.8.0.jar:/opt/hive/lib/accumulo-trace-1.6.0.jar:/opt/hive/lib/commons-math-2.1.jar:  

2016-02-02 00:50:53,863 [myid:] - INFO [main:Environment@100] - Client environment:java.library.path=/usr/java/packages/lib/amd64:/usr/lib64:/lib64:/lib:/usr/lib  

2016-02-02 00:50:53,863 [myid:] - INFO [main:Environment@100] - Client environment:java.io.tmpdir=/tmp  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:java.compiler=<NA>  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:os.name=Linux  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:os.arch=amd64  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:os.version=3.10.0-327.4.5.el7.x86_64  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:user.name=aluno  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:user.home=/home/aluno  

2016-02-02 00:50:53,864 [myid:] - INFO [main:Environment@100] - Client environment:user.dir=/home/aluno  

2016-02-02 00:50:53,865 [myid:] - INFO [main:ZooKeeper@438] - Initiating client connection, connectString=localhost:2181 sessionTimeout=30000 watcher=org.apache.zookeeper.ZooKeeperMain$MyWatcher@4cc77c2e  

2016-02-02 00:50:53,921 [myid:] - INFO [main-SendThread(localhost:2181):ClientCnxn$SendThread@975] - Opening socket connection to server localhost/127.0.0.1:2181. Will not attempt to authenticate using SASL (unknown error)  

Welcome to ZooKeeper!  

JLine support is enabled  

2016-02-02 00:50:54,081 [myid:] - INFO [main-SendThread(localhost:2181):ClientCnxn$SendThread@852] - Socket connection established to localhost/127.0.0.1:2181, initiating session  

2016-02-02 00:50:54,116 [myid:] - INFO [main-SendThread(localhost:2181):ClientCnxn$SendThread@1235] - Session establishment complete on server localhost/127.0.0.1:2181, sessionid = 0x1529fe2f6d40001, negotiated timeout = 30000  

WATCHER::  

WatchedEvent state:SyncConnected type:None path:null  

[zk: localhost:2181(CONNECTED) 0]
```


aluno@dataserver:~ Index of /zookeeper/stable - Mozilla/5.0... 1 / 4

CLI iniciado

## 7. Instalação e Configuração do HBase

Podemos instalar HBase em qualquer um dos três modos: Standalone mode, Pseudo Distributed mode e Fully Distributed mode.

### 7.1. Download e Instalação do HBase

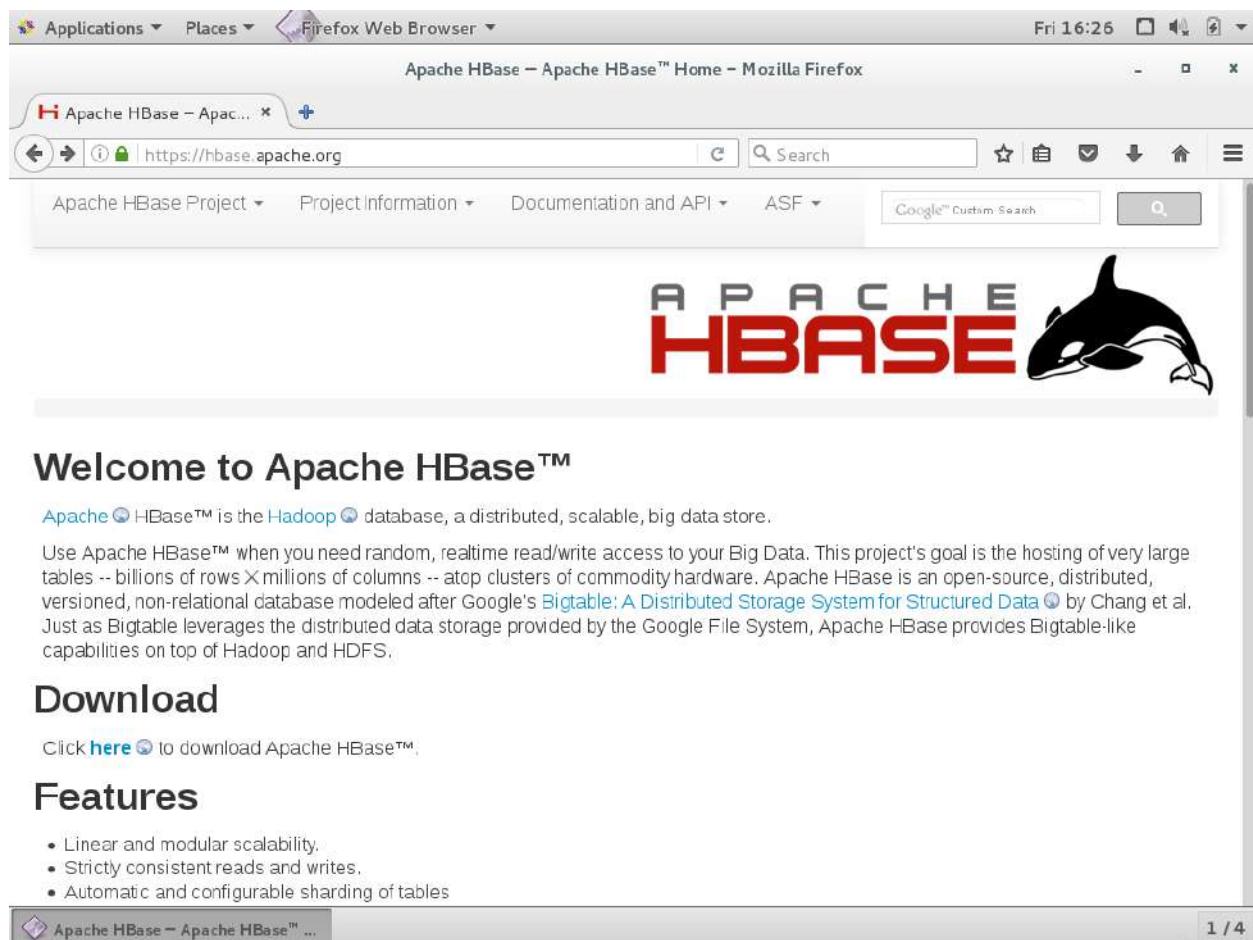

The screenshot shows a Firefox browser window with the title bar "Applications ▾ Places ▾ Firefox Web Browser ▾ Fri 16:26". The address bar displays "Apache HBase – Apache HBase™ Home – Mozilla Firefox" and the URL "https://hbase.apache.org". The page content features the Apache HBase logo with the word "APACHE" in blue and "HBASE" in red, accompanied by a black orca illustration. Below the logo, the heading "Welcome to Apache HBase™" is displayed. A paragraph describes HBase as a distributed, scalable, big data store. It highlights its use for random, real-time access to Big Data, its open-source nature, and its compatibility with Hadoop and HDFS. The "Download" section includes a link to download the software. The "Features" section lists benefits such as linear scalability, strict consistency, and automatic sharding. At the bottom, a navigation bar shows the page is "1 / 4".

Faça o download, descompacte o arquivo e mova o diretório para /opt/hbase da mesma forma como você fez com o Java JDK e com o Hadoop.


## 7.2. Configurando o HBase



```
aluno@dataserver:~$ cd /opt/hbase/
[aluno@dataserver hbase]$ cd conf
[aluno@dataserver conf]$ gedit hbase-env.sh
```

No diretório /opt/hbase/conf, editar o arquivo hbase-env.sh

## Instalação e Configuração do Ecossistema Hadoop

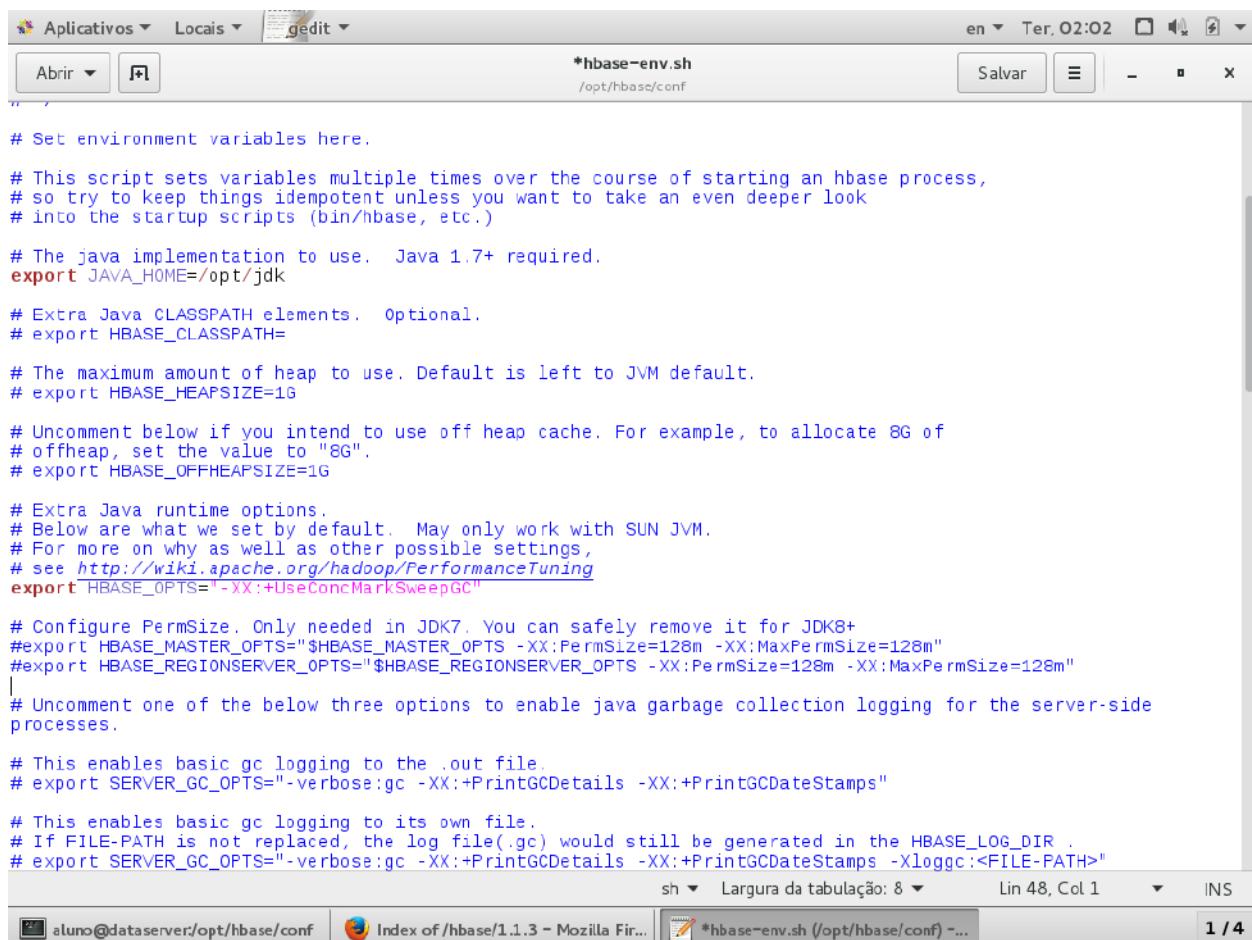

```

# Set environment variables here.

# This script sets variables multiple times over the course of starting an hbase process,
# so try to keep things idempotent unless you want to take an even deeper look
# into the startup scripts (bin/hbase, etc.)

# The java implementation to use. Java 1.7+ required.
export JAVA_HOME=/opt/jdk

# Extra Java CLASSPATH elements. Optional.
# export HBASE_CLASSPATH=

# The maximum amount of heap to use. Default is left to JVM default.
# export HBASE_HEAPSIZE=1G

# Uncomment below if you intend to use off heap cache. For example, to allocate 8G of
# offheap, set the value to "8G".
# export HBASE_OFFHEAPSIZE=1G

# Extra Java runtime options.
# Below are what we set by default. May only work with SUN JVM.
# For more on why as well as other possible settings,
# see http://wiki.apache.org/hadoop/PerformanceTuning
export HBASE_OPTS="-XX:+UseConcMarkSweepGC"

# Configure PermSize. Only needed in JDK7. You can safely remove it for JDK8+
#export HBASE_MASTER_OPTS="$HBASE_MASTER_OPTS -XX:PermSize=128m -XX:MaxPermSize=128m"
#export HBASE_REGIONSERVER_OPTS="$HBASE_REGIONSERVER_OPTS -XX:PermSize=128m -XX:MaxPermSize=128m"
|
# Uncomment one of the below three options to enable java garbage collection logging for the server-side
processes.

# This enables basic gc logging to the .out file.
# export SERVER_GC_OPTS="-verbose:gc -XX:+PrintGCDetails -XX:+PrintGCDateStamps"


# This enables basic gc logging to its own file.
# If FILE-PATH is not replaced, the log file(.gc) would still be generated in the HBASE_LOG_DIR .
# export SERVER_GC_OPTS="-verbose:gc -XX:+PrintGCDetails -XX:+PrintGCDateStamps -Xloggc:<FILE-PATH>"
```

sh ▾ Largura da tabulação: 8 ▾ Lin 48, Col 1 ▾ INS

aluno@dataserver:/opt/hbase/conf | Index of /hbase/1.1.3 - Mozilla Fir... | \*hbase-env.sh (/opt/hbase/conf) - ... | 1 / 4

**Editar o PATH do Java e comentar as linhas do PermSize**

## Instalação e Configuração do Ecossistema Hadoop

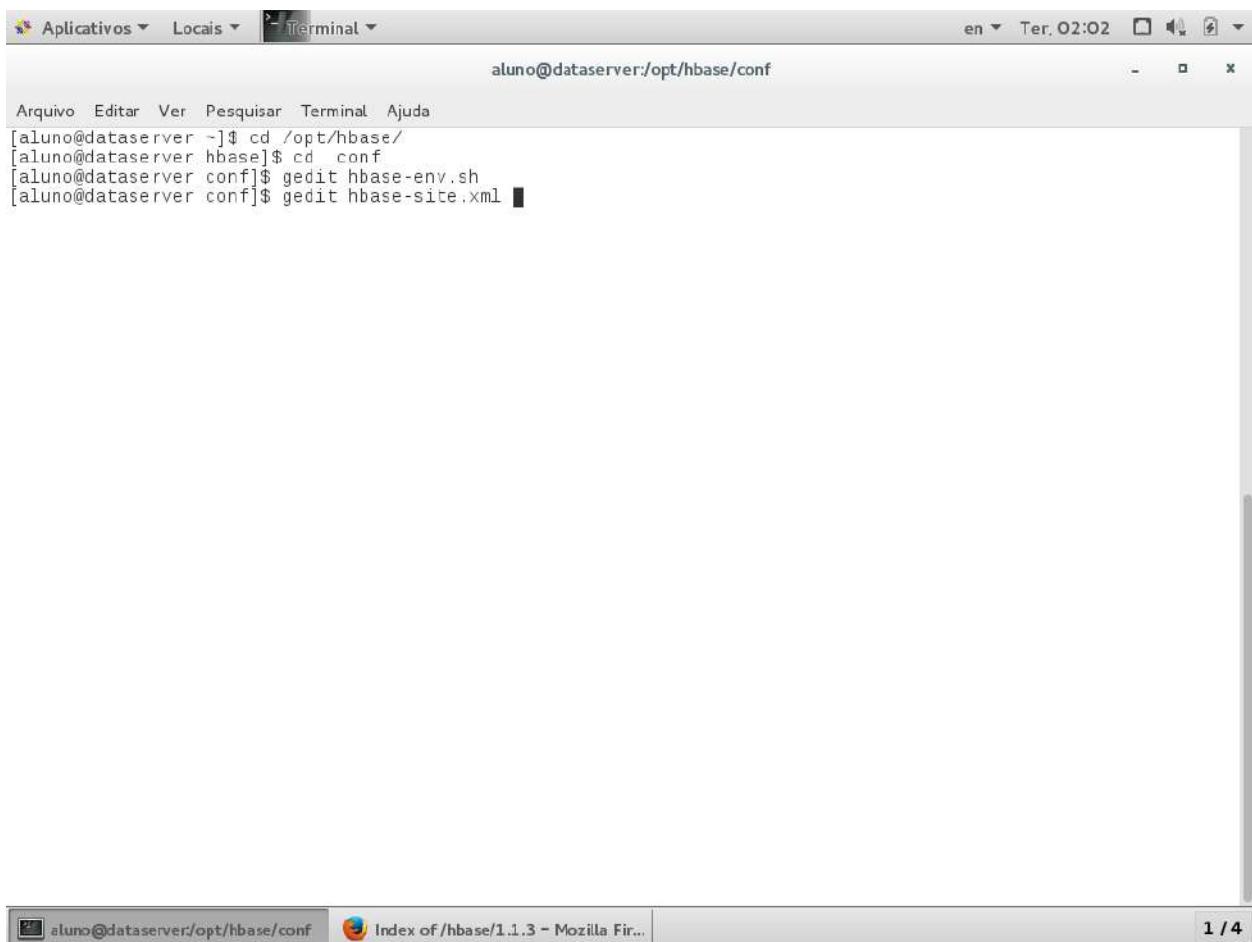

The screenshot shows a terminal window titled "Terminal" with the user "aluno" at "dataserver:/opt/hbase/conf". The menu bar includes "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The terminal history shows:

```
[aluno@dataserver ~]$ cd /opt/hbase/
[aluno@dataserver hbase]$ cd conf
[aluno@dataserver conf]$ gedit hbase-env.sh
[aluno@dataserver conf]$ gedit hbase-site.xml
```

No mesmo diretório conf, editar o arquivo hbase-site.xml

## Instalação e Configuração do Ecossistema Hadoop

Screenshot of a terminal window showing the content of the file `hbase-site.xml` located at `/opt/hbase/conf`. The file contains XML configuration for HBase, including license information and properties for root directory and ZooKeeper data directory.


```

<?xml version="1.0"?>
<?xml-stylesheet type="text/xsl" href="configuration.xsl"?>
<!--
  * Licensed to the Apache Software Foundation (ASF) under one
  * or more contributor license agreements. See the NOTICE file
  * distributed with this work for additional information
  * regarding copyright ownership. The ASF licenses this file
  * to you under the Apache License, Version 2.0 (the
  * "License"); you may not use this file except in compliance
  * with the License. You may obtain a copy of the License at
  *
  *     http://www.apache.org/licenses/LICENSE-2.0
  *
  * Unless required by applicable law or agreed to in writing, software
  * distributed under the License is distributed on an "AS IS" BASIS,
  * WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
  * See the License for the specific language governing permissions and
  * limitations under the License.
-->
<configuration>
<property>
<name>hbase.rootdir</name>
<value>file:///opt/hbase/hfiles</value>
</property>
<property>
<name>hbase.zookeeper.property.dataDir</name>
<value>/opt/zookeeper/data</value>
</property>
</configuration>

```


Screenshot of a browser tab showing the file `hbase-site.xml` at `/opt/hbase/conf`. The page displays the XML configuration content. A note at the bottom of the page says: "Incluir as linhas entre as tags <configuration>" (Include the lines between the <configuration> tags).

## Instalação e Configuração do Ecossistema Hadoop

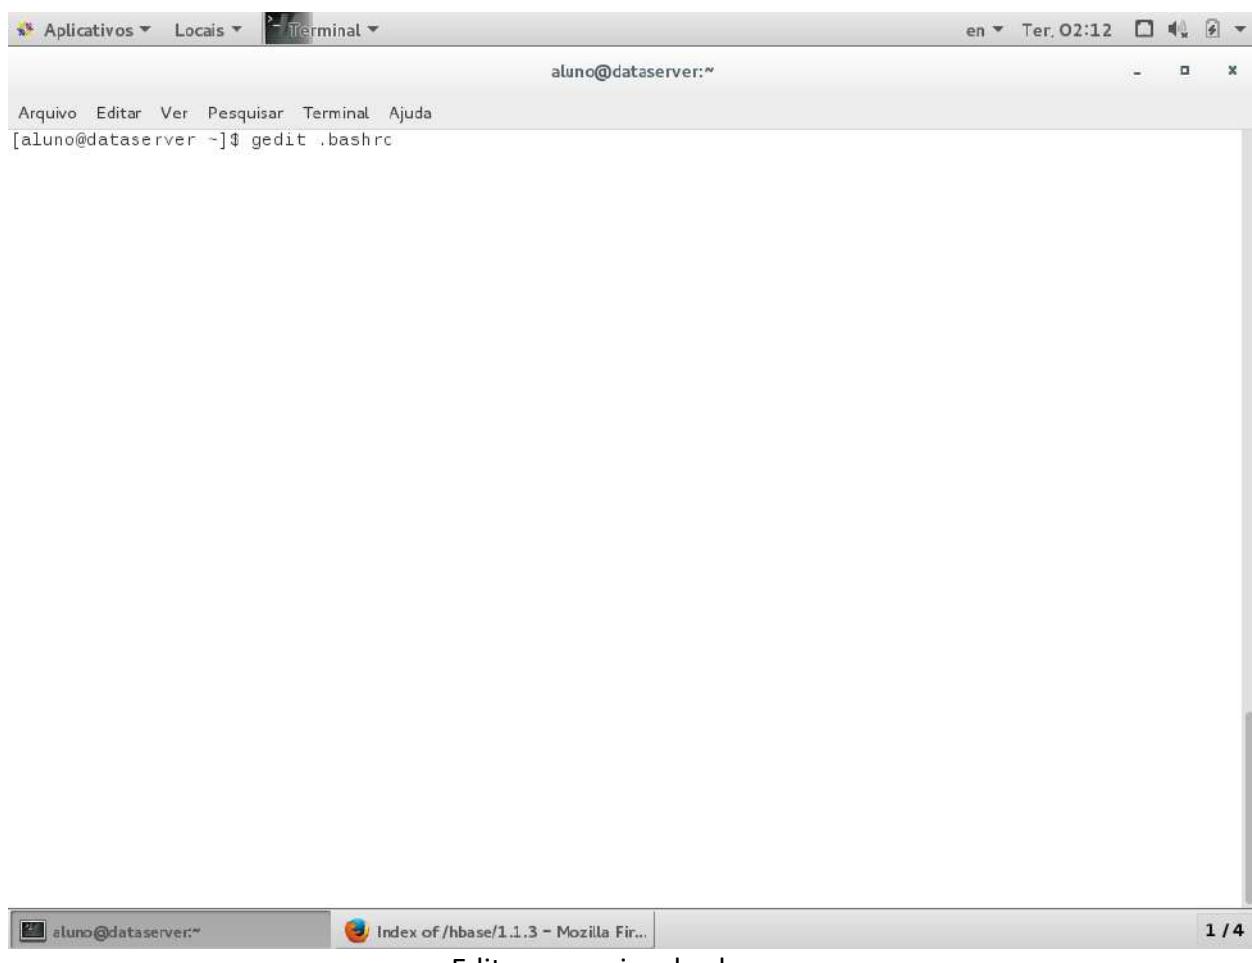

Editar o arquivo .bashrc

## Instalação e Configuração do Ecossistema Hadoop

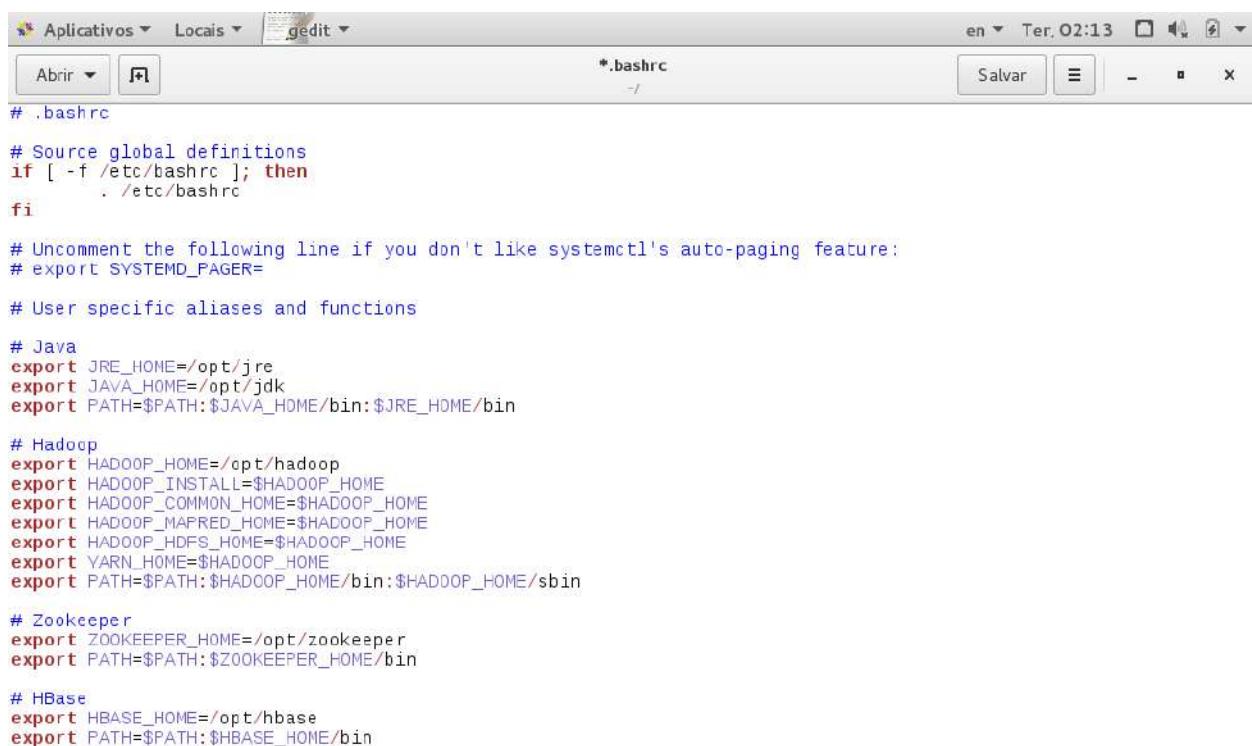

```

*.bashrc
-/

# .bashrc

# Source global definitions
if [ -f /etc/bashrc ]; then
    . /etc/bashrc
fi

# Uncomment the following line if you don't like systemctl's auto-paging feature:
# export SYSTEMD_PAGER=

# User specific aliases and functions

# Java
export JRE_HOME=/opt/jre
export JAVA_HOME=/opt/jdk
export PATH=$PATH:$JAVA_HOME/bin:$JRE_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin

# Zookeeper
export ZOOKEEPER_HOME=/opt/zookeeper
export PATH=$PATH:$ZOOKEEPER_HOME/bin

# HBase
export HBASE_HOME=/opt/hbase
export PATH=$PATH:$HBASE_HOME/bin

```




sh ▾ Largura da tabulação: 8 ▾ Lin 35, Col 1 ▾ INS

aluno@dataserver:~ | Index of /hbase/1.1.3 - Mozilla Fir... | \*.bashrc (~) - gedit | 1 / 4

Variáveis HBase

## Instalação e Configuração do Ecossistema Hadoop

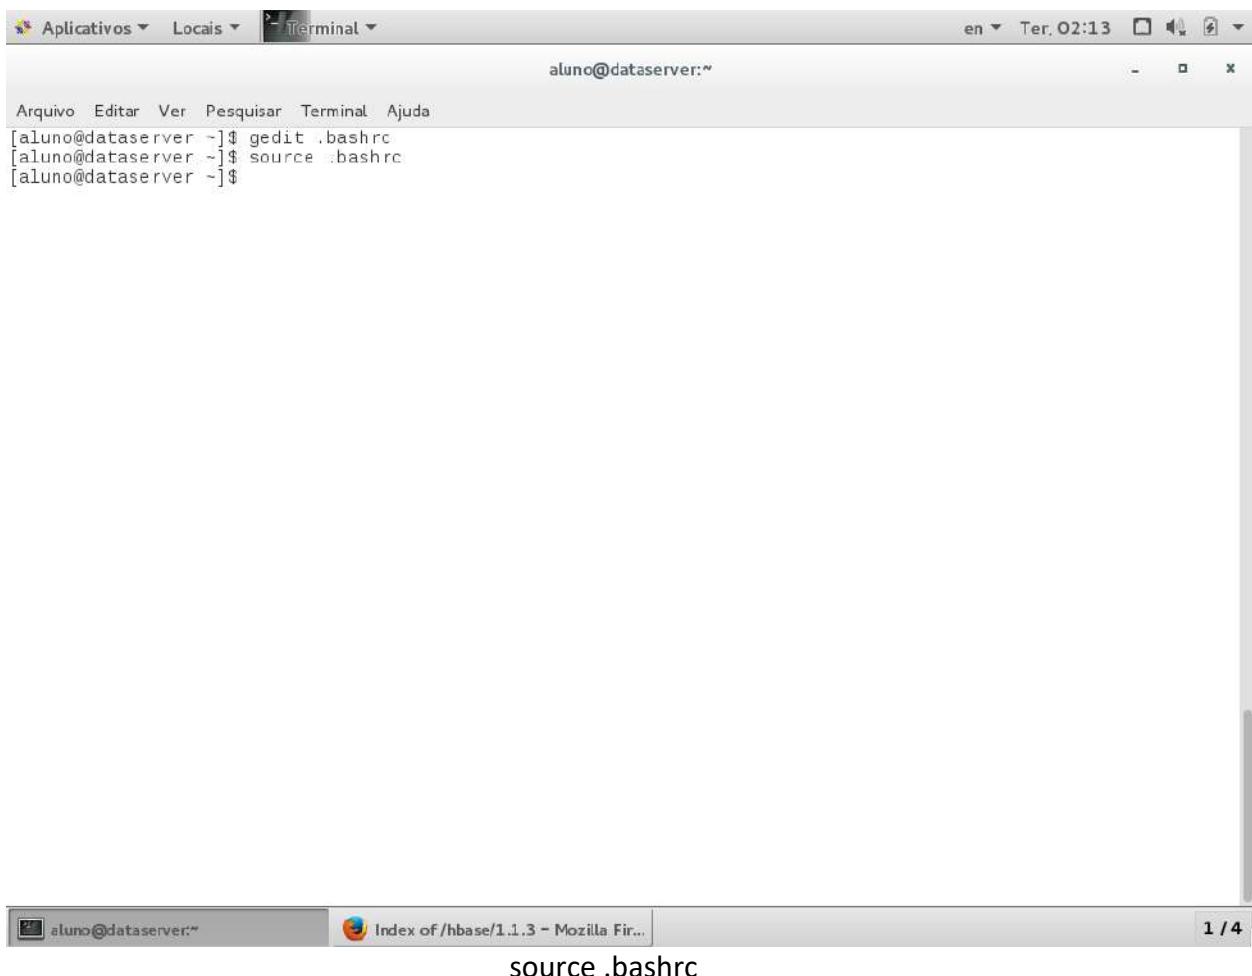


A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". The user has run three commands:

```
[aluno@dataserver ~]$ gedit .bashrc
[aluno@dataserver ~]$ source .bashrc
[aluno@dataserver ~]$
```

Below the terminal window, there is a browser tab titled "Index of /hbase/1.1.3 - Mozilla Fir..." and a status bar indicating "1 / 4".

## Instalação e Configuração do Ecossistema Hadoop

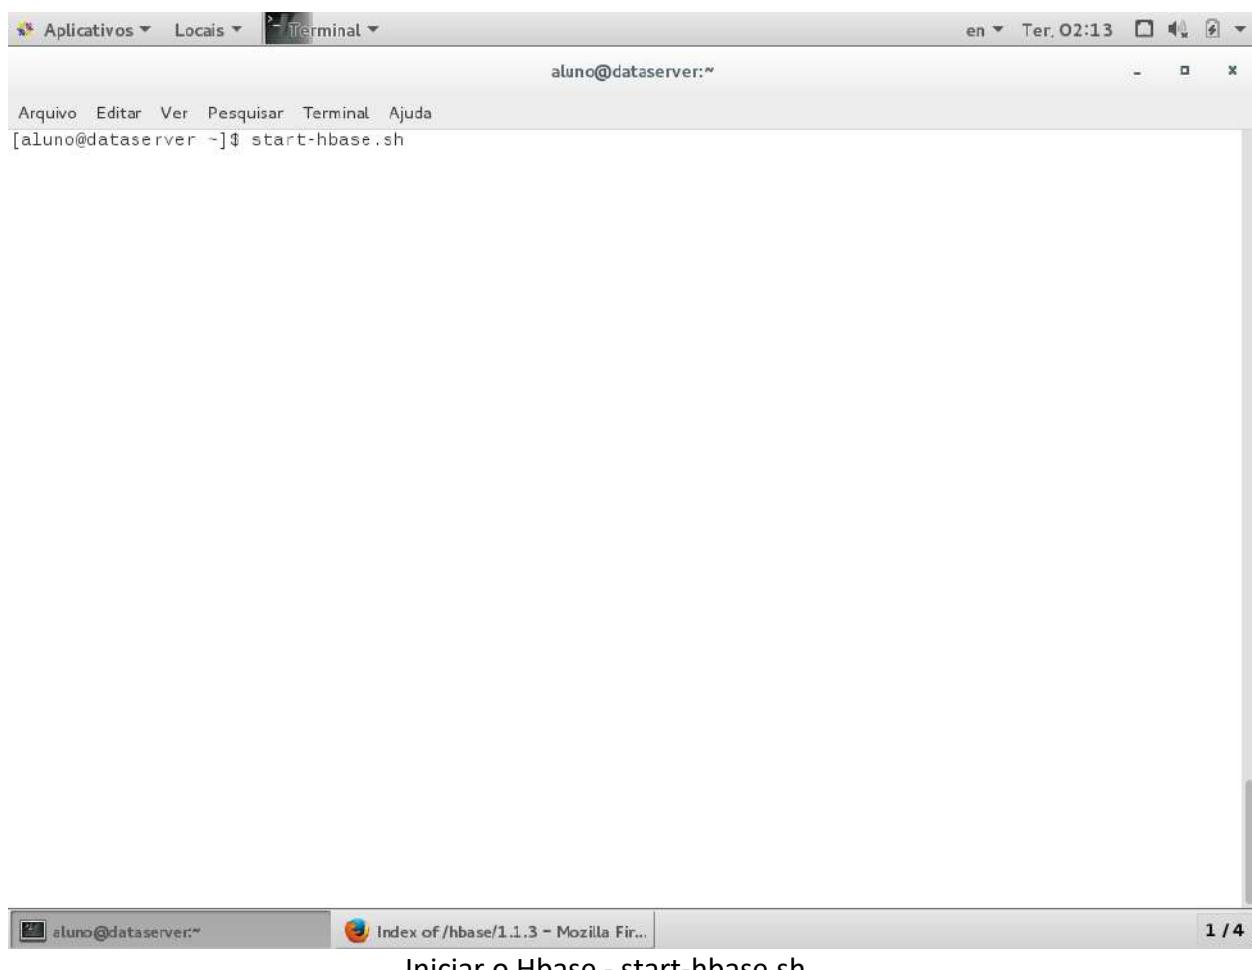


A screenshot of a terminal window titled "Terminal". The window has a menu bar with "Aplicativos", "Locais", and "Terminal". The status bar shows "en Ter. 02:13". The terminal prompt is "aluno@dataserver:~". Below the prompt, the command "[aluno@dataserver ~]\$ start-hbase.sh" is visible.

Iniciar o Hbase - start-hbase.sh

1 / 4

## Instalação e Configuração do Ecossistema Hadoop

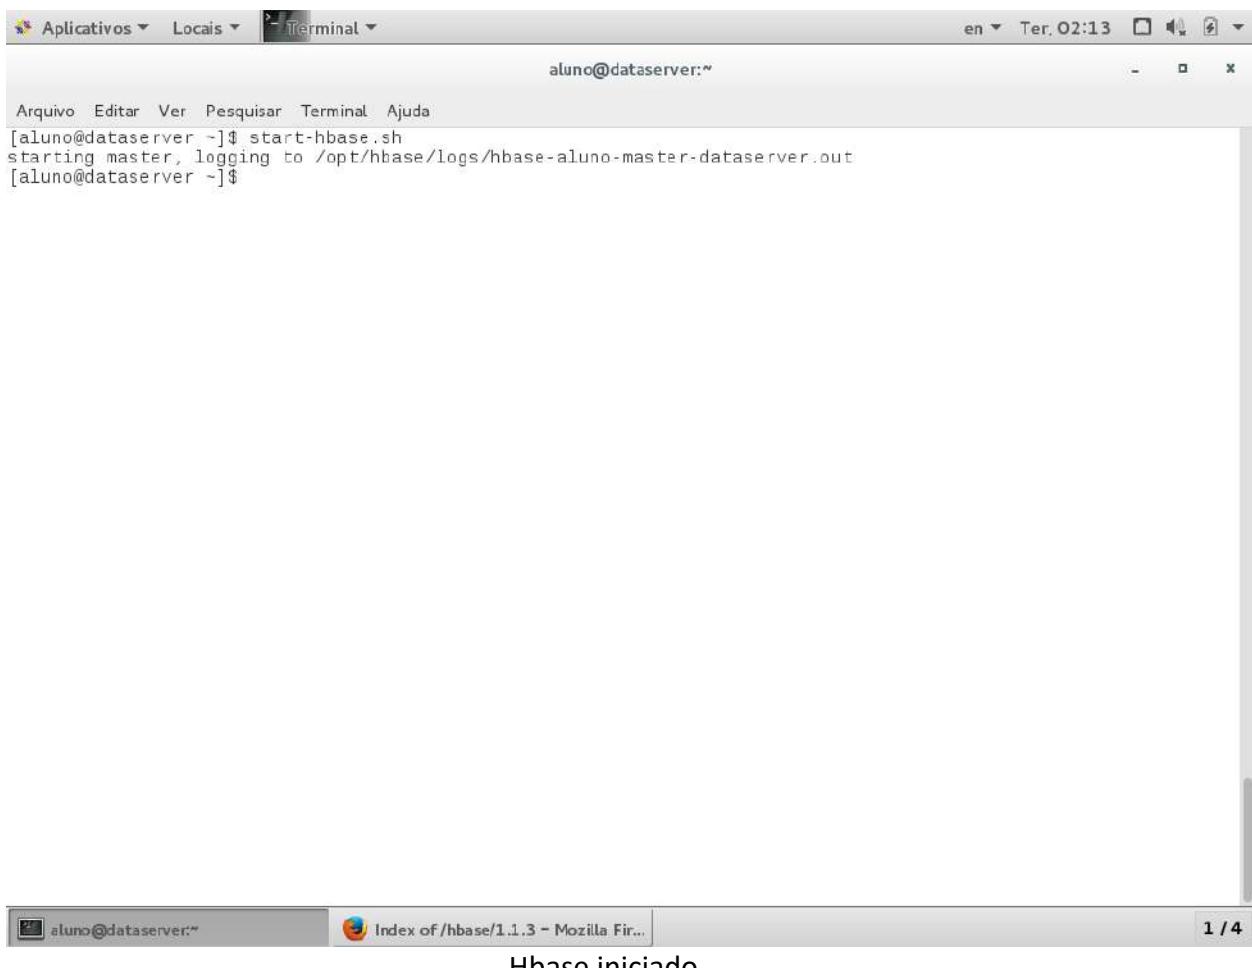


```
aluno@dataserver:~$ start-hbase.sh
starting master, logging to /opt/hbase/logs/hbase-aluno-master-dataserver.out
[aluno@dataserver ~]$
```


aluno@dataserver:~\$ Index of /hbase/1.1.3 - Mozilla Fir... 1 / 4

Hbase iniciado

## Instalação e Configuração do Ecossistema Hadoop

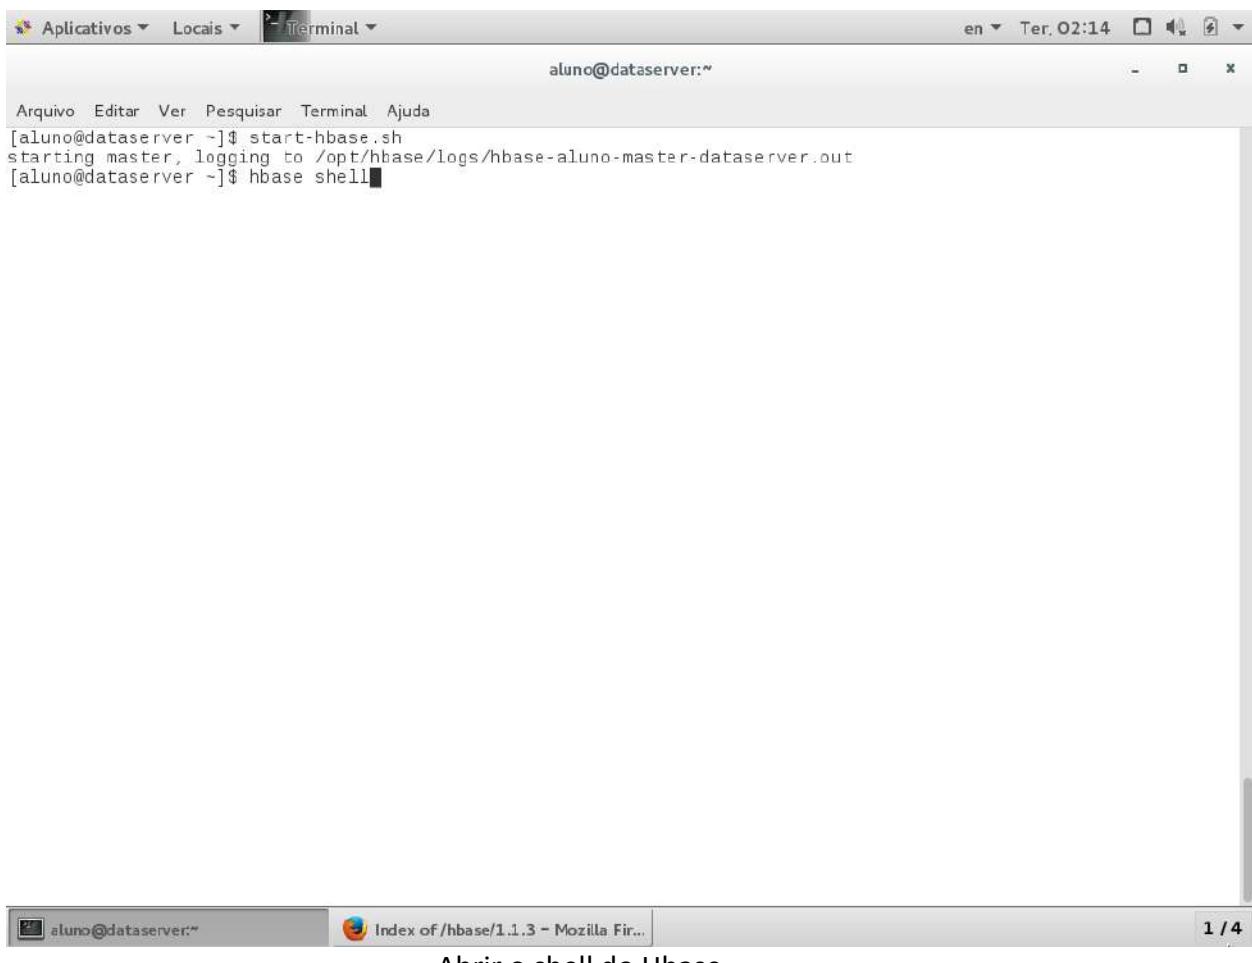


A screenshot of a Linux terminal window titled "Terminal". The window has a menu bar with "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The terminal prompt is "aluno@dataserver:~". The user has run the command "[aluno@dataserver ~]\$ start-hbase.sh" which outputs "starting master, logging to /opt/hbase/logs/hbase-aluno-master-dataserver.out". Then the user runs "[aluno@dataserver ~]\$ hbase shell" which is still running.

Abrir o shell do Hbase

1 / 4

## Instalação e Configuração do Ecossistema Hadoop

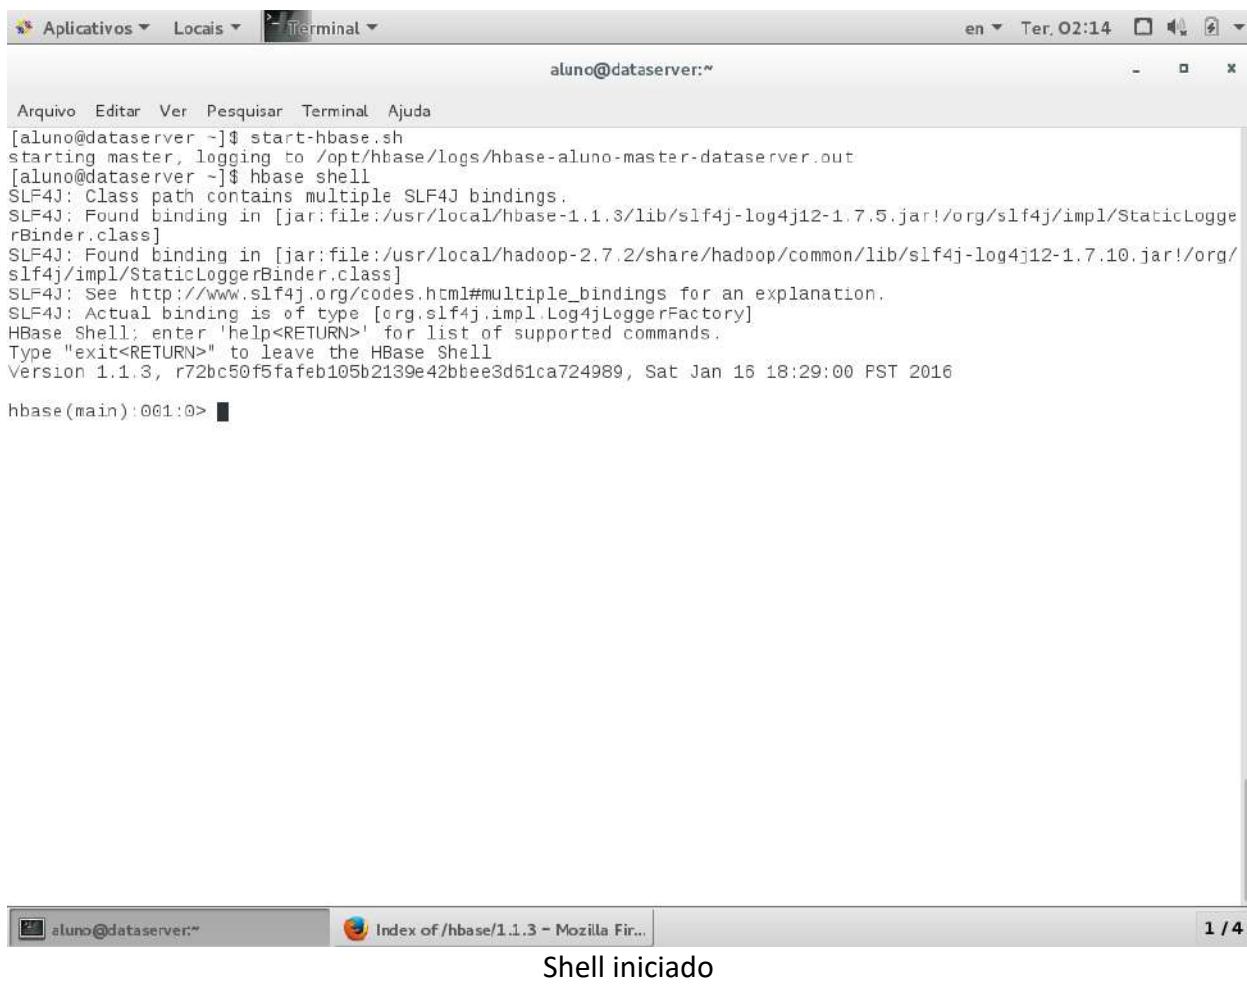


A screenshot of a terminal window titled "Terminal". The window shows the command "start-hbase.sh" being run, which starts the HBase master service. The output includes logs about SLF4J binding and the start time: "Version 1.1.3, r72bc50f5fafeb105b2139e42bbe3d61ca724989, Sat Jan 16 18:29:00 PST 2016". The terminal window has a menu bar with "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The status bar at the bottom right shows "aluno@dataserver:~".

```
[aluno@dataserver ~]$ start-hbase.sh
starting master, logging to /opt/hbase/logs/hbase-aluno-master-dataserver.out
[aluno@dataserver ~]$ hbase shell
SLF4J: Class path contains multiple SLF4J bindings.
SLF4J: Found binding in [jar:file:/usr/local/hbase-1.1.3/lib/slf4j-log4j12-1.7.5.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: Found binding in [jar:file:/usr/local/hadoop-2.7.2/share/hadoop/common/lib/slf4j-log4j12-1.7.10.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.slf4j.impl.Log4jLoggerFactory]
HBase Shell; enter 'help[RETURN]' for list of supported commands.
Type "exit<RETURN>" to leave the HBase Shell
Version 1.1.3, r72bc50f5fafeb105b2139e42bbe3d61ca724989, Sat Jan 16 18:29:00 PST 2016
hbase(main):001:0>
```

Shell iniciado

## 8. Instalação e Configuração do Hive


### 8.1. Download e Instalação do Hive

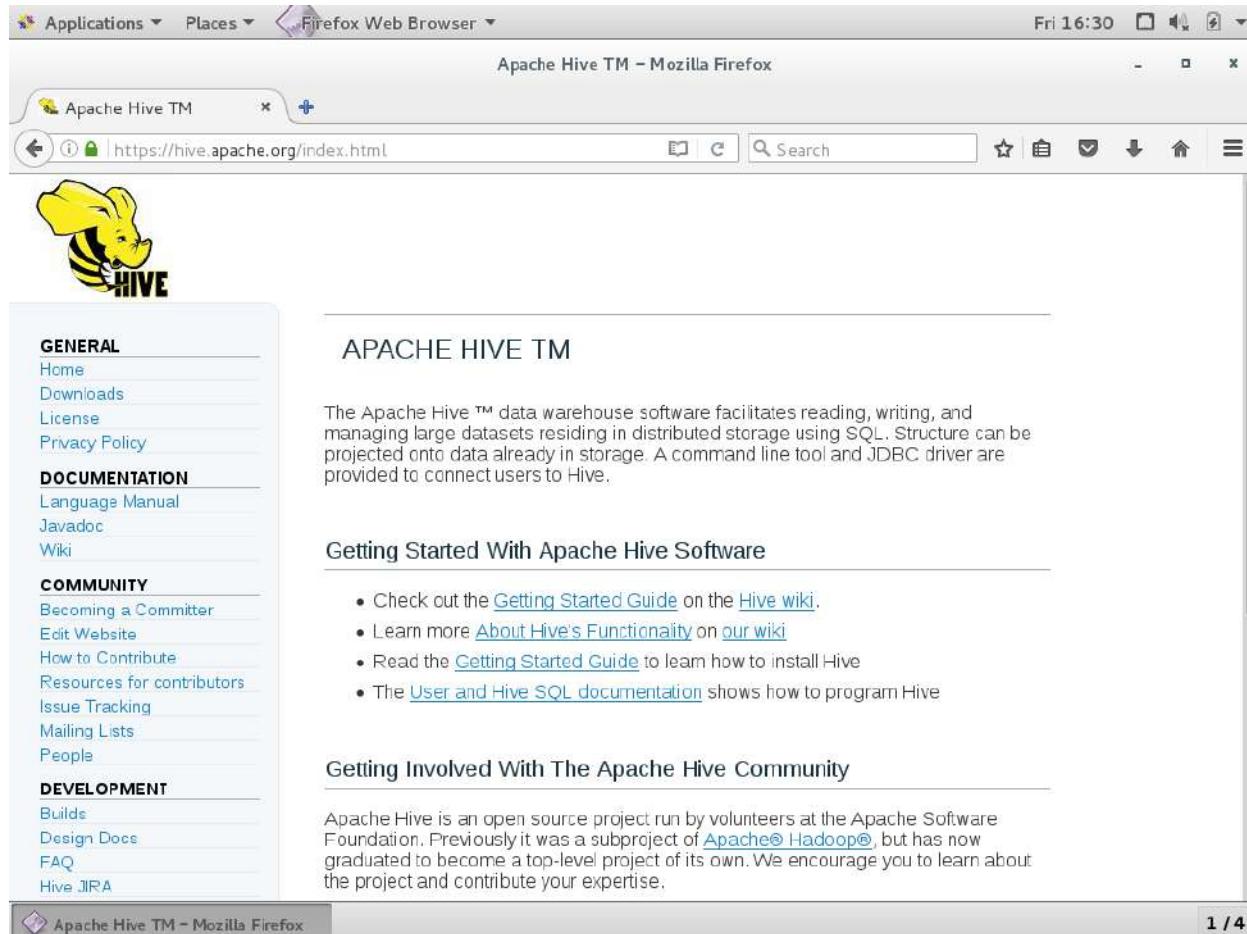

The screenshot shows a Firefox browser window with the title "Apache Hive TM - Mozilla Firefox". The address bar displays the URL <https://hive.apache.org/index.html>. The main content area features the Apache Hive logo (a yellow bee with wings) and the text "APACHE HIVE TM". Below this, a section titled "APACHE HIVE TM" explains that the software facilitates reading, writing, and managing large datasets using SQL. It also links to the "Getting Started With Apache Hive Software" section, which contains a bulleted list of resources for installation and programming. Another section, "Getting Involved With The Apache Hive Community", provides information about the project's history and encourages contributions. At the bottom of the page, there is a prominent blue button labeled "Download do Hive – Versão 3.1.1".


Faça o download, descompacte o arquivo e mova o diretório para /opt/hive da mesma forma como você fez com o Java JDK e com o Hadoop.

## 8.2. Configurando o Hive

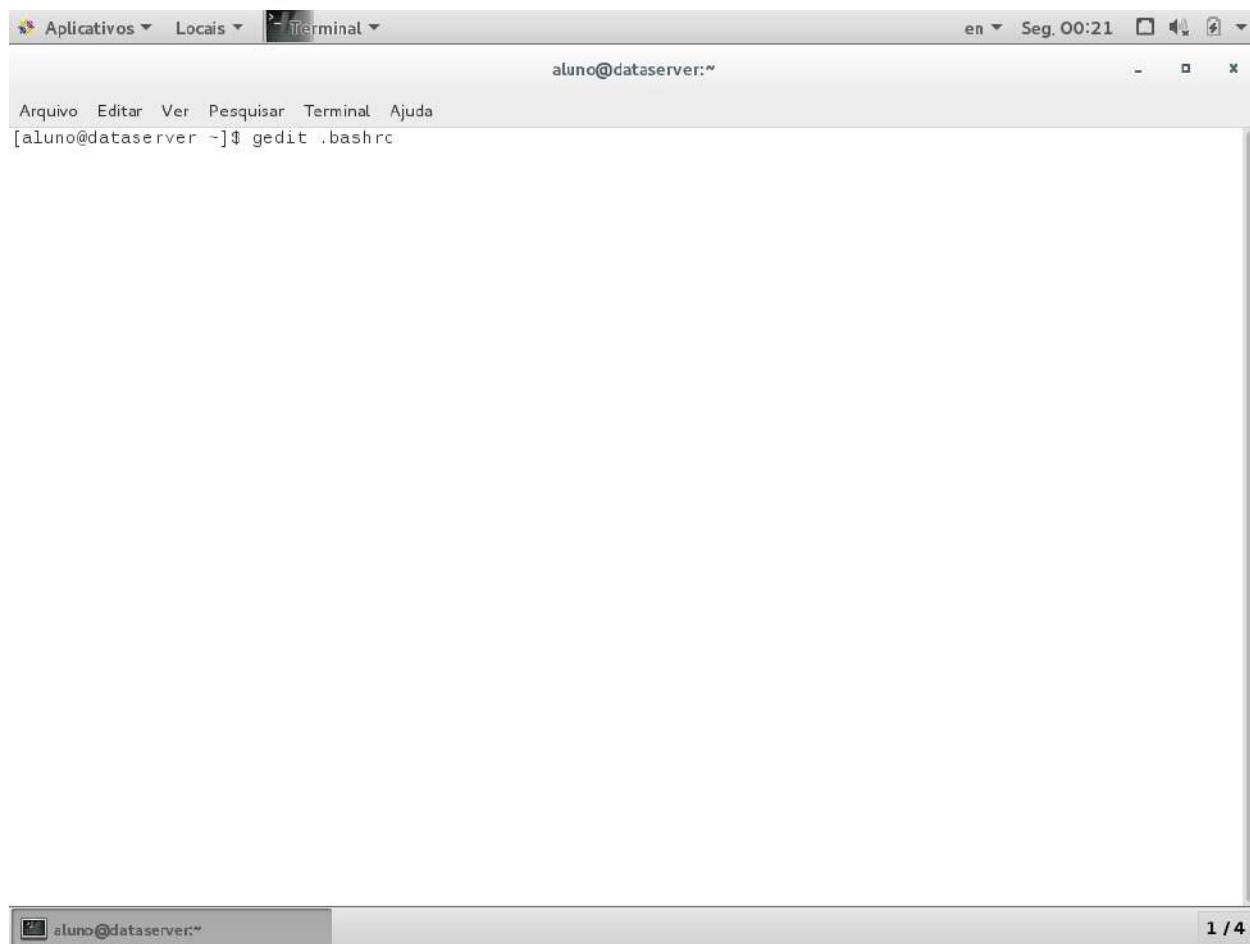

Editando o arquivo .bashrc

## Instalação e Configuração do Ecossistema Hadoop

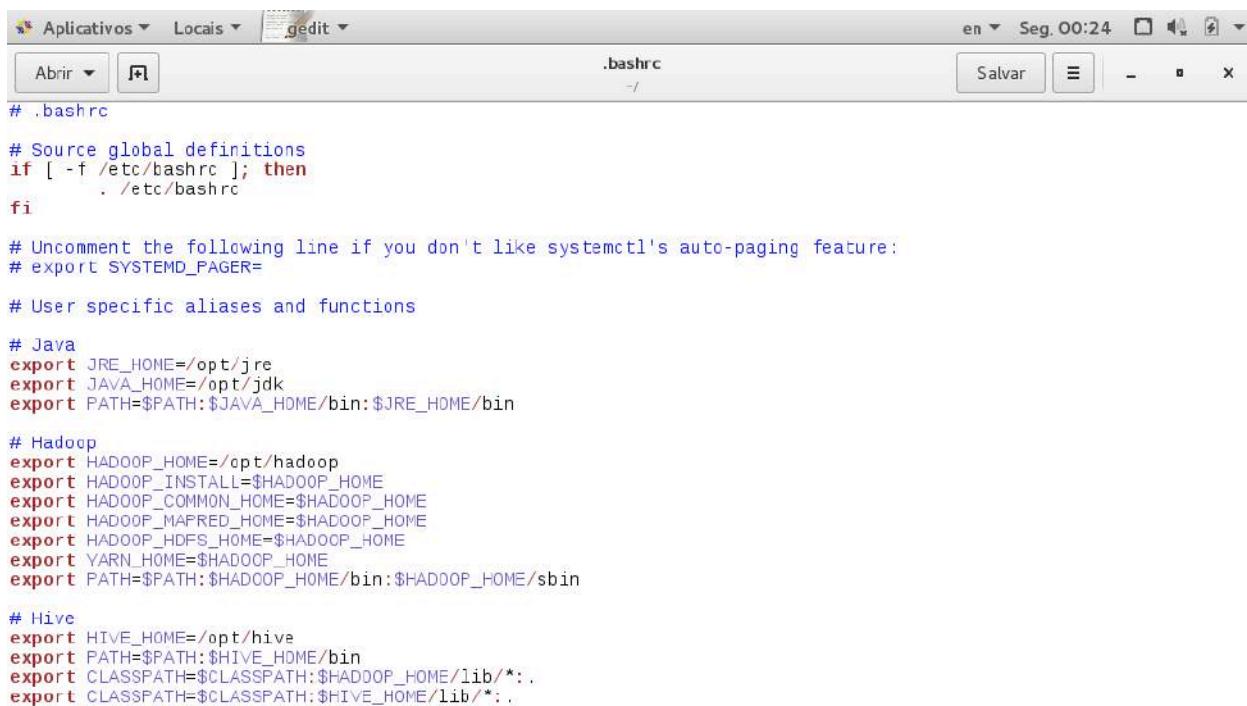

```

Aplicativos Locais gedit
Abrir Salvar
.bashrc ~/
# .bashrc

# Source global definitions
if [ -f /etc/bashrc ]; then
    . /etc/bashrc
fi

# Uncomment the following line if you don't like systemctl's auto-paging feature:
# export SYSTEMD_PAGER=


# User specific aliases and functions

# Java
export JRE_HOME=/opt/jre
export JAVA_HOME=/opt/jdk
export PATH=$PATH:$JAVA_HOME/bin:$JRE_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin

# Hive
export HIVE_HOME=/opt/hive
export PATH=$PATH:$HIVE_HOME/bin
export CLASSPATH=$CLASSPATH:$HADOOP_HOME/lib/*:.
export CLASSPATH=$CLASSPATH:$HIVE_HOME/lib/*:.

```



sh ▾ Largura da tabulação: 8 ▾ Lin 32, Col 1 ▾ INS

aluno@dataserver:~ .bashrc (~) - gedit 1 / 4

Variáveis de ambiente do Hive

## Instalação e Configuração do Ecossistema Hadoop



A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". Below the prompt, the command "source .bashrc" is visible. The status bar at the bottom of the terminal shows the path "aluno@dataserver:~" and the number "1 / 4".

## Instalação e Configuração do Ecossistema Hadoop




A screenshot of a Linux terminal window titled "Terminal". The window shows the command line interface with the user "aluno" at "dataserver". The command entered is:

```
[aluno@dataserver ~]$ cd $HIVE_HOME/conf  
[aluno@dataserver conf]$ cp hive-env.sh.template hive-env.sh
```

A partir do arquivo template, gerar o arquivo hive-env.sh

## Instalação e Configuração do Ecossistema Hadoop

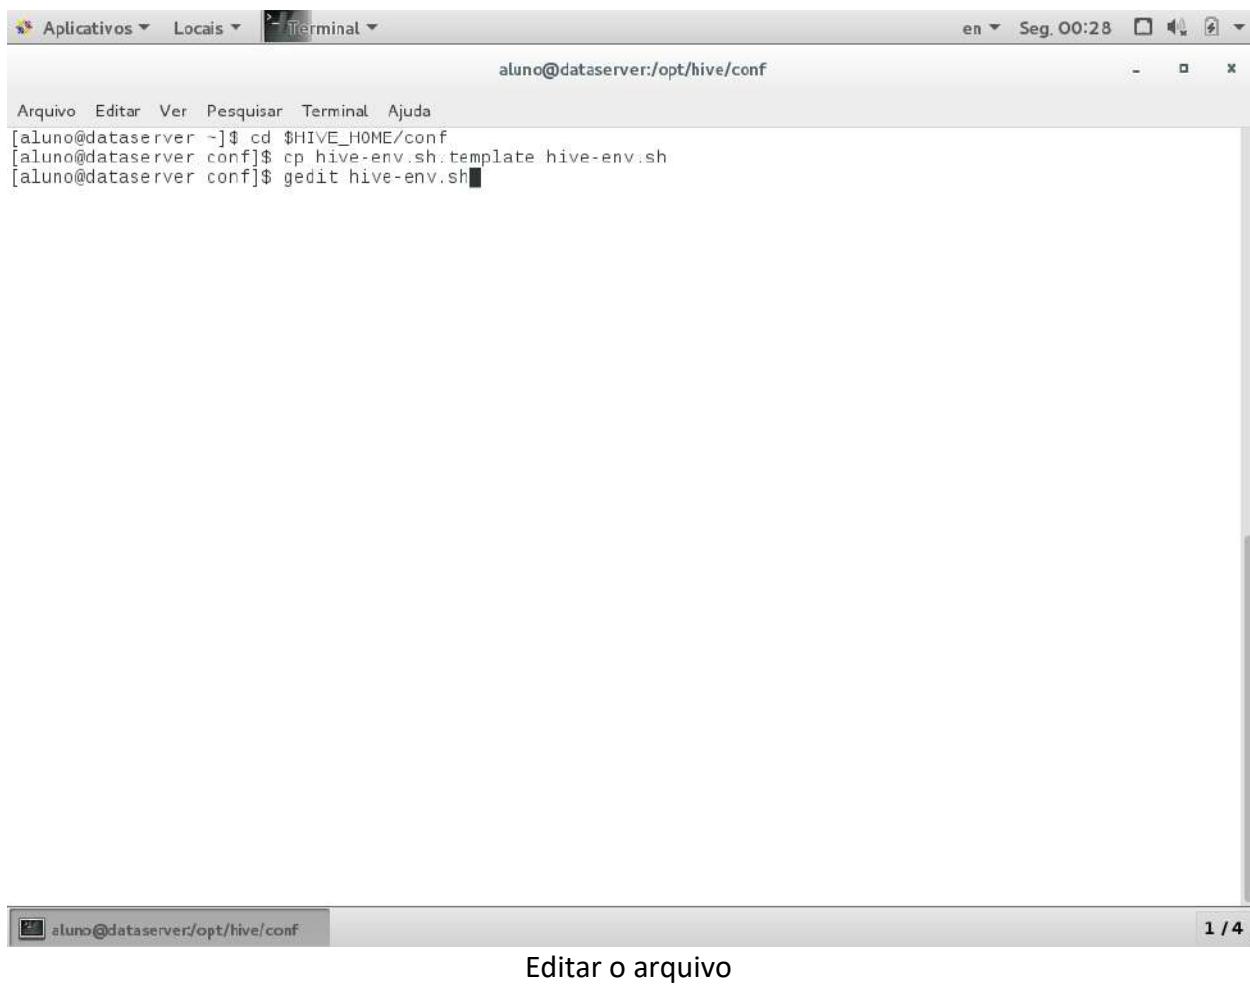


The screenshot shows a terminal window titled "Terminal" with the command prompt "aluno@dataserver:/opt/hive/conf". The user has run the following commands:

```
[aluno@dataserver ~] $ cd $HIVE_HOME/conf  
[aluno@dataserver conf]$ cp hive-env.sh.template hive-env.sh  
[aluno@dataserver conf]$ gedit hive-env.sh
```

At the bottom of the terminal window, there is a toolbar with icons for "Aplicativos", "Locais", and "Terminal". The status bar at the bottom right shows "en Seg. 00:28". A tooltip "Editar o arquivo" is visible over the "Edit" icon in the toolbar.

## Instalação e Configuração do Ecossistema Hadoop

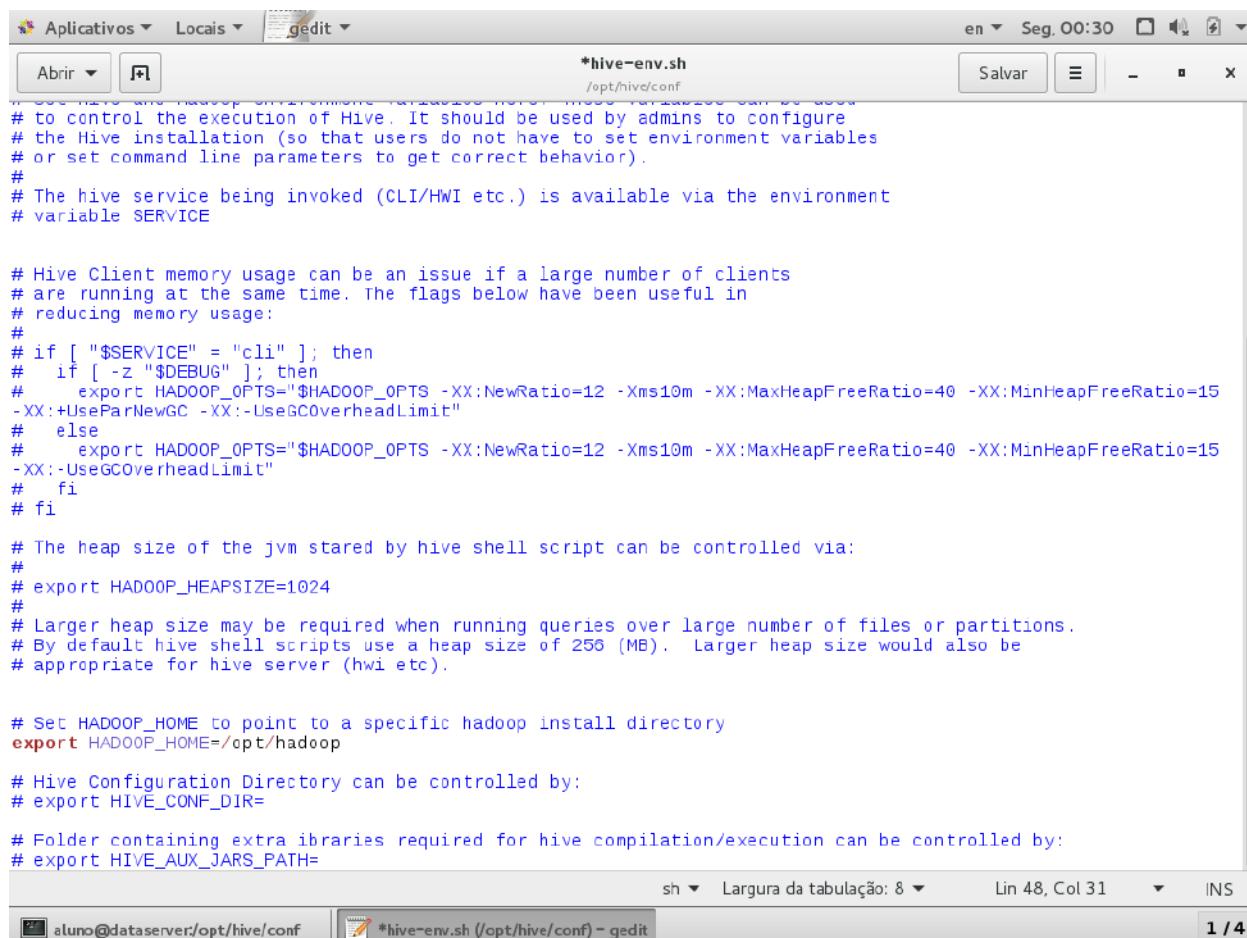

```

*hive-env.sh
/opt/hive/conf

# to control the execution of Hive. It should be used by admins to configure
# the Hive installation (so that users do not have to set environment variables
# or set command line parameters to get correct behavior).
#
# The hive service being invoked (CLI/HWI etc.) is available via the environment
# variable SERVICE

# Hive Client memory usage can be an issue if a large number of clients
# are running at the same time. The flags below have been useful in
# reducing memory usage:
#
# if [ "$SERVICE" = "cli" ]; then
#   if [ -z "$DEBUG" ]; then
#     export HADOOP_OPTS="$HADOOP_OPTS -XX:NewRatio=12 -Xms10m -XX:MaxHeapFreeRatio=40 -XX:MinHeapFreeRatio=15
# -XX:+UseParNewGC -XX:-UseGCOverheadLimit"
#   else
#     export HADOOP_OPTS="$HADOOP_OPTS -XX:NewRatio=12 -Xms10m -XX:MaxHeapFreeRatio=40 -XX:MinHeapFreeRatio=15
# -XX:-UseGCOverheadLimit"
#   fi
# fi

# The heap size of the jvm started by hive shell script can be controlled via:
#
# export HADOOP_HEAPSIZE=1024
#
# Larger heap size may be required when running queries over large number of files or partitions.
# By default hive shell scripts use a heap size of 256 (MB). Larger heap size would also be
# appropriate for hive server (hwi etc).

# Set HADOOP_HOME to point to a specific hadoop install directory
export HADOOP_HOME=/opt/hadoop

# Hive Configuration Directory can be controlled by:
# export HIVE_CONF_DIR=

# Folder containing extra libraries required for hive compilation/execution can be controlled by:
# export HIVE_AUX_JARS_PATH=


```

sh ▾ Largura da tabulação: 8 ▾ Lin 48, Col 31 ▾ INS

aluno@dataserver:/opt/hive/conf \*hive-env.sh (/opt/hive/conf) - gedit 1 / 4

Incluir PATH do Hadoop, conforme tela acima

## Instalação e Configuração do Ecossistema Hadoop

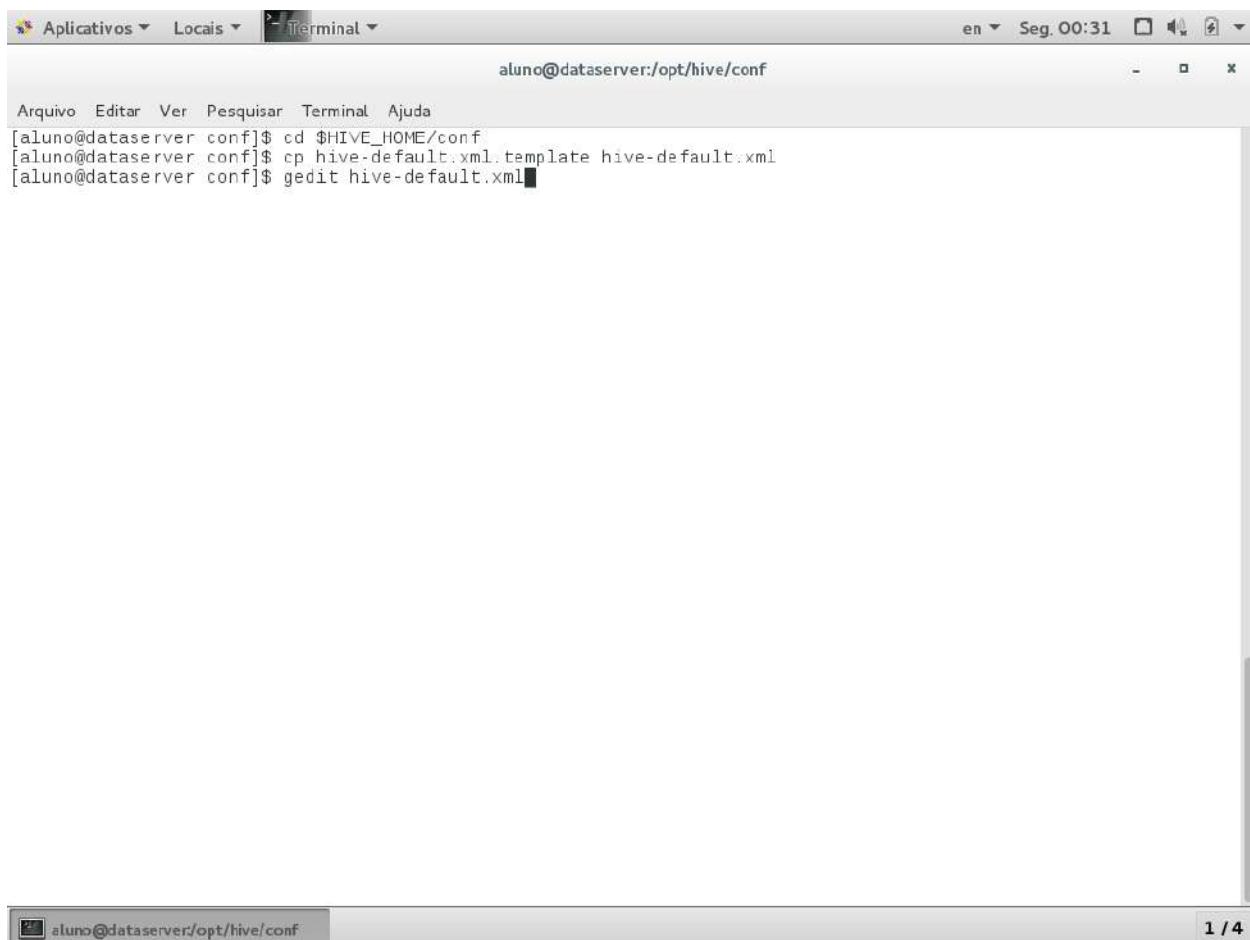


The screenshot shows a terminal window titled "Terminal" with the command prompt "aluno@dataserver:/opt/hive/conf". The user has run the following commands:

```
[aluno@dataserver conf]$ cd $HIVE_HOME/conf  
[aluno@dataserver conf]$ cp hive-default.xml.template hive-default.xml  
[aluno@dataserver conf]$ gedit hive-default.xml
```

The terminal window has a menu bar with "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The status bar at the bottom shows "aluno@dataserver:/opt/hive/conf" and "1 / 4".

A partir do template, gerar o arquivo `hive-site.xml`


## Instalação e Configuração do Ecossistema Hadoop

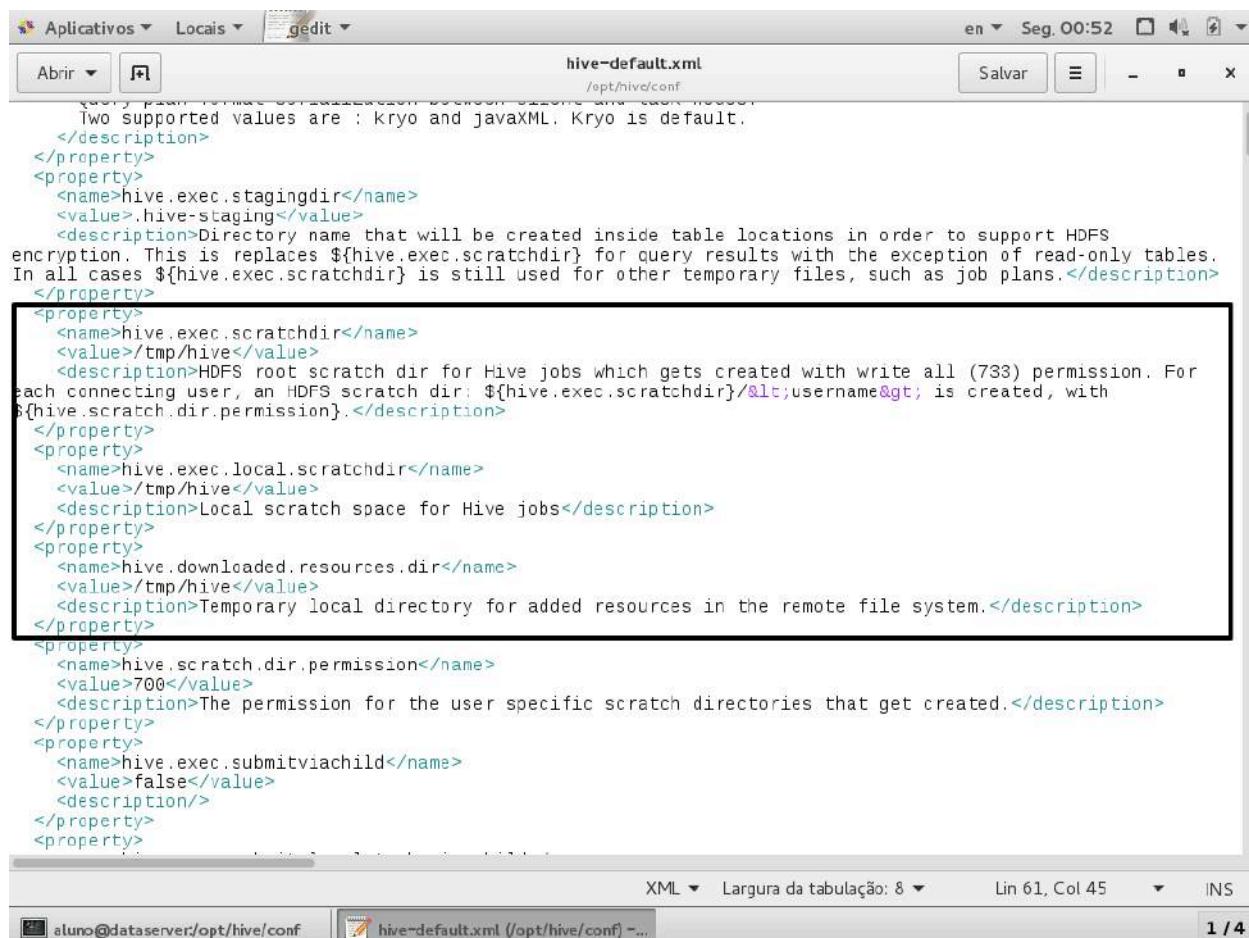


```
Two supported values are : kryo and javaXML. Kryo is default.
</description>
</property>
<property>
<name>hive.exec.stagingdir</name>
<value>.hive-staging</value>
<description>Directory name that will be created inside table locations in order to support HDFS encryption. This is replaces ${hive.exec.scratchdir} for query results with the exception of read-only tables. In all cases ${hive.exec.scratchdir} is still used for other temporary files, such as job plans.</description>
</property>
<property>
<name>hive.exec.scratchdir</name>
<value>/tmp/hive</value>
<description>HDFS root scratch dir for Hive jobs which gets created with write all (733) permission. For each connecting user, an HDFS scratch dir: ${hive.exec.scratchdir}/<username> is created, with ${hive.scratch.dir.permission}.</description>
</property>
<property>
<name>hive.exec.local.scratchdir</name>
<value>/tmp/hive</value>
<description>Local scratch space for Hive jobs</description>
</property>
<property>
<name>hive.downloaded.resources.dir</name>
<value>/tmp/hive</value>
<description>Temporary local directory for added resources in the remote file system.</description>
</property>
<property>
<name>hive.scratch.dir.permission</name>
<value>700</value>
<description>The permission for the user specific scratch directories that get created.</description>
</property>
<property>
<name>hive.exec.submitviachild</name>
<value>false</value>
<description/>
</property>
<property>
```

Editar as linhas conforme cima

## Instalação e Configuração do Ecossistema Hadoop

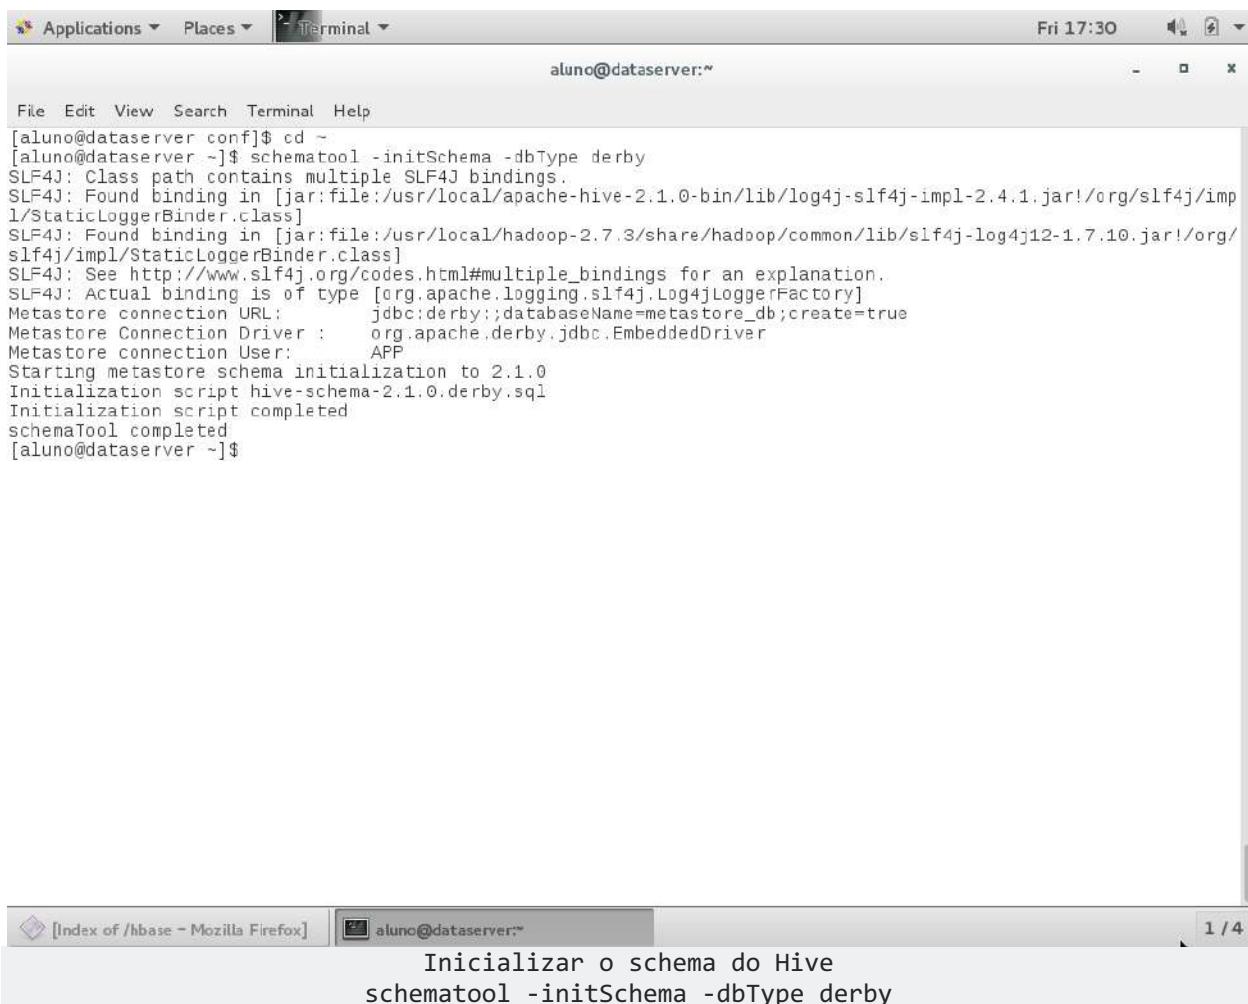

```
[aluno@dataserver conf]$ cd ~
[aluno@dataserver ~]$ schematool -initSchema -dbType derby
SLF4J: Class path contains multiple SLF4J bindings.
SLF4J: Found binding in [jar:file:/usr/local/apache-hive-2.1.0-bin/lib/log4j-slf4j-impl-2.4.1.jar!/_org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: Found binding in [jar:file:/usr/local/hadoop-2.7.3/share/hadoop/common/lib/slf4j-log4j12-1.7.10.jar!/_org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]
Metastore connection URL:      jdbc:derby:;databaseName=metastore_db;create=true
Metastore Connection Driver :  org.apache.derby.jdbc.EmbeddedDriver
Metastore connection User:     APP
Starting metastore schema initialization to 2.1.0
Initialization script hive-schema-2.1.0.derby.sql
Initialization script completed
schemaTool completed
[aluno@dataserver ~]$
```

Index of /hbase - Mozilla Firefox

aluno@dataserver:~

Iniciar o schema do Hive  
schematool -initSchema -dbType derby

## Instalação e Configuração do Ecossistema Hadoop



The screenshot shows a terminal window titled "Terminal" with the user "aluno@dataserver:~". The terminal displays the output of the "hive" command:

```
[aluno@dataserver ~]$ hive
SLF4J: Class path contains multiple SLF4J bindings.
SLF4J: Found binding in [jar:file:/usr/local/apache-hive-2.1.0-bin/lib/log4j-slf4j-impl-2.4.1.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: Found binding in [jar:file:/usr/local/hadoop-2.7.3/share/hadoop/common/lib/slf4j-log4j12-1.7.10.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]

Logging initialized using configuration in jar:file:/usr/local/apache-hive-2.1.0-bin/lib/hive-common-2.1.0.jar!/hive-log4j2.properties Async: true
Hive-on-MR is deprecated in Hive 2 and may not be available in the future versions. Consider using a different execution engine (i.e. spark, tez) or using Hive 1.X releases.
hive> ■
```

Executando o Hive (execute o comando jps para se certificar que o Hadoop está ativo)

## Instalação e Configuração do Ecossistema Hadoop



The screenshot shows a terminal window titled "Terminal" with the user "aluno@dataserver:~". The terminal displays the following output:


```
[aluno@dataserver ~]$ hive
SLF4J: Class path contains multiple SLF4J bindings.
SLF4J: Found binding in [jar:file:/usr/local/apache-hive-2.1.0-bin/lib/log4j-slf4j-impl-2.4.1.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: Found binding in [jar:file:/usr/local/hadoop-2.7.3/share/hadoop/common/lib/slf4j-log4j12-1.7.10.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]

Logging initialized using configuration in jar:file:/usr/local/apache-hive-2.1.0-bin/lib/hive-common-2.1.0.jar!/hive-log4j2.properties Async: true
Hive-on-MR is deprecated in Hive 2 and may not be available in the future versions. Consider using a different execution engine (i.e. spark, tez) or using Hive 1.X releases.
hive> show tables;
OK
Time taken: 1.352 seconds
hive>
```

O comando “show tables;” demonstra que o Hive foi instalado com sucesso

## 9. Instalação e Configuração do Pig

### 9.1. Download e Instalação do Pig

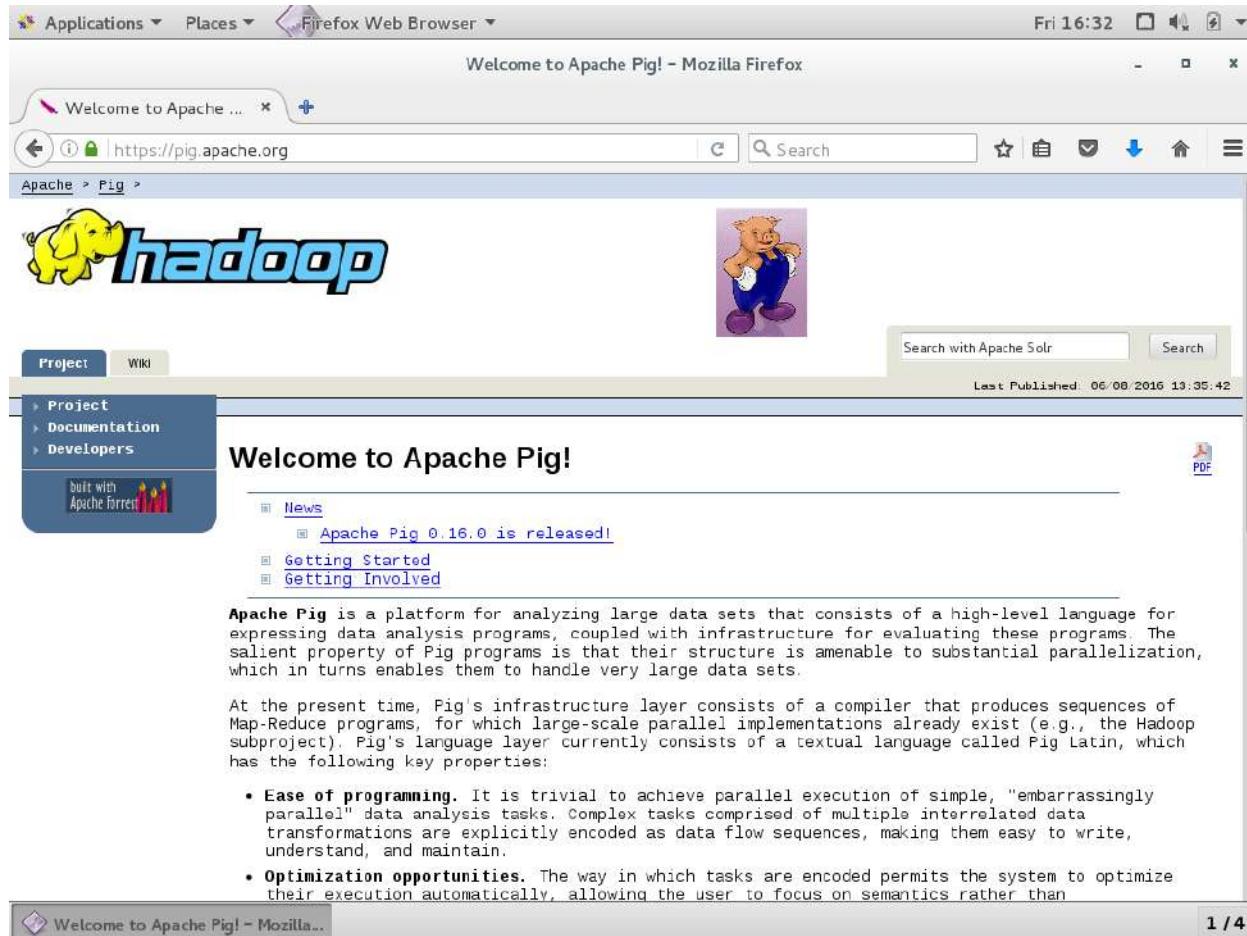

Welcome to Apache Pig! - Mozilla Firefox

https://pig.apache.org

Apache > Pig >

**Welcome to Apache Pig!**

**News**

- Apache Pig 0.16.0 is released!
- Getting Started
- Getting Involved

**Apache Pig** is a platform for analyzing large data sets that consists of a high-level language for expressing data analysis programs, coupled with infrastructure for evaluating these programs. The salient property of Pig programs is that their structure is amenable to substantial parallelization, which in turns enables them to handle very large data sets.

At the present time, Pig's infrastructure layer consists of a compiler that produces sequences of Map-Reduce programs, for which large-scale parallel implementations already exist (e.g., the Hadoop subproject). Pig's language layer currently consists of a textual language called Pig Latin, which has the following key properties:


- Ease of programming.** It is trivial to achieve parallel execution of simple, "embarrassingly parallel" data analysis tasks. Complex tasks comprised of multiple interrelated data transformations are explicitly encoded as data flow sequences, making them easy to write, understand, and maintain.
- Optimization opportunities.** The way in which tasks are encoded permits the system to optimize their execution automatically, allowing the user to focus on semantics rather than

1 / 4

### Download do Pig – Versão 0.17.0

Faça o download, descompacte o arquivo e mova o diretório para /opt/pig da mesma forma como você fez com o Java JDK e com o Hadoop.

## 9.2. Configurando do Pig

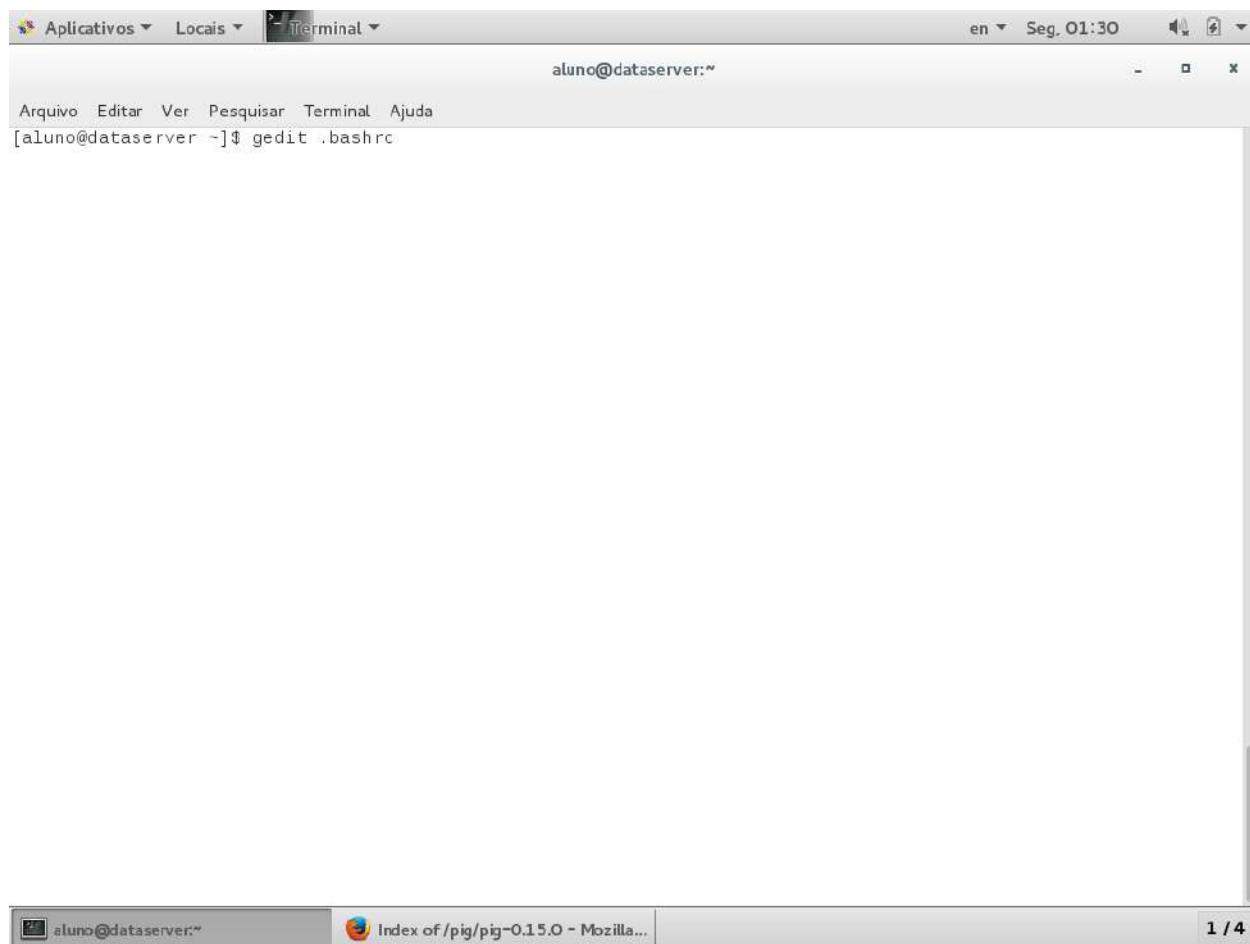

Editando o arquivo .bashrc

## Instalação e Configuração do Ecossistema Hadoop

Applications ▾ Places ▾ gedit Fri 18:02

**.bashrc**

Save

```
# export SYSTEMD_PAGER=
# User specific aliases and functions
# Java
export JAVA_HOME=/opt/jdk
export JRE_HOME=/opt/jre
export PATH=$PATH:$JRE_HOME/bin:$JAVA_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin

# Zookeeper
export ZOOKEEPER_HOME=/opt/zookeeper
export PATH=$PATH:$ZOOKEEPER_HOME/bin

# HBase
export HBASE_HOME=/opt/hbase
export PATH=$PATH:$HBASE_HOME/bin

# Hive
export HIVE_HOME=/opt/hive
export PATH=$PATH:$HIVE_HOME/bin
export CLASSPATH=$CLASSPATH:$HADOOP_HOME/lib/*:.
export CLASSPATH=$CLASSPATH:$HIVE_HOME/lib/*:.

# Pig
export PIG_HOME=/opt/pig
export PATH=$PATH:$PIG_HOME/bin
export PIG_CLASSPATH=$HADOOP_HOME/conf|
```

sh ▾ Tab Width: 8 ▾ Ln 44, Col 39 ▾ INS

aluno@dataserver:~ .bashrc (~) - gedit 1 / 4

Inserir variáveis de ambiente do Pig

## Instalação e Configuração do Ecossistema Hadoop




A screenshot of a Linux terminal window titled "Terminal". The window shows the command `source .bashrc` being run by the user `aluno` at the prompt `aluno@dataserver:~`. The terminal interface includes a menu bar with "Aplicativos", "Locais", and "Terminal", and a status bar at the bottom indicating "en Seg. 01:33". The window has standard window controls (minimize, maximize, close) in the top right corner.

Arquivo Editar Ver Pesquisar Terminal Ajuda  
[aluno@dataserver ~]\$ source .bashrc

aluno@dataserver:~ 1 / 4

source .bashrc

## Instalação e Configuração do Ecossistema Hadoop

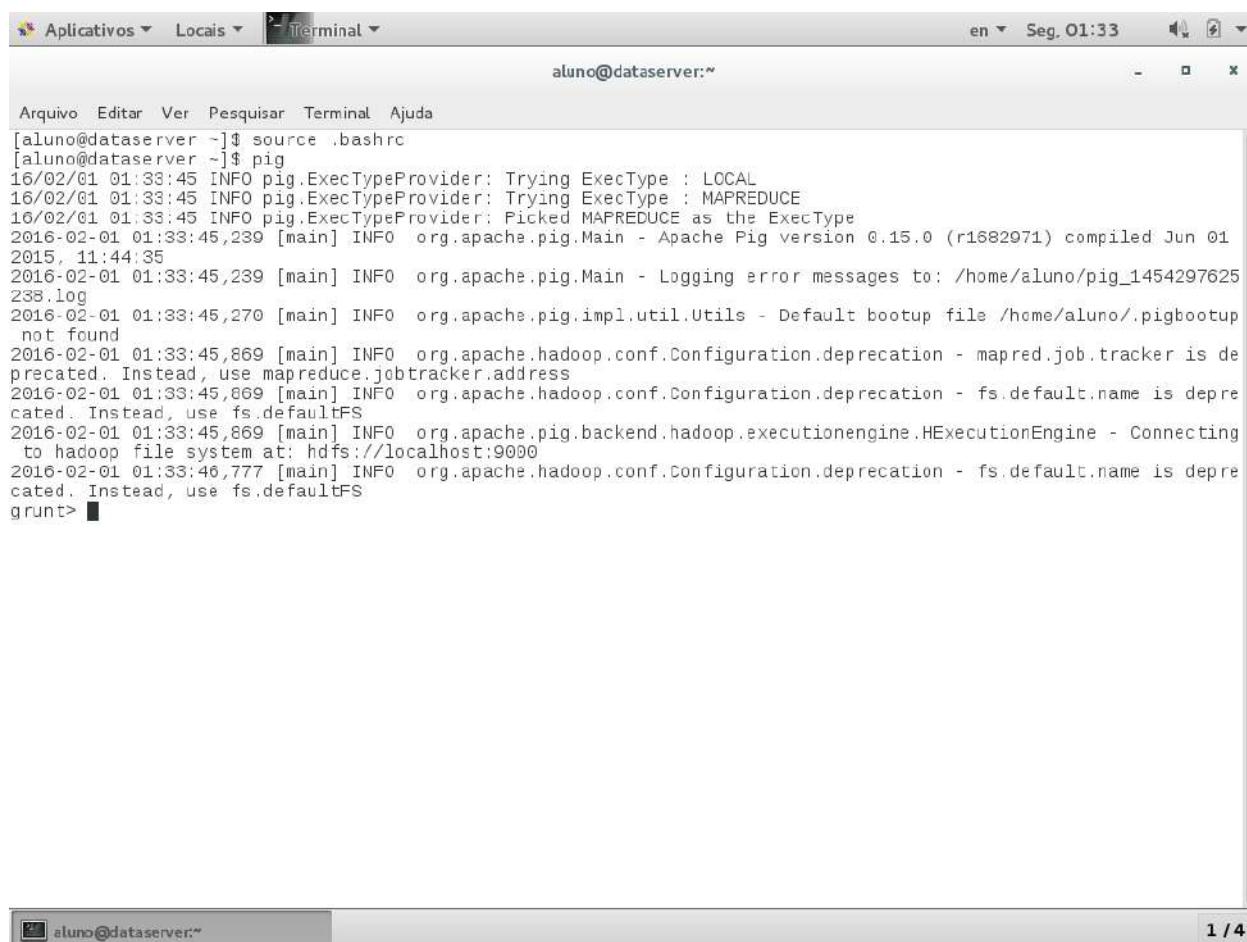


The screenshot shows a terminal window titled "Terminal" with the user "aluno@dataserver:~". The terminal displays the output of running the command "source .bashrc" followed by "pig". The log output shows the configuration of Apache Pig, including the selection of LOCAL as the ExecType and the use of mapred.job.tracker. It also shows deprecations related to mapreduce.jobtracker.address and fs.default.name, which are being replaced by fs.defaultFS. The command "grunt>" is shown at the end, indicating the completion of the setup.

```
[aluno@dataserver ~]$ source .bashrc
[aluno@dataserver ~]$ pig
16/02/01 01:33:45 INFO pig.ExecTypeProvider: Trying ExecType : LOCAL
16/02/01 01:33:45 INFO pig.ExecTypeProvider: Trying ExecType : MAPREDUCE
16/02/01 01:33:45 INFO pig.ExecTypeProvider: Picked MAPREDUCE as the ExecType
2016-02-01 01:33:45,239 [main] INFO org.apache.pig.Main - Apache Pig version 0.15.0 (r1682971) compiled Jun 01
2015, 11:44:35
2016-02-01 01:33:45,239 [main] INFO org.apache.pig.Main - Logging error messages to: /home/aluno/pig_1454297625
238.log
2016-02-01 01:33:45,270 [main] INFO org.apache.pig.impl.util.Utils - Default bootup file /home/aluno/.pigbootup
not found
2016-02-01 01:33:45,869 [main] INFO org.apache.hadoop.conf.Configuration.deprecation - mapred.job.tracker is de
precated. Instead, use mapreduce.jobtracker.address
2016-02-01 01:33:45,869 [main] INFO org.apache.hadoop.conf.Configuration.deprecation - fs.default.name is depre
cated. Instead, use fs.defaultFS
2016-02-01 01:33:45,869 [main] INFO org.apache.pig.backend.hadoop.executionengine.HExecutionEngine - Connecting
to hadoop file system at: hdfs://localhost:9000
2016-02-01 01:33:46,777 [main] INFO org.apache.hadoop.conf.Configuration.deprecation - fs.default.name is depre
cated. Instead, use fs.defaultFS
grunt> ■
```

Pig instalado com sucesso

## Instalação e Configuração do Ecossistema Hadoop

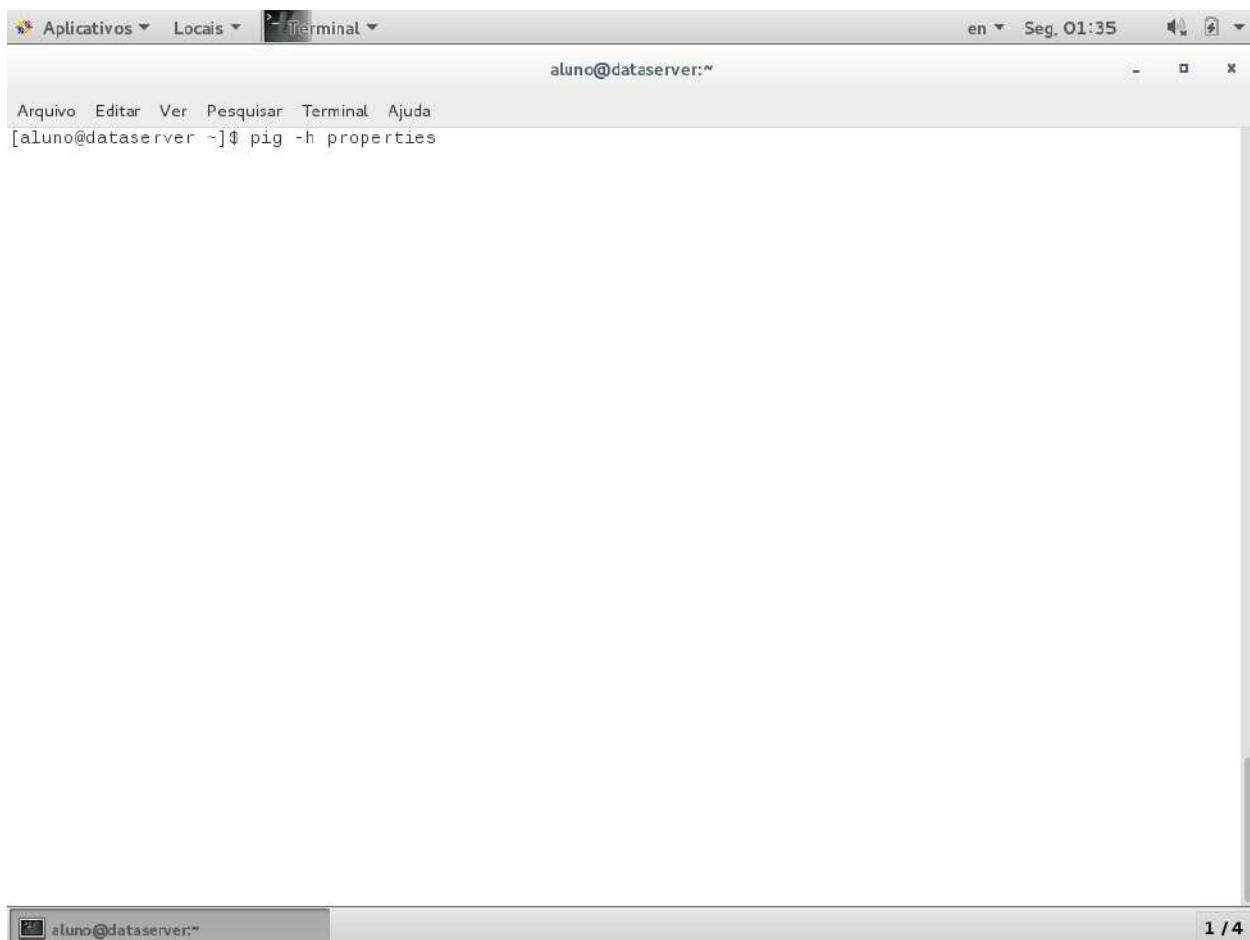

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". Below the prompt, the command "pig -h properties" is typed. The terminal window has a standard window title bar with icons for application, location, and terminal, and status indicators for language ("en") and date/time ("Seg, 01:35"). The window is maximized. The desktop background is visible behind the terminal window.

O comando **pig -h properties** lista as variáveis configuradas

## Instalação e Configuração do Ecossistema Hadoop

**Alunos** Aplicativos Locais Terminal en Seg. 01:36

aluno@dataserver:~

Arquivo Editar Ver Pesquisar Terminal Ajuda

```

Logging:
  verbose=true|false; default is false. This property is the same as -v switch
  brief=true|false; default is false. This property is the same as -b switch
  debug=OFF|ERROR|WARN|INFO|DEBUG; default is INFO. This property is the same as -d switch
  aggregate.warning=true|false; default is true. If true, prints count of warnings
    of each type rather than logging each warning.

Performance tuning:
  pig.cachedbag.memusage=<mem fraction>; default is 0.2 (20% of all memory).
    Note that this memory is shared across all large bags used by the application.
  pig.skewedjoin.reduce.memusage=<mem fraction>; default is 0.3 (30% of all memory).
    Specifies the fraction of heap available for the reducer to perform the join.
  pig.exec.nocombiner=true|false; default is false.
    Only disable combiner as a temporary workaround for problems.
  opt.multiquery=true|false; multiquery is on by default.
    Only disable multiquery as a temporary workaround for problems.
  opt.fetch=true|false; fetch is on by default.
    Scripts containing Filter, Foreach, Limit, Stream, and Union can be dumped without MR jobs.
  pig.tmpfilecompression=true|false; compression is off by default.
    Determines whether output of intermediate jobs is compressed.
  pig.tmpfilecompression.codec=lzo|gzip; default is gzip.
    Used in conjunction with pig.tmpfilecompression. Defines compression type.
  pig.noSplitCombination=true|false. Split combination is on by default.
    Determines if multiple small files are combined into a single map.
  pig.exec.mapPartAgg=true|false. Default is false.
    Determines if partial aggregation is done within map phase,
    before records are sent to combiner.
  pig.exec.mapPartAgg.minReduction=<min aggregation factor>. Default is 10.
    If the in-map partial aggregation does not reduce the output num records
    by this factor, it gets disabled.

Miscellaneous:
  exec-type=mapreduce|tez|local; default is mapreduce. This property is the same as -x switch
  pig.additional.jars.uris=<comma separated list of jars>. Used in place of register command.
  udf.import.list=<comma seperated list of imports>. Used to avoid package names in UDF.
  stop.on.failure=true|false; default is false. Set to true to terminate on the first error.
  pig.datetime.default.tz=<UTC time offset>. e.g. +08:00. Default is the default timezone of the host.
    Determines the timezone used to handle datetime datatype and UDFs.

Additionally, any Hadoop property can be specified.

16/02/01 01:36:00 INFO pig.Main: Pig script completed in 224 milliseconds (224 ms)
[aluno@dataserver ~]$
```

1 / 4

### Variáveis Pig

## Instalação e Configuração do Ecossistema Hadoop




```
aluno@dataserver:~$ Arquivo Editar Ver Pesquisar Terminal Ajuda
[aluno@dataserver ~]$ pig -version
Apache Pig version 0.15.0 (r1682971)
compiled Jun 01 2015, 11:44:35
[aluno@dataserver ~]$
```

Verificar a versão do Pig

## 10. Instalação e Configuração do Spark

### 10.1. Download e Instalação do Spark

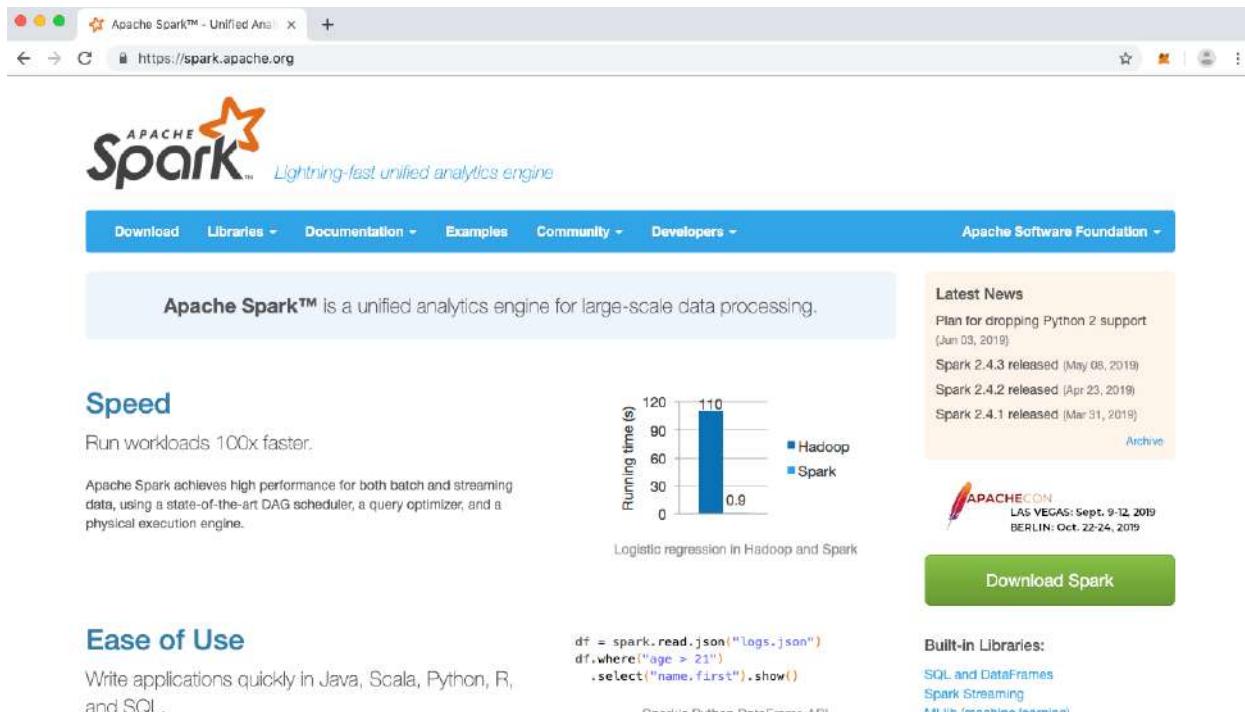

**Speed**

Run workloads 100x faster.

Apache Spark achieves high performance for both batch and streaming data, using a state-of-the-art DAG scheduler, a query optimizer, and a physical execution engine.

System	Running time (s)
Hadoop	110
Spark	0.9

**Ease of Use**

Write applications quickly in Java, Scala, Python, R, and SQL.

Spark offers over 80 high-level operators that make it easy to build parallel apps. And you can use it interactively from the Scala, Python, R, and SQL.

```
df = spark.read.json("logs.json")
df.where("age > 21")
  .select("name, first").show()
```

Spark's Python DataFrame API  
Read JSON files with automatic schema inference

**Latest News**

- Plan for dropping Python 2 support (Jan 03, 2019)
- Spark 2.4.3 released (May 08, 2019)
- Spark 2.4.2 released (Apr 23, 2019)
- Spark 2.4.1 released (Mar 31, 2019)

[Archive](#)

**Download Spark**

**Built-in Libraries:**


- SQL and DataFrames
- Spark Streaming
- MLLib (machine learning)
- GraphX (graph)

**Third-Party Projects**

### Download do Spark – Versão 2.4.3

Faça o download, descompacte o arquivo e mova o diretório para /opt/spark da mesma forma como você fez com o Java JDK e com o Hadoop.


## Instalação e Configuração do Ecossistema Hadoop

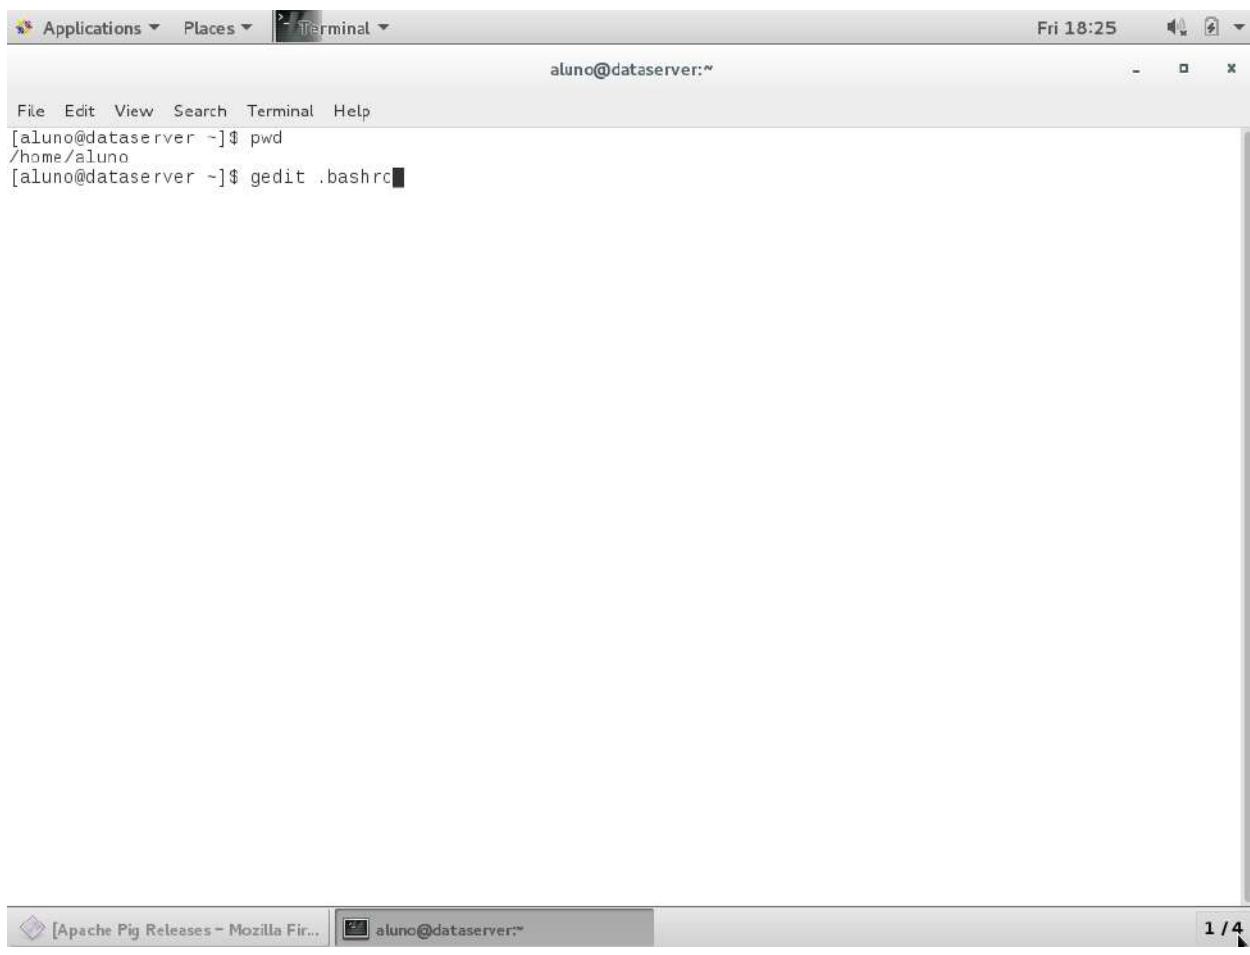

A screenshot of a Linux desktop environment showing a terminal window. The terminal title is "Terminal". The user is connected to "aluno@dataserver:~". The terminal shows the command "pwd" followed by the output "/home/aluno". The user then types "gedit .bashrc" and presses Enter. The terminal window has a standard window title bar with icons for Applications, Places, and Terminal, and a status bar showing the date and time as "Fri 18:25". Below the terminal window, the desktop taskbar shows other open applications: "Apache Pig Releases - Mozilla Fir..." and "aluno@dataserver:~". A status bar at the bottom of the screen indicates "1 / 4".

Editando o arquivo .bashrc

## Instalação e Configuração do Ecossistema Hadoop

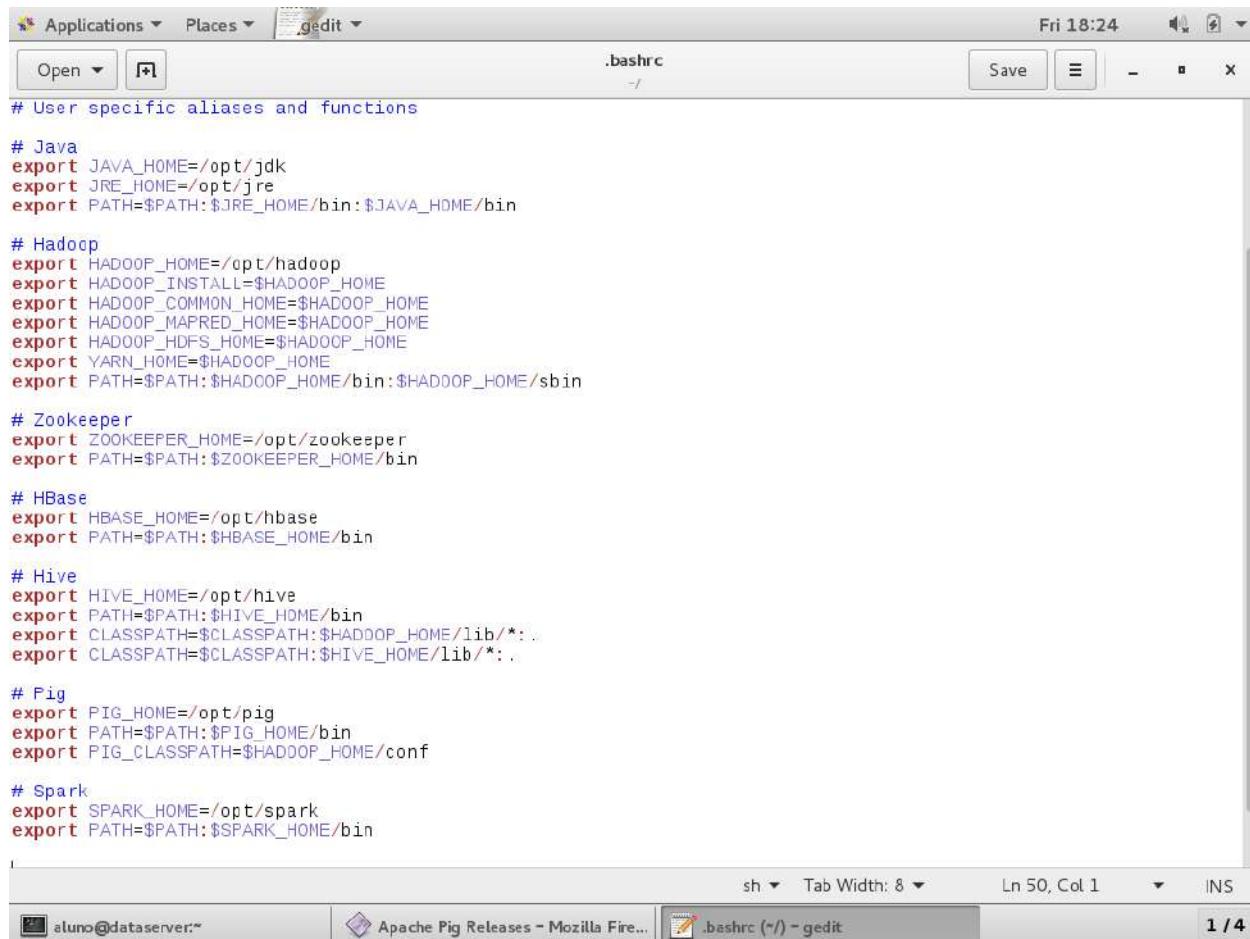

```

# User specific aliases and functions

# Java
export JAVA_HOME=/opt/jdk
export JRE_HOME=/opt/jre
export PATH=$PATH:$JRE_HOME/bin:$JAVA_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin

# Zookeeper
export ZOOKEEPER_HOME=/opt/zookeeper
export PATH=$PATH:$ZOOKEEPER_HOME/bin

# HBase
export HBASE_HOME=/opt/hbase
export PATH=$PATH:$HBASE_HOME/bin

# Hive
export HIVE_HOME=/opt/hive
export PATH=$PATH:$HIVE_HOME/bin
export CLASSPATH=$CLASSPATH:$HADOOP_HOME/lib/*:.
export CLASSPATH=$CLASSPATH:$HIVE_HOME/lib/*:.

# Pig
export PIG_HOME=/opt/pig
export PATH=$PATH:$PIG_HOME/bin
export PIG_CLASSPATH=$HADOOP_HOME/conf

# Spark
export SPARK_HOME=/opt/spark
export PATH=$PATH:$SPARK_HOME/bin

```

Incluir variáveis Spark

## Instalação e Configuração do Ecossistema Hadoop




A screenshot of a Linux desktop environment showing a terminal window. The terminal title is "Terminal". The user is connected to "aluno@dataserver:~". The terminal shows the following commands:

```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ pwd
/home/aluno
[aluno@dataserver ~]$ source .bashrc
```

The terminal window is part of a larger desktop interface with other windows visible in the background, including one titled "[Apache Pig Releases - Mozilla Fir...]".

## Instalação e Configuração do Ecossistema Hadoop

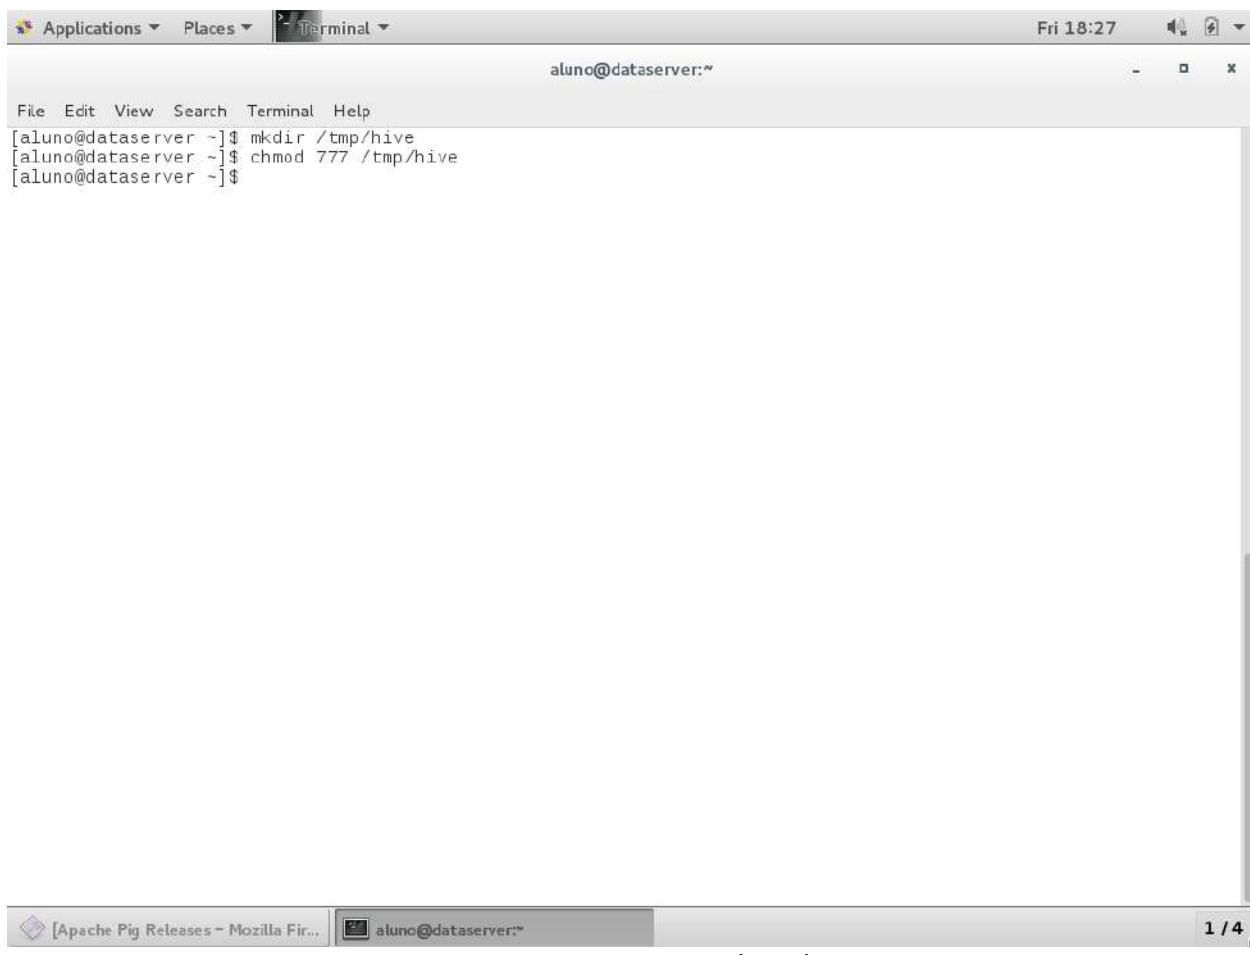

The screenshot shows a terminal window titled "Terminal" with the user "aluno@dataserver:~". The terminal displays the following commands:


```
[aluno@dataserver ~]$ mkdir /tmp/hive  
[aluno@dataserver ~]$ chmod 777 /tmp/hive  
[aluno@dataserver ~]$
```

Below the terminal window, there is a status bar with the text "[Apache Pig Releases - Mozilla Fir... aluno@dataserver:~]" and a page number "1 / 4".

Se necessário chmod 777 /tmp/hive

## Instalação e Configuração do Ecossistema Hadoop

## Instalação e Configuração do Ecossistema Hadoop

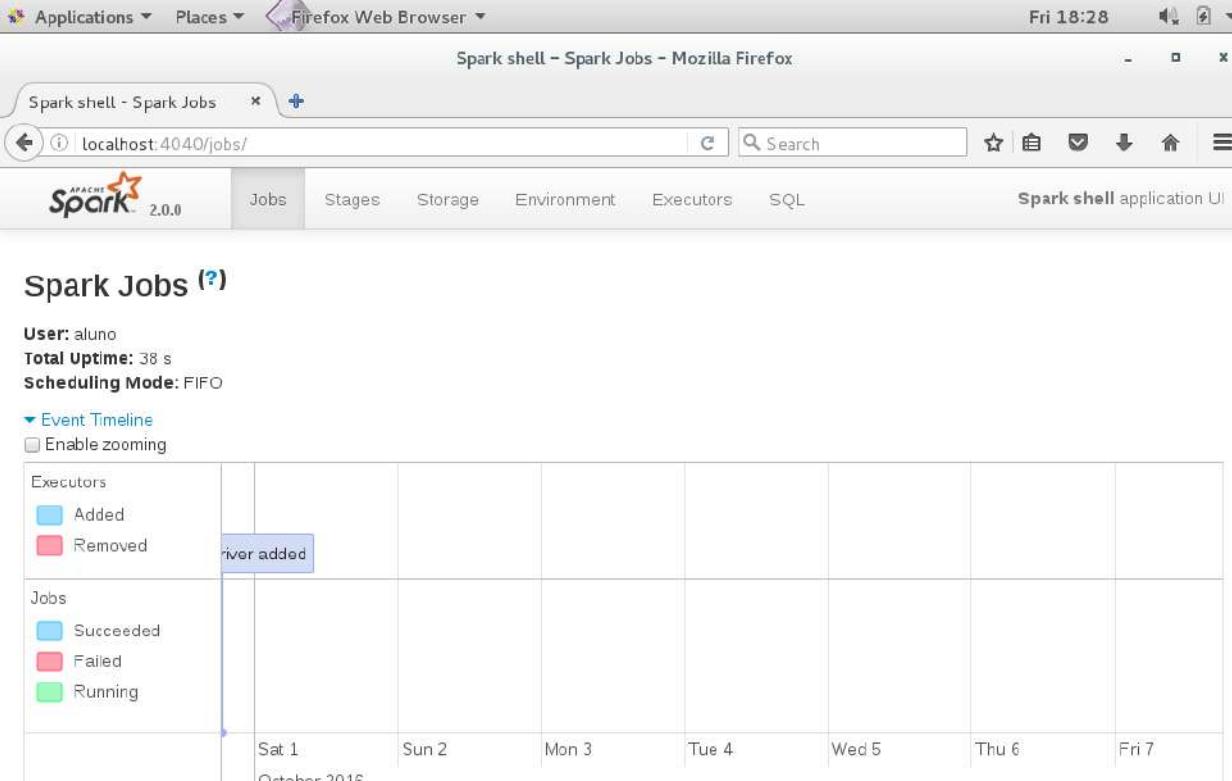

The screenshot shows the Apache Spark 2.0.0 web UI interface. At the top, there's a header bar with tabs for Applications, Places, and Firefox Web Browser. The main title is "Spark shell - Spark Jobs - Mozilla Firefox". Below the header, the URL is "localhost:4040/jobs". The navigation bar includes links for Jobs, Stages, Storage, Environment, Executors, and SQL, along with a "Spark shell application UI" link.

**Spark Jobs (?)**

User: aluno  
Total Uptime: 38 s  
Scheduling Mode: FIFO

**Event Timeline**

Enable zooming

Executors


- Added (Blue)
- Removed (Red)

Jobs

- Succeeded (Blue)
- Failed (Red)
- Running (Green)


Sat 1 Sun 2 Mon 3 Tue 4 Wed 5 Thu 6 Fri 7  
October 2016

A single event is visible in the timeline: "Driver added" at the beginning of the timeline on Saturday, October 1, 2016.



## 11. Instalação e Configuração do Sqoop


### 11.1. Download do Sqoop

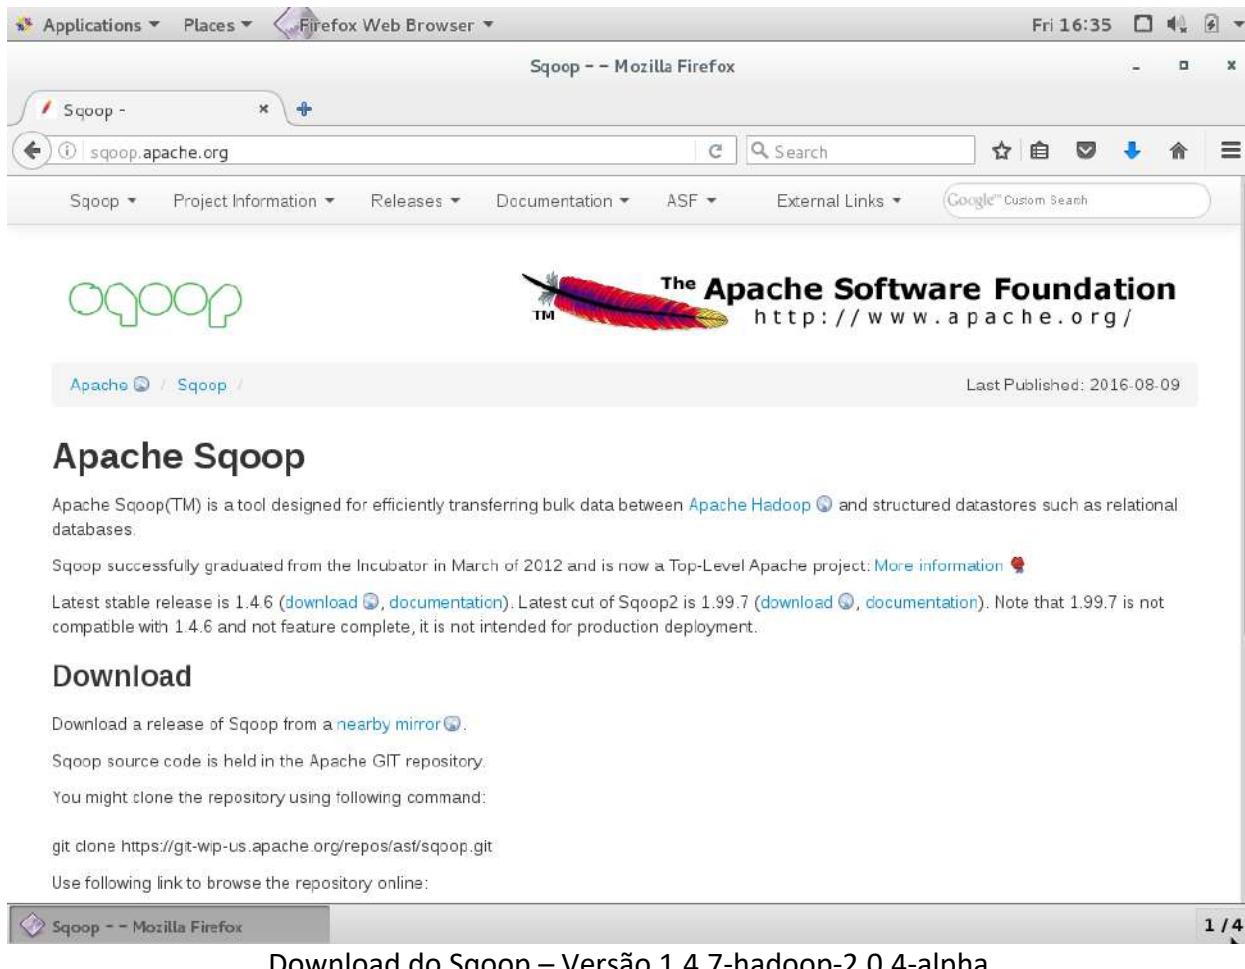


The screenshot shows a Firefox browser window with the title "Scoop - Mozilla Firefox". The address bar contains "sqoop.apache.org". The main content area displays the Apache Sqoop project page. At the top, there's a green "Sqoop" logo and the "The Apache Software Foundation" logo with the URL "http://www.apache.org/". Below the header, the page title is "Apache Sqoop". It states that Apache Sqoop(TM) is a tool for efficiently transferring bulk data between Apache Hadoop and structured datastores. It mentions that Sqoop successfully graduated from the Incubator in March 2012 and is now a Top-Level Apache project. The latest stable release is 1.4.6, and the latest cut of Sqoop2 is 1.99.7. A note indicates that 1.99.7 is not compatible with 1.4.6 and is not feature complete, so it's not intended for production deployment. A "Download" section provides links for "Nearby mirror" and the "Apache Git repository". It also includes a command to clone the repository using "git clone https://git-wip-us.apache.org/repos/asf/sqoop.git". A link to browse the repository online is provided. The bottom of the page features a footer with the Apache Software Foundation logo and the text "Last Published: 2016-08-09". The browser status bar at the bottom right shows "1 / 4".

Faça o download, descompacte o arquivo e mova o diretório para /opt/sqoop da mesma forma como você fez com o Java JDK e com o Hadoop.

## 11.2. Configuração do Sqoop

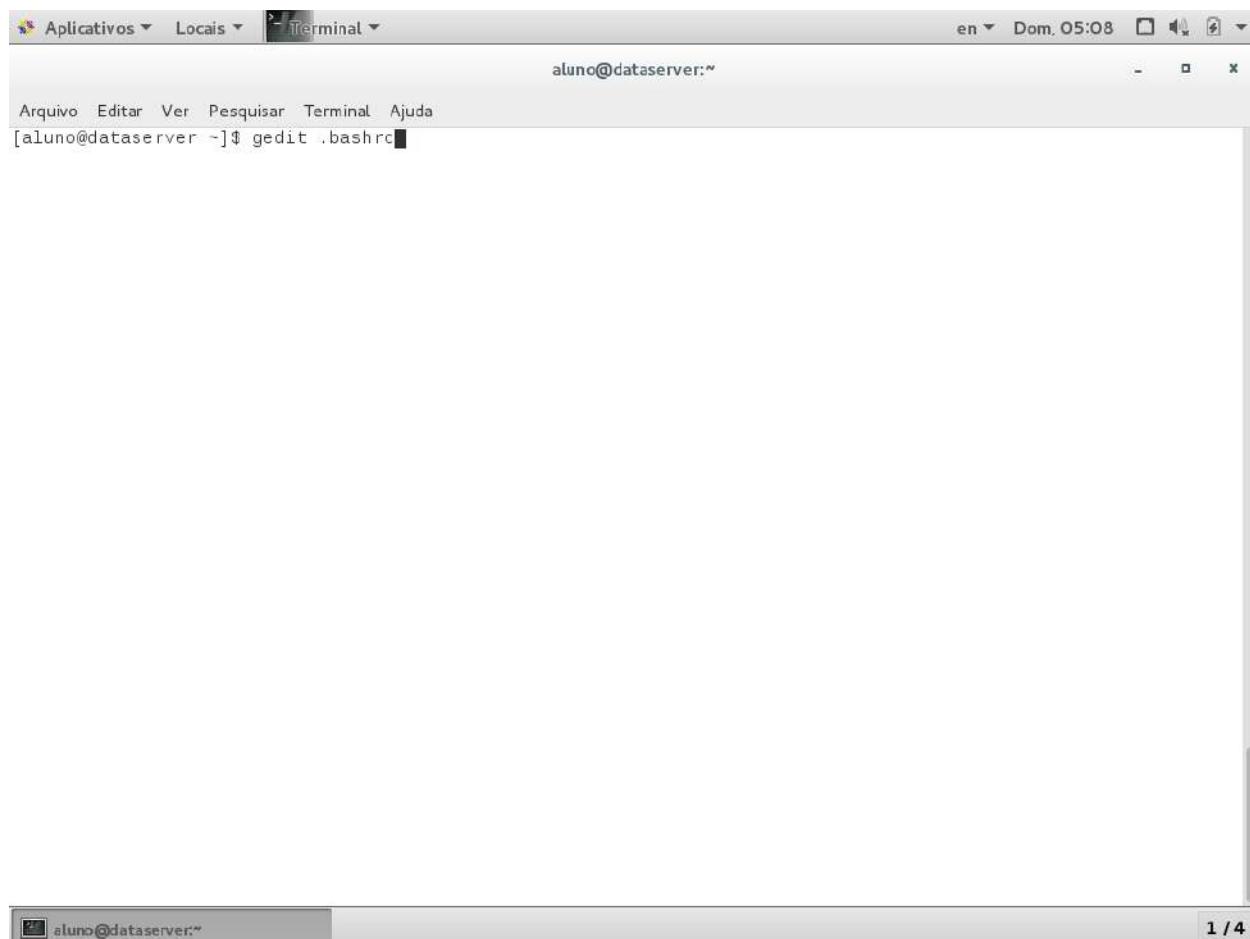

## Instalação e Configuração do Ecossistema Hadoop

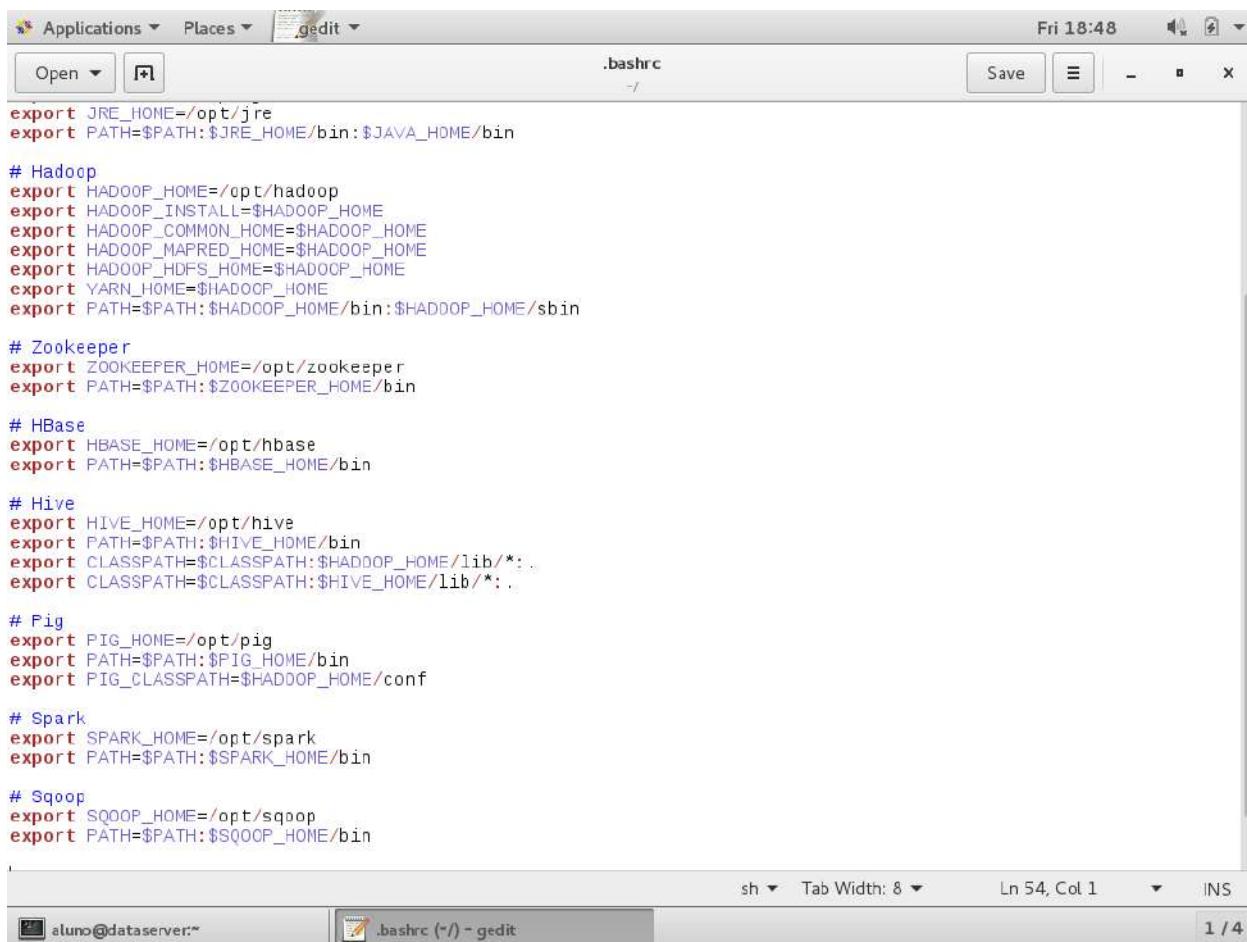

```

Applications ▾ Places ▾ .bashrc
Open Save Fri 18:48
.bashrc ~/
export JRE_HOME=/opt/jre
export PATH=$PATH:$JRE_HOME/bin:$JAVA_HOME/bin

# Hadoop
export HADOOP_HOME=/opt/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin

# Zookeeper
export ZOOKEEPER_HOME=/opt/zookeeper
export PATH=$PATH:$ZOOKEEPER_HOME/bin

# HBase
export HBASE_HOME=/opt/hbase
export PATH=$PATH:$HBASE_HOME/bin

# Hive
export HIVE_HOME=/opt/hive
export PATH=$PATH:$HIVE_HOME/bin
export CLASSPATH=$CLASSPATH:$HADOOP_HOME/lib/*:.
export CLASSPATH=$CLASSPATH:$HIVE_HOME/lib/*:.

# Pig
export PIG_HOME=/opt/pig
export PATH=$PATH:$PIG_HOME/bin
export PIG_CLASSPATH=$HADOOP_HOME/conf

# Spark
export SPARK_HOME=/opt/spark
export PATH=$PATH:$SPARK_HOME/bin

# Sqoop
export SQOOP_HOME=/opt/sqoop
export PATH=$PATH:$SQOOP_HOME/bin

```

sh ▾ Tab Width: 8 ▾ Ln 54, Col 1 ▾ INS

aluno@dataserver:~ .bashrc (~) - gedit 1 / 4

Incluir variáveis Sqoop

## Instalação e Configuração do Ecossistema Hadoop




A screenshot of a Linux terminal window titled "Terminal". The window shows the user's session path as "aluno@dataserver:~". The menu bar includes "Arquivo", "Editar", "Ver", "Pesquisar", "Terminal", and "Ajuda". The terminal window contains the following text:

```
[aluno@dataserver ~]$ gedit .bashrc
[aluno@dataserver ~]$ source .bashrc
[aluno@dataserver ~]$
```

The terminal window has a standard Linux-style interface with a title bar, menu bar, and scroll bars. At the bottom, there is a status bar with the text "aluno@dataserver:~" and a progress indicator "1 / 4".


## Instalação e Configuração do Ecossistema Hadoop

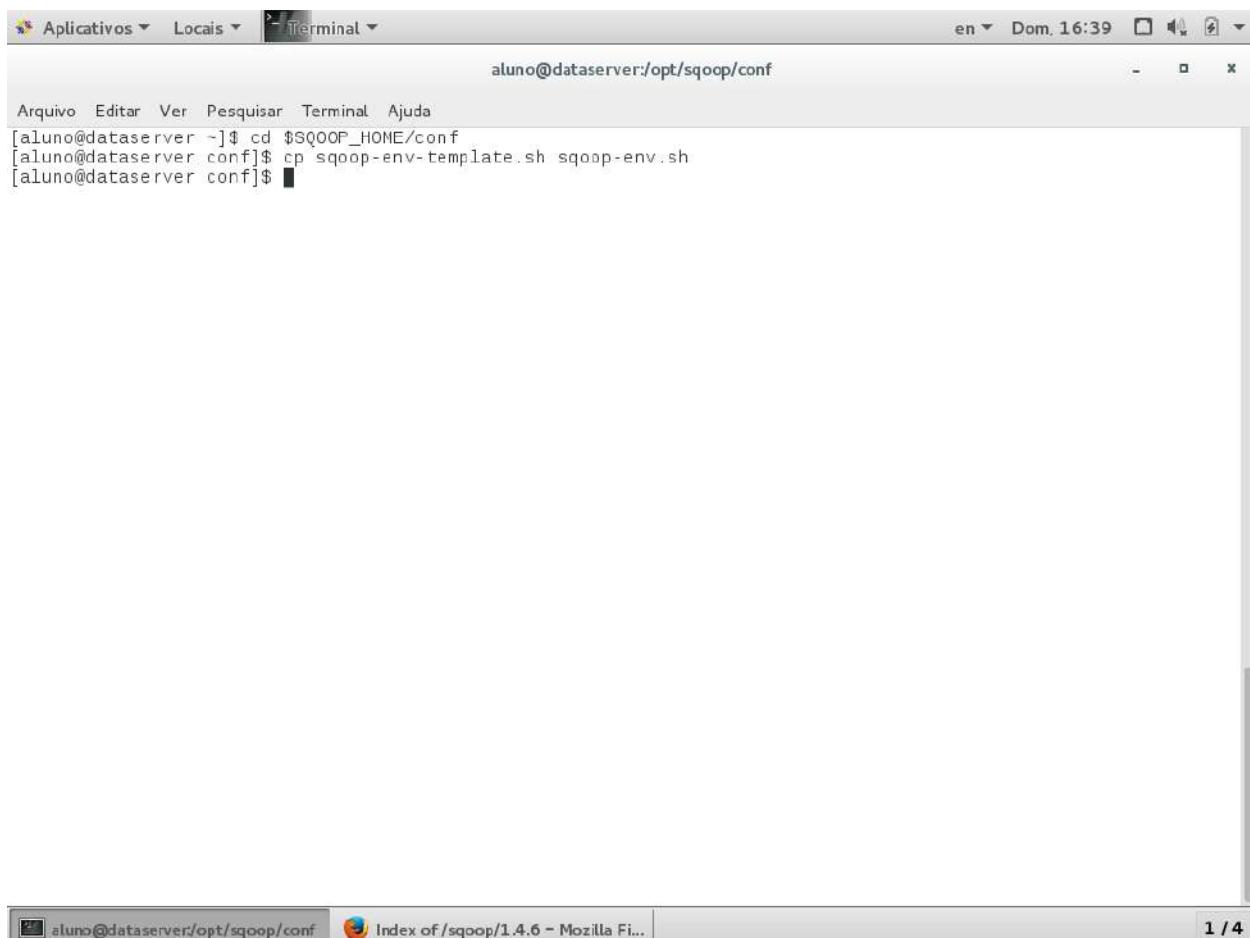

```
aluno@dataserver:~$ cd $SQOOP_HOME/conf
[aluno@dataserver conf]$ cp sqoop-env-template.sh sqoop-env.sh
[aluno@dataserver conf]$
```

A partir do template, criar o arquivo sqoop-env.sh e editá-lo

## Instalação e Configuração do Ecossistema Hadoop

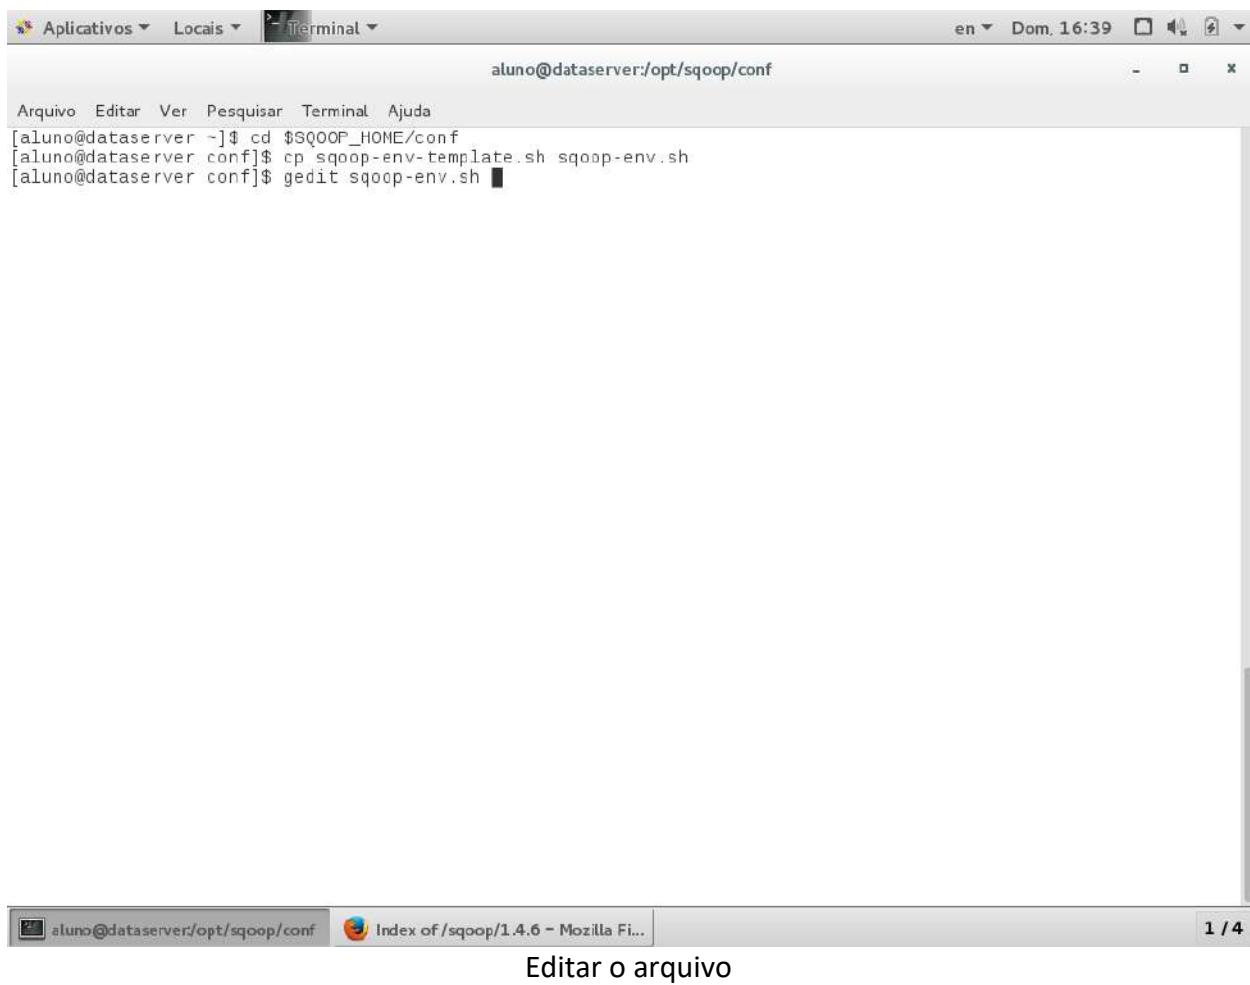

The screenshot shows a terminal window titled "Terminal" with the command prompt "aluno@dataserver:/opt/sqoop/conf". The user has run the following commands:

```
[aluno@dataserver ~] cd $SQOOP_HOME/conf  
[aluno@dataserver conf]$ cp sqoop-env-template.sh sqoop-env.sh  
[aluno@dataserver conf]$ gedit sqoop-env.sh
```

Below the terminal, a file browser window is open at "Index of /sqoop/1.4.6 - Mozilla Fi...". A link labeled "Editar o arquivo" (Edit the file) is visible.

## Instalação e Configuração do Ecossistema Hadoop

Applications ▾ Places ▾ gedit ▾ Fri 19:04

Open Save

**sqoop-env.sh**  
/opt/sqoop/conf

```

# Licensed to the Apache Software Foundation (ASF) under one or more
# contributor license agreements. See the NOTICE file distributed with
# this work for additional information regarding copyright ownership.
# The ASF licenses this file to You under the Apache License, Version 2.0
# (the "License"); you may not use this file except in compliance with
# the License. You may obtain a copy of the License at
#
#     http://www.apache.org/licenses/LICENSE-2.0
#
# Unless required by applicable law or agreed to in writing, software
# distributed under the License is distributed on an "AS IS" BASIS,
# WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
# See the License for the specific language governing permissions and
# limitations under the License.

# included in all the hadoop scripts with source command
# should not be executable directly
# also should not be passed any arguments, since we need original $*
# Set Hadoop-specific environment variables here.

#Set path to where bin/hadoop is available
export HADOOP_COMMON_HOME=/opt/hadoop

#Set path to where hadoop-*core.jar is available
export HADOOP_MAPRED_HOME=/opt/hadoop

#set the path to where bin/hbase is available
export HBASE_HOME=/opt/hbase

#Set the path to where bin/hive is available
export HIVE_HOME=/opt/hive

#Set the path for where zookeeper config dir is
export ZOOCFGDIR=/opt/zookeeper/conf


```

sh ▾ Tab Width: 8 ▾ Ln 35, Col 37 ▾ INS

aluno@dataserver:/opt/sqoop/conf ▾ Index of /sqoop/1.4.6 - Mozilla Fi... ▾ sqoop-env.sh (/opt/sqoop/conf) - ... 1 / 4


Editar variáveis conforme tela acima

## Instalação e Configuração do Ecossistema Hadoop

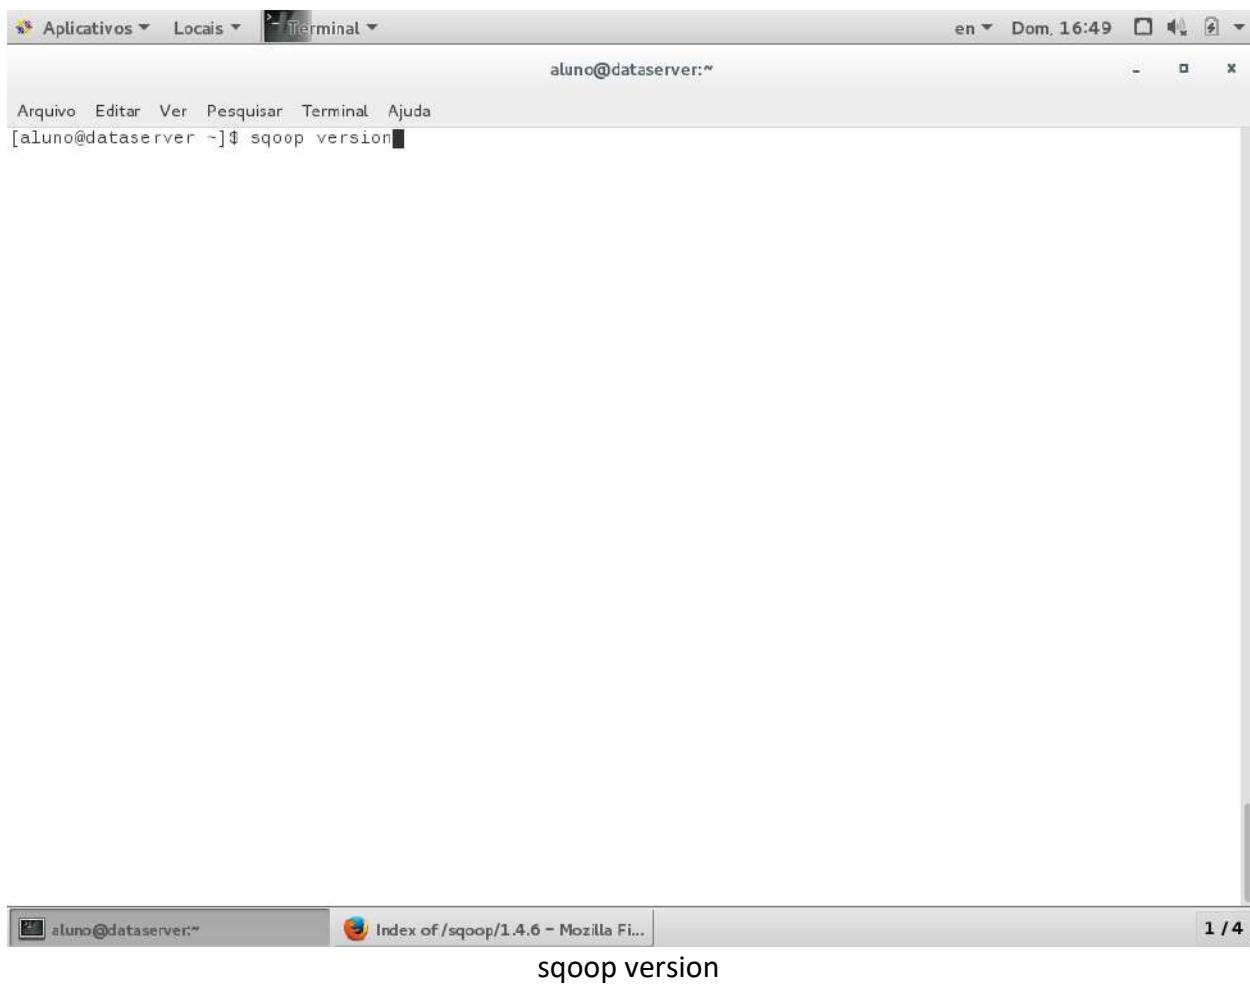

A screenshot of a Linux desktop environment showing a terminal window. The window title is "Terminal". The terminal prompt is "aluno@dataserver:~". Below the prompt, the user has typed the command "sqoop version". The terminal window is part of a larger desktop interface with other windows visible in the background.

## Instalação e Configuração do Ecossistema Hadoop

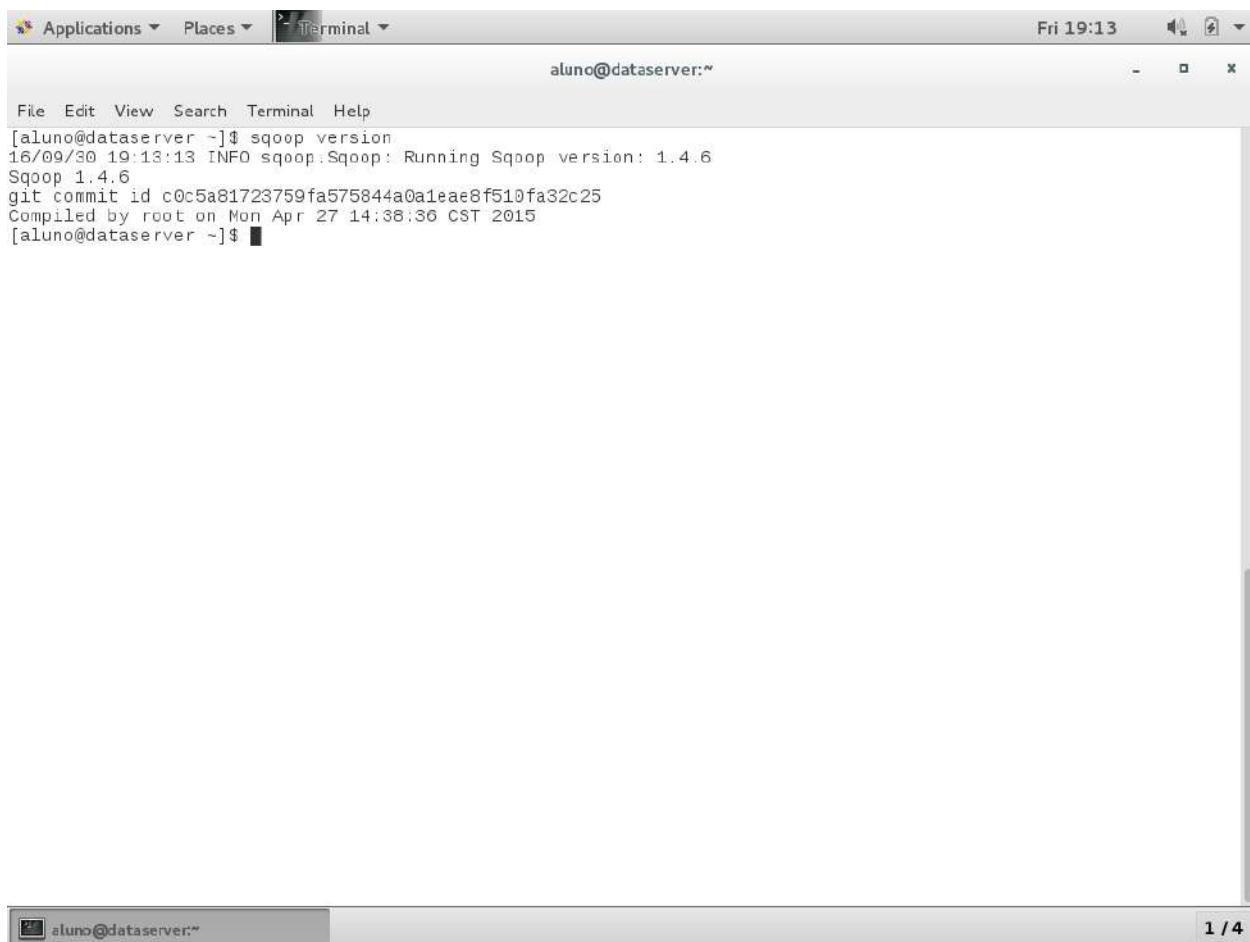


The screenshot shows a terminal window titled "Terminal" with the user "aluno@dataserver:~". The terminal displays the output of the "sqoop version" command:

```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ sqoop version
16/09/30 19:13:13 INFO sqoop:Sqoop: Running Sqoop version: 1.4.6
Sqoop 1.4.6
git commit id c0c5a81723759fa575844a0a1ea8f510fa32c25
Compiled by root on Mon Apr 27 14:38:36 CST 2015
[aluno@dataserver ~]$
```

The terminal window has a title bar with "Applications", "Places", and "Terminal". The status bar at the bottom right shows "Fri 19:13". A navigation bar at the bottom includes icons for back, forward, and search.

Sqoop version

## 12. Instalação e Configuração do Apache Flume

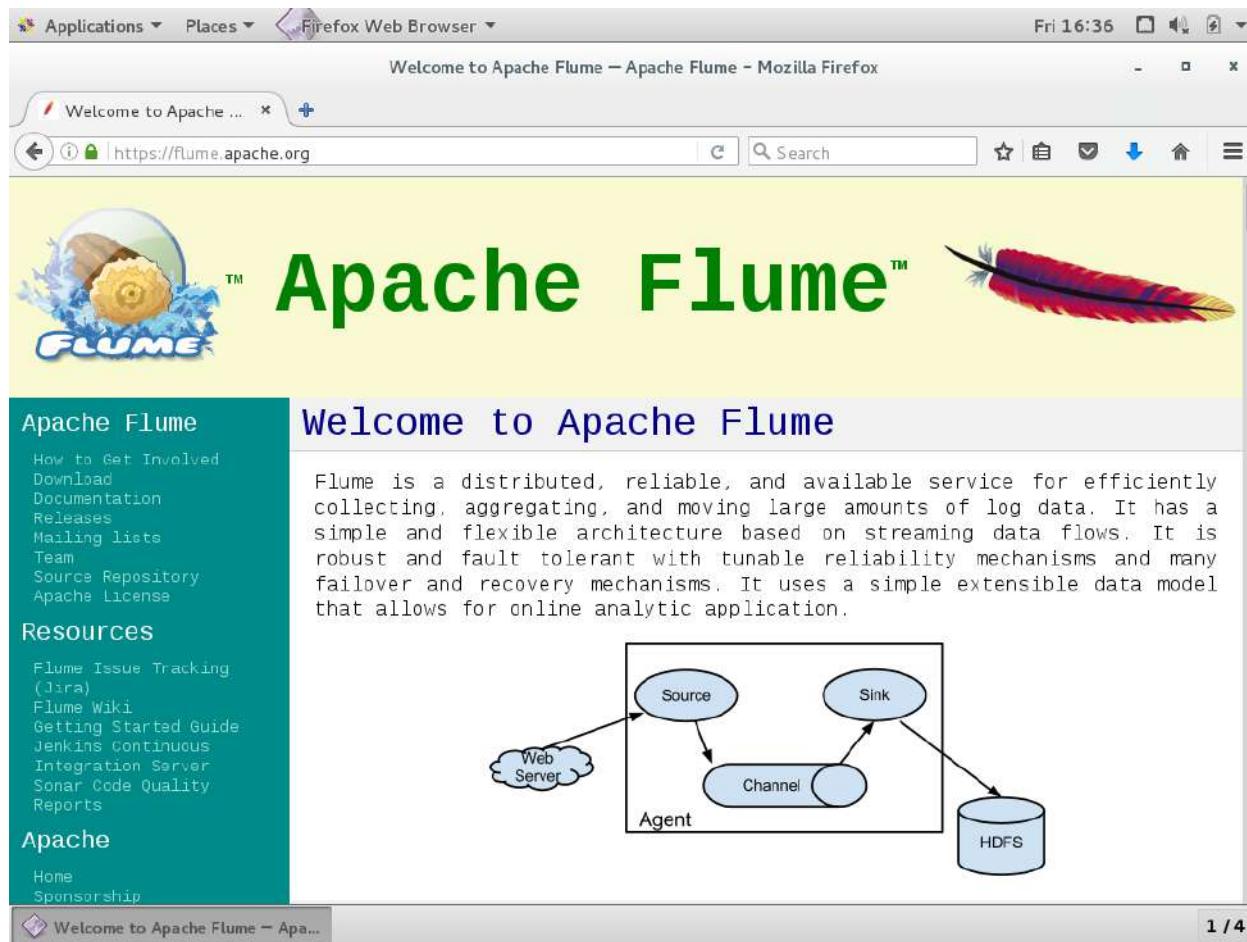

Welcome to Apache Flume – Apache Flume – Mozilla Firefox


Welcome to Apache ...

https://flume.apache.org

# Apache Flume™

## Welcome to Apache Flume

Flume is a distributed, reliable, and available service for efficiently collecting, aggregating, and moving large amounts of log data. It has a simple and flexible architecture based on streaming data flows. It is robust and fault tolerant with tunable reliability mechanisms and many failover and recovery mechanisms. It uses a simple extensible data model that allows for online analytic application.

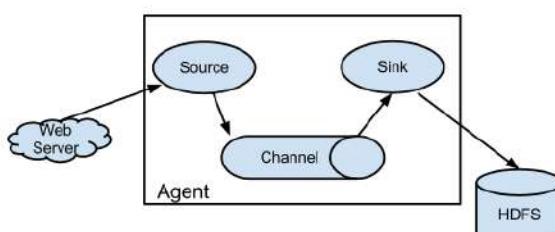


1 / 4

### Download do Apache Flume – Versão 1.9

Faça o download, descompacte o arquivo e mova o diretório para /opt/flume da mesma forma como você fez com o Java JDK e com o Hadoop.

## Instalação e Configuração do Ecossistema Hadoop

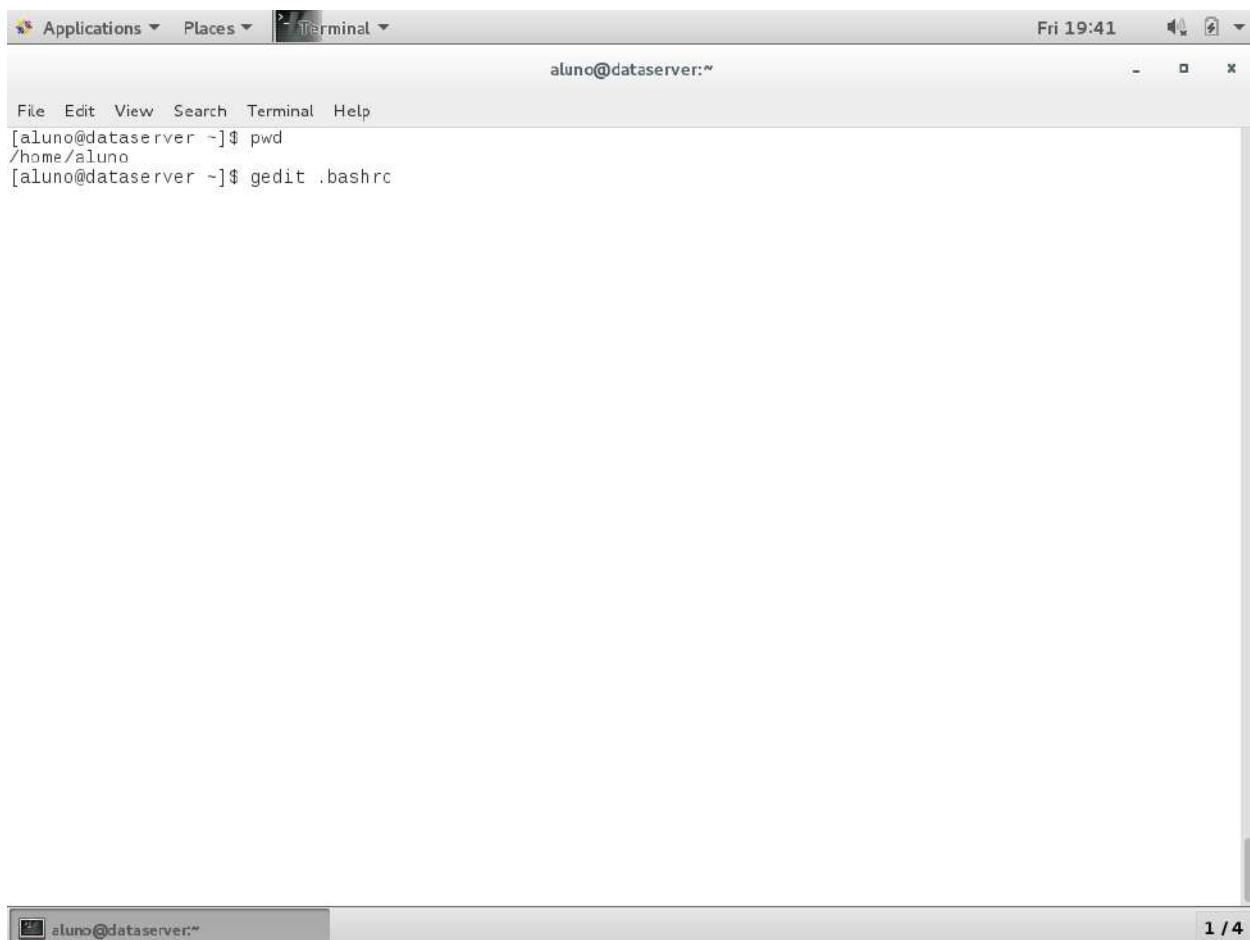

The screenshot shows a terminal window with the title bar 'Terminal'. The window contains the following text:

```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ pwd
/home/aluno
[aluno@dataserver ~]$ gedit .bashrc
```

The terminal window has a standard Linux interface with a menu bar, a title bar, and a scroll bar on the right. The bottom status bar shows the user 'aluno@dataserver' and the number '1 / 4'.

Editar as variáveis de ambiente

## Instalação e Configuração do Ecossistema Hadoop

**.bashrc**

```

export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export PATH=$PATH:$HADOOP_HOME/bin:$HADOOP_HOME/sbin

# Zookeeper
export ZOOKEEPER_HOME=/opt/zookeeper
export PATH=$PATH:$ZOOKEEPER_HOME/bin

# HBase
export HBASE_HOME=/opt/hbase
export PATH=$PATH:$HBASE_HOME/bin

# Hive
export HIVE_HOME=/opt/hive
export PATH=$PATH:$HIVE_HOME/bin
export CLASSPATH=$CLASSPATH:$HADOOP_HOME/lib/*:.
export CLASSPATH=$CLASSPATH:$HIVE_HOME/lib/*:.

# Pig
export PIG_HOME=/opt/pig
export PATH=$PATH:$PIG_HOME/bin
export PIG_CLASSPATH=$HADOOP_HOME/conf

# Spark
export SPARK_HOME=/opt/spark
export PATH=$PATH:$SPARK_HOME/bin

# Sqoop
export SQOOP_HOME=/opt/sqoop
export PATH=$PATH:$SQOOP_HOME/bin
export ACCUMULO_HOME=/opt/sqoop/accumulo
export HCAT_HOME=/opt/sqoop/hcatalog

# Flume
export FLUME_HOME=/opt/flume
export PATH=$PATH:$FLUME_HOME/bin
export CLASSPATH=$CLASSPATH:$FLUME_HOME/lib/*


```

sh ▾ Tab Width: 8 ▾ Ln 59, Col 46 ▾ INS

aluno@dataserver:~ .bashrc (~) - gedit 1 / 4

Variáveis de ambiente para o Flume

## Instalação e Configuração do Ecossistema Hadoop

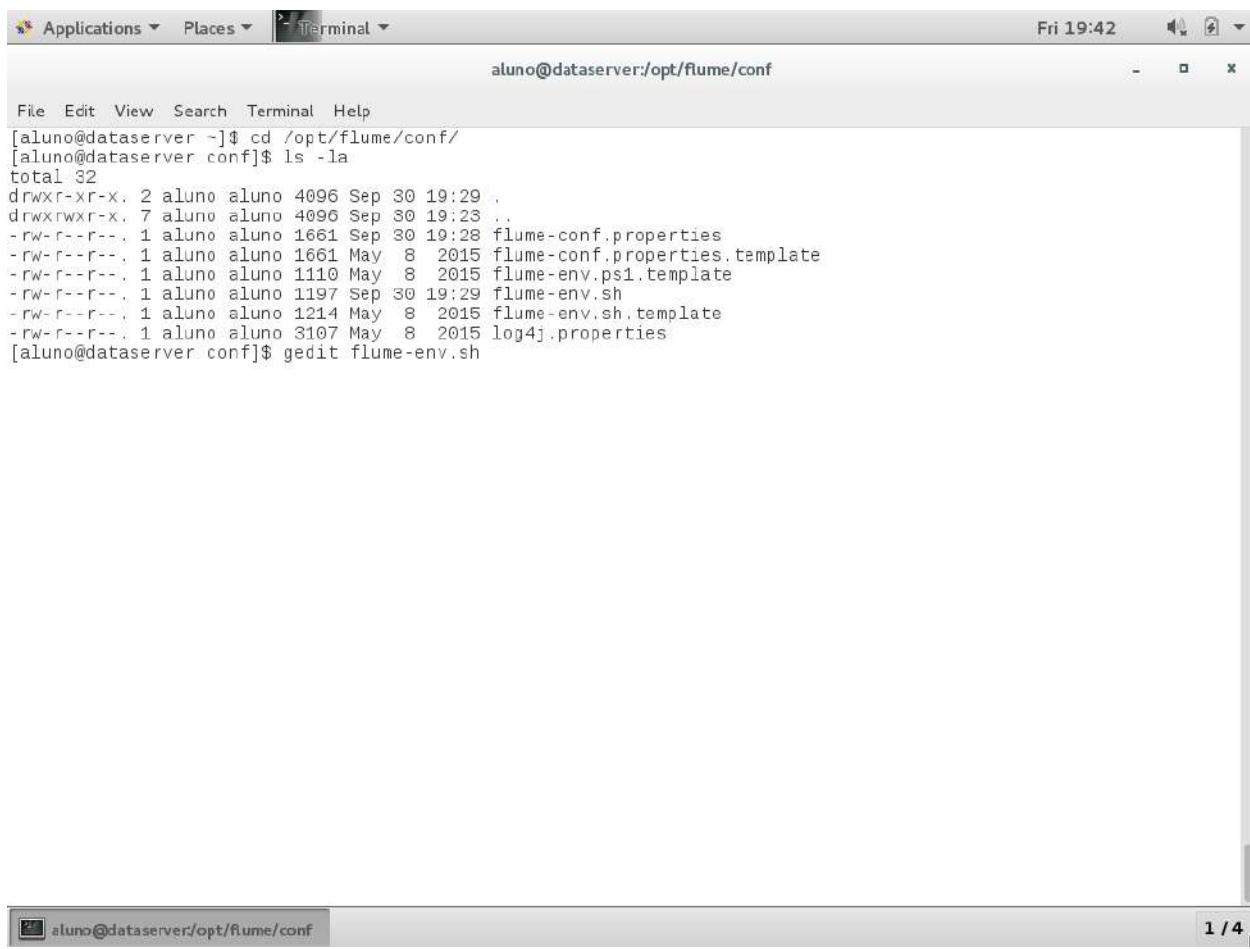


The screenshot shows a terminal window titled "Terminal" with the command line "aluno@dataserver:/opt/flume/conf". The user has run the command "ls -la" to list files in the directory. The output shows several files and directories:

```
[aluno@dataserver ~]$ cd /opt/flume/conf/
[aluno@dataserver conf]$ ls -la
total 32
drwxr-xr-x. 2 aluno aluno 4096 Sep 30 19:29 .
drwxrwxr-x. 7 aluno aluno 4096 Sep 30 19:23 ..
-rw-r--r--, 1 aluno aluno 1661 Sep 30 19:28 flume-conf.properties
-rw-r--r--, 1 aluno aluno 1661 May  8 2015 flume-conf.properties.template
-rw-r--r--, 1 aluno aluno 1110 May  8 2015 flume-env.ps1.template
-rw-r--r--, 1 aluno aluno 1197 Sep 30 19:29 flume-env.sh
-rw-r--r--, 1 aluno aluno 1214 May  8 2015 flume-env.sh.template
-rw-r--r--, 1 aluno aluno 3107 May  8 2015 log4j.properties
[aluno@dataserver conf]$ gedit flume-env.sh
```

At the bottom of the terminal window, there is a status bar with the text "aluno@dataserver:/opt/flume/conf" and "1 / 4".

Editar o arquivo flume-env.sh

## Instalação e Configuração do Ecossistema Hadoop

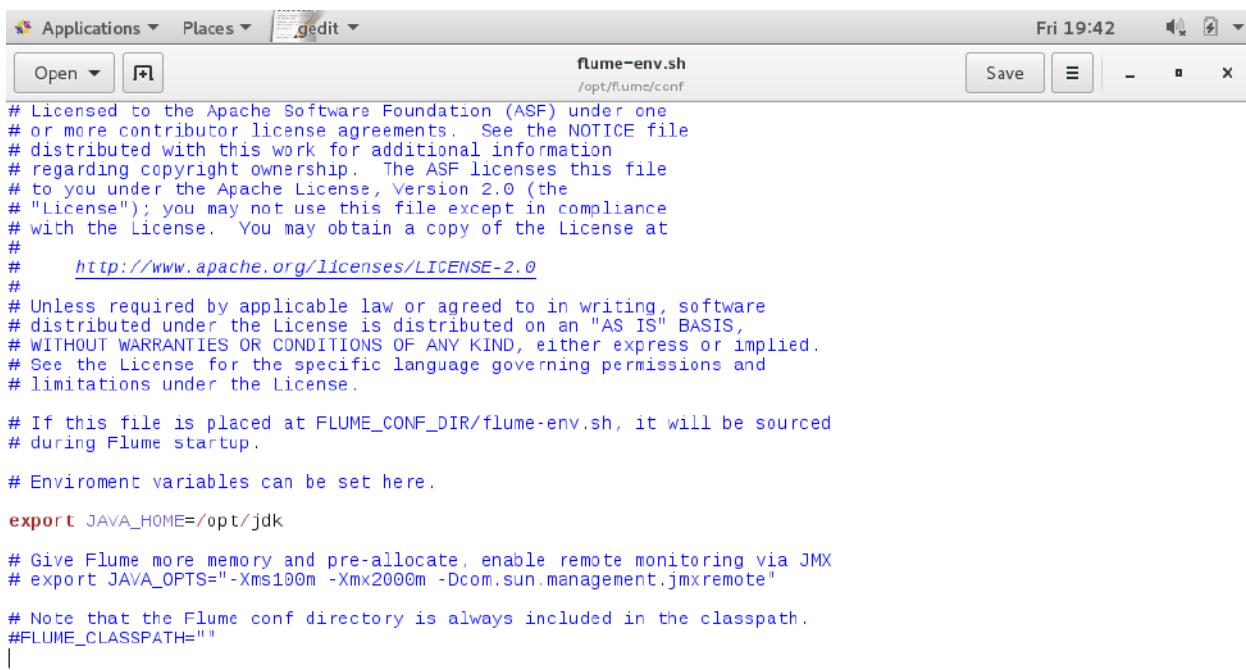

The screenshot shows a terminal window with a text editor open. The file is named 'flume-env.sh' located at '/opt/flume/conf'. The code in the file is the Apache Flume license and configuration script. It includes comments about the license, environment variables, and Java memory settings. A specific line 'export JAVA\_HOME=/opt/jdk' is highlighted.

```

# Licensed to the Apache Software Foundation (ASF) under one
# or more contributor license agreements. See the NOTICE file
# distributed with this work for additional information
# regarding copyright ownership. The ASF licenses this file
# to you under the Apache License, Version 2.0 (the
# "License"); you may not use this file except in compliance
# with the License. You may obtain a copy of the License at
#
#     http://www.apache.org/licenses/LICENSE-2.0
#
# Unless required by applicable law or agreed to in writing, software
# distributed under the License is distributed on an "AS IS" BASIS,
# WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
# See the License for the specific language governing permissions and
# limitations under the License.

# If this file is placed at FLUME_CONF_DIR/flume-env.sh, it will be sourced
# during Flume startup.

# Environment variables can be set here.

export JAVA_HOME=/opt/jdk

# Give Flume more memory and pre-allocate, enable remote monitoring via JMX
# export JAVA_OPTS="-Xms100m -Xmx2000m -Dcom.sun.management.jmxremote"


# Note that the Flume conf directory is always included in the classpath.
#FLUME_CLASSPATH=""
|
```



The screenshot shows a terminal window with a text editor open. The file is named 'flume-env.sh' located at '/opt/flume/conf'. The title bar indicates the file is 'flume-env.sh (/opt/flume/conf) - ...'. The status bar shows 'sh' and 'Tab Width: 8'. The page number '1 / 4' is visible in the bottom right corner. The text 'Acrecentar o JAVA\_HOME' is centered below the file path.

Acrecentar o JAVA\_HOME

## Instalação e Configuração do Ecossistema Hadoop

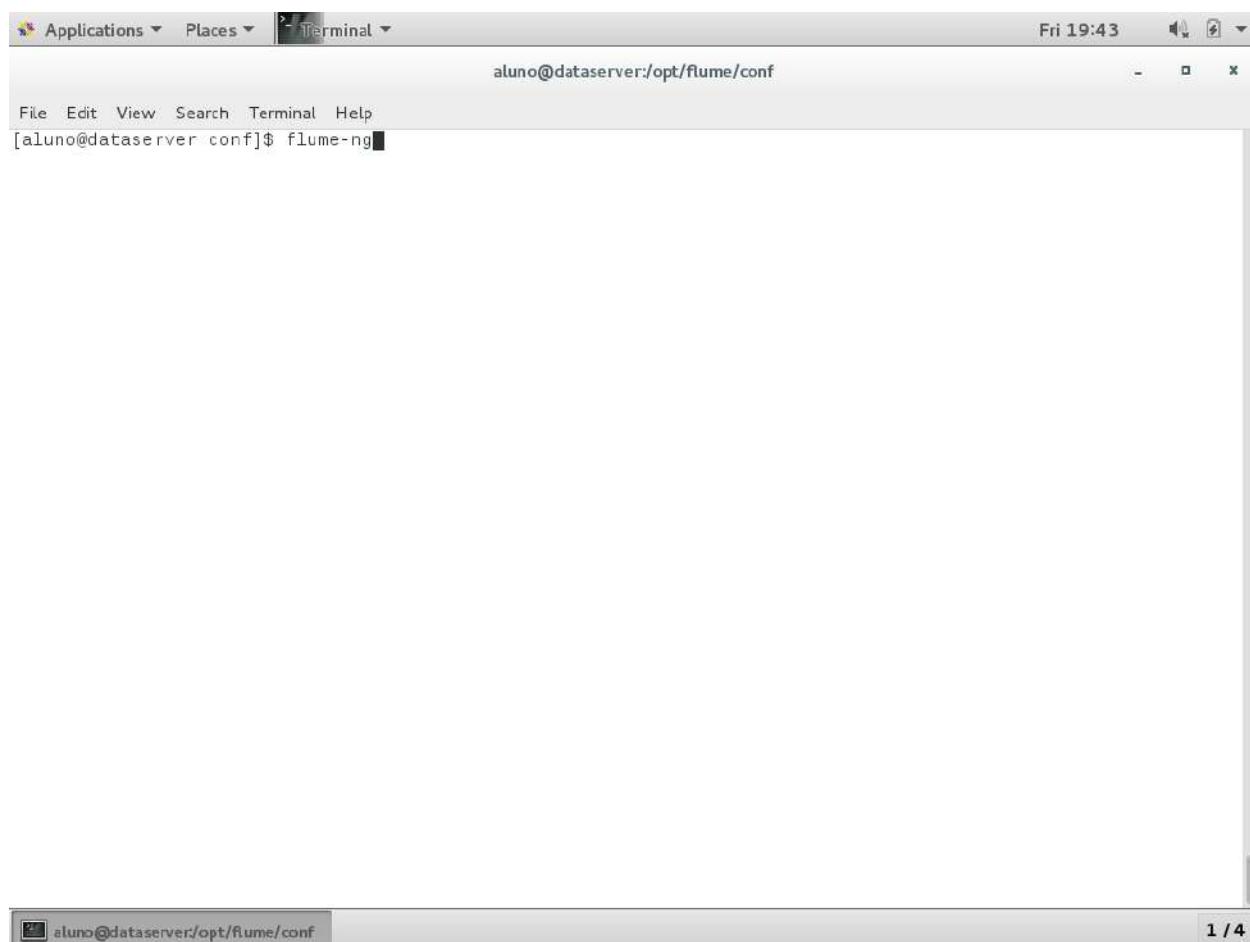

A screenshot of a terminal window titled "Terminal". The window shows the command "flume-ng" being typed at the prompt "aluno@dataserver:/opt/flume/conf\$". The terminal interface includes a menu bar with "File", "Edit", "View", "Search", "Terminal", and "Help". The status bar at the bottom right indicates "Fri 19:43". A progress bar at the bottom of the window shows "1 / 4".

Testar a instalação

## Instalação e Configuração do Ecossistema Hadoop

aluno@dataserver:~/opt/flume/conf

```

File Edit View Search Terminal Help
commands:
  help           display this help text
  agent          run a Flume agent
  avro-client    run an avro Flume client
  version        show Flume version info

global options:
  --conf,-c <conf>      use configs in <conf> directory
  --classpath,-C <cp>    append to the classpath
  --dryrun,-d             do not actually start Flume, just print the command
  --plugins-path <dirs>  colon-separated list of plugins.d directories. See the
                        plugins.d section in the user guide for more details.
                        Default: $FLUME_HOME/plugins.d
  -Dproperty=value       sets a Java system property value
  -Xproperty=value       sets a Java -X option

agent options:
  --name,-n <name>       the name of this agent (required)
  --conf-file,-f <file>   specify a config file (required if -z missing)
  --zkConnString,-z <str> specify the ZooKeeper connection to use (required if -f missing)
  --zkBasePath,-p <path>  specify the base path in ZooKeeper for agent configs
  --no-reload-conf       do not reload config file if changed
  --help,-h               display help text

avro-client options:
  --rpcProps,-P <file>   RPC client properties file with server connection params
  --host,-H <host>        hostname to which events will be sent
  --port,-p <port>        port of the avro source
  --dirname <dir>         directory to stream to avro source
  --filename,-F <file>    text file to stream to avro source (default: std input)
  --headerFile,-R <file>  File containing event headers as key/value pairs on each new line
  --help,-h               display help text

Either --rpcProps or both --host and --port must be specified.

Note that if <conf> directory is specified, then it is always included first
in the classpath.


[aluno@dataserver conf]$ ■

```

Flume instalado com sucesso

## 13. Instalação e Configuração do Ambari (Opcional)


Nota: No CentOS, o Ambari pode ser instalado mais facilmente através do gerenciador de pacotes yum.

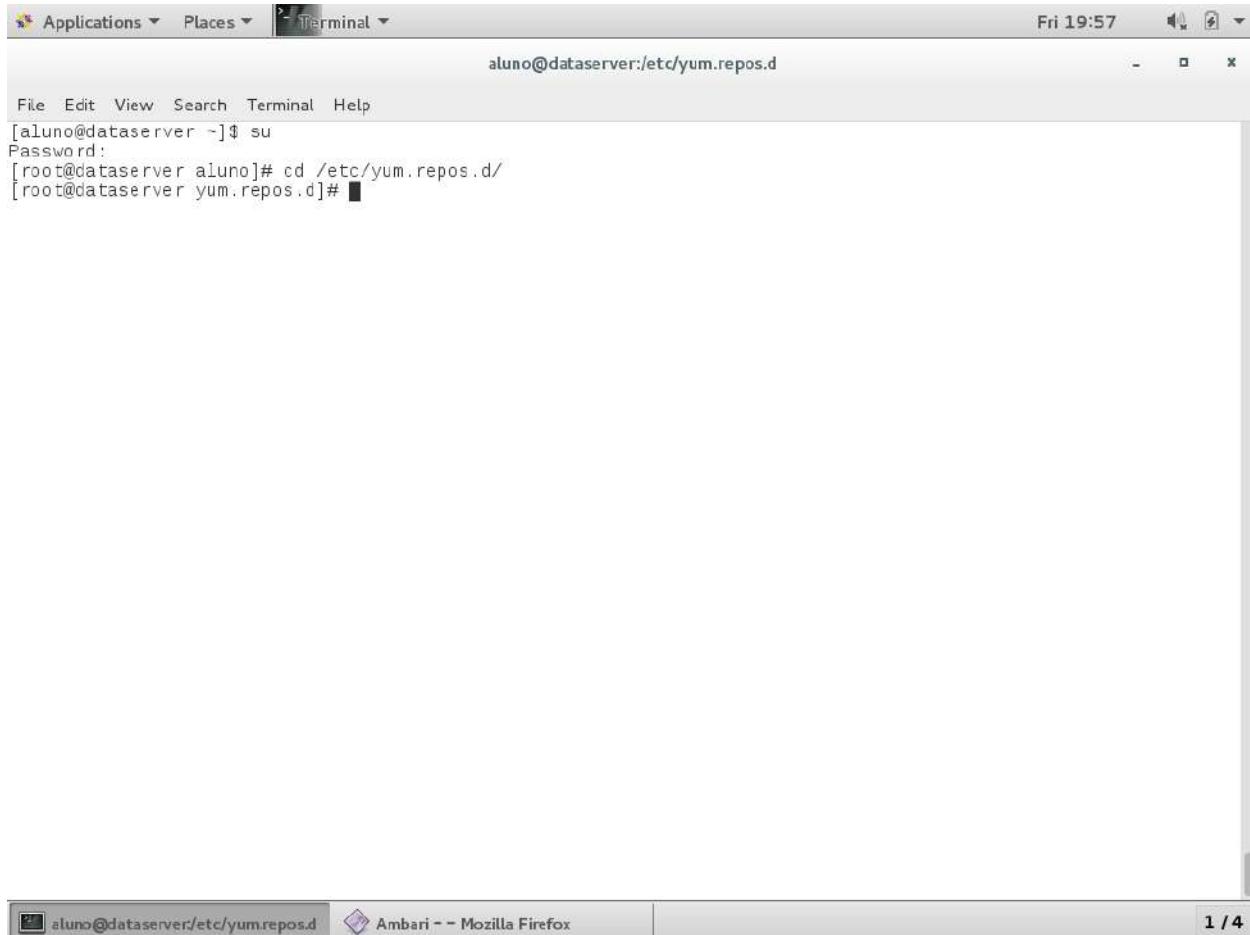

```
aluno@dataserver:/etc/yum.repos.d Fri 19:57
File Edit View Search Terminal Help
[aluno@dataserver ~]$ su
Password:
[root@dataserver alumno]# cd /etc/yum.repos.d/
[root@dataserver yum.repos.d]#
```

Conectado como root, acessar o diretório de repositórios do CentOS


## Instalação e Configuração do Ecossistema Hadoop

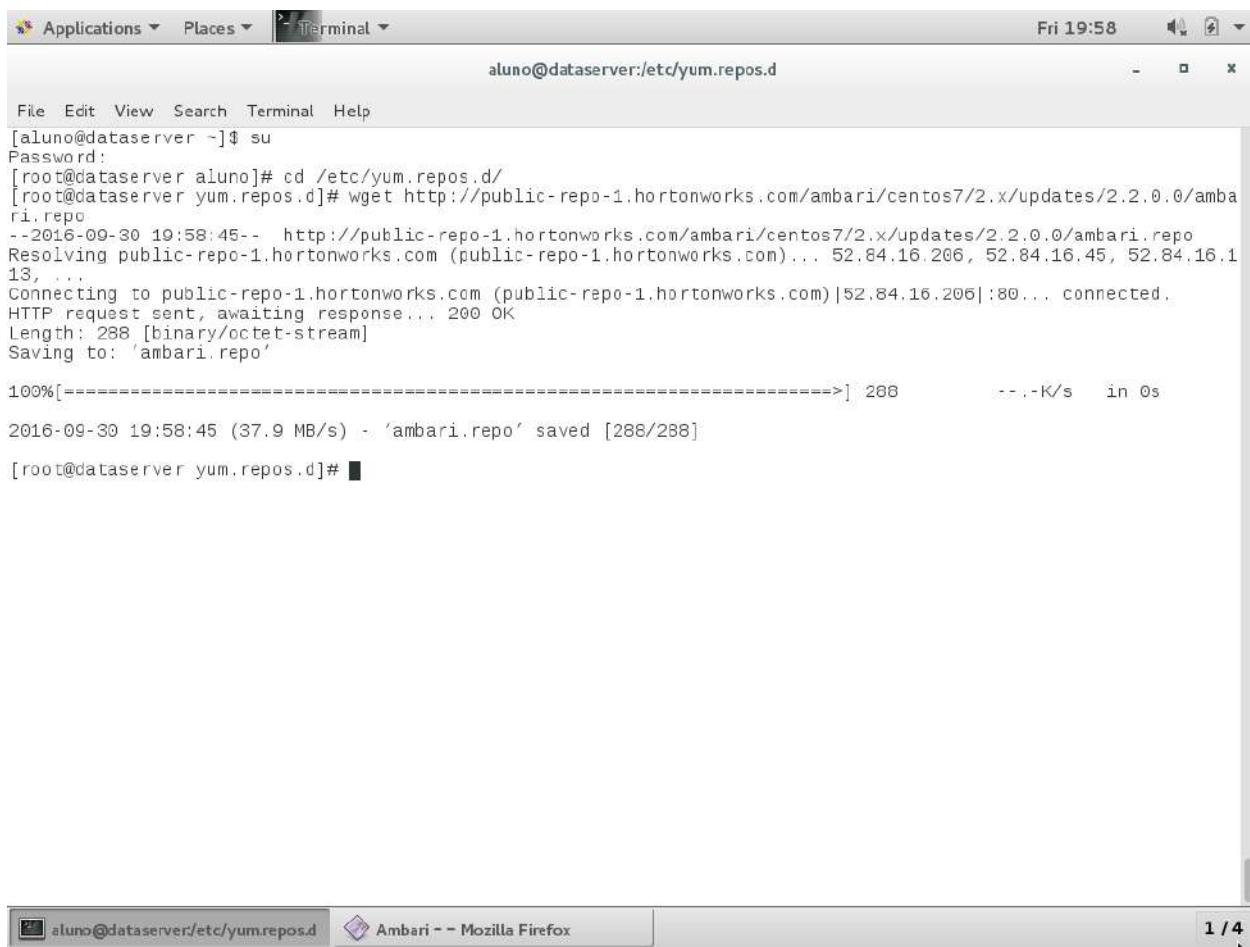

The screenshot shows a terminal window titled 'Terminal' with the command 'aluno@dataserver:/etc/yum.repos.d'. The user runs 'su' to become root and then navigates to the '/etc/yum.repos.d' directory. They use 'wget' to download the 'ambari.repo' file from the Hortonworks public repository. The download progress is shown as a bar reaching 100%, with a speed of 37.9 MB/s and a duration of 0s. The terminal ends with '[root@dataserver yum.repos.d]#'. The status bar at the bottom indicates the current tab is 'aluno@dataserver:/etc/yum.repos.d' and the title is 'Ambari - Mozilla Firefox'. A page number '1 / 4' is also visible.

Download do arquivo de repositório do Ambari

## Instalação e Configuração do Ecossistema Hadoop

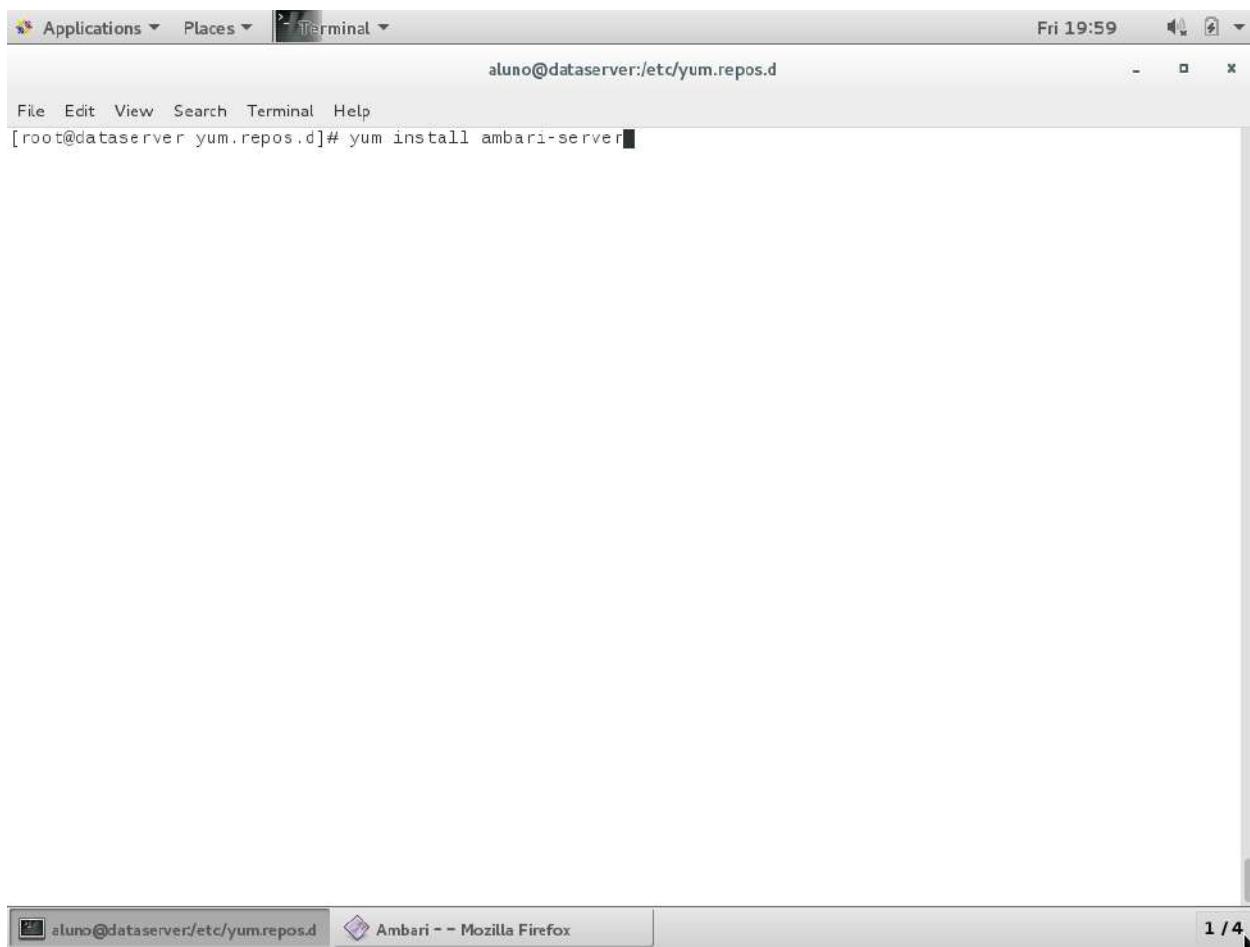

A screenshot of a terminal window titled "Terminal". The window shows the command `[root@dataserver yum.repos.d]# yum install ambari-server` being typed. The terminal is running on a Linux system with a desktop environment, as evidenced by the window title bar and icons.

Como root, executar: `yum install ambari-server`

## Instalação e Configuração do Ecossistema Hadoop

Applications ▾ Places ▾ Terminal ▾ Fri 19:59

```
aluno@dataserver:/etc/yum.repos.d

File Edit View Search Terminal Help
Loading mirror speeds from cached hostfile
 * base: mirror.its.sfu.ca
 * extras: centos.mirror.rafal.ca
 * updates: centos.mirror.rafal.ca
Resolving Dependencies
--> Running transaction check
--> Package ambari-server.x86_64 0:2.2.0.0-1310 will be installed
--> Processing Dependency: postgresql-server >= 8.1 for package: ambari-server-2.2.0.0-1310.x86_64
--> Running transaction check
--> Package postgresql-server.x86_64 0:9.2.15-1.el7_2 will be installed
--> Processing Dependency: postgresql-libs(x86-64) = 9.2.15-1.el7_2 for package: postgresql-server-9.2.15-1.el7_2.x86_64
--> Processing Dependency: postgresql(x86-64) = 9.2.15-1.el7_2 for package: postgresql-server-9.2.15-1.el7_2.x86_64
--> Processing Dependency: libpq.so.5()(64bit) for package: postgresql-server-9.2.15-1.el7_2.x86_64
--> Running transaction check
--> Package postgresql.x86_64 0:9.2.15-1.el7_2 will be installed
--> Package postgresql-libs.x86_64 0:9.2.15-1.el7_2 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=====
Package           Arch      Version       Repository      Size
=====
Installing:
ambari-server    x86_64   2.2.0.0-1310  Updates-ambari-2.2.0.0  406 M
Installing for dependencies:
postgresql        x86_64   9.2.15-1.el7_2  updates          3.0 M
postgresql-libs   x86_64   9.2.15-1.el7_2  updates          231 k
postgresql-server x86_64   9.2.15-1.el7_2  updates          3.8 M

Transaction Summary
=====
Install 1 Package (+3 Dependent packages)

Total download size: 413 M
Installed size: 465 M
Is this ok [y/d/N]: ■
```

aluno@dataserver:/etc/yum.repos.d Ambari - Mozilla Firefox 1 / 4

### Instalação do Ambari

## Instalação e Configuração do Ecossistema Hadoop

aluno@dataserver:/etc/yum.repos.d

```

File Edit View Search Terminal Help
Is this ok [y/d/N]: y
Downloading packages:
(1/4): postgresql-libs-9.2.15-1.el7_2.x86_64.rpm | 231 kB 00:00:00
(2/4): postgresql-server-9.2.15-1.el7_2.x86_64.rpm | 3.8 MB 00:00:02
(3/4): postgresql-9.2.15-1.el7_2.x86_64.rpm | 3.0 MB 00:00:02
warning: /var/cache/yum/x86_64/7/Updates-ambari-2.2.0.0/packages/ambari-server-2.2.0.0-1310.x86_64.rpm: Header V4 RSA/SHA1 Signature, key ID 07513cad: NOKEY
Public key for ambari-server-2.2.0.0-1310.x86_64.rpm is not installed
(4/4): ambari-server-2.2.0.0-1310.x86_64.rpm | 406 MB 00:03:52

Total                                         1.8 MB/s | 413 MB 00:03:52
Retrieving key from http://public-repo-1.hortonworks.com/ambari/centos7/RPM-GPG-KEY/RPM-GPG-KEY-Jenkins
Importing GPG Key 0x07513CAD:
  Userid   : "Jenkins (HDP Builds) <jenkin@hortonworks.com>"
  Fingerprint: df52 ed4f 7a3a 5882 c099 4c66 b973 3a7a 0751 3cad
  From     : http://public-repo-1.hortonworks.com/ambari/centos7/RPM-GPG-KEY/RPM-GPG-KEY-Jenkins
Is this ok [y/N]: y
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : postgresql-libs-9.2.15-1.el7_2.x86_64                                         1/4
  Installing : postgresql-9.2.15-1.el7_2.x86_64                                         2/4
  Installing : postgresql-server-9.2.15-1.el7_2.x86_64                                         3/4
  Installing : ambari-server-2.2.0.0-1310.x86_64                                         4/4
  Verifying  : postgresql-libs-9.2.15-1.el7_2.x86_64                                         1/4
  Verifying  : postgresql-server-9.2.15-1.el7_2.x86_64                                         2/4
  Verifying  : ambari-server-2.2.0.0-1310.x86_64                                         3/4
  Verifying  : postgresql-9.2.15-1.el7_2.x86_64                                         4/4

Installed:
  ambari-server.x86_64 0:2.2.0.0-1310

Dependency Installed:
  postgresql.x86_64 0:9.2.15-1.el7_2                               postgresql-libs.x86_64 0:9.2.15-1.el7_2
  postgresql-server.x86_64 0:9.2.15-1.el7_2

Complete!
[root@dataserver yum.repos.d]#

```

aluno@dataserver:/etc/yum.repos.d Ambari -- Mozilla Firefox 1 / 4

Instalação concluída com sucesso

## Instalação e Configuração do Ecossistema Hadoop



```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ sudo ambari-server setup
[sudo] password for aluno:
Using python /usr/bin/python2
Setup ambari-server
Checking SELinux...
SELinux status is 'enabled'
SELinux mode is 'enforcing'
Temporarily disabling SELinux
WARNING: SELinux is set to 'permissive' mode and temporarily disabled.
OK to continue [y/n] (y)? █
```

Configuração do Ambari

## Instalação e Configuração do Ecossistema Hadoop




```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ sudo ambari-server setup
Using python /usr/bin/python2
Setup ambari-server
Checking SELinux...
SELinux status is 'enabled'
SELinux mode is 'permissive'
WARNING: SELinux is set to 'permissive' mode and temporarily disabled.
OK to continue [y/n] (y)? y
Customize user account for ambari-server daemon [y/n] (n)? y
Enter user account for ambari-server daemon (root):aluno
Adjusting ambari-server permissions and ownership...
Checking firewall status...
Redirecting to /bin/systemctl status iptables.service

Checking JDK...
[1] Oracle JDK 1.8 + Java Cryptography Extension (JCE) Policy Files 8
[2] Oracle JDK 1.7 + Java Cryptography Extension (JCE) Policy Files 7
[3] Custom JDK
=====
Enter choice (1): 3
WARNING: JDK must be installed on all hosts and JAVA_HOME must be valid on all hosts.
WARNING: JCE Policy files are required for configuring Kerberos security. If you plan to use Kerberos, please make sure JCE Unlimited Strength Jurisdiction Policy Files are valid on all hosts.
Path to JAVA_HOME: /opt/jdk
Validating JDK on Ambari Server...done.
Completing setup...
Configuring database...
Enter advanced database configuration [y/n] (n)?
```

## Configuração do Ambari

## Instalação e Configuração do Ecossistema Hadoop

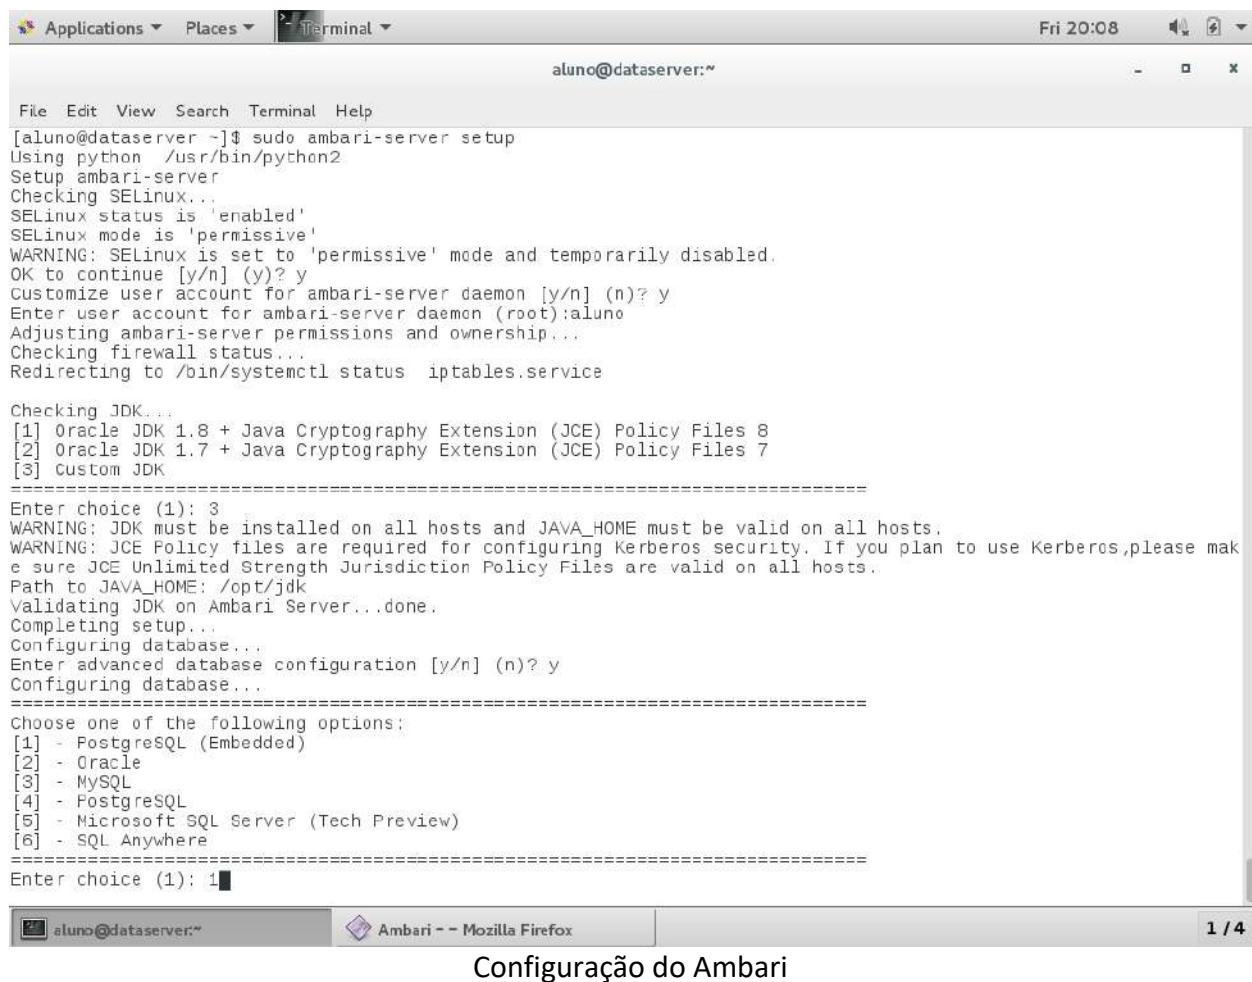

```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ sudo ambari-server setup
Using python /usr/bin/python2
Setup ambari-server
Checking SELinux...
SELinux status is 'enabled'
SELinux mode is 'permissive'
WARNING: SELinux is set to 'permissive' mode and temporarily disabled.
OK to continue [y/n] (y)? y
Customize user account for ambari-server daemon [y/n] (n)? y
Enter user account for ambari-server daemon (root):aluno
Adjusting ambari-server permissions and ownership...
Checking firewall status...
Redirecting to /bin/systemctl status iptables.service

Checking JDK...
[1] Oracle JDK 1.8 + Java Cryptography Extension (JCE) Policy Files 8
[2] Oracle JDK 1.7 + Java Cryptography Extension (JCE) Policy Files 7
[3] Custom JDK
=====
Enter choice (1): 3
WARNING: JDK must be installed on all hosts and JAVA_HOME must be valid on all hosts.
WARNING: JCE Policy files are required for configuring Kerberos security. If you plan to use Kerberos, please make sure JCE Unlimited Strength Jurisdiction Policy Files are valid on all hosts.
Path to JAVA_HOME: /opt/jdk
Validating JDK on Ambari Server...done.
Completing setup...
Configuring database...
Enter advanced database configuration [y/n] (n)? y
Configuring database...
=====
Choose one of the following options:
[1] - PostgreSQL (Embedded)
[2] - Oracle
[3] - MySQL
[4] - PostgreSQL
[5] - Microsoft SQL Server (Tech Preview)
[6] - SQL Anywhere
=====
Enter choice (1): 1
```

## Configuração do Ambari

## Instalação e Configuração do Ecossistema Hadoop




```
[1] Oracle JDK 1.8 + Java Cryptography Extension (JCE) Policy Files 8
[2] Oracle JDK 1.7 + Java Cryptography Extension (JCE) Policy Files 7
[3] Custom JDK
=====
Enter choice (1): 3
WARNING: JDK must be installed on all hosts and JAVA_HOME must be valid on all hosts.
WARNING: JCE Policy files are required for configuring Kerberos security. If you plan to use Kerberos, please make sure JCE Unlimited Strength Jurisdiction Policy Files are valid on all hosts.
Path to JAVA_HOME: /opt/jdk
Validating JDK on Ambari Server...done.
Completing setup...
Configuring database...
Enter advanced database configuration [y/n] (n)? y
Configuring database...
=====
Choose one of the following options:
[1] - PostgreSQL (Embedded)
[2] - Oracle
[3] - MySQL
[4] - PostgreSQL
[5] - Microsoft SQL Server (Tech Preview)
[6] - SQL Anywhere
=====
Enter choice (1): 1
Database name (ambari): ambari
Postgres schema (ambari): ambari
Username (ambari): ambari
Enter Database Password (bigdata):
Re-enter password:
Default properties detected. Using built-in database.
Configuring ambari database...
Checking PostgreSQL...
Running initdb: This may take upto a minute.
Initializing database ... OK

About to start PostgreSQL
Configuring local database...

```

Configuração em andamento

## Instalação e Configuração do Ecossistema Hadoop

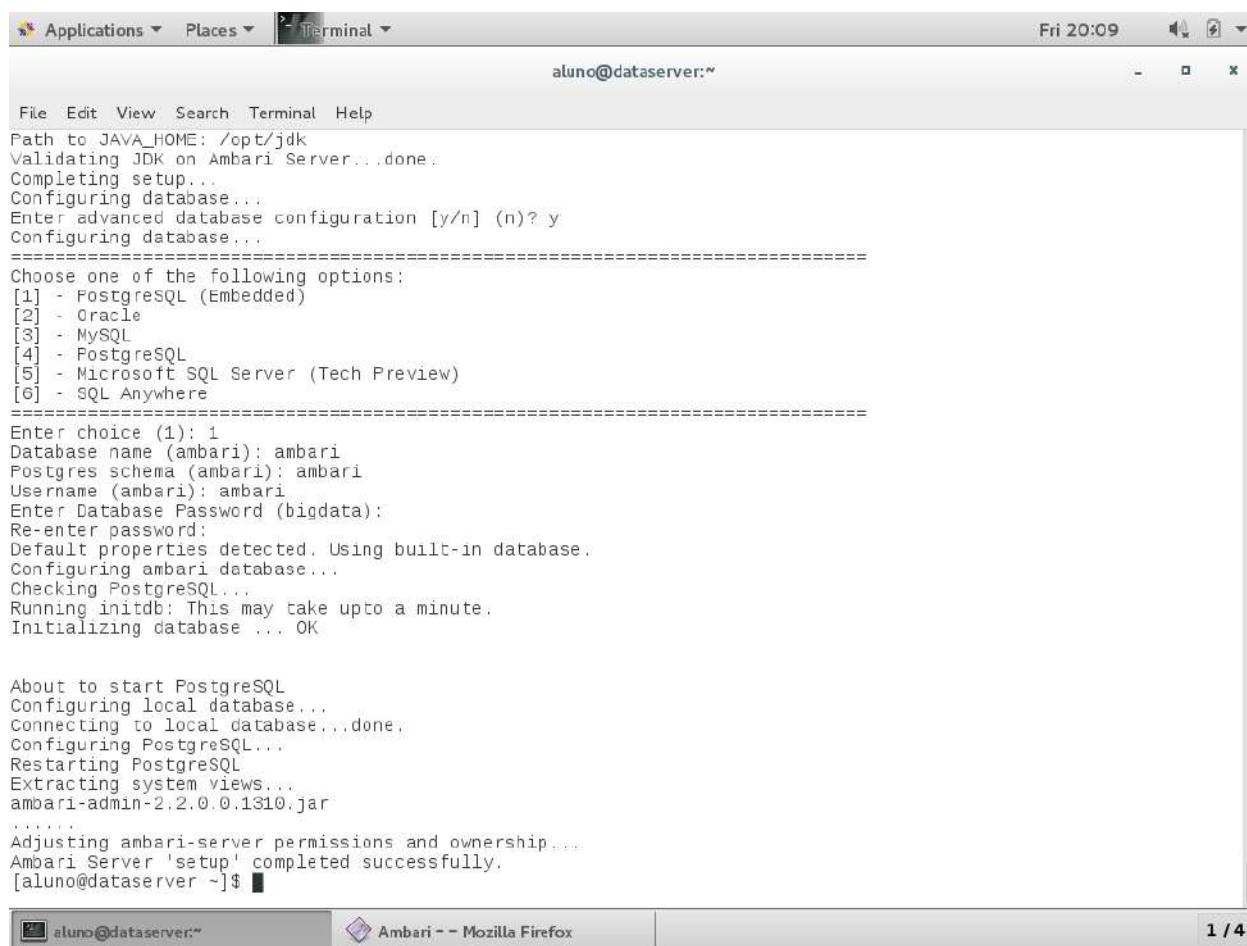


```
File Edit View Search Terminal Help
Path to JAVA_HOME: /opt/jdk
Validating JDK on Ambari Server...done.
Completing setup...
Configuring database...
Enter advanced database configuration [y/n] (n)? y
Configuring database...
=====
Choose one of the following options:
[1] - PostgreSQL (Embedded)
[2] - Oracle
[3] - MySQL
[4] - PostgreSQL
[5] - Microsoft SQL Server (Tech Preview)
[6] - SQL Anywhere
=====
Enter choice (1): 1
Database name (ambari): ambari
Postgres schema (ambari): ambari
Username (ambari): ambari
Enter Database Password (bigdata):
Re-enter password:
Default properties detected. Using built-in database.
Configuring ambari database...
Checking PostgreSQL...
Running initdb: This may take upto a minute.
Initializing database ... OK

About to start PostgreSQL
Configuring local database...
Connecting to local database...done.
Configuring PostgreSQL...
Restarting PostgreSQL
Extracting system views...
ambari-admin-2.2.0.0.1310.jar
.....
Adjusting ambari-server permissions and ownership...
Ambari Server 'setup' completed successfully.
[aluno@dataserver ~]$
```


Configuração concluída

## Instalação e Configuração do Ecossistema Hadoop

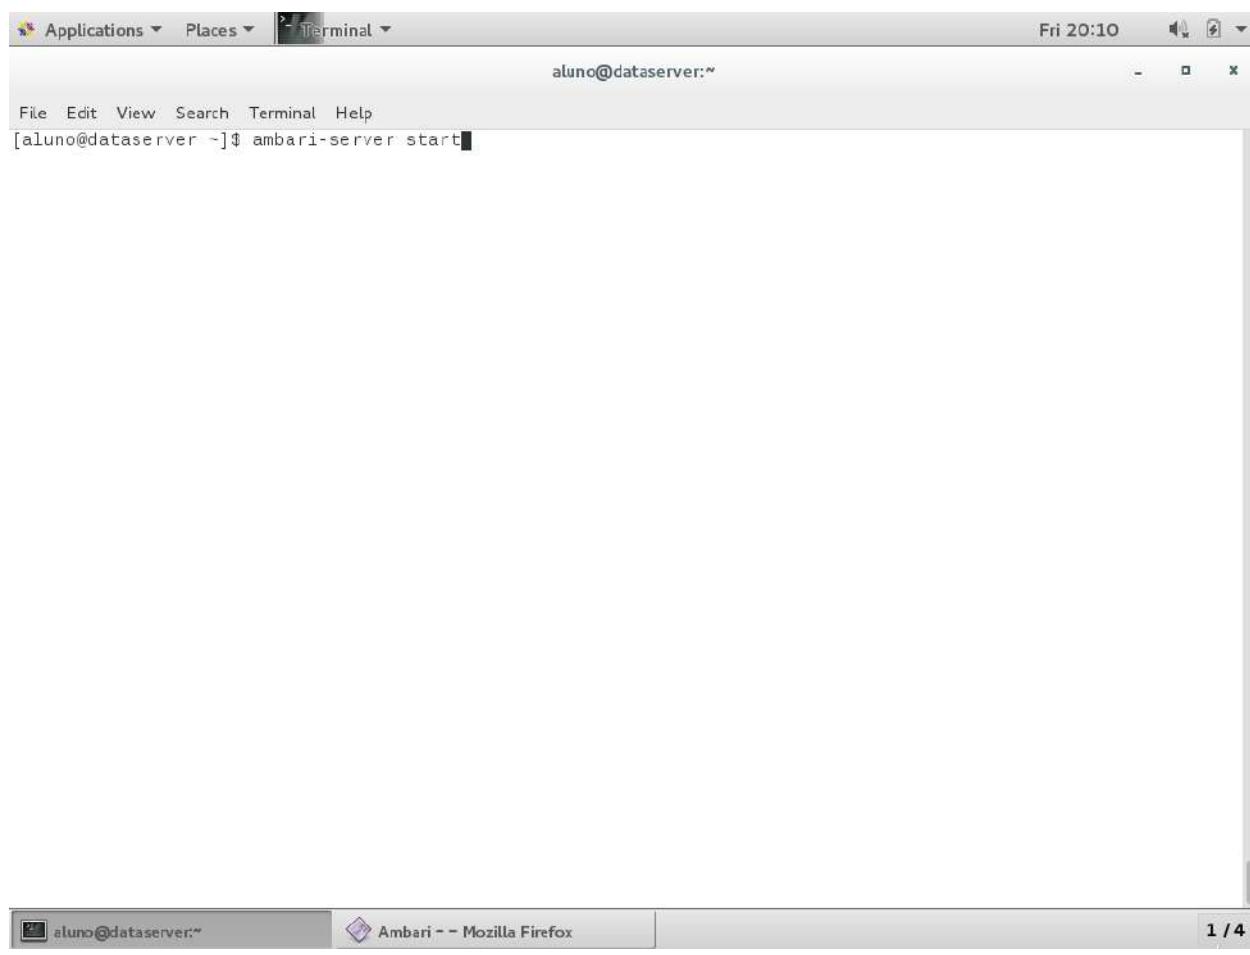

Iniciar o Ambari


## Instalação e Configuração do Ecossistema Hadoop

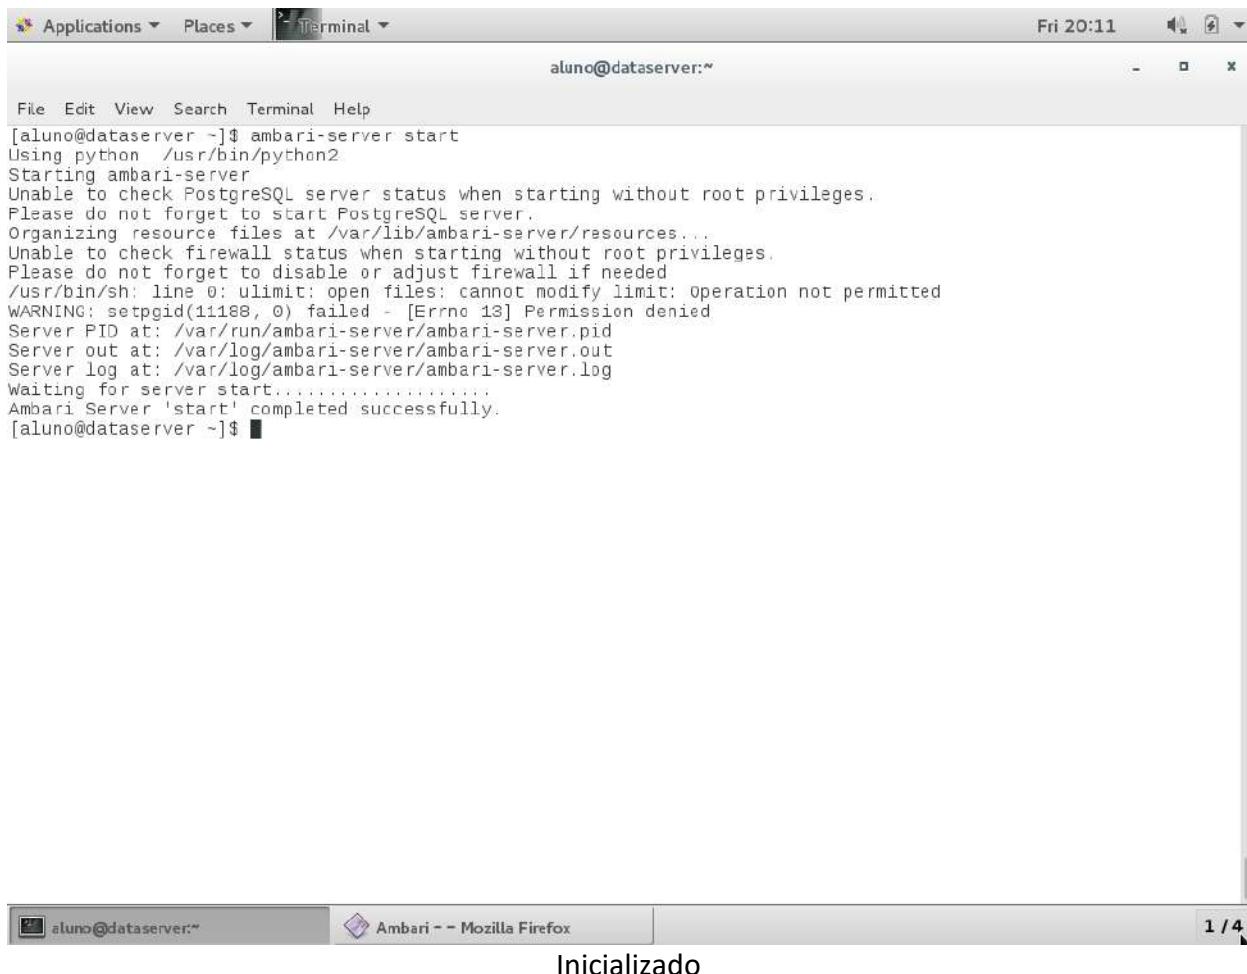

```
File Edit View Search Terminal Help
[aluno@dataserver ~]$ ambari-server start
Using python /usr/bin/python2
Starting ambari-server
Unable to check PostgreSQL server status when starting without root privileges.
Please do not forget to start PostgreSQL server.
Organizing resource files at /var/lib/ambari-server/resources...
Unable to check firewall status when starting without root privileges.
Please do not forget to disable or adjust firewall if needed
/usr/bin/sh: line 0: ulimit: open files: cannot modify limit: Operation not permitted
WARNING: setpgid(11188, 0) failed - [Errno 13] Permission denied
Server PID at: /var/run/ambari-server/ambari-server.pid
Server out at: /var/log/ambari-server/ambari-server.out
Server log at: /var/log/ambari-server/ambari-server.log
Waiting for server start.....
Ambari Server 'start' completed successfully.
[aluno@dataserver ~]$
```

Inicializado


## Instalação e Configuração do Ecossistema Hadoop

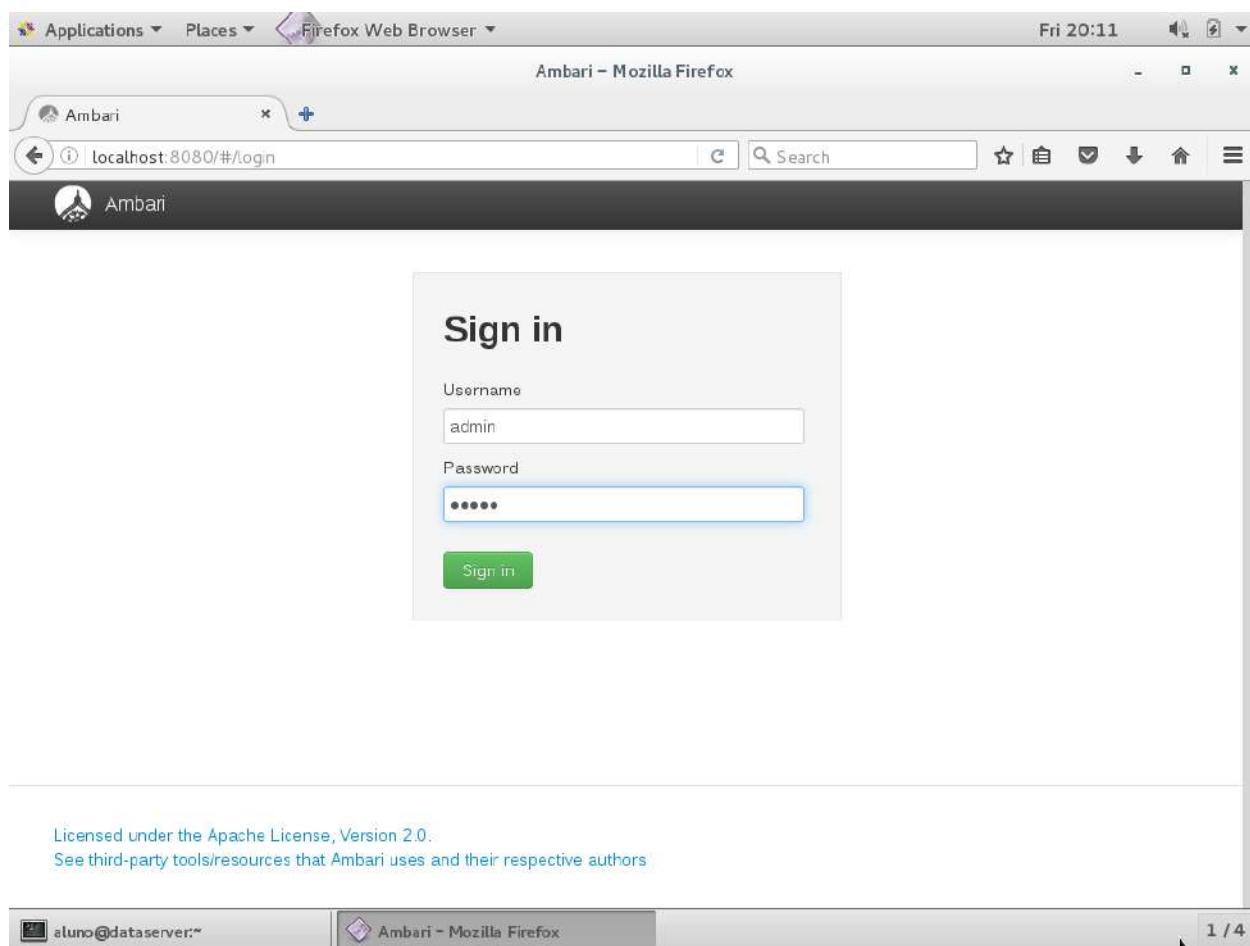

Licensed under the Apache License, Version 2.0.  
See third-party tools/resources that Ambari uses and their respective authors

Acessar o browser – <http://dataserver:8080> - usuário: admin / senha: admin

## Instalação e Configuração do Ecossistema Hadoop

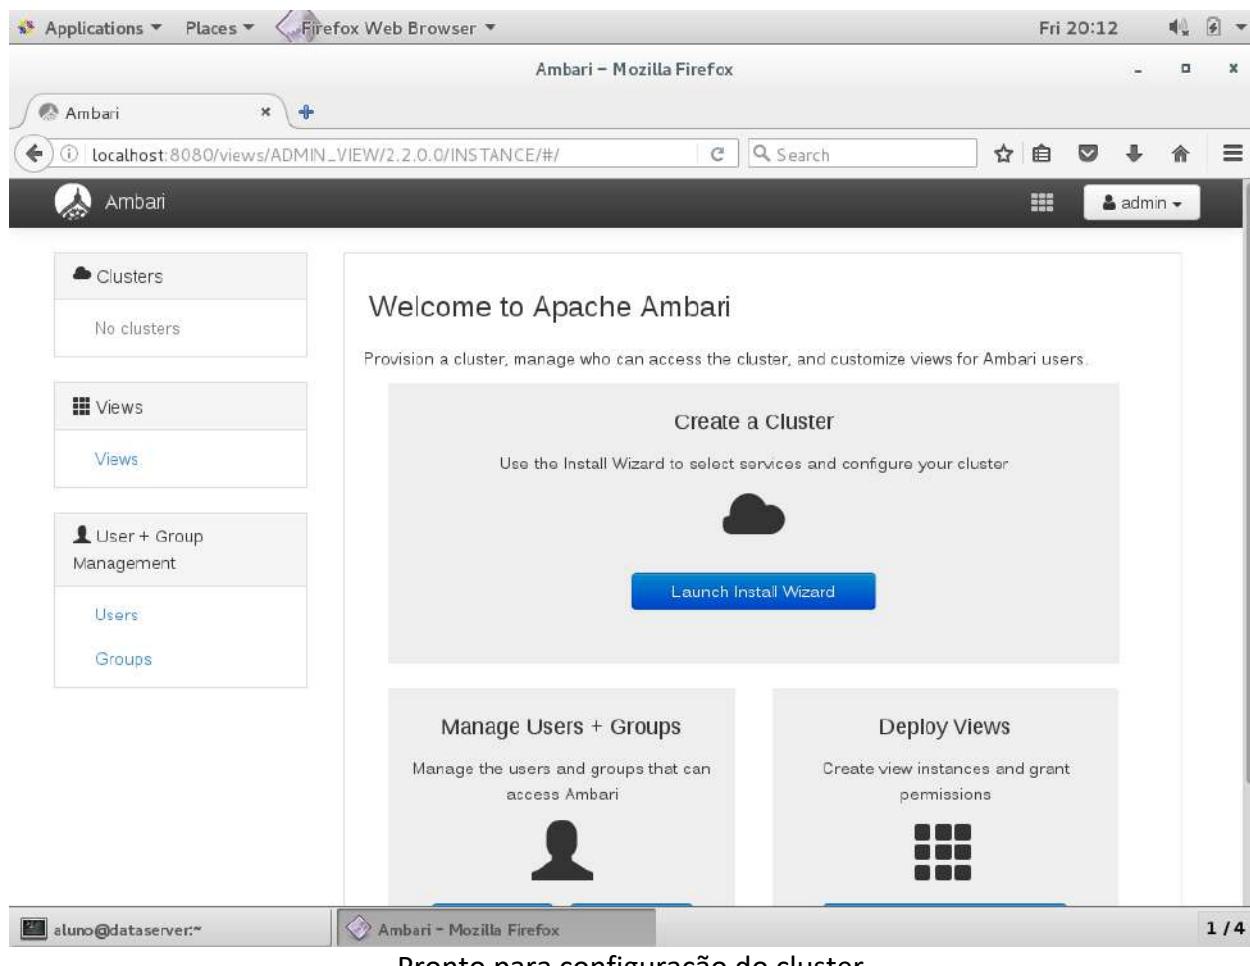

The screenshot shows the Apache Ambari web interface running in Mozilla Firefox. The title bar says "Ambari - Mozilla Firefox". The left sidebar has three main sections: "Clusters" (No clusters), "Views" (Views), and "User + Group Management" (Users, Groups). The main content area is titled "Welcome to Apache Ambari" with the sub-instruction "Provision a cluster, manage who can access the cluster, and customize views for Ambari users.". It features three buttons: "Create a Cluster" (with a cloud icon), "Manage Users + Groups" (with a user icon), and "Deploy Views" (with a grid icon). A "Launch Install Wizard" button is located below the "Create a Cluster" section. The bottom status bar shows "aluno@dataserver:~" and "Ambari - Mozilla Firefox". The bottom right corner of the browser window shows "1 / 4".

Quarto checkpoint:

Clique no meu File – Export Appliance.  
Será gerada uma cópia de segurança da sua máquina virtual.

→ VM: DataServer-vFinal.ova (Completa)

**Parabéns!**

**Você tem um ambiente de testes para  
armazenar e processar Big Data!**