

# Powershell - Create HTML File

## Cmdlet

**New-Item** cmdlet is used to create a html file and **Set-Content** cmdlet to put content into it.

## Step 1

In this example, we're creating a new html file named test.html

Type the following command in PowerShell ISE Console

```
New-Item D:\temp\test\test.html -ItemType File
```

You can see the test.html created in D:\temp\test directory.

Explore our **latest online courses** and learn new skills at your own pace. Enroll and become a certified expert to boost your career.

## Step 2


In this example, we're adding content to test.html.

Type the following command in PowerShell ISE Console

```
Set-Content D:\temp\test\test.html '<html>Welcome to Tutorialspoint</html>'
```

## Step 3

In this example, we're reading content of test.html.

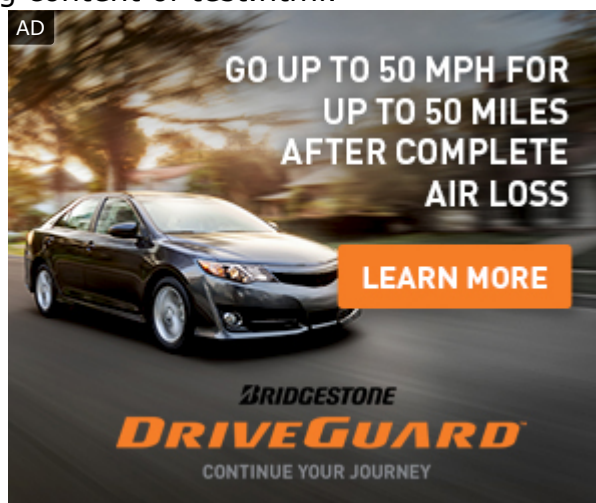

```
Get-Content D:\temp\test\test.html
```

## Output

You can see following output in PowerShell console.

```
<html>Welcome to TutorialsPoint</html>
```