



Conosciamo LDAP

- Utilizziamo ldp che è un browser LDAP per navigare all'interno della directory. Potremmo utilizzare anche adsiedit, ma come detto è un EDITOR, quindi potremmo inavvertitamente fare dei cambiamenti che potrebbero essere distruttivi.
Esistono anche altri browser LDAP più amichevoli, come ad esempio LDAP Browser di Softerra
- Vediamo la sintassi per fare delle query LDAP e ne proviamo qualcuna


LDAP browser: ldp.exe

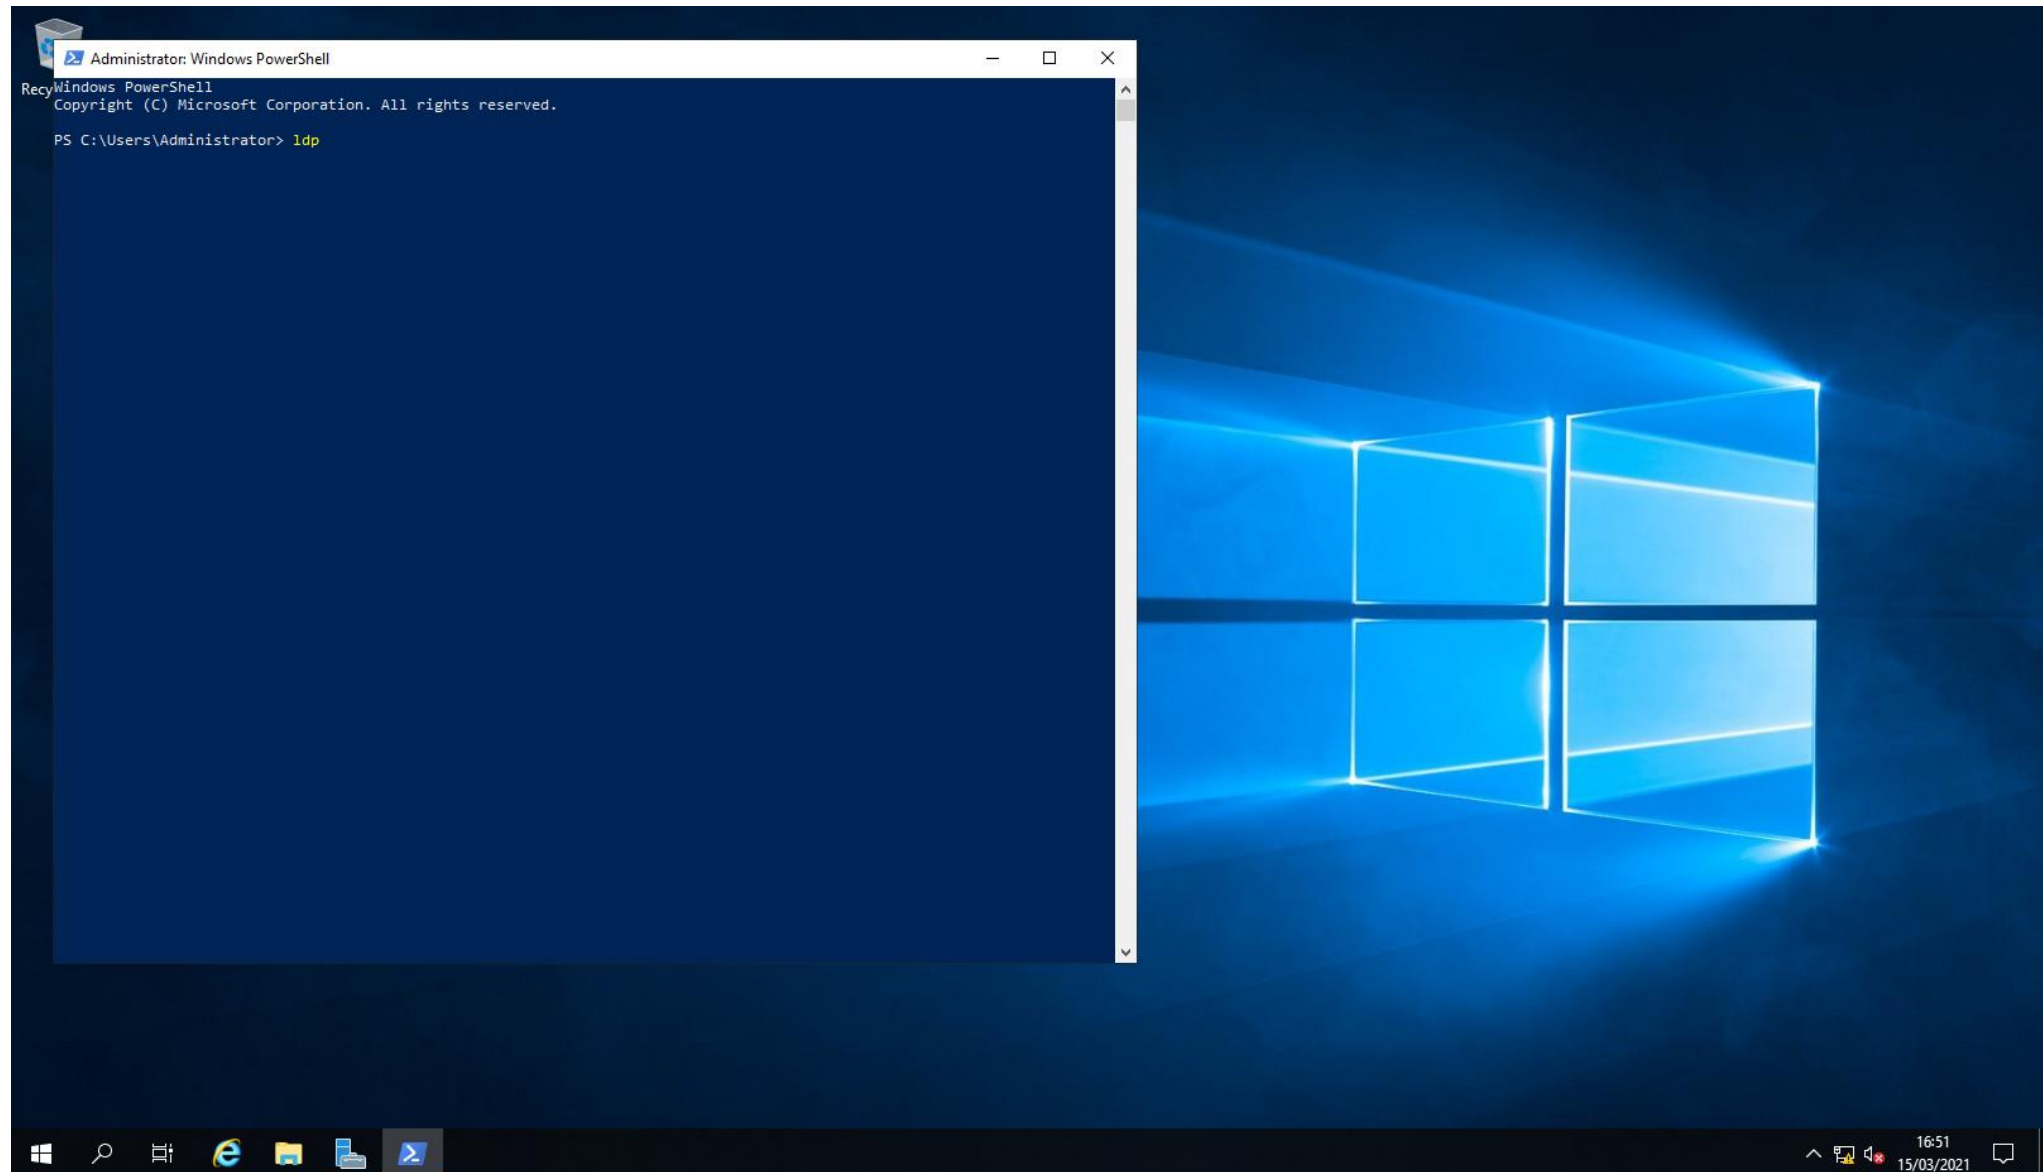


LDAP browser: ldp.exe

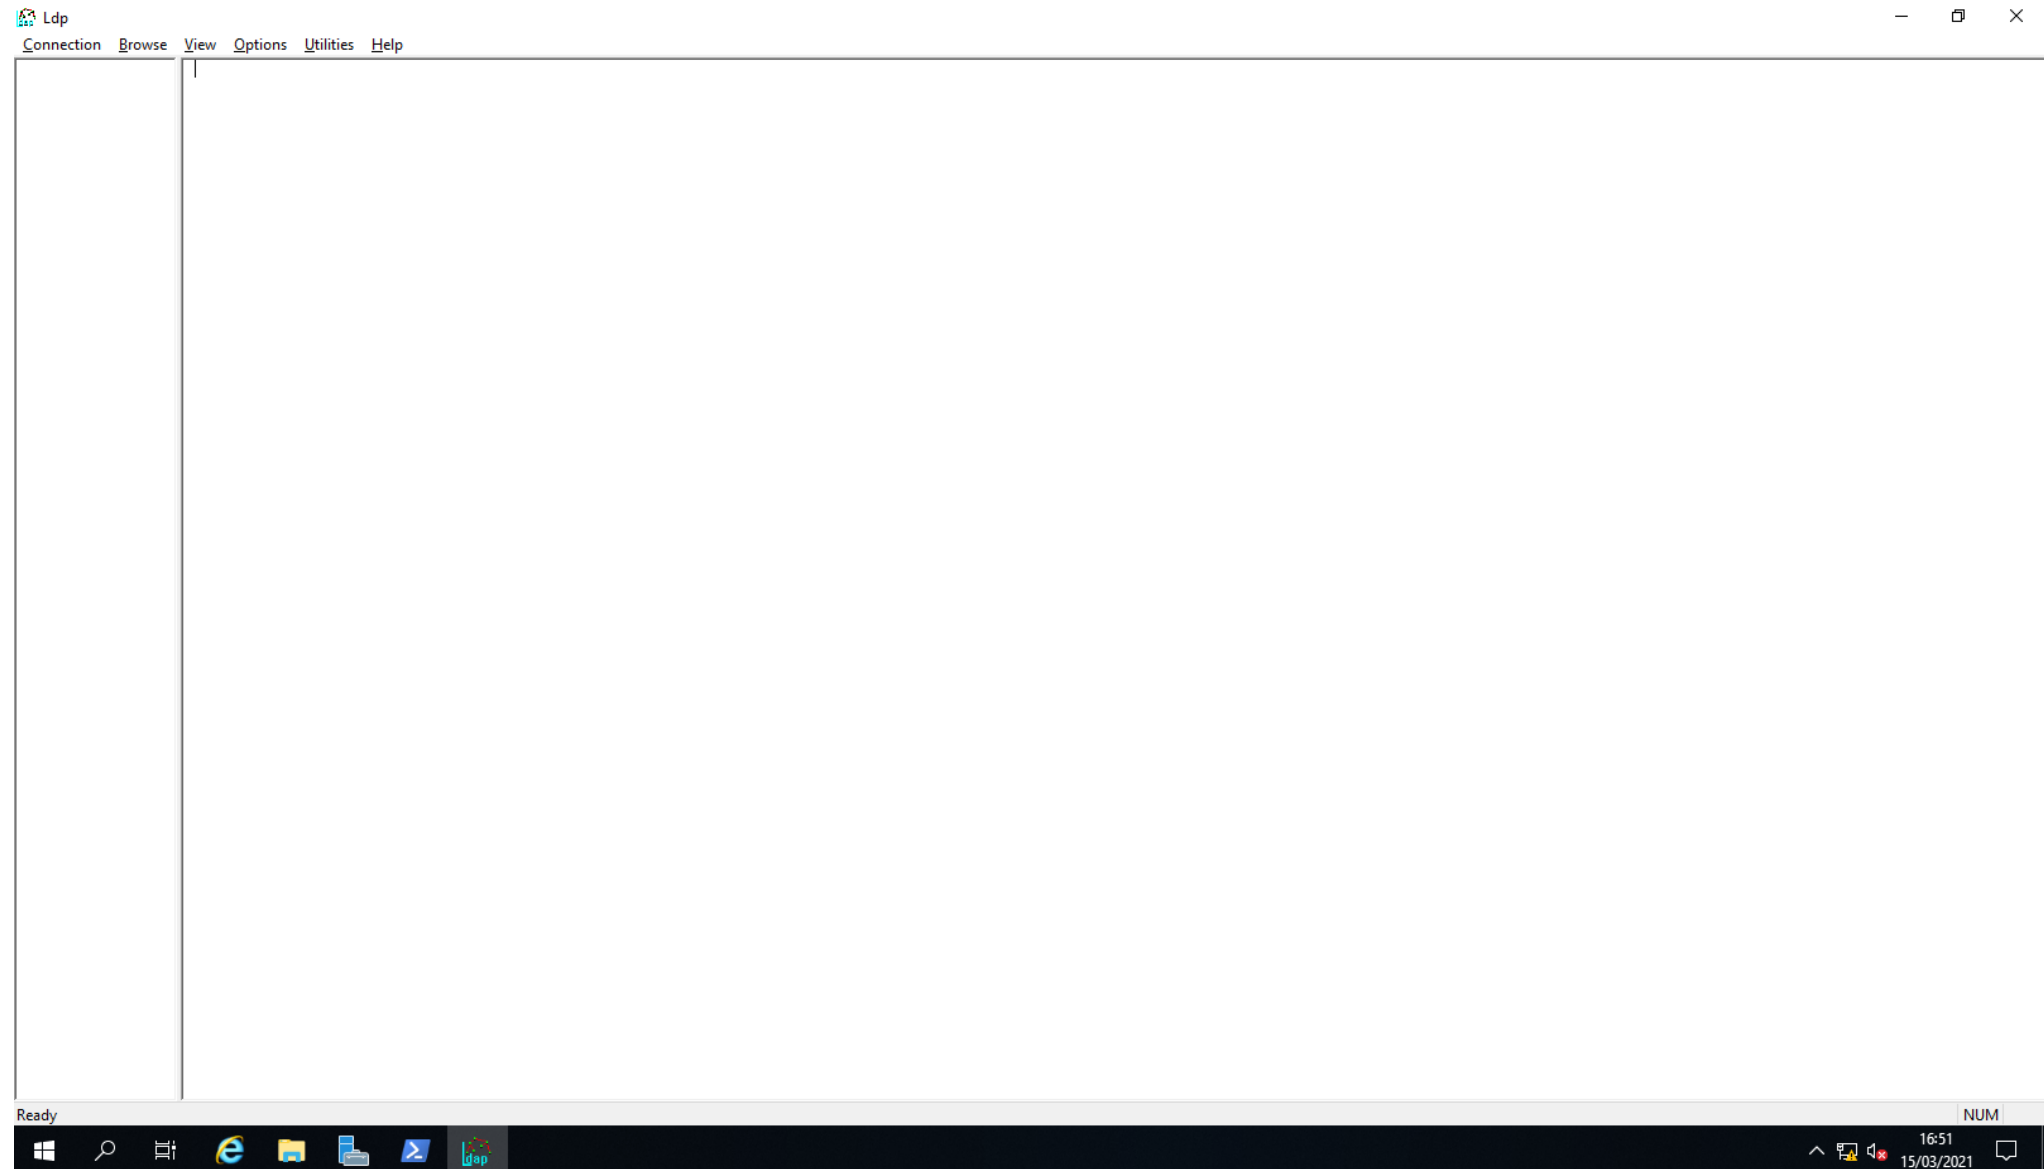


LDAP browser: ldp.exe

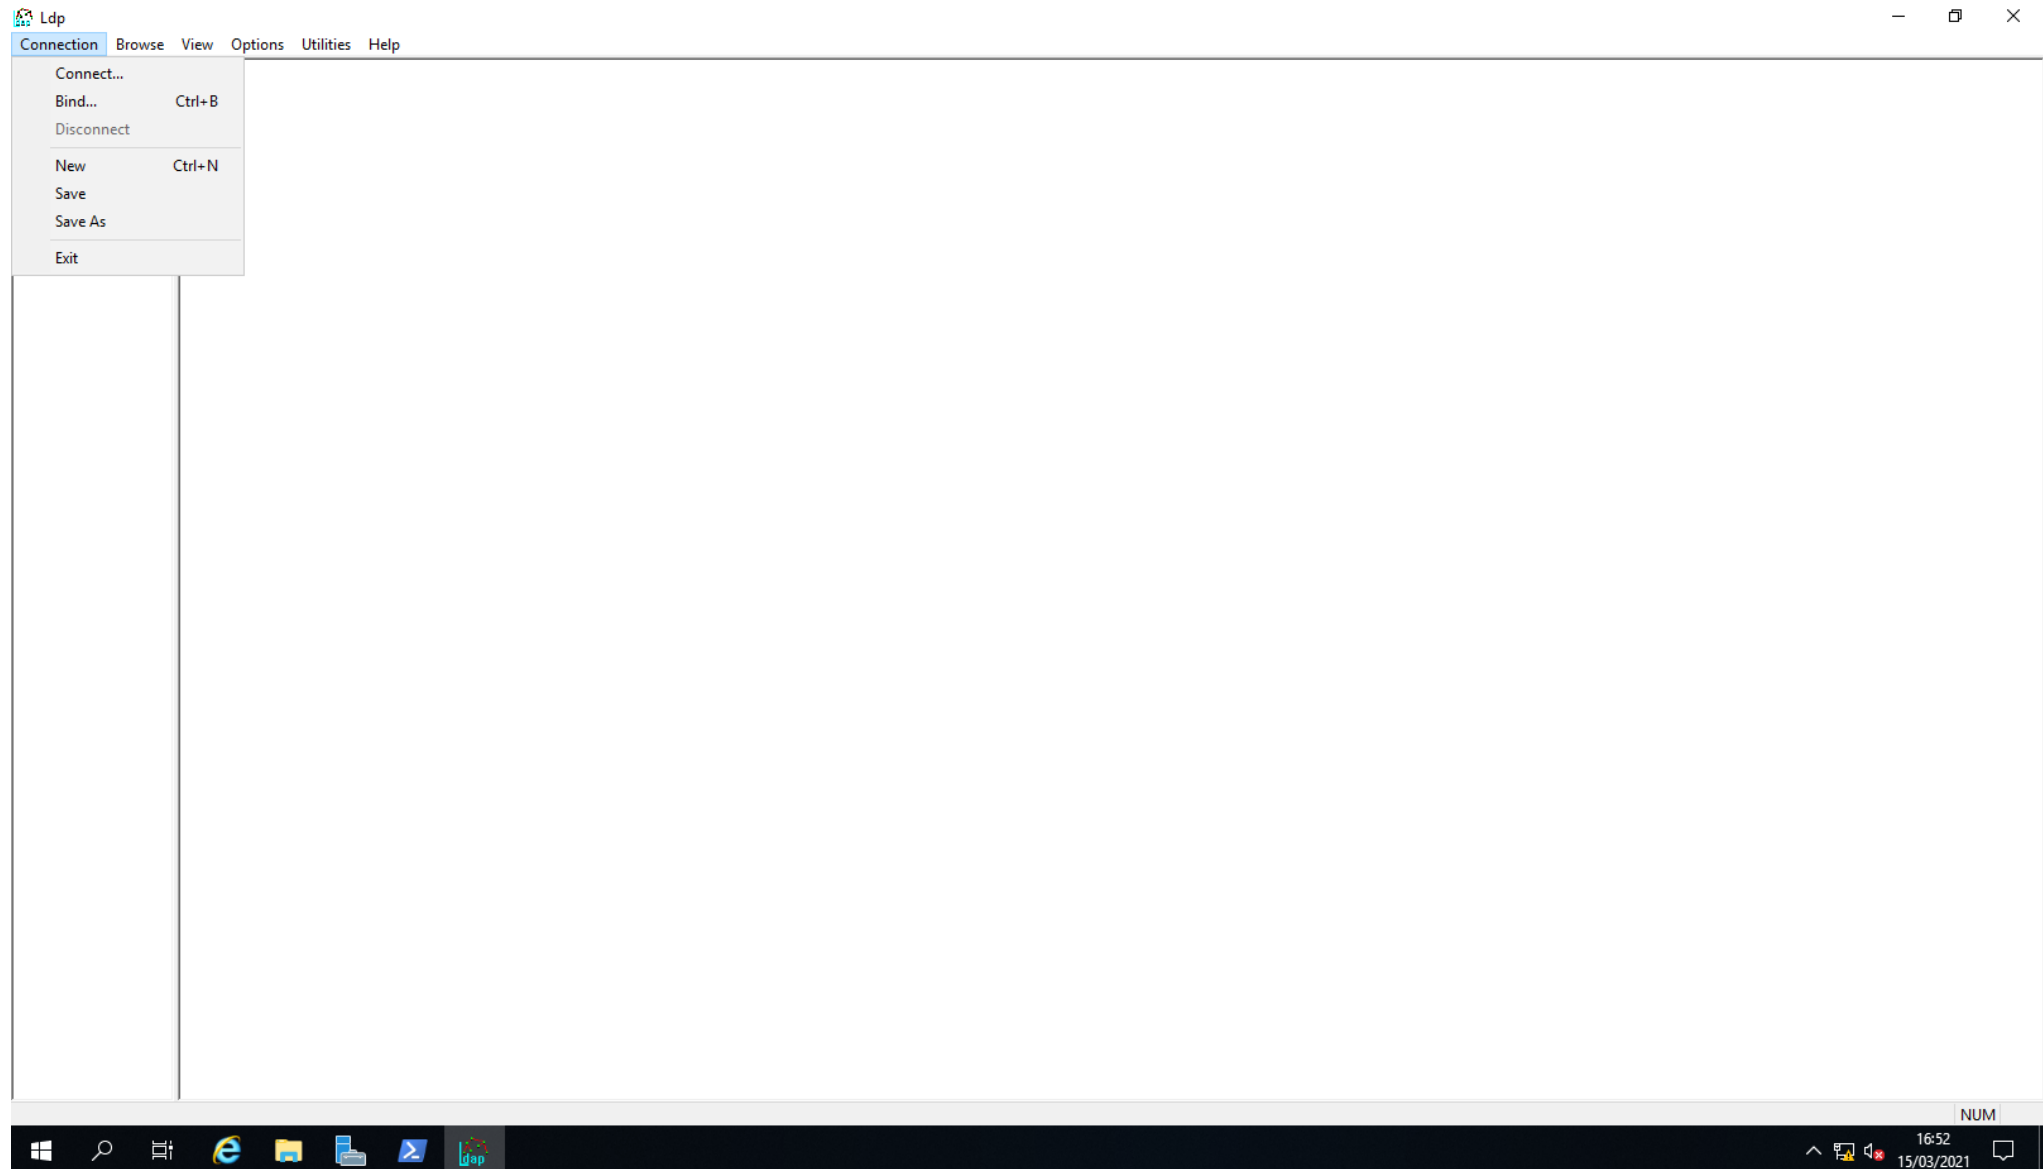

LDAP browser: ldp.exe

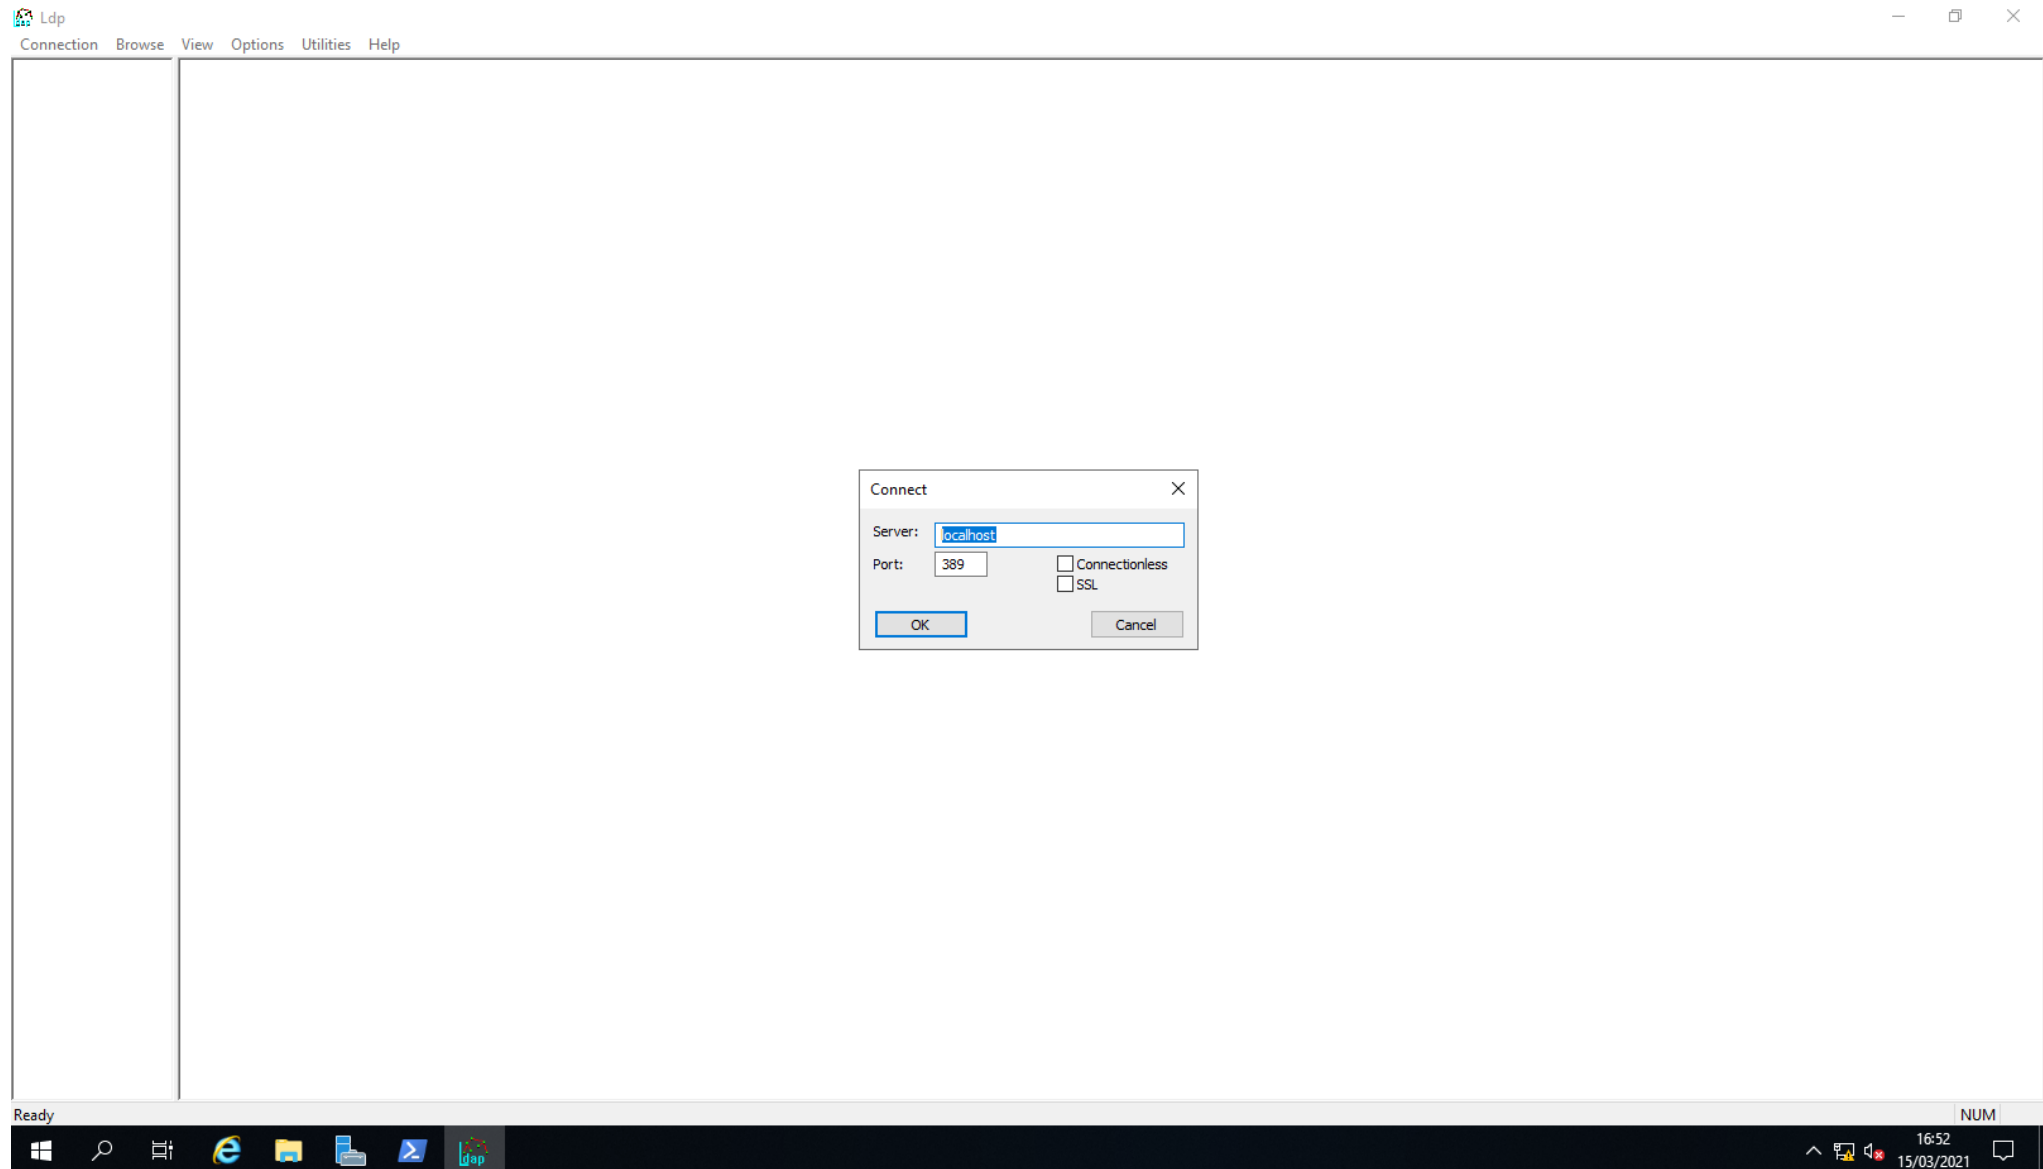

LDAP browser: ldp.exe

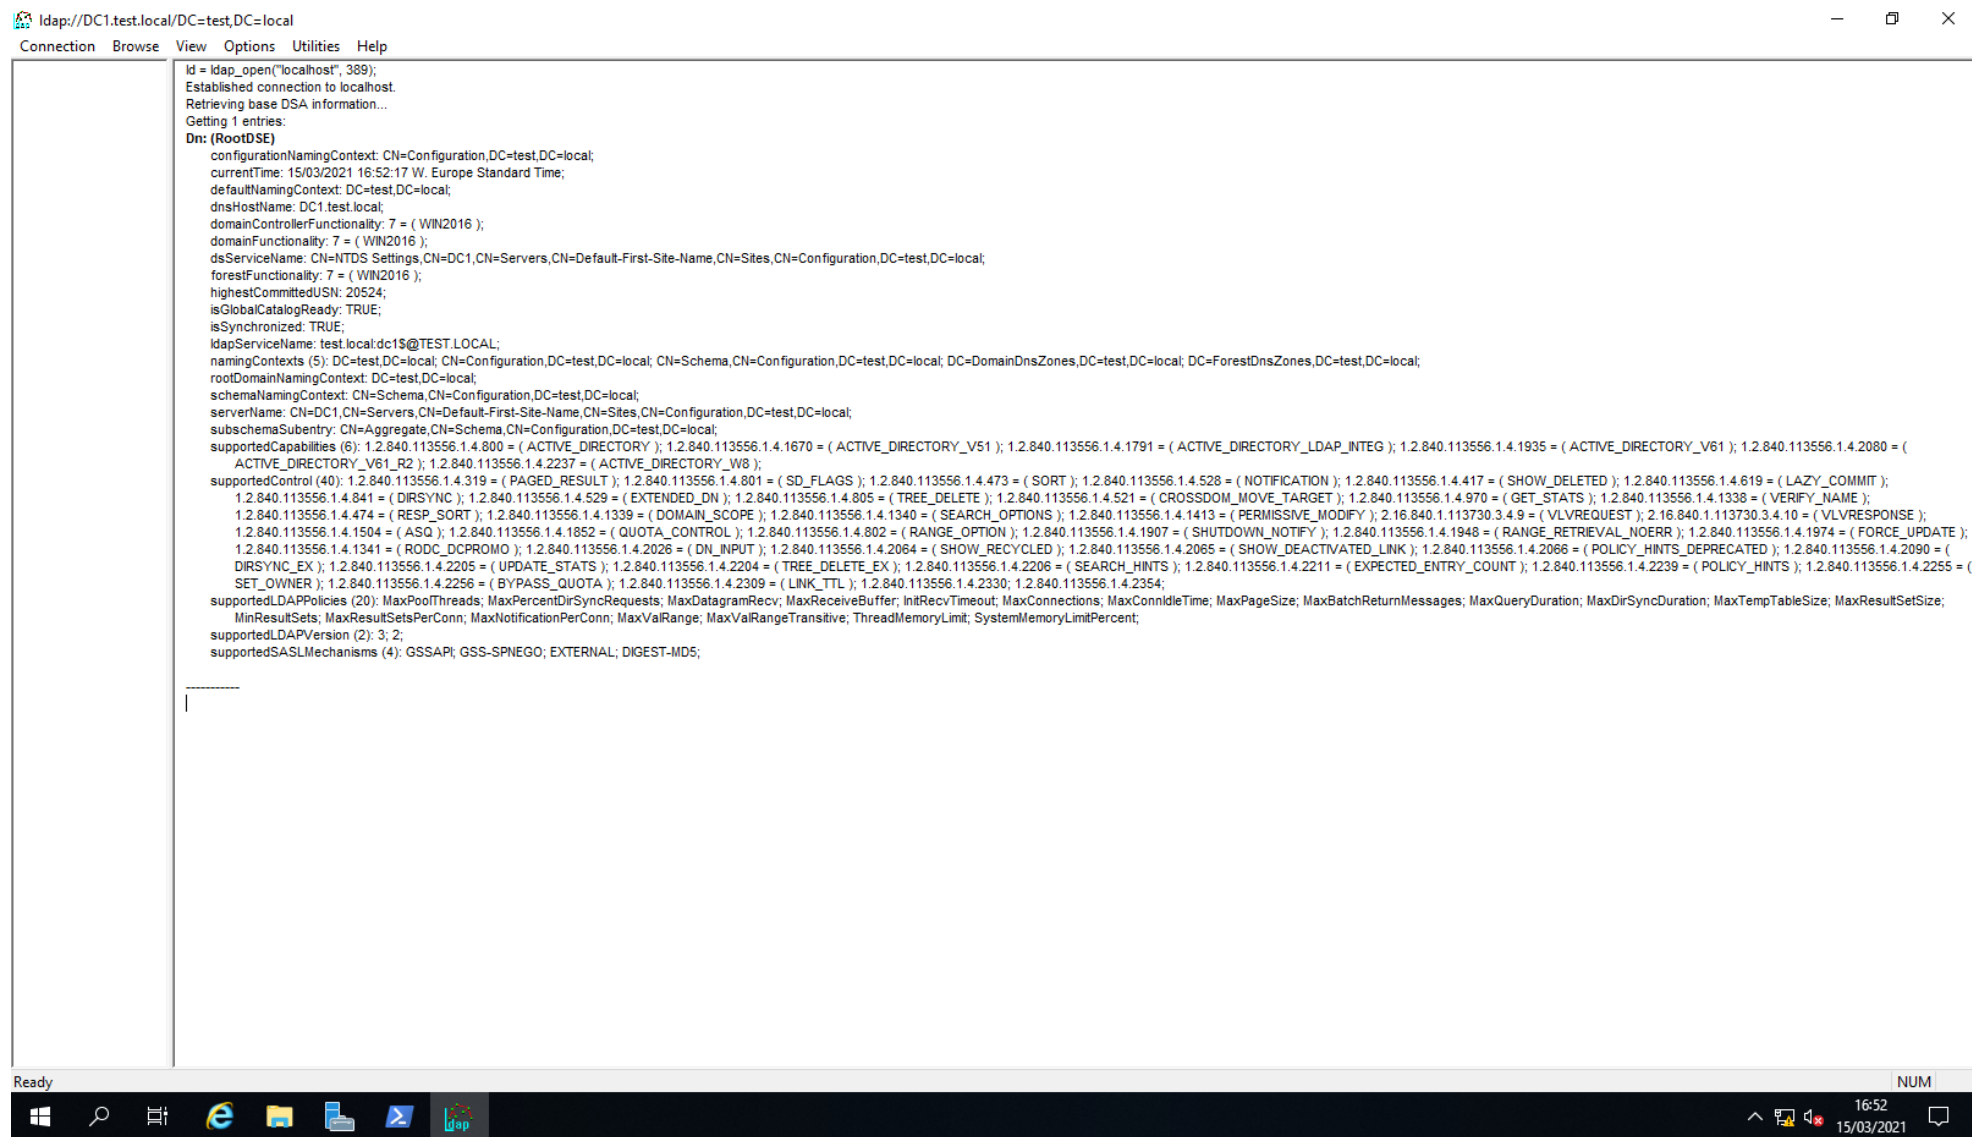

The screenshot shows the ldp.exe application window with the title bar "ldp://DC1.test.local/DC=test,DC=local". The menu bar includes "Connection", "Browse", "View", "Options", "Utilities", and "Help". The main content area displays the following text:

```
ld = ldap_open("localhost", 389);
Established connection to localhost.
Retrieving base DSA information...
Getting 1 entries:
Dn: (RootDSE)
configurationNamingContext: CN=Configuration,DC=test,DC=local;
currentTime: 15/03/2021 16:52:17 W. Europe Standard Time;
defaultNamingContext: DC=test,DC=local;
dnsHostName: DC1.test.local;
domainControllerFunctionality: 7 = ( WIN2016 );
domainFunctionality: 7 = ( WIN2016 );
dsServiceName: CN=NTDS Settings,CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
forestFunctionality: 7 = ( WIN2016 );
highestCommittedUSN: 20524;
isGlobalCatalogReady: TRUE;
isSynchronized: TRUE;
ldapServiceName: test.local:dc1$@TEST.LOCAL;
namingContexts (5): DC=test,DC=local; CN=Configuration,DC=test,DC=local; CN=Schema,CN=Configuration,DC=test,DC=local; DC=DomainDnsZones,DC=test,DC=local; DC=ForestDnsZones,DC=test,DC=local;
rootDomainNamingContext: DC=test,DC=local;
schemaNamingContext: CN=Schema,CN=Configuration,DC=test,DC=local;
serverName: CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
subschemaSubentry: CN=Aggregate,CN=Schema,CN=Configuration,DC=test,DC=local;
supportedCapabilities (6): 1.2.840.113556.1.4.800 = ( ACTIVE_DIRECTORY ); 1.2.840.113556.1.4.1670 = ( ACTIVE_DIRECTORY_V51 ); 1.2.840.113556.1.4.1791 = ( ACTIVE_DIRECTORY_LDAP_INTEG ); 1.2.840.113556.1.4.1935 = ( ACTIVE_DIRECTORY_V61 ); 1.2.840.113556.1.4.2080 = (
ACTIVE_DIRECTORY_V61_R2 ); 1.2.840.113556.1.4.2237 = ( ACTIVE_DIRECTORY_W8 );
supportedControl (40): 1.2.840.113556.1.4.319 = ( PAGED_RESULT ); 1.2.840.113556.1.4.801 = ( SD_FLAGS ); 1.2.840.113556.1.4.473 = ( SORT ); 1.2.840.113556.1.4.528 = ( NOTIFICATION ); 1.2.840.113556.1.4.417 = ( SHOW_DELETED ); 1.2.840.113556.1.4.619 = ( LAZY_COMMIT );
1.2.840.113556.1.4.841 = ( DIRSYNC ); 1.2.840.113556.1.4.529 = ( EXTENDED_DN ); 1.2.840.113556.1.4.805 = ( TREE_DELETE ); 1.2.840.113556.1.4.521 = ( CROSSDOM_MOVE_TARGET ); 1.2.840.113556.1.4.970 = ( GET_STATS ); 1.2.840.113556.1.4.1338 = ( VERIFY_NAME );
1.2.840.113556.1.4.474 = ( RESP_SORT ); 1.2.840.113556.1.4.1339 = ( DOMAIN_SCOPE ); 1.2.840.113556.1.4.1340 = ( SEARCH_OPTIONS ); 1.2.840.113556.1.4.1413 = ( PERMISSIVE_MODIFY ); 2.16.840.1.113730.3.4.9 = ( VLVREQUEST ); 2.16.840.1.113730.3.4.10 = ( VLVRESPONSE );
1.2.840.113556.1.4.1504 = ( ASQ ); 1.2.840.113556.1.4.1852 = ( QUOTA_CONTROL ); 1.2.840.113556.1.4.802 = ( RANGE_OPTION ); 1.2.840.113556.1.4.1907 = ( SHUTDOWN_NOTIFY ); 1.2.840.113556.1.4.1948 = ( RANGE_RETRIEVAL_NOERR ); 1.2.840.113556.1.4.1974 = ( FORCE_UPDATE );
1.2.840.113556.1.4.1341 = ( RODC_DCPROMO ); 1.2.840.113556.1.4.2026 = ( DN_INPUT ); 1.2.840.113556.1.4.2064 = ( SHOW_RECYCLED ); 1.2.840.113556.1.4.2065 = ( SHOW_DEACTIVATED_LINK ); 1.2.840.113556.1.4.2066 = ( POLICY_HINTS_DEPRECATED ); 1.2.840.113556.1.4.2090 = (
DIRSYNC_EX ); 1.2.840.113556.1.4.2205 = ( UPDATE_STATS ); 1.2.840.113556.1.4.2204 = ( TREE_DELETE_EX ); 1.2.840.113556.1.4.2206 = ( SEARCH_HINTS ); 1.2.840.113556.1.4.2211 = ( EXPECTED_ENTRY_COUNT ); 1.2.840.113556.1.4.2239 = ( POLICY_HINTS ); 1.2.840.113556.1.4.2255 = (
SET_OWNER ); 1.2.840.113556.1.4.2256 = ( BYPASS_QUOTA ); 1.2.840.113556.1.4.2309 = ( LINK_TTL ); 1.2.840.113556.1.4.2330; 1.2.840.113556.1.4.2354;
supportedLDAPPolicies (20): MaxPoolThreads; MaxPercentDirSyncRequests; MaxDatagramRecv; MaxReceiveBuffer; InitRecvTimeout; MaxConnections; MaxConnIdleTime; MaxPageSize; MaxBatchReturnMessages; MaxQueryDuration; MaxDirSyncDuration; MaxTempTableSize; MaxResultSetSize;
MinResultSets; MaxResultSetsPerConn; MaxNotificationPerConn; MaxValRange; MaxValRangeTransitive; ThreadMemoryLimit; SystemMemoryLimitPercent;
supportedLDAPVersion (2): 3; 2;
supportedSASLMechanisms (4): GSSAPI; GSS-SPNEGO; EXTERNAL; DIGEST-MD5;
```

The status bar at the bottom shows "Ready" on the left and "NUM" on the right. The Windows taskbar at the very bottom includes the Start button, search icon, task view icon, and several application icons, with the system clock showing 16:52 on 15/03/2021.

LDAP browser: ldp.exe

ldp://DC1.test.local/DC=test,DC=local

Connection Browse View Options Utilities Help

Connect... _open("localhost", 389);
ed connection to localhost.
g base DSA information...

Bind... Ctrl+B entries:
ntDSE)

Disconnect

New Ctrl+N figurationNamingContext: CN=Configuration,DC=test,DC=local;
entTime: 15/03/2021 16:52:17 W. Europe Standard Time;
ultNamingContext: DC=test,DC=local;
ostName: DC1.test.local;

Save ainControllerFunctionality: 7 = (WIN2016);

Save As ainFunctionality: 7 = (WIN2016);


Exit rviceName: CN=NTDS Settings,CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
forestFunctionality: 7 = (WIN2016);
highestCommittedUSN: 20524;
isGlobalCatalogReady: TRUE;
isSynchronized: TRUE;
ldapServiceName: test.local:dc1\$@TEST.LOCAL;
namingContexts (5): DC=test,DC=local; CN=Configuration,DC=test,DC=local; CN=Schema,CN=Configuration,DC=test,DC=local; DC=DomainDnsZones,DC=test,DC=local; DC=ForestDnsZones,DC=test,DC=local;
rootDomainNamingContext: DC=test,DC=local;
schemaNamingContext: CN=Schema,CN=Configuration,DC=test,DC=local;
serverName: CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
subschemaSubentry: CN=Aggregate,CN=Schema,CN=Configuration,DC=test,DC=local;
supportedCapabilities (6): 1.2.840.113556.1.4.800 = (ACTIVE_DIRECTORY); 1.2.840.113556.1.4.1670 = (ACTIVE_DIRECTORY_V51); 1.2.840.113556.1.4.1791 = (ACTIVE_DIRECTORY_LDAP_INTEG); 1.2.840.113556.1.4.1935 = (ACTIVE_DIRECTORY_V61); 1.2.840.113556.1.4.2080 = (ACTIVE_DIRECTORY_V61_R2); 1.2.840.113556.1.4.2237 = (ACTIVE_DIRECTORY_W8);
supportedControl (40): 1.2.840.113556.1.4.319 = (PAGED_RESULT); 1.2.840.113556.1.4.801 = (SD_FLAGS); 1.2.840.113556.1.4.473 = (SORT); 1.2.840.113556.1.4.528 = (NOTIFICATION); 1.2.840.113556.1.4.417 = (SHOW_DELETED); 1.2.840.113556.1.4.619 = (LAZY_COMMIT); 1.2.840.113556.1.4.841 = (DIRSYNC); 1.2.840.113556.1.4.529 = (EXTENDED_DN); 1.2.840.113556.1.4.805 = (TREE_DELETE); 1.2.840.113556.1.4.521 = (CROSSDOM_MOVE_TARGET); 1.2.840.113556.1.4.970 = (GET_STATS); 1.2.840.113556.1.4.1338 = (VERIFY_NAME); 1.2.840.113556.1.4.474 = (RESP_SORT); 1.2.840.113556.1.4.1339 = (DOMAIN_SCOPE); 1.2.840.113556.1.4.1340 = (SEARCH_OPTIONS); 1.2.840.113556.1.4.1413 = (PERMISSIVE_MODIFY); 2.16.840.1.113730.3.4.9 = (VLVREQUEST); 2.16.840.1.113730.3.4.10 = (VLVRESPONSE); 1.2.840.113556.1.4.1504 = (ASQ); 1.2.840.113556.1.4.1852 = (QUOTA_CONTROL); 1.2.840.113556.1.4.802 = (RANGE_OPTION); 1.2.840.113556.1.4.1907 = (SHUTDOWN_NOTIFY); 1.2.840.113556.1.4.1948 = (RANGE_RETRIEVAL_NOERR); 1.2.840.113556.1.4.1974 = (FORCE_UPDATE); 1.2.840.113556.1.4.1341 = (RODC_DCPROMO); 1.2.840.113556.1.4.2026 = (DN_INPUT); 1.2.840.113556.1.4.2064 = (SHOW_RECYCLED); 1.2.840.113556.1.4.2065 = (SHOW_DEACTIVATED_LINK); 1.2.840.113556.1.4.2066 = (POLICY_HINTS_DEPRECATED); 1.2.840.113556.1.4.2090 = (DIRSYNC_EX); 1.2.840.113556.1.4.2205 = (UPDATE_STATS); 1.2.840.113556.1.4.2204 = (TREE_DELETE_EX); 1.2.840.113556.1.4.2206 = (SEARCH_HINTS); 1.2.840.113556.1.4.2211 = (EXPECTED_ENTRY_COUNT); 1.2.840.113556.1.4.2239 = (POLICY_HINTS); 1.2.840.113556.1.4.2255 = (SET_OWNER); 1.2.840.113556.1.4.2256 = (BYPASS_QUOTA); 1.2.840.113556.1.4.2309 = (LINK_TTL); 1.2.840.113556.1.4.2330; 1.2.840.113556.1.4.2354;
supportedLDAPPolicies (20): MaxPoolThreads; MaxPercentDirSyncRequests; MaxDatagramRecv; MaxReceiveBuffer; InitRecvTimeout; MaxConnections; MaxConnIdleTime; MaxPageSize; MaxBatchReturnMessages; MaxQueryDuration; MaxDirSyncDuration; MaxTempTableSize; MaxResultSetSize; MinResultSets; MaxResultSetsPerConn; MaxNotificationPerConn; MaxValRange; MaxValRangeTransitive; ThreadMemoryLimit; SystemMemoryLimitPercent;
supportedLDAPVersion (2): 3; 2;
supportedSASLMechanisms (4): GSSAPI; GSS-SPNEGO; EXTERNAL; DIGEST-MD5;

Set Server Bind Information


NUM

16:52
15/03/2021


LDAP browser: ldp.exe

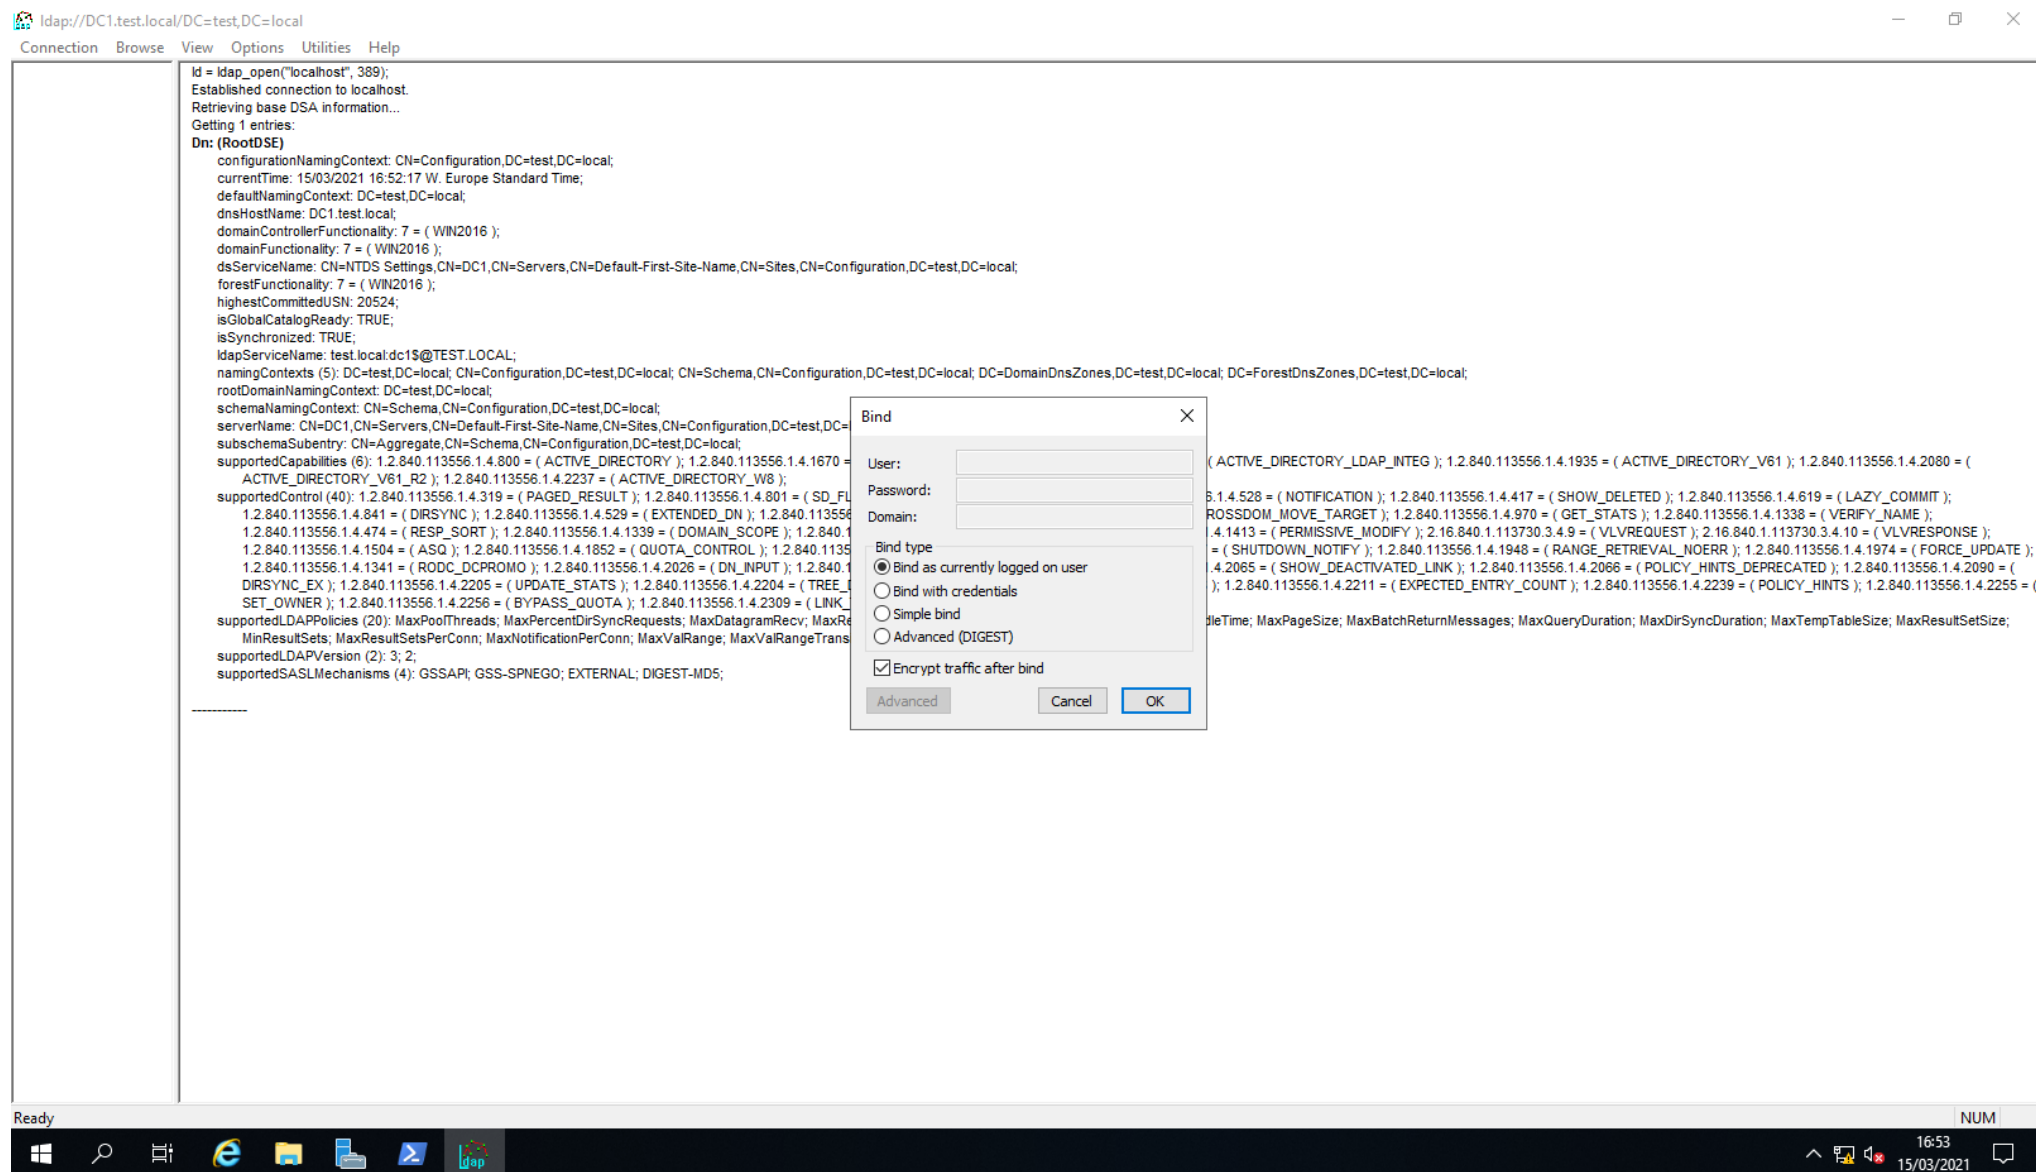

LDAP browser: ldp.exe

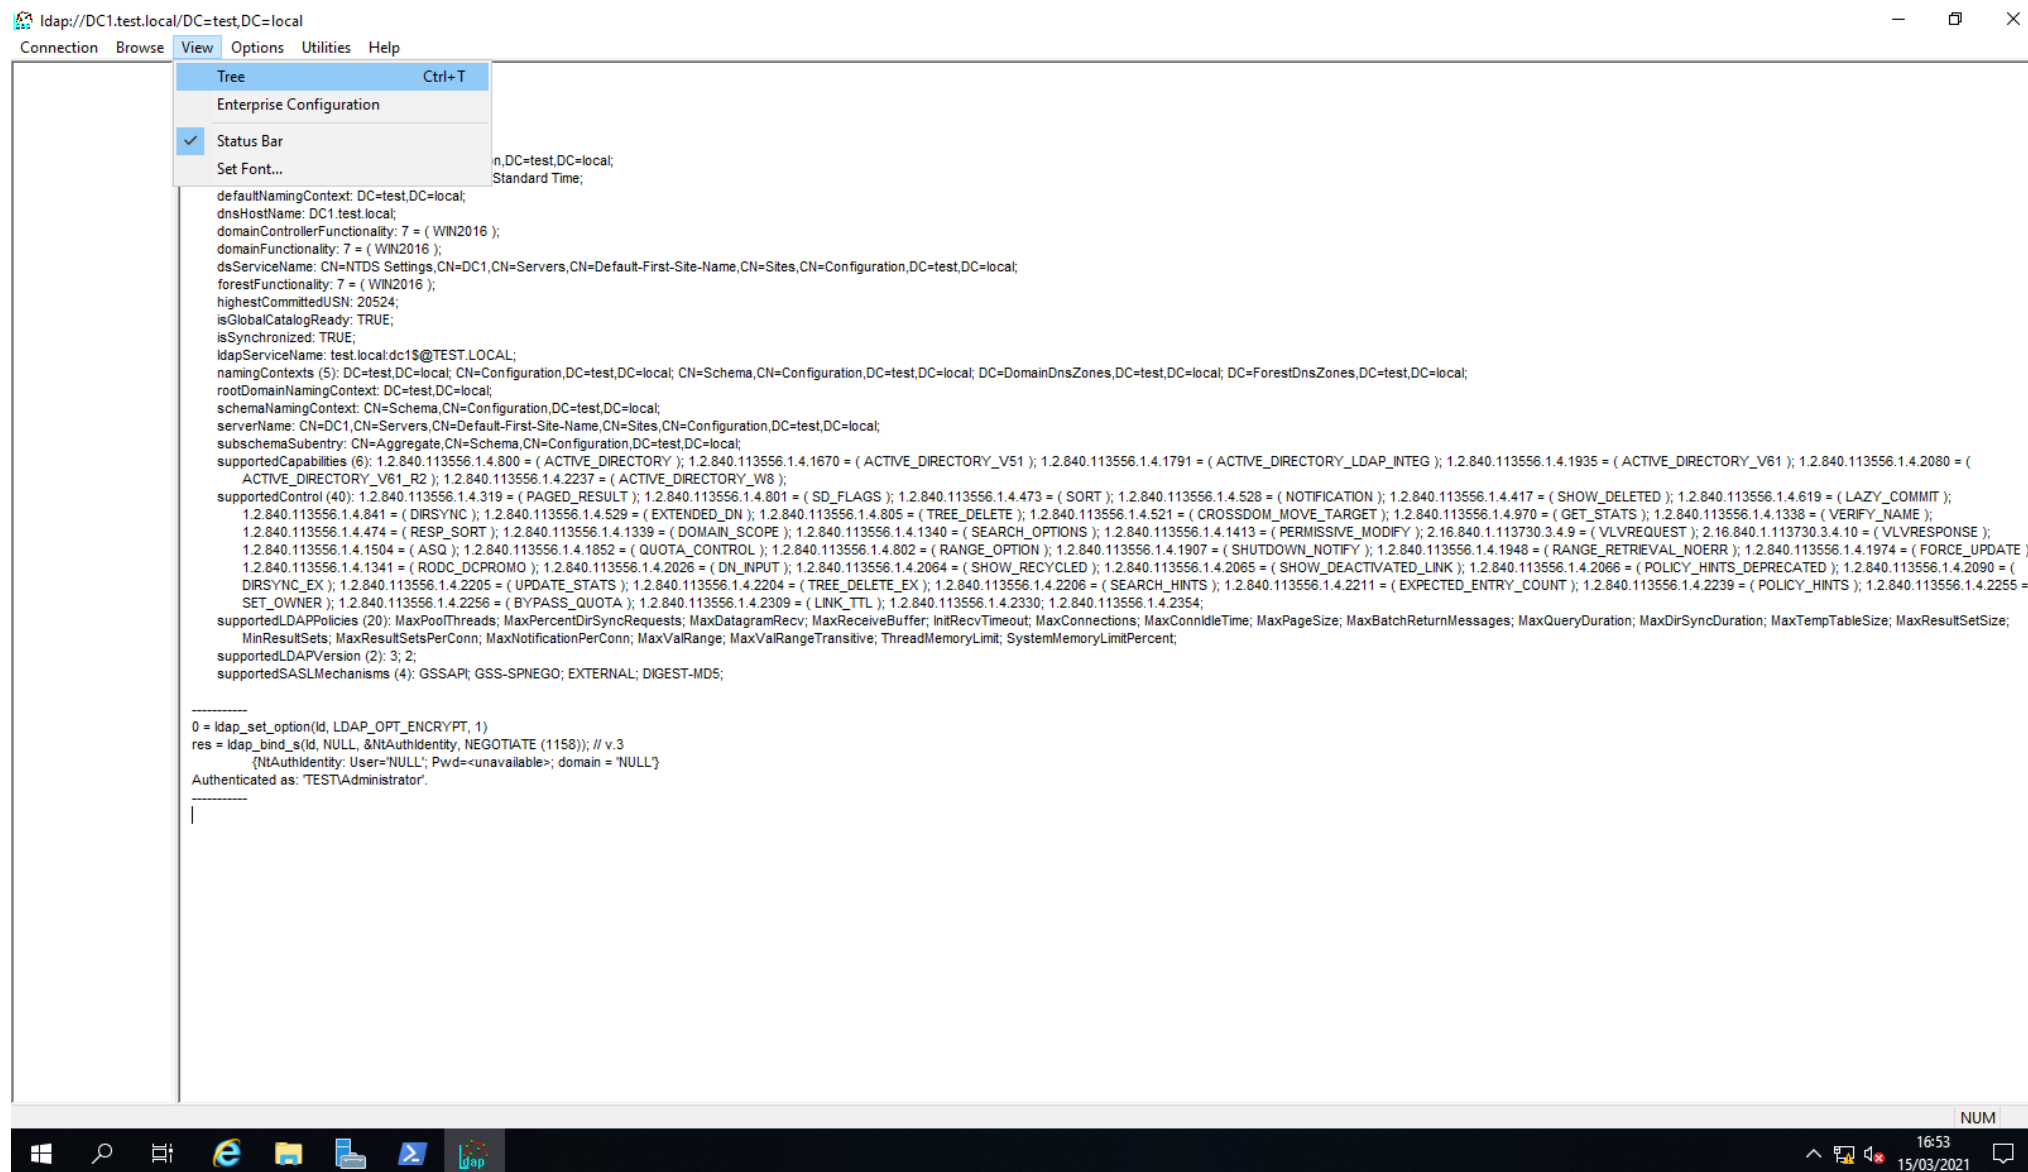

LDAP browser: ldp.exe

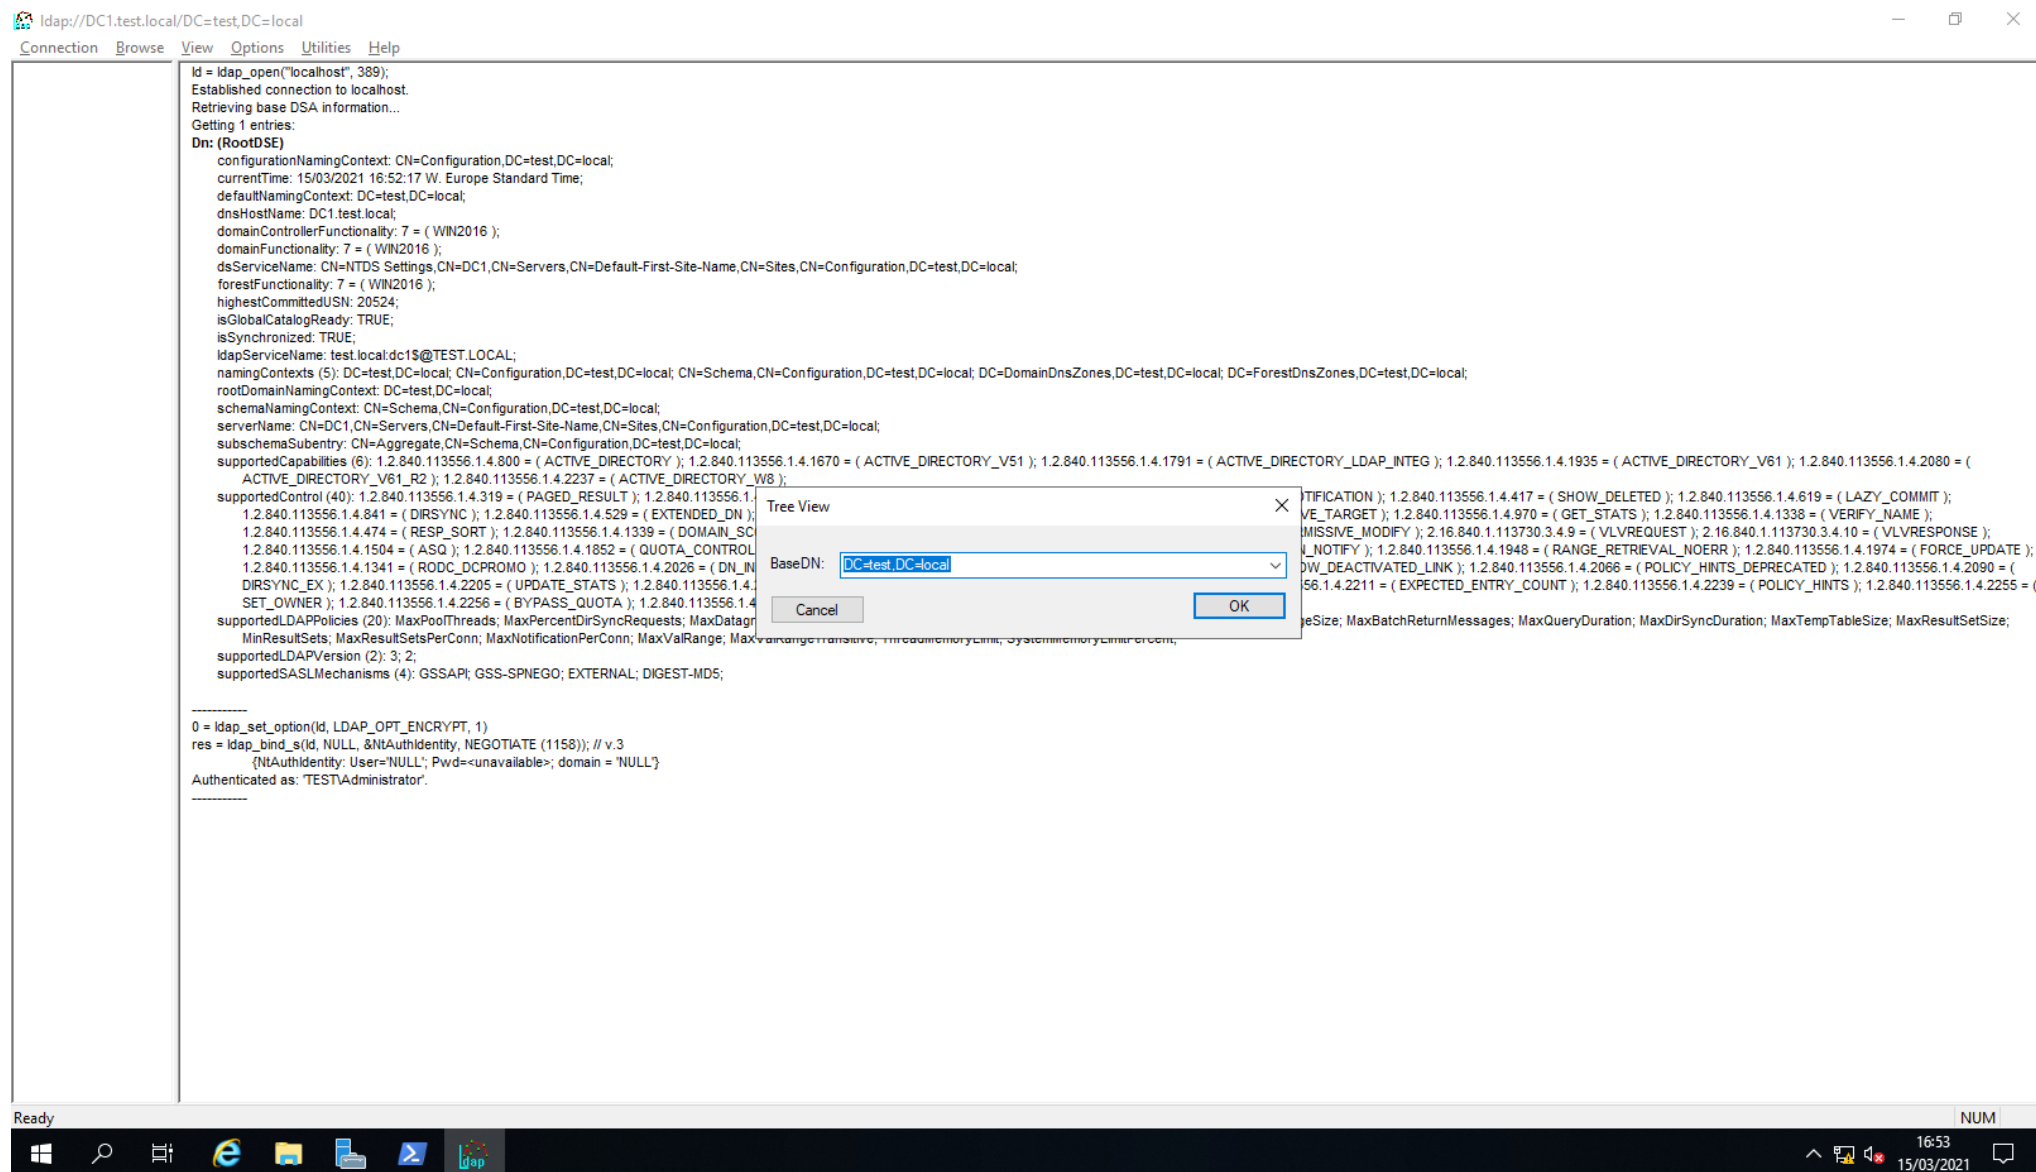

LDAP browser: ldp.exe

The screenshot shows the LDAP browser application (ldp.exe) with the following details:

- Address Bar:** ldap://DC1.test.local/DC=test,DC=local
- Menu Bar:** Connection, Browse, View, Options, Utilities, Help
- Left Pane (Tree View):**
 - DC=test,DC=local (selected)
 - CN=Builtin,DC=test,DC=local
 - CN=Computers,DC=test,DC=local
 - OU=Domain Controllers,DC=test,DC=local
 - CN=ForeignSecurityPrincipals,DC=test,DC=local
 - CN=Infrastructure,DC=test,DC=local
 - CN=Keys,DC=test,DC=local
 - CN=LostAndFound,DC=test,DC=local
 - CN=Managed Service Accounts,DC=test,DC=local
 - CN=NTDS Quotas,DC=test,DC=local
 - CN=Program Data,DC=test,DC=local
 - CN=System,DC=test,DC=local
 - OU=System Integration,DC=test,DC=local
 - CN=TPM Devices,DC=test,DC=local
 - CN=Users,DC=test,DC=local
- Right Pane (Details View):**

Dn: DC=test,DC=local

```
auditingPolicy: <ldap: Binary blob 2 bytes>;
creationTime: 15/03/2021 12:13:30 W. Europe Standard Time;
dc: test;
distinguishedName: DC=test,DC=local;
dSASignature: { V1: Flags = 0x0; LatencySecs = 0; DsaGuid = 91c42ef2-23c2-49dd-88ae-18cdd935b040 };
dSCorePropagationData: 0x0 = ( );
forceLogoff: -9223372036854775808 (never);
fSMORoleOwner: CN=NTDS Settings,CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
gPLink: [LDAP://CN=(31B2F340-016D-11D2-945F-00C04FB984F9),CN=Policies,CN=System,DC=test,DC=local,0];
instanceType: 0x5 = ( IS_NC_HEAD | WRITE );
isCriticalSystemObject: TRUE;
lockoutDuration: 0:00:30:00;
lockoutObservationWindow: 0:00:30:00;
lockoutThreshold: 0;
masteredBy: CN=NTDS Settings,CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
maxPwdAge: 42:00:00:00;
minPwdAge: 1:00:00:00;
minPwdLength: 7;
modifiedCount: 1;
modifiedCountAtLastProm: 0;
ms-DS-MachineAccountQuota: 10;
ms-DS-AllUsersTrustQuota: 1000;
ms-DS-Behavior-Version: 7 = ( WIN2016 );
ms-DS-ExpirePasswordsOnSmartCardOnlyAccounts: TRUE;
ms-DS-IsDomainFor: CN=NTDS Settings,CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
ms-DS-masteredBy: CN=NTDS Settings,CN=DC1,CN=Servers,CN=Default-First-Site-Name,CN=Sites,CN=Configuration,DC=test,DC=local;
ms-DS-NcType: 0;
ms-DS-PerUserTrustQuota: 1;
ms-DS-PerUserTrustTombstonesQuota: 10;
name: test;
nextRid: 1000;
nTLMixedDomain: 0;
objectCategory: CN=Domain-DNS,CN=Schema,CN=Configuration,DC=test,DC=local;
objectClass (3): top; domain; domainDNS;
objectGUID: ae90da52-828e-40f7-a8a9-5e4d38abc7d5;
objectSid: S-1-5-21-4139152014-3162265257-3068965598;
otherWellKnownObjects (2): B:32:683A24E2E8164BD3AF86AC3C2CF3F981:CN=Keys,DC=test,DC=local; B:32:1EB93889E40C45DF90C64D23BBB6237:CN=Managed Service Accounts,DC=test,DC=local;
pwdHistoryLength: 24;
pwdProperties: 0x1 = ( COMPLEX );
repUpToDateVector: dwVersion: 2, dwReserved1: 0, V2.cNumCursors: 1, V2.dwReserved2: 0, rgCursors:
{ uuidDsa: 91c42ef2-23c2-49dd-88ae-18cdd935b040, usnHighPropUpdate: 16386, timeLastSyncSuccess: 03/13/2021 10:42:07 };
rIDManagerReference: CN=RID Manager$,CN=System,DC=test,DC=local;
serverState: 1;
subRefs (3): DC=ForestDnsZones,DC=test,DC=local; DC=DomainDnsZones,DC=test,DC=local; CN=Configuration,DC=test,DC=local;
systemFlags: 0x8C000000 = ( DISALLOW_DELETE | DOMAIN_DISALLOW_RENAME | DOMAIN_DISALLOW_MOVE );
uASCompat: 1;
uSNChanged: 20501;
uSNCreated: 4099;
wellKnownObjects (11): B:32:6227F0AF1FC2410D8E3BB10615BB5B0F:CN=NTDS Quotas,DC=test,DC=local; B:32:F4BE92A4C777485E878E9421D53087DB:CN=Microsoft,CN=Program Data,DC=test,DC=local; B:32:09460C08AE1E4A4EA0F64AEE7DAA1E5A:CN=Program
Data,DC=test,DC=local; B:32:22B70C67D56E4EFB91E9300FCA3DC1AA:CN=ForeignSecurityPrincipals,DC=test,DC=local; B:32:18E2EA80684F11D2B9AA00C04F79F805:CN=Deleted Objects,DC=test,DC=local;
B:32:2FBAC1870ADE11D297C400C04FD8D5CD:CN=Infrastructure,DC=test,DC=local; B:32:AB8153B7768811D1ADED00C04FD8D5CD:CN=LostAndFound,DC=test,DC=local; B:32:AB1D30F3768811D1ADED00C04FD8D5CD:CN=System,DC=test,DC=local;
B:32:A361B2FFFFD211D1AA4B00C04FD7D83A:OU=Domain Controllers,DC=test,DC=local; B:32:AA312825768811D1ADED00C04FD8D5CD:CN=Computers,DC=test,DC=local; B:32:A9D1CA15768811D1ADED00C04FD8D5CD:CN=Users,DC=test,DC=local;
whenChanged: 15/03/2021 13:13:40 W. Europe Standard Time;
whenCreated: 06/03/2021 18:49:27 W. Europe Standard Time;
```

Query LDAP

- Una query LDAP si costruisce mettendo fra parentesi tonde l'attributo sul quale effettuiamo la ricerca seguito dal simbolo «=» e dal valore da ricercare. All'interno del valore da ricercare si può utilizzare il simbolo «*» come wildcard. Non tutti gli attributi lo supportano
Es.: (mail=enrico*), (ObjectClass=*)
- Esistono gli operatori logici and, or e not che sono rispettivamente i caratteri &, | e !
- L'operatore not viene messo all'interno delle parentesi prima del nome dell'attributo. Es.: (!mail=enrico*)
- Gli operatori and e or vengono messi all'interno di ulteriori parentesi tonde seguito dal match da eseguire. Es: (&(mail=enrico*)(sn=fiumana))
(|(mail=enrico*)(sn=fiumana))

Query LDAP

<i>Name</i>	<i>Symbol Notation</i>	<i>Example</i>
equalityMatch	(attribute=abc)	(objectclass=user)
lessOrEqual	(attribute<=abc)	(mdbStorageQuota<=100000)
greaterOrEqual	(attribute>=abc)	(mdbStorageQuota>=100000)
approxMatch	(attribute~=abc)	(displayName~=Foeckeler)
present	(attribute=*)	(mailNickName=*)
substrings	(mail=*@cerrotorre.de) or (givenName=*Paul*)	(mail=*@cerrotorre.de) or (givenName=*Paul*)
and	(& (...K1...) (...K2...) (...K3...) (...K4...))	(&(objectclass=user)(displayName=Foeckeler)
or	((...K1...) (...K2...) (...K3...) (...K4...))	((cn=jim)(cn=james))
not	(!attribute=abc)	(!objectClass=group)

Query LDAP

Return all Values for an AttributeType

(mail=*) # returns all entries which have a mail attribute

Return All LDAP Entries

(objectclass=*) # returns all entries

Wildcard LDAP SearchFilters

(mail=*@*) # return entries with any valid [rfc822Name] [mail] address

(sn=s*) # returns entries with surnames starting with s or S

(telephonenumber=*555) # return entries with telephone numbers that end with 555

(cn=*a*i*) # return entries with common names with both a and i anywhere

Exact Match


(sn=smith) # exact match returns Smith but NOT Smit

(objectclass=person) #return entries which use person objectclass

Cosa ci ritorna questa query?

(&(employmentType=*)(!(employmentType=Hired))(!(employmentType=NEW))(!(employmentType=POS))(!(employmentType=REH)))

Query LDAP

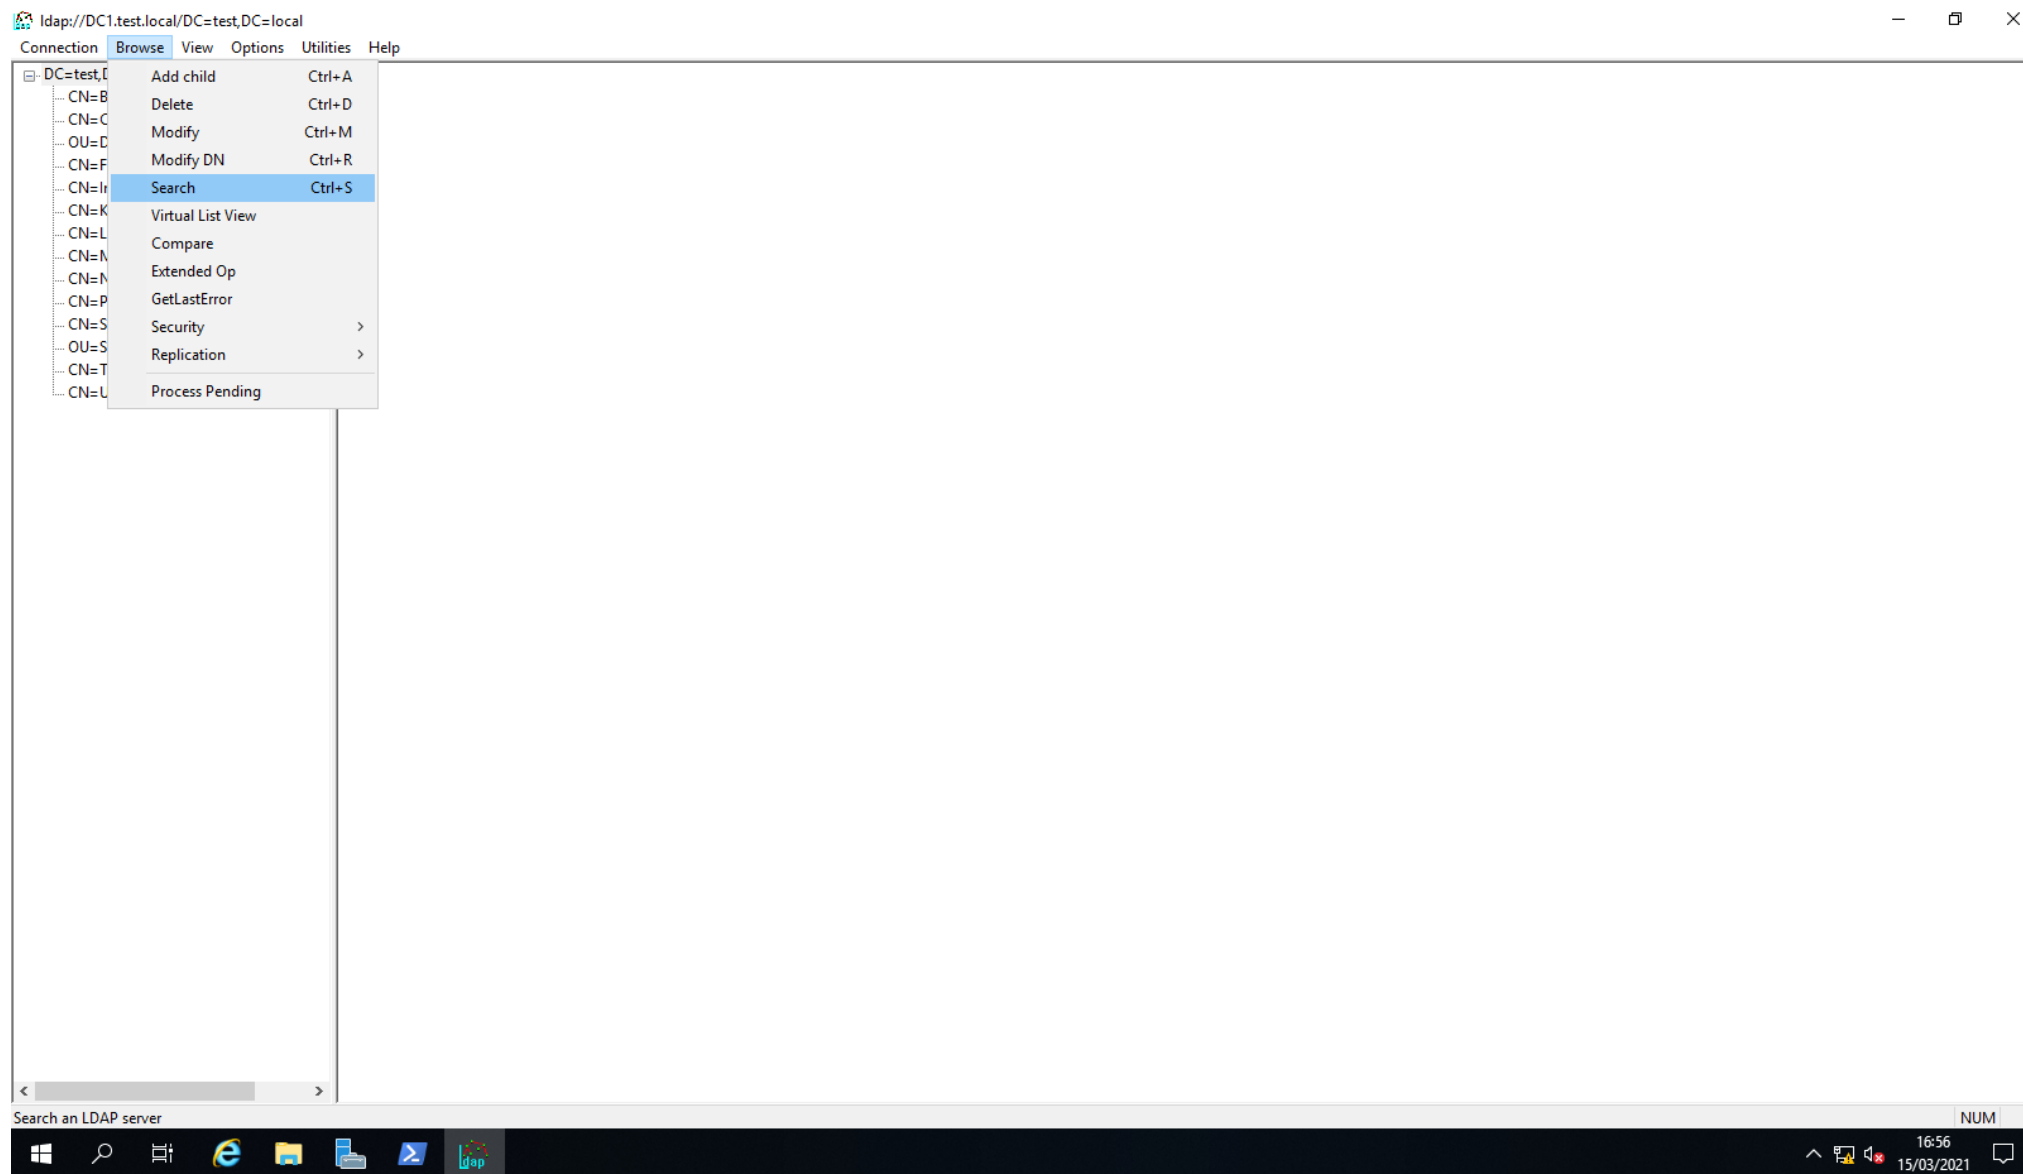

Query LDAP

The screenshot shows an LDAP browser window with the following components:

- Left Panel (Directory Tree):** Displays a hierarchy starting with `DC=test,DC=local`. Sub-entries include `CN=Builtin,DC=test,DC=local`, `CN=Computers,DC=test,DC=local`, `OU=Domain Controllers,DC=test,DC=local`, `CN=ForeignSecurityPrincipals,DC=test,DC=local`, `CN=Infrastructure,DC=test,DC=local`, `CN=Keys,DC=test,DC=local`, `CN=LostAndFound,DC=test,DC=local`, `CN=Managed Service Accounts,DC=test,DC=local`, `CN=NTDS Quotas,DC=test,DC=local`, `CN=Program Data,DC=test,DC=local`, `CN=System,DC=test,DC=local`, `OU=System Integration,DC=test,DC=local`, `CN=TPM Devices,DC=test,DC=local`, and `CN=Users,DC=test,DC=local`.
- Right Panel (Search Results):** Displays the output of an LDAP search. The search criteria are `ldap_search_s(ld, "DC=test,DC=local", 2, "(objectclass=user)", attrList, 0, &msg)`. The results show 5 entries:
 - Dn: CN=Administrator,CN=Users,DC=test,DC=local**
canonicalName: test.local/Users/Administrator;
description: Built-in account for administering the computer/domain;
name: Administrator;
objectClass (4): top; person; organizationalPerson; user;
 - Dn: CN=Guest,CN=Users,DC=test,DC=local**
canonicalName: test.local/Users/Guest;
description: Built-in account for guest access to the computer/domain;
name: Guest;
objectClass (4): top; person; organizationalPerson; user;
 - Dn: CN=DC1,OU=Domain Controllers,DC=test,DC=local**
canonicalName: test.local/Domain Controllers/DC1;
name: DC1;
objectClass (5): top; person; organizationalPerson; user; computer;
 - Dn: CN=krbtgt,CN=Users,DC=test,DC=local**
canonicalName: test.local/Users/krbtgt;
description: Key Distribution Center Service Account;
name: krbtgt;
objectClass (4): top; person; organizationalPerson; user;
 - Dn: CN=Enrico Fiumana,OU=System Integration,DC=test,DC=local**
canonicalName: test.local/System Integration/Enrico Fiumana;
name: Enrico Fiumana;
objectClass (4): top; person; organizationalPerson; user;

Overlaid on the right panel is a **Search** dialog box with the following settings:

- Base DN:** `DC=test,DC=local`
- Filter:** `(objectclass=user)`
- Scope:** ☒ Subtree (Other options: Base, One Level)
- Attributes:** `objectClass;name;description;canonicalName`
- Buttons:** Options, Run, Close

The Windows taskbar at the bottom shows the system clock at 16:56 on 15/03/2021.

Query LDAP

Trova Ricerca personalizzata

File Modifica Visualizza

Trova: Ricerca personalizzata in: campusfc.dir.unibo.it Sfoglia...

Ricerca personalizzata Avanzate

Immettere query LDAP:

(&(objectClass=Group)(CN=CSI*))

Trova Interrompi Cancella tutto

Risultati ricerca:

Nome	Tipo	Descrizione
CSI-PrintAdmins	Gruppo	
CSI-PCTestCrypto	Gruppo	
csi-NoSophos	Gruppo	
CSI-HelpDesk-VNC	Gruppo	
csi-dsa1-rdp_allow	Gruppo	
csi-collaboratori	Gruppo	
CSI-CesenaWifi	Gruppo	
CSI-AlmaWifi-Temporanei-10_07_2015	Gruppo	
CSI-AlmaWifi-Temporanei	Gruppo	
csi-vmware-admins	Gruppo	
CSI-UtentiWiredTemporanei	Gruppo	
CSI-TestCrypto	Gruppo	
CSI-TecniciInformatici	Gruppo	

Elementi trovati: 13

E' possibile fare delle query LDAP anche dallo strumento Active Directory Users and Computers utilizzando la funzione Find del menu contestuale del dominio