

# Milestone 2

*Daniel Smith*

*3/27/2019*

```
knitr::opts_chunk$set(echo = TRUE)
#load needed packages
library(tidyverse)
```

```
## -- Attaching packages ----- tidyverse 1.2.1 --
```

```
## v ggplot2 3.1.0      v purrr  0.3.0
## v tibble  2.0.1      v dplyr  0.8.0.1
## v tidyr   0.8.2      v stringr 1.4.0
## v readr   1.3.1      v forcats 0.4.0
```

```
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
```

```
library(twitterR)
```

```
##
## Attaching package: 'twitterR'
```

```
## The following objects are masked from 'package:dplyr':
##
##      id, location
```

## R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   : 2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean   : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.   :120.00
```

## Including Plots

You can also embed plots, for example:

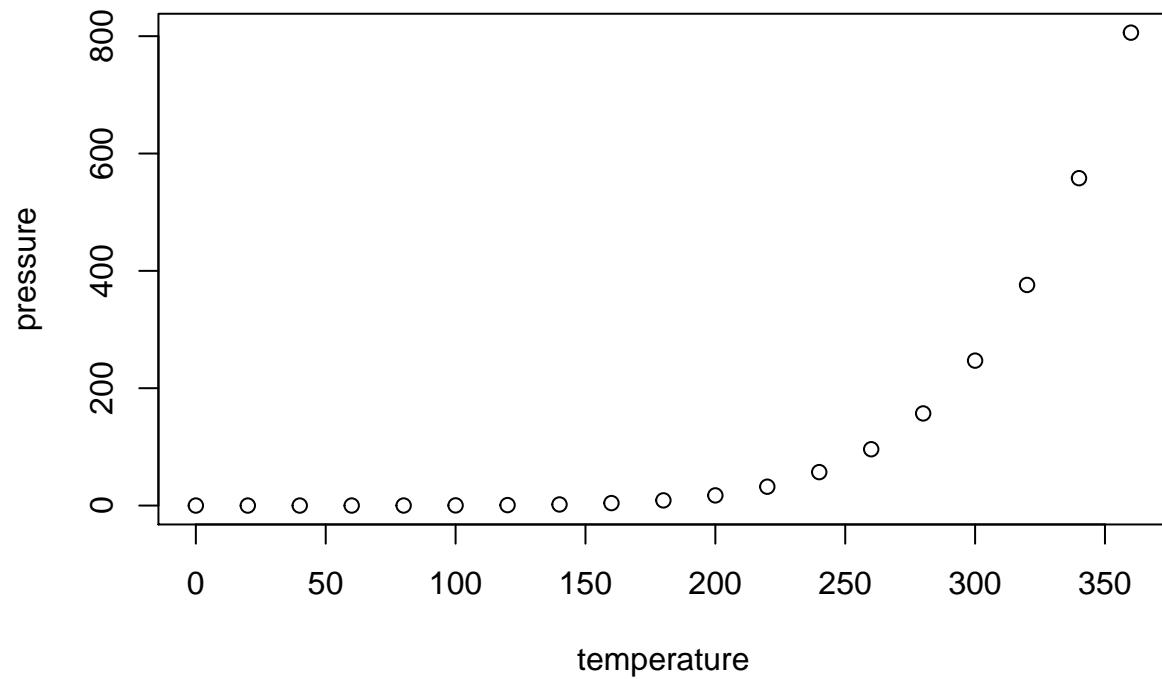

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.