LOWER COLUMBIA RIVER GRP OCTOBER 2015

Wallacut River (WA) LCR-3.5R

Position - Location:	46° 18.948', -124° 1.229'	46° 18' 56.9", -124° 1' 13.7"	46.31580, -124.02048	Ilwaco
----------------------	---------------------------	-------------------------------	----------------------	--------

Strategy Objective: Collection, Exclusion: Prevent oil from entering Wallacut River

Implementation: From private property access, deploy hand-launch boat into Wallacut River. Angle 200ft. boom across Wallacut River from field on river

right. Anchor to AP-1 and AP-2 using shoreside anchor posts. Adjust angle of boom, quantity and placement of anchors (every 100-

150ft. along boom length) as appropriate for conditions. Recover oil on river right using portable skimmer and storage.


Staging Area: Onsite: Stage onsite at 1664 US-101, Ilwaco, WA

Site Safety: Slips, trips, and falls. Soft, muddy banks. Water hazards.

Field Notes: Best access by road on private property. Contact property owner before deploying strategy.

Watercourse: River - With Tidal Influence - Wallacut River

Resources at Risk: Fish and Wildlife Resources, Wetland Habitat

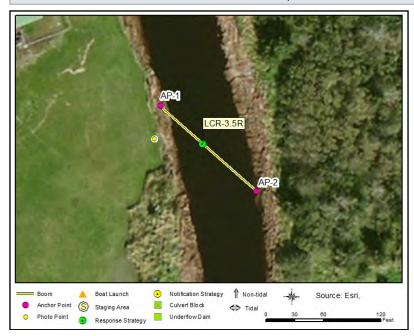

Recommended Equipment

1	Each	Anchor - Danforth (or other appropriate type)
2	Each	Anchoring System(s)- Shoreside
200	Feet	Boom - B3 (River Boom) or equivalent
1	Each	Skimmer (appropriately sized) with Portable Storage
1	Each	Workboat(s) - (hand-launch)

Recommended Personnel

1 Boat Operator
2 Laborer
1 Supervisor

APPENDIX 4A 189