LOWER COLUMBIA RIVER GRP OCTOBER 2015

Green Slough (OR) L&C-2.6

Position - Location: 46° 8.045', -123° 52.427' 46° 8' 2.7", -123° 52' 25.6" 46.13408, -123.87378 Astoria

Strategy Objective: Exclusion: Keep oil out of Lewis & Clark River.

Implementation: Deploy 300' of boom across the entrance to the slough as a backup to the Lewis and Clark River strategy, L&C-1.2. USe shoreside anchor

systems on either end and Danforth type anchors every 100-150' depending on conditions of the day.


Staging Area: Remote: Stage and launch at East Mooring Basin BL-LCR-15.8L

Site Safety: Slips, trips, and falls.

Field Notes: Access by boat at high tide from launch at East Mooring Basin. Low flow only.

Watercourse: Slough - Lewis & Clark River

Resources at Risk: Foraging Shorebirds and Seabirds, National Park, Wintering Waterfowl

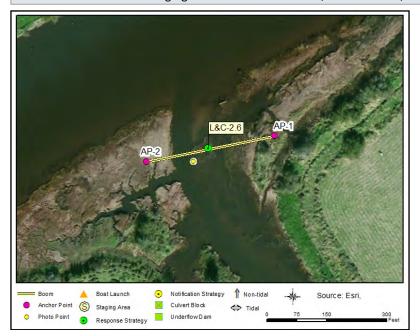

Recommended Equipment

2	Each	Anchor - Danforth (or other appropriate type)	
300	Feet	Boom - B3 (River Boom) or equivalent	
2	Each	Shore Connect System (posts, driver, anchor, chain, line)	
1	Each	Workboat(s) - of adequate size for type and amount of boom	

Recommended Personnel

1 Boat Operator	
2 Laborer	
1 Supervisor	

APPENDIX 4A 183