

Burke Island - S end (WA)**LCR-81.2R**

Position - Location: 45° 55.793', -122° 47.911' 45° 55' 47.6", -122° 47' 54.7" 45.92988, -122.79852 Woodland

Strategy Objective: Exclusion : Prevent oil from entering Burke Slough.

Implementation: Launch workboat from Woodland Bottoms, BL-LCR-82.1R, with 400ft. boom. Deploy boom across the south end of Burke Slough. Anchor to AP-1 and AP-2 using natural anchors or shoreside anchor posts and anchor every 100-150ft. along boom length or as necessary for conditions.

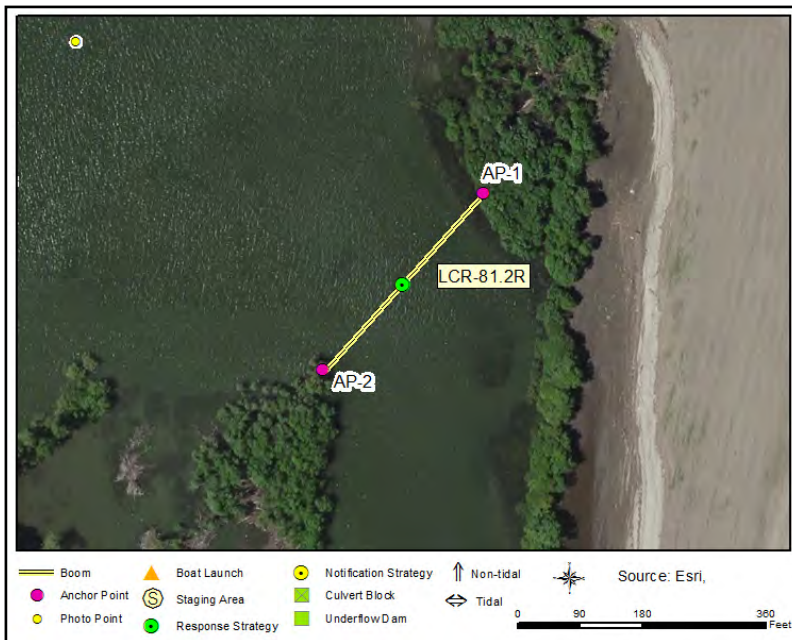
Staging Area: Remote: Stage at SA-LCR-82.1R, Woodland Bottoms. Launch at same BL-LCR-75.2R.

Site Safety: Slips, trips, and falls. Water hazards. Shallow water, pilings.

Field Notes: Boat access only. Use caution around the long row of wood pilings just north of the strategy.

Watercourse: Slough - Burke Slough

Resources at Risk: Geese (Summer), Waterfowl (Wintering)

**Recommended Equipment**

3	Each	Anchor - Danforth (or other appropriate type)
2	Each	Anchoring System(s)- Shoreside
400	Feet	Boom - B2 (Contractor Boom) or equivalent
1	Each	Workboat(s) - (jet drive)

Recommended Personnel

2	Boat Operator
2	Laborer
1	Supervisor