



POLITECNICO

MILANO 1863

- DD -

Design Document

COMPUTER SCIENCE AND ENGINEERING
SOFTWARE ENGINEERING II

A.A. 2020/2021

DANIELE MAMMONE - 10625264

GIANMARCO NARO - 10610374

MASSIMO PARISI - 10583470

Contents

1	Introduction	3
1.1	Purpose	3
1.2	Scope	3
1.3	Definitions, Acronyms, Abbreviations	4
1.3.1	Definitions	4
1.3.2	Acronyms	5
1.3.3	Abbreviations	6
1.4	Revision History	6
1.5	Software and Tools	6
1.6	Reference Documents	6
1.7	Document Structure	7
2	Architectural Design	8
2.1	Overview	8
2.2	Component View	10
2.2.1	Adapters	13
2.2.1.1	Data Manager Component	13
2.2.2	CLup Server	14
2.2.2.1	Customer Handler Component	16
2.2.2.2	Access Manager Component	17
2.2.2.3	Reservation Handler Component	18
2.2.3	Store Component	20
2.2.4	Store Manager Handler Component	23
2.3	Deployment View	25
2.3.1	Client-side	25
2.3.2	Server-side	25
2.3.3	Deployment Diagram	27
2.4	Runtime View	28
2.4.1	User login	28
2.4.2	Customer Registration	29
2.4.3	Store Manager Registration	29
2.5	Make a reservation	30
2.6	Component Interfaces	33
2.7	Selected Architectural Styles and Patterns	33
2.8	Other design decisions	33
3	Requirements Traceability	33
4	Implementation, Integration and Test Plan	33
4.1	Overview	33
4.2	Implementation Plan	33
4.3	Integration Strategy	33
4.4	System Testing	33

4.5 Additional Specification on Testing	34
5 Effort Spent	34

1 Introduction

1.1 Purpose

The main target of this document is to describe the **Customer Line-Up** (*CLup*) design from a more detailed point of view. This document follows faithfully what was defined in the Requirement Analysis and Specification Document and must be read carefully before starting the software implementation in order to understand the software design in detail. Moreover, we tried to maintain independence between *DD* document and *RASD* document in order to allow greater flexibility in case you want to reuse the design model.

1.2 Scope

CLup is a booking application and nowadays this type of applications are more and more widespread in people's everyday life and are becoming more and more indispensable. For this reason, intelligent design choices have been made that extrapolate the positive aspects of existing booking apps, in order to make CLup really "achievable" in real life.

The main purpose of CLup is to facilitate customers to access at a store in **security**, both allowing them to reserve a spot on the queue for entering the store through the app and to book a visit at the store at a determined time of a certain day, selected by the customer. Thanks to this, store managers can manage the **affluence** in their store more easily, and moreover can reduce the crowd in front of the store, that is one of the main purposes of the application. Another important feature deals with obtaining statistics from customers and generic information from stores in order to help customers during their reservation. For this, the system has to store a very large amount of data. This data are mined and used later, which is why it is very important to identify the user's role so that we can provide him with more accurate and suitable information. Indeed a customer wants to provide information about the stores while, for example, a store manager is more interested in information about customer permanence in the store.

1.3 Definitions, Acronyms, Abbreviations

1.3.1 Definitions

QR Code	Bi dimensional bar code that allows the user to check-in/check-out at the store entries/exits
Reservation	Indicates both booked visits and spots on the queue to enter the store as soon as possible
Customer	The clients of the store, that uses the system to get a reservation to access the store
Store manager	The app user that access to stores' bookings, occupancy and settings, in order to manage the flow of customers
QR Code Reader	Device used to scan customers' <i>QR Code</i>
Totem	Electronic device that allows customers to physically get a spot on the queue to enter the store as soon as possible; it allows to specify the same parameters that can be inserted through the app
QR Code Printer	Device used by totems to print <i>QR Code</i>
Department	Part of the store that contains the same category of products
Query	Synonym for request

1.3.2 Acronyms

RASD	Requirement Analysis and Specification Document
DD	Design Document
ETA	Estimated Time of Arrival
GPS	Global Positioning System
API	Application Programming Interface
UML	Unified Modeling Language
DBMS	DataBase Management Service
OS	Operative System
HTTPS	HyperText Transfer Protocol over Secure Socket Layer
TCP	Trasmission Control Protocol
IP	Internet Protocol

1.3.3 Abbreviations

IIT	Implementation, Integration and Testing
Rn	Requirement number n
ASAP	As soon as possible
POV	Point of view

1.4 Revision History

Version	Date	Changelog
1.0	24/12/2020	First version

1.5 Software and Tools

- L^AT_EX as software system for document preparation
- UMLet for the UML diagrams and other diagrams
- Photoshop for the mockups
- Git & Github as work space. The repository is here.

1.6 Reference Documents

- Specification Document
- Slides of the lectures

1.7 Document Structure

The structure of the document is thought with the intention of allowing simple navigation through it. Also, various abbreviations, highlighted in Abbreviations section, have been used to make the content smoother. Hence, the structure of the document is the following one:

- **Introduction:** this section gives a general view of the problem and describes the scope and purpose of the *DD*, including a set of definitions, acronyms and abbreviations used.
- **Architectural Design:** this section starts with a high level description of the architecture of the system and continues going into details, specifying the components and interfaces used.
- **User Interface Design:** this section presents the mockups of the application, describing how the clients can navigate the application, highlighting the actions they can do.
- **Requirements Traceability:** this section describes the connection between the RASD and the DD, identifying the relation between goals and requirements described previously and the components that allow to realize them.
- **Implementation, Integration and Test Plan:** this section establishes a plan for the development of components, identifying the conditions needed to be met before starting the development process and then maximizing the efficiency of the developer teams with a precise schedule.
- **Effort Spent:** the main focus of this section is to track the time spent to complete this project. In particular, is highlighted the subdivision of the working hours of the various sections.
- **References:** this section is dedicated to all references used in this project.


2 Architectural Design

The aim of this section is to give a look to the architectural aspect of the analyzed system. In doing this, a top-down approach will be followed, starting from a very general view of the system, then going into more detail through **Component Diagrams**, more and more detailed. This allows us to precisely describe each component of *CLup*, so that who will develop the system, well know the behaviour of each component.

2.1 Overview

A first high level overview can be done through the system's **Composition Diagram**. In fact, here there is a first subdivision of the system's component, each one with a different task.

- **Communication Interfaces:** to work properly, the system needs to interface over the network with both remote applications, and external services. Because of this, there are some components devoted to interact with remote devices:
 - **UserHandler:** to interact with users, both managers and customers, the latter both at *totems*, and on app.
 - **EntranceManagement:** so that the store can process a scanned *QR Code* at entry/exit.
 - **NumberCallingInterface:** to notify the call of a certain number.
- and others deputy to access external services, such as
 - **Map Component:** to access an external **Map Provider**.
 - **Notification Component:** to send notifications to customers through an external **Notification Service**.
 - **Mail Component:** to externally sending mails, avoiding building an internal **Mail Manager**.
- **Business Logic:** here there is the whole Business Logic of the system. Since each store may maintain a different logic from another, there is a Component for each store managed by the system. Each store, manages the following aspects:
 - **Reservation Manager:** manages all the things concerning reservations and their making. It's useful also to retrieve some important data, such as *ETAs* and available time intervals to enter the store.
 - **Statistic Manager:** it's the part used for the calculation of statistics about customers' shopping time, and about the average time spent in a single department. Since each store is different from the other, the statistics are maintained unique per store. This part is also used by **Reservation Manager** to calculates *ETAs* and time intervals;

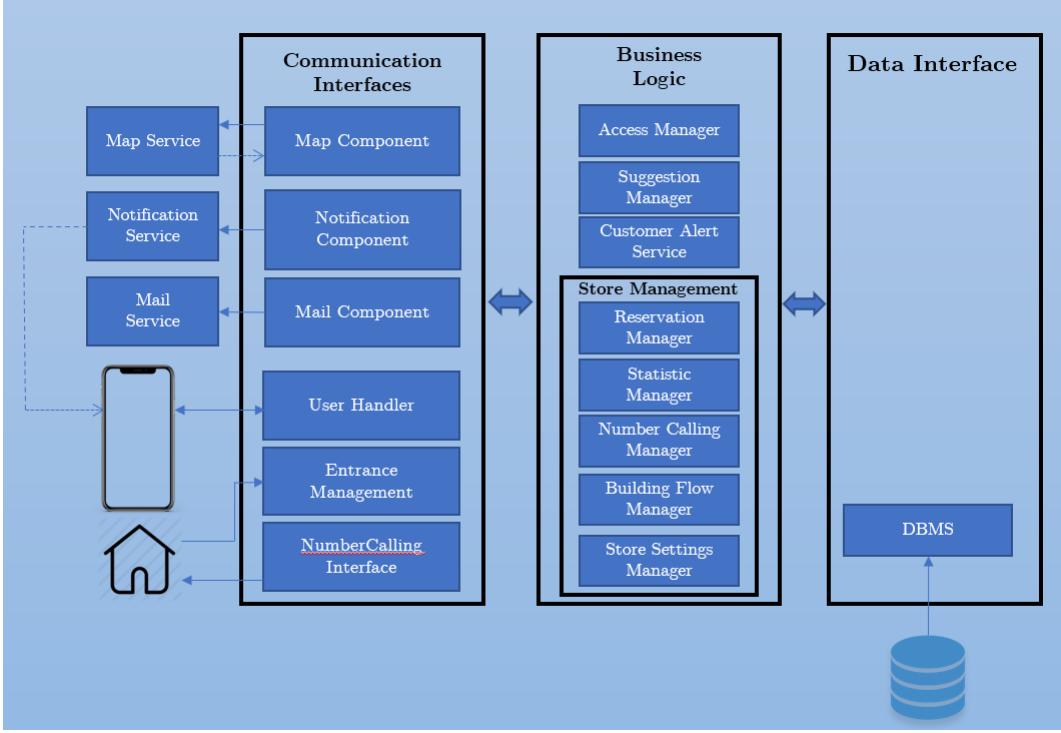Figure 1: *Number calling system*

- **Number Calling System:** is the component dedicated to admit reserved customers inside the store.
- **Building Flow Manager:** it takes care of processing scanned *QR Codes* at the entry and the exit of the store.
- **Store Settings Manager:** manages all the things concerning stores' settings and parameters, such as working hours and capacity (also for each department).

This subdivision allows to separate better the logic off each store. Moreover, there are component common to each store, so the ones deputy to allow users to request services to the system.

- **Access Manager:** manages users' registration and log-in;
- **Suggestion Manager:** manages the retrieve of suggestions when required, or necessary;
- **Customer Alert Service:** takes care of sending departing notifications to customers.

At the end, there is another block: the **Data Interface**: it represents the *Data Tier* of the system and separates the Business Logic from the data. It interacts with the *DBMS* to store and load informations.

2.2 Component View

The aim of this section is to give a look to the architectural aspect of the analyzed system. In doing this, a top-down approach will be followed, starting from a very general view of the system, then going into more detail through **Component Diagrams**, more and more detailed. This allows us to precisely describe each component of *CLup*, so that who will develop the system, well know the behaviour of each component.

- **MobileApp**: it is the component relative to the mobile application used by store managers and customers; in order to access *CLup* services. It uses three interfaces: *CustomerInterface*, *StoreInterface*, used to access functionalities respectively for customers and store managers, and *Access-Interface*, that allows users to log-in and register. Moreover, uses *Map-API* to access to cartographic services, and *NotificationAPI* to send local notifications.
- **CLupServer**: it is the component deputy to manage users' access, and customers requests.
- **StoreComponent**: it is the component that principally manages the business logic of the system, since takes care of the functionalities associated with a single store. Each store will have its own **Store Component** deployed in a dedicated container. The aim of this is to separate the critical functionalities of each store, to reduce the risk of a complete block of the system and to make maintenance easier in case of dysfunctionality of a single store.
- **TotemApp**: it is the component that represents the interface used by a physical totem installed at stores in order to request the issue of a ticket. The totem interface is separated from the Mobile App's one, since a totem can request tickets only to the store where it's installed, directly communicating with it.
- **ScannerApp**: it is the component that represents *QR Scanners'*, that asks the associated store to process the scanned *QR Codes*.
- **NumberCallingApp**: it is the component deputy to notify at stores that a number has been called. It's used by the associated store to notify that some customers are admitted to enter the store.

Moreover, to exploit some features, *CLup* relies on some external services, using them through their *APIs*:

- **MapsAPI:** exploits the *APIs* of an external map services, necessary to compute percurrency times and sort stores depending on the position.
- **NotificationAPI:** it is the interface used to send notifications to customers' devices. Since each mobile *OS* already has its own notification system, *CLup* exploits this in sending notifications, without the need of building a new in-house notification service.
- **EmailAPI:** it is the interface used to communicate with a mail provider service, to send emails to customers.
- **DBMSAPI:** the interface used to access the Data Logic of *CLup*.

It has been chosen to not develop these features, since there isn't a real necessity of making them from scratch: the existing ones work well, are already tested and complete (for example, developing an internal map service will require inserting the whole world cartography, while a non *OS*-integrated notification service must deal with aggressive *OSes*' power management). Moreover, this outsourcing allows to reduce the time for developing the system, and the maintenance costs, since it's externally done by the service provider.

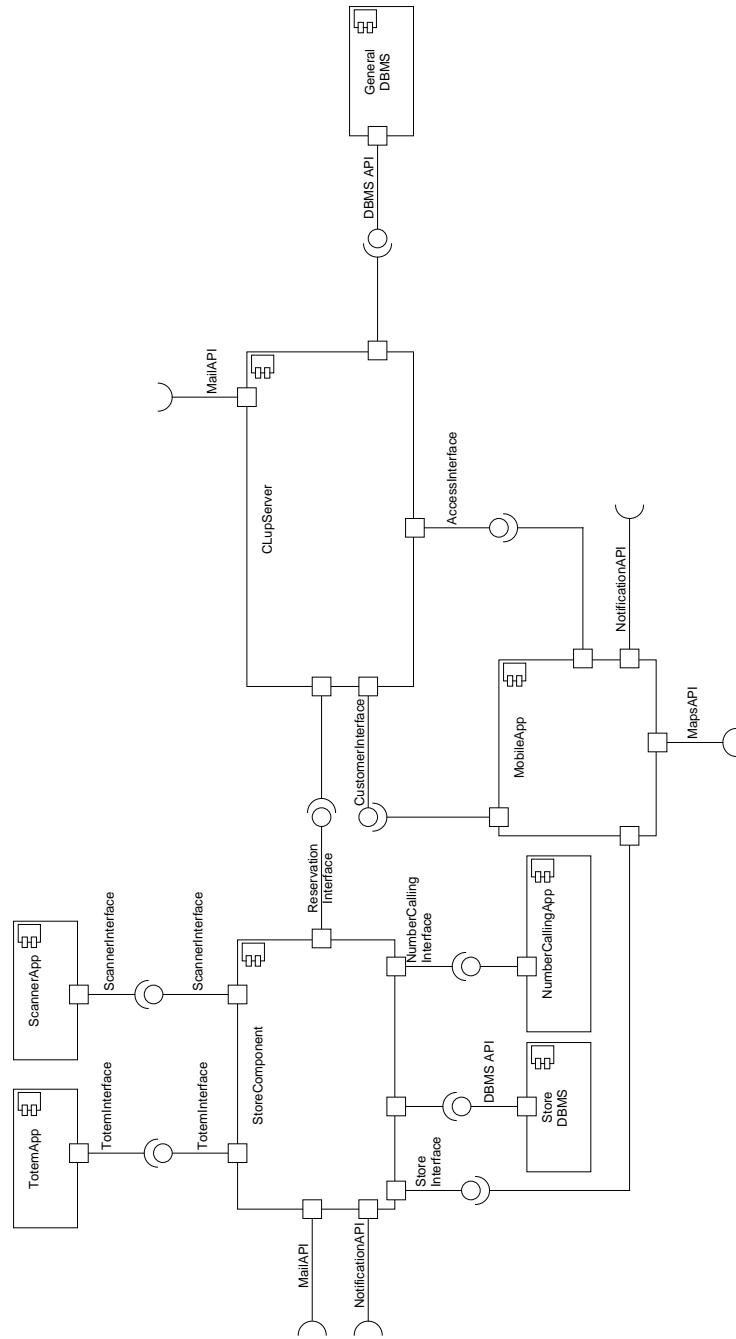


Figure 2: High Level Component Diagram

2.2.1 Adapters

The system uses some “Adapters” to access the external services; no *APIs* are directly exposed to any component but the adapters. So, it is sufficient to change the corresponding adapter to migrate to another service, without the need of rewriting code of other components. Moreover, if required in some circumstances, it’s possible to use different external services: it is sufficient to use the correct adapter in order to access the desired service.

- **MapManager:** it is the component that takes requests from other components, and redirect them to the chosen external **Map Service**.
- **NotificationComponent:** since each mobile *OS* uses its own notification service, this adapter takes in requests of notification sending, and redirect them to the correct service; the latter will take care of delivering the notification to the customer.
- **MailComponent:** an adapter used to send emails; as the previous ones, allows to change the used mail service painlessly.
- **DataManager:** probably, the most important adapter of the system, since it is the one connecting the other components to the system’s data logic.


Here, there is described the adapter for *DBMS*, since it’s the most articulated among those.

2.2.1.1 Data Manager Component The Data Manager is the component that manages the requests for data manipulation. The component handles two aspects:

- Data Manipulation
- Query Execution

The components’ services are requested through the *DataInterface*, while it access to the *DBMS* through its *APIs*. Data can be accessed or written to the *DBMS*. This partition is very important because it allows to separate the query for obtaining data from the ones to manipulate the database.

- **DataRequestor:** it is the component that manages the data reading. Indeed if *DataInterface* asks for a data, this component allows to satisfy this request.
- **DataStorer:** it is the component that manages the data writing. Indeed if *DataInterface* asks to manipulate the *DBMS*, this component allows to satisfy this request.
- **QueryExecutor:** it is the component that manages the connection with the *DBMS*. It uses the *DBMSAPI* and both *DataRequestor* and *DataStorer* rely on him to interface directly with the database.

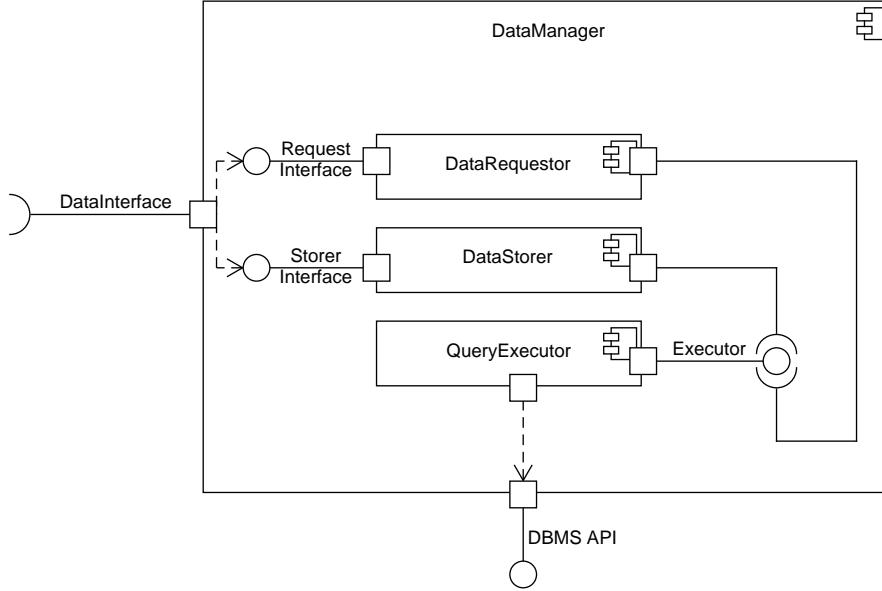
Figure 3: *Data Manager Component View*

2.2.2 CLup Server

As said before, it manages customers' requests and access operations, through the two interfaces it expose:

- **CustomerInterface**: expose all the methods relative to services a customer can access, such as making a reservation and retrieving already made reservations.
- **AccessManager**: the interface deputy to manage login and registration of users. After a login, will send to the user the correct set of operations the user can do, depending on their role: customers or store managers.

In the following paragraphs, there is a description of the most relevant component contained in **CLup Server**.

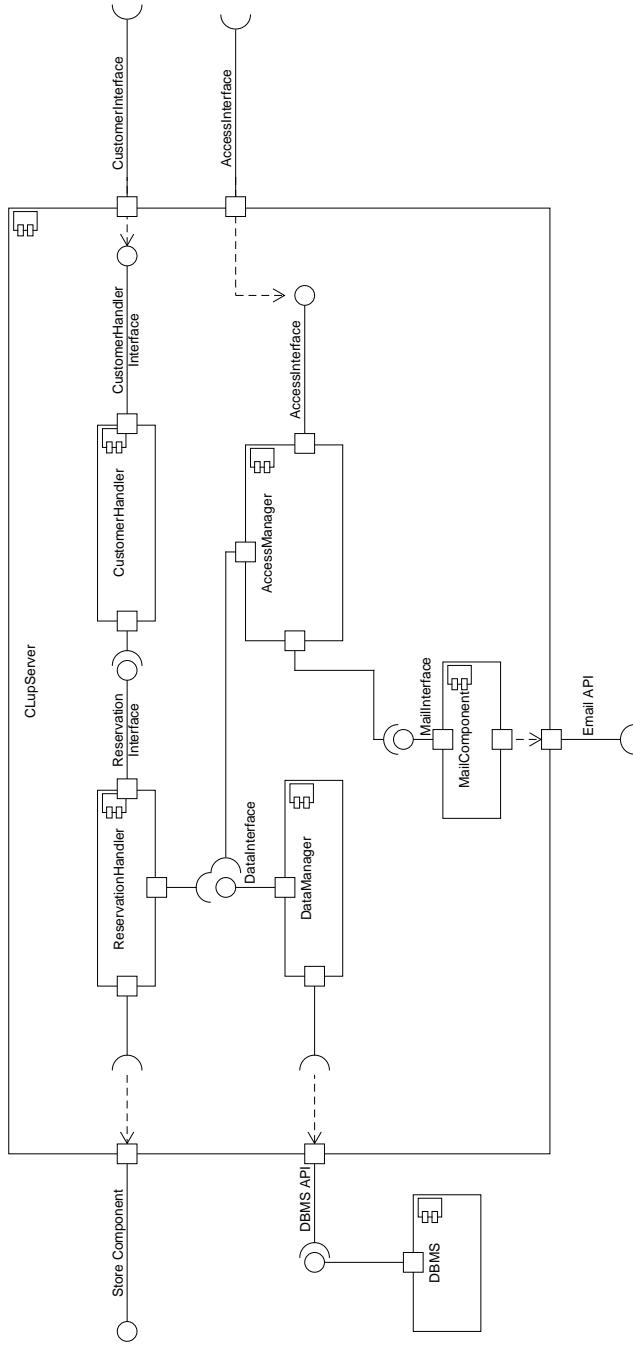Figure 4: *Server Component View*

2.2.2.1 Customer Handler Component The CustomerHandler is the component that manages all the actions that a customer can make within the application. The component analyze the aspects concerning reservations.

This component is used by invoking methods on the *CustomerHandlerInterface*. This component is divided in some subcomponents:

- **ASAPManager:** it is the component that manages the *ASAP* reservations and it is formed from two sub-component: **DeleteRes** and **AddRes**. The first one deals with deleting an *ASAP* reservation while the second one deals with creating a new *ASAP* reservation.
- **BookingManager:** it is the component that manages the booking via app and it is formed from three sub-component: **DeleteRes**, **ModifyRes** and **AddRes**. The first one deals with deleting a reservation, the second one deals with modifying a reservation while the third one deals with adding new reservations.
- **RetriveReservation:** it is the component that is used to retrieve and update all user's reservations.

All of these components uses the *ReservationInterface* to complete their tasks.

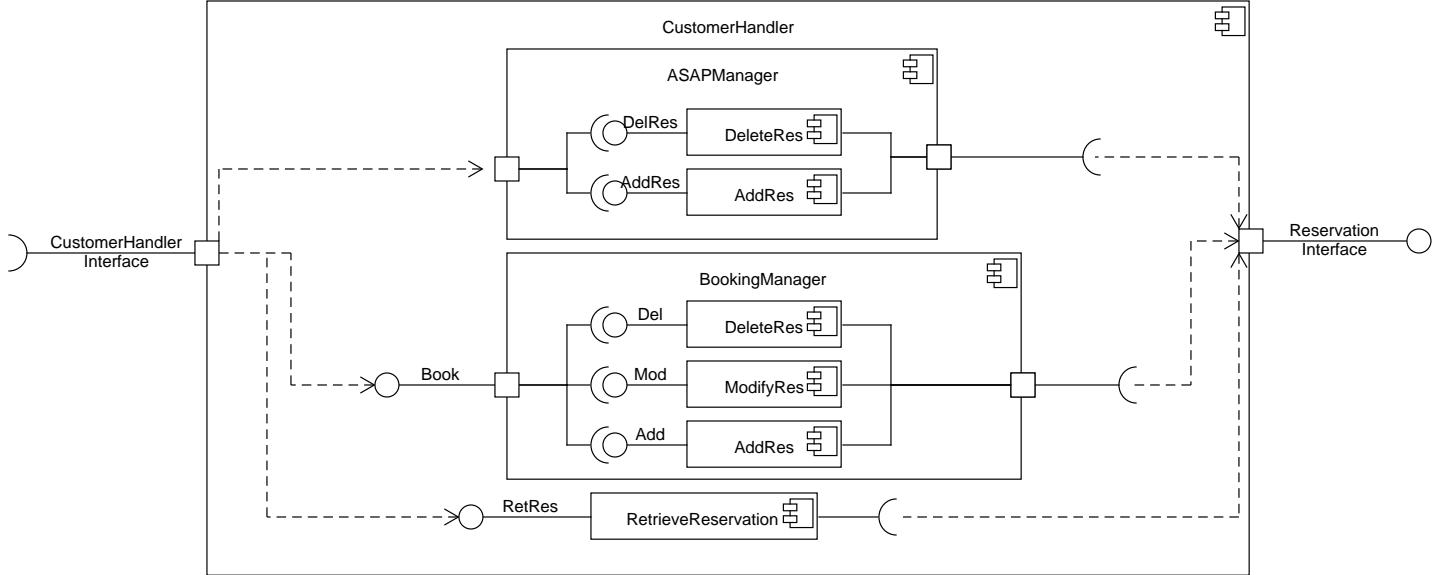


Figure 5: *Customer Handler Component View*

2.2.2.2 Access Manager Component The Access Manager is the component that manages all the issues concerning the access of the users. Indeed, as mentioned above, it is very important to recognize the role of the users in the app in order to provide them correct information, and only the functionalities/-data they are authorized to use. The component analyze two main aspects:

- Login
- Registration

The component uses two very important interfaces: *EmailAPI* and *DataInterface*. The first one is used for the registration, in order to send confirmation messages, while the second one is used for storing registration data, and to check credentials for log-in operations. Furthermore, its services are requested through the *AccessInterface*, that implements the interfaces exposed by **Login Component**, and **Registration Component**. This component is invoked by *StoreManageAccessInterface* and *CustomerAccessInterface* in case an user wants to log in or register

- **LoginManager:** it is the component that manages user's login. Indeed, if a user logs in, the component checks if the credentials are correct and then allows the user to use their personal area.
- **RegistrationManager:** it is the component that manages the user's registration. Indeed, if a user makes a registration, this component, at the beginning, checks through *DataInterface* if the data inserted by the user are valid (e.g. uniqueness of the email, or certification for store managers). Then, if the data are correct, the user's data are stored in the *DBMS*.
 - **RegistrationChecker:** it is the component that checks if the information is inserted during the registration, from the user, are valid. In case of customers, this component checks if the email is valid while in case of store manager checks if the store certification is valid and the registration *ID* is unique.
 - **RegistrationStorer:** it is the component that stores the new data in the *DBMS* after checking.

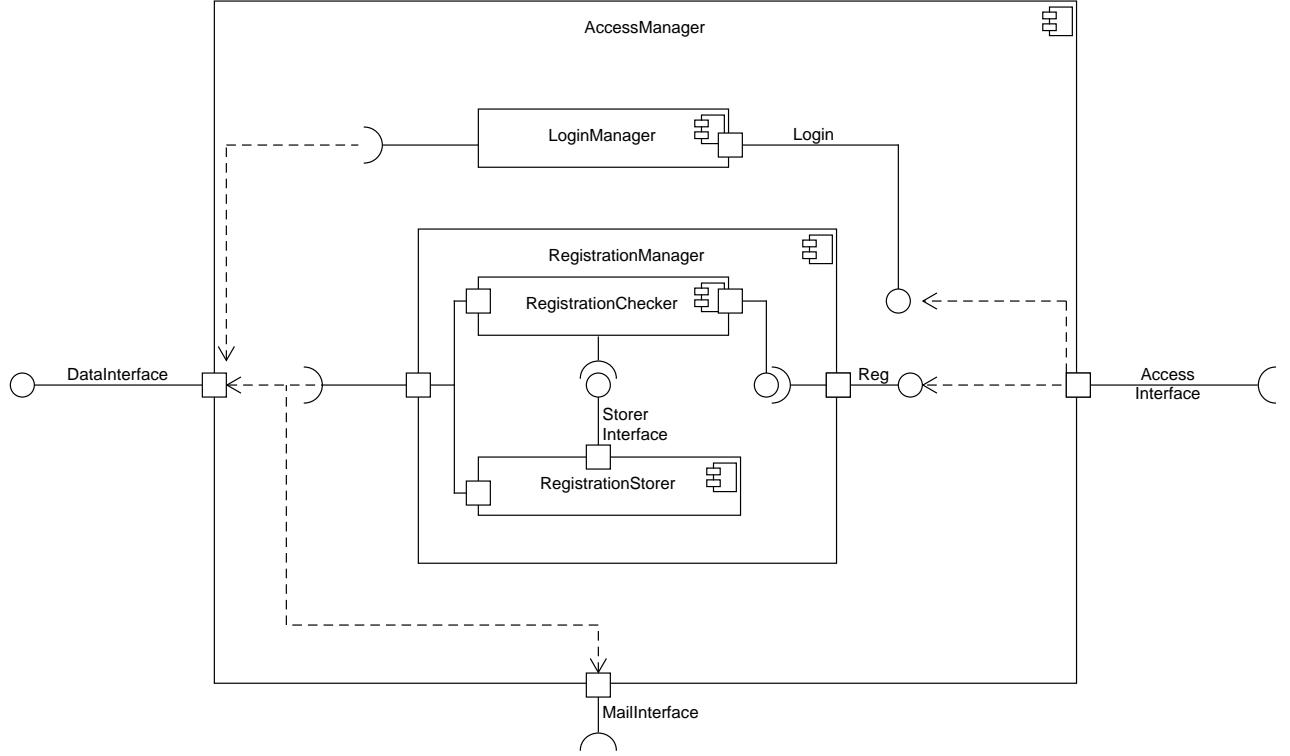


Figure 6: Access Manager Component View

2.2.2.3 Reservation Handler Component The Reservation Handler is the component that manages the customer's reservations. The component analyzes two main aspects:

- Suggestions
- Reservation Management

The component uses *ReservationInterface* (that implements *QueryInterface* and *SuggestionInterface*) to accept requests, and **Store Component**, used to make requests to a specific store. This component is invoked when the customer tries to make or modify a reservation, or tries to retrieve his ones. Each time a reservation is retrieved, the customer will receive the updated information (such as *ETA* to enter the store). Moreover, it uses the *Data Interface* to access to CLups' general DBMS, in order to retrieve informations on stores.

- **SuggestionComponent:** it is the component that manages the suggestions that are made available to the customer at the time of reservation.

It will query each store registered on the platform, to retrieve availability information, depending on the preferences inserted by the customer and the type of reservation they are making (so, the component will use the right **Query Component**); it's invoked by both the *ReservationInterface* when a customer asks for suggestions on bookings, or by **ASAP-QueryComponent** while the *ETA* for entering the store *ASAP* is too high.

- **StoreQueryComponent**: it is the component that manages the queries that are made at a particular store, indeed this component uses the **Store Component**. The queries they can be of two types:
 - **ASAPQueryComponent**: it is the component that manages the *ASAP* reservation, asks the server for waiting times for accessing the store, notifies the store if a reservation is made and manage the deletion of *ASAP* reservations.
 - **BookingQueryComponent**: it is the component that manages the booking via app, asking the server time slots to enter the store, in case a reservation is confirmed, notify the store to save it, and manage all the requests about modification and cancellation of booking reservations.

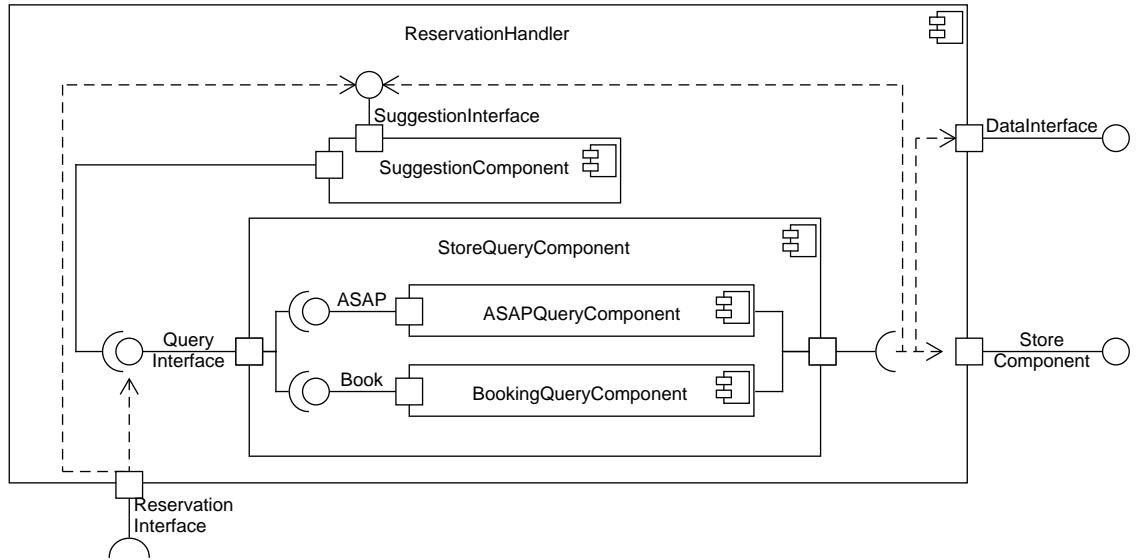


Figure 7: *Reservation Handler Component View*

2.2.3 Store Component

The Store is the component that manages the store from all points of view and it is the most important component of the whole architecture, since implements the whole business tier. The component analyze many important aspect, but the most important are:

- Reservation
- Admit Reservations Inside
- Store Parameters
- Statistical Values

As said before, it's been preferred to separate the logic governing each store by designing a component for each different store. Also here, the store component have been designed in a modular way, to separate the different features offered by a single store; these are:


- **FlowComponent**: this component manages the functionalities that are requested when a *QR Code* is scanned at the store entry, and uses the **Calling Number Component** to check the scanned QR Code status, the **Department Component** to register the entrance/exit and the **StatisticComponent** to update visit statistics.
- **StatisticComponent**: it is the component dedicated to building customer statistics. It's used by:
 - **EntranceComponent**: in order to update visiting statistics at customers' exit
 - **ReservationComponent**: invokes the methods when, during a reservation process, it's necessary to infer the estimation of customers' shopping time.
- **RearrangeComponent**: it is the component that rearrange the reservations when a store manager modifies the capacity of some part of the store, or some reservations are changed, and the queue must be reschedules. Interacts with the **Calling Number Component** in order to rearrange the queue. In case of delays or cancellations, the customers will receive a notification.
- **StoreDataManager**: it is the adapter between the store and its dedicated *DBMS*. The choice of dedicating a *DBMS* for each store is due to efficiency and security reasons: if a *DBMS* broke, it wouldn't affect the whole system, while a store can access only its data.
- **ParameterManager**: it is the component that manages the parameters of the store, the settings and the situation of each department of the store. It's used by:

- **FlowComponent**: is used to update Departments' situation.
- **StoreManagerHandler**: is used to update store parameters, and to access the real-time situation of the store.
- **ReservationComponent**: is used to request store situation in order to make a reservation.

Moreover, uses **RearrangeReservation** when a parameter is modified, to make coherent the store's status

- **ReservationComponent**: it is the component that is dedicated to the management of reservations. It's used to retrieve reservations made in that store, to retrieve waiting times, and to store customers' reservations. Uses the **Calling Number Component** to notify a modification in reservations list, and it's used by the latter latter to initialize the queue at store opening. It also handles modifications made by customers and store managers to reservations. Furthermore, a store manager uses it to contact customers about some specific reservation. Because of this, the components interact with **Notification Component** and **Mail Component** to interact with customers. To logically separate the management of the two types of reservations, the component is divided in two subcomponents: **BookingComponent**, and **ASAPComponent**.
- **CallingNumberComponent**: it is the component deputy to call in reservations, and to notify customers they should depart for the store. It's divided in two subcomponents, each carrying out different functionalities:
 - **CallableReservationComponent**: checks whenever a reservation in the queue is callable, checking the store affluence, through the **Parameter Manager Component**;
 - **CallNumberComponent**: takes a queue of reservations to be called, and when it's possible, a reservation is called to enter. It's alerted by the **Entrance Component** that somebody exited the store.

The core store functionalities are requested through the *ReservationInterface* (dedicated to customers' features) and the *StoreInterfaces*, dedicated to store managers; their requests pass through an handler, here described. One note: the *StoreComponentInterfaces* implements all the interfaces of the single services requested by the **Store Manager Handler**.

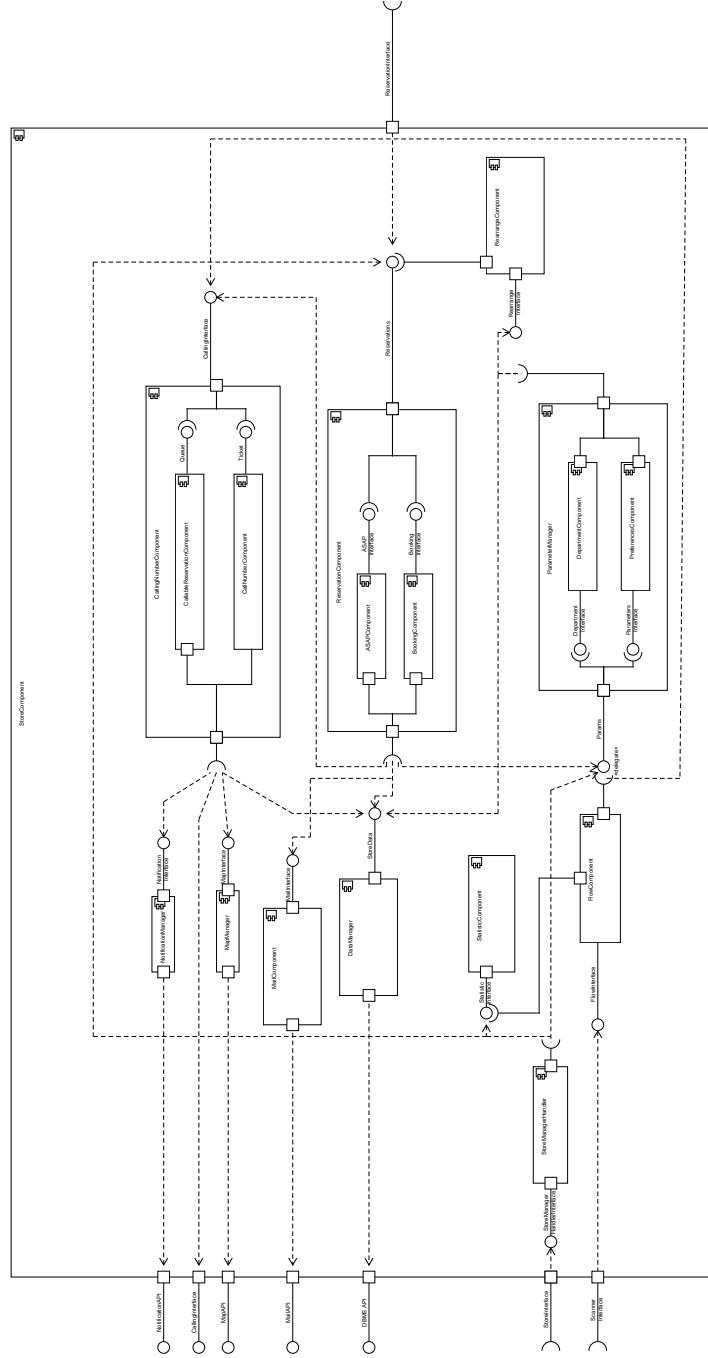Figure 8: *Store Component View*


2.2.4 Store Manager Handler Component

The Store Manager Handler is the component that manages all the actions that a store manager can make within the application. The component analyze various aspects:

- Reservations
- Modify Parameters

This component handles all the possible settable options of a store manager, it is invoked on the *StoreInterface*, from the mobile application, and it interfaces with *StoreComponentInterface*, that manages all information regarding parameters and reservations.

- **ManagerReservationHandler:** it is the component that manages the store reservations and it is divided in two sub-component:
 - **DeleteRes:** it is the component that manages the elimination of the reservations.
 - **ModifyRes:** it is the component that manages the modification of the reservations.
- **ModifyParameters:** it is the component that manages the store parameter. They are of two types:
 - **DepartmentManager:** it is the component that manages all the parameters which concern the individual departments. Indeed, the store manager can add or delete a new department and can modify the maximum capacity of each department.
 - **StoreSettingManager:** it is the component that manages all the parameters which concern the entire store. Indeed, the store manager, can change the maximum capacity of the people inside the store and can modify the opening and closing hours.
- **RetriveReservation:** it is the component that manages all the reservation of a specific store.
- **SituationManager:** it is the component that manages the requests for the real time situation of the store.

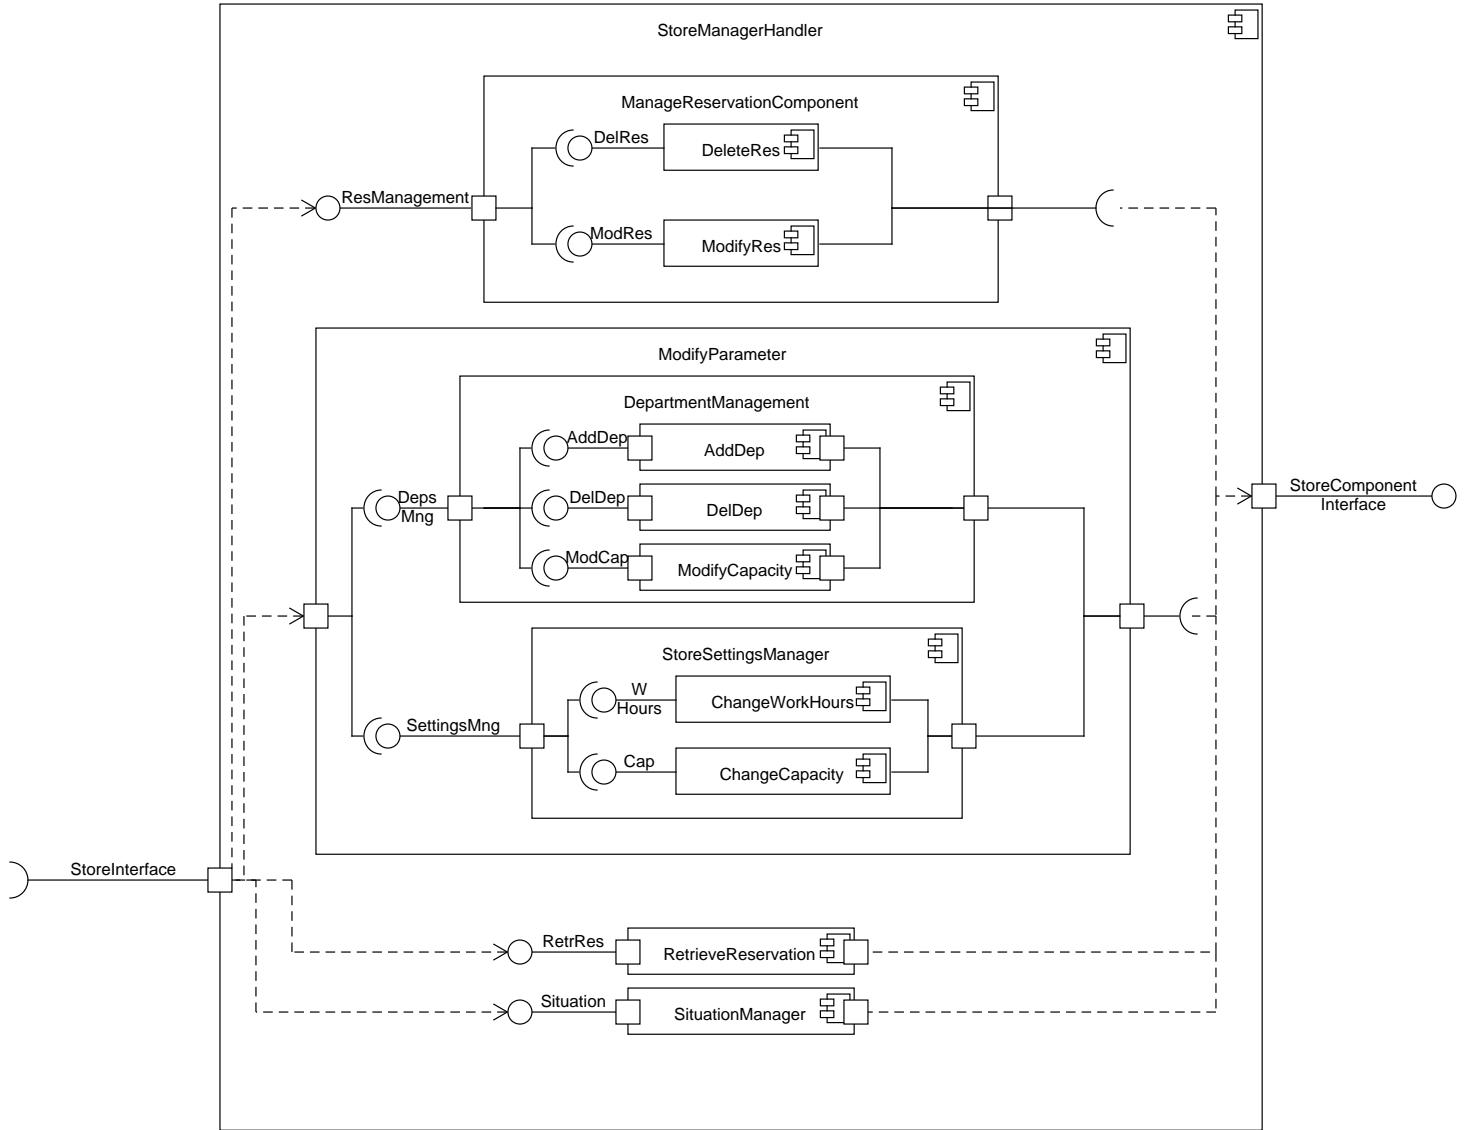Figure 9: *Store Manager Handler Component View*

2.3 Deployment View

As said in the previous pages, the system have been developed in a very modular way, trying to handle all the required functionalities through dedicated components.

Since the application needs to remotely communicate with various actor, the architecture which best fit for *CLup* purposed is the **client-server** one. Moreover, this architecture has been implemented through the **three-tier** paradigm. This aims to separate the different logic part of the system: **presentation**, **business** and **data**.

2.3.1 Client-side

In *CLup*, there are many actors constituting the system's clients, since they are necessary for many *CLup*'s features:

- **Mobile app:** it's the mobile application used by *customers* and *store managers* to request services to *CLup*. It also represents the **Presentation tier** of the system, developed following the *thin client* paradigm, leaving the whole business logic to the server, but for a thing: the notifications when a customer should depart for the store, and the map related functions. In fact, it's the mobile app that monitors when a it's time to go to the store. Even if a *thin client* shouldn't handle operations, this aims to reduce the work load of the server: it's useless to remotely request the customer's position, and then send it to the *Map Service*, while mobile devices can do it on their own (the same applies for distance and travel time);
- **QR Code Scanner:** its role is to send server the scanned QR Code to process it;
- **Totem:** a client needed to allow making requests at any store;
- **Number Calling Device:** it's the device used to receive from the server the called reservations, so that a customer in front of the store knows when they can enter.

2.3.2 Server-side

CLup's server side implements both **business logic** and **data logic**.

- **Business-logic:** it's implemented by **CLupServer** and **StoreComponent**. The first is needed to manage users access to *CLup* services, and to manage reservations request, forwarding them to the correct store, or to generate suggestions querying all the store managed by the system. Instead, *StoreComponent* manages the business logic related to each store, including reservations, ticket calling, capacity ecc. This design choice is to separate the logic of each store, and to avoid disservices to the whole *CLup* system if something may fail.

- **Data-logic:** it's implemented through various **DBMSs**: one for the general server, and one for each store. Business components can access the DBMS through their related DataManager, the adapter between DBMS and other components.

Here, follows a diagram of the subdivision of the various tiers. The clients (implementing the presentation tier) are in red, the components related to the business logic in blue, while the data-related parts are in green.

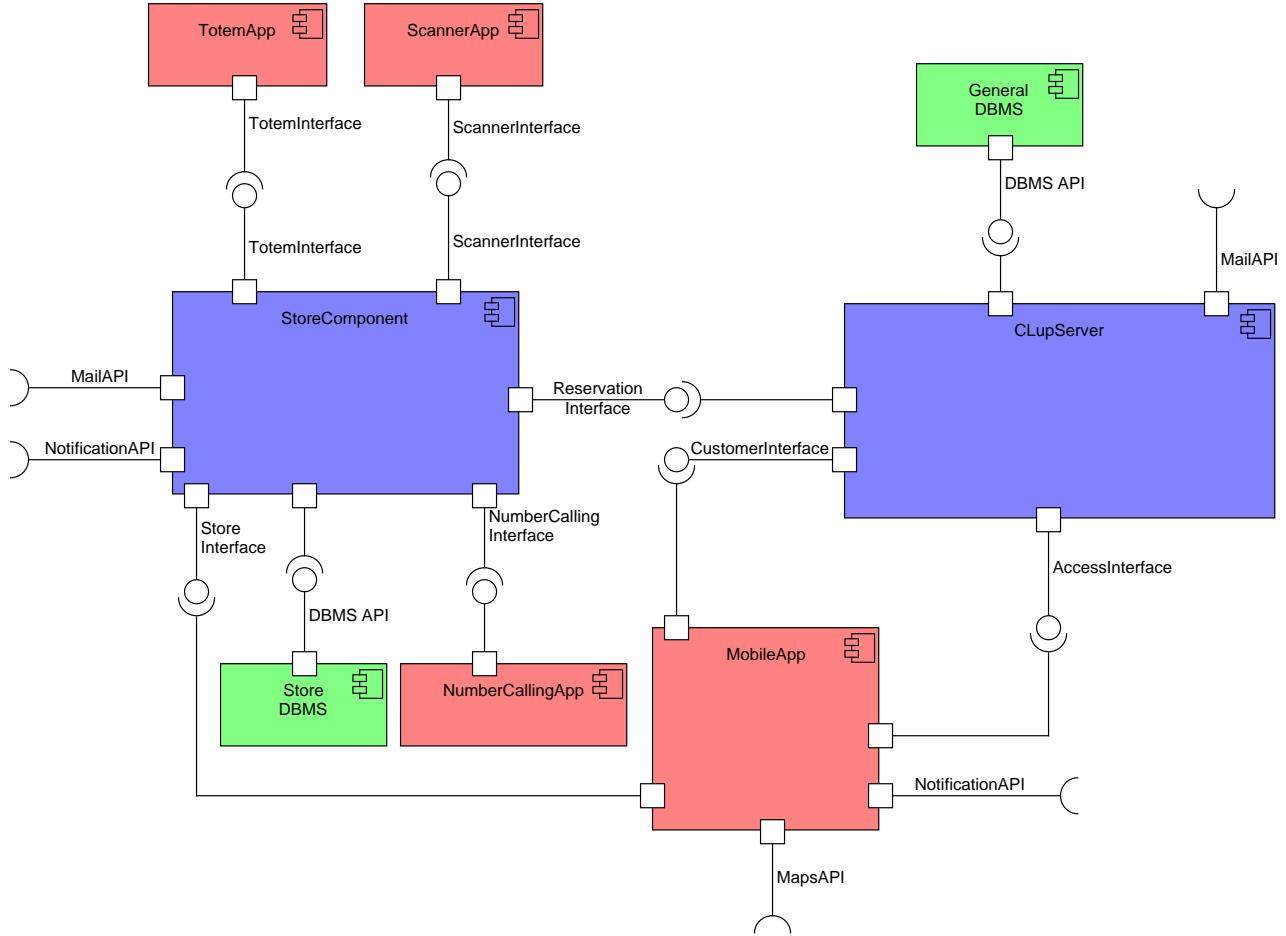


Figure 10: Component mapping with tiers

2.3.3 Deployment Diagram

Here there is the deployment diagram of the described system. As described in the *RASD*, all the communications are routed via the *TCP-IP* transmission protocol, using a secure transport protocol (such as *TLS*). For example, *HTTPS* may be used to connect client and server, and to access external services.

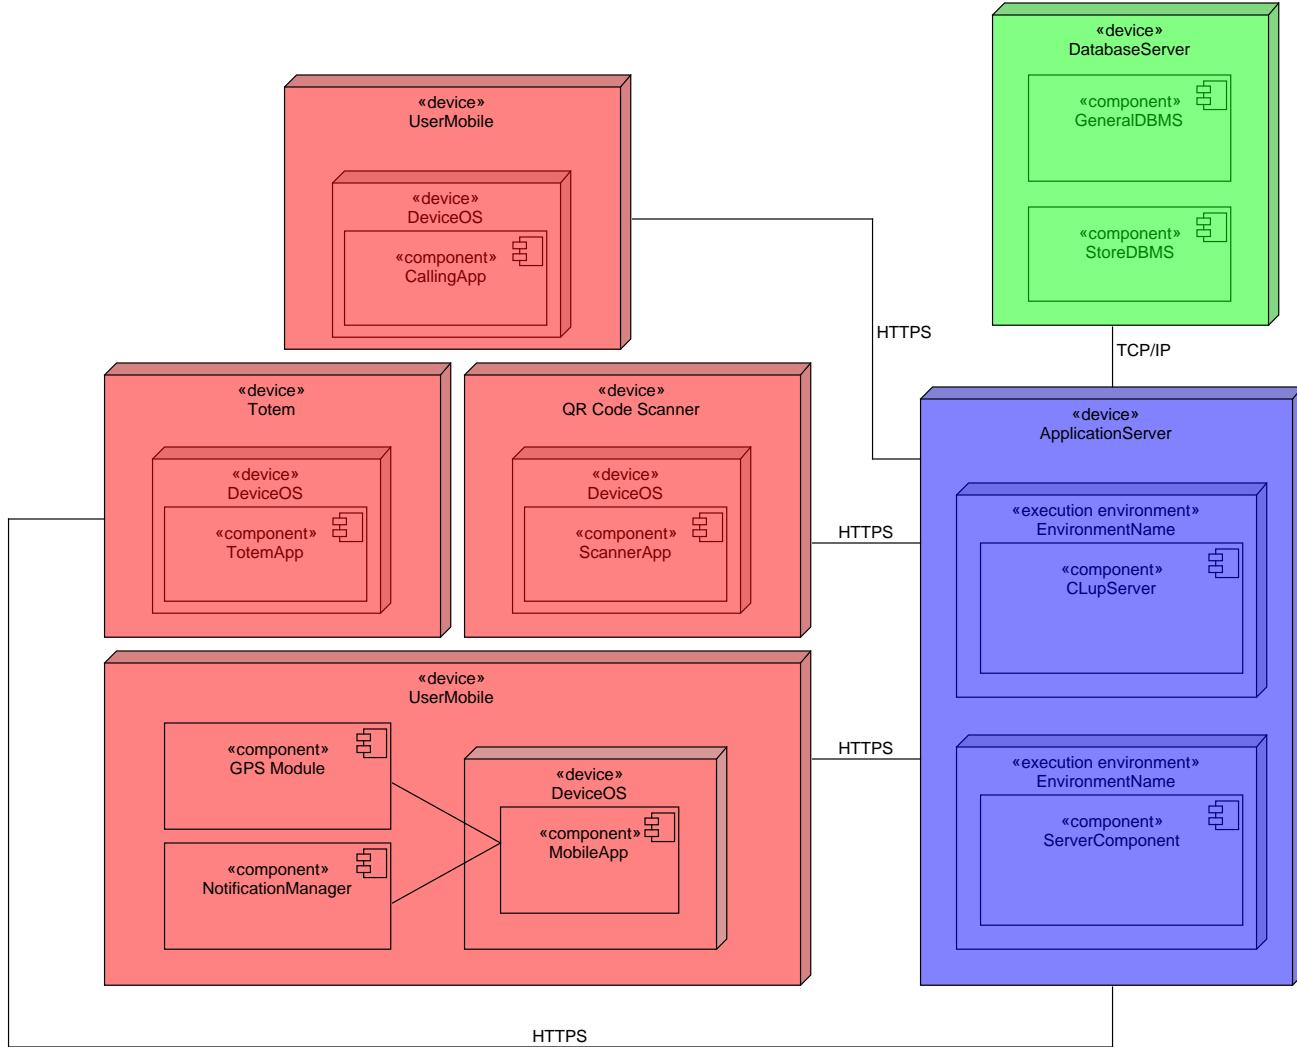


Figure 11: Deployment Diagram

2.4 Runtime View

In this section will be analysed the runtime view of the system, through some *Sequence Diagrams*. This should help to understand how the different components interact. Some aspects have been simplified to make the diagrams more readable; e.g., some interactions with the DBMS have been omitted, some operations with identical behaviour have been collapsed in generic requests, through a generic method, just to model the interaction. The *Component Interfaces diagram* will report all these methods in detail.

2.4.1 User login

Since the interactions for both *customers* and *managers* log-in are the same, here there is reported only the ones relative to customers.

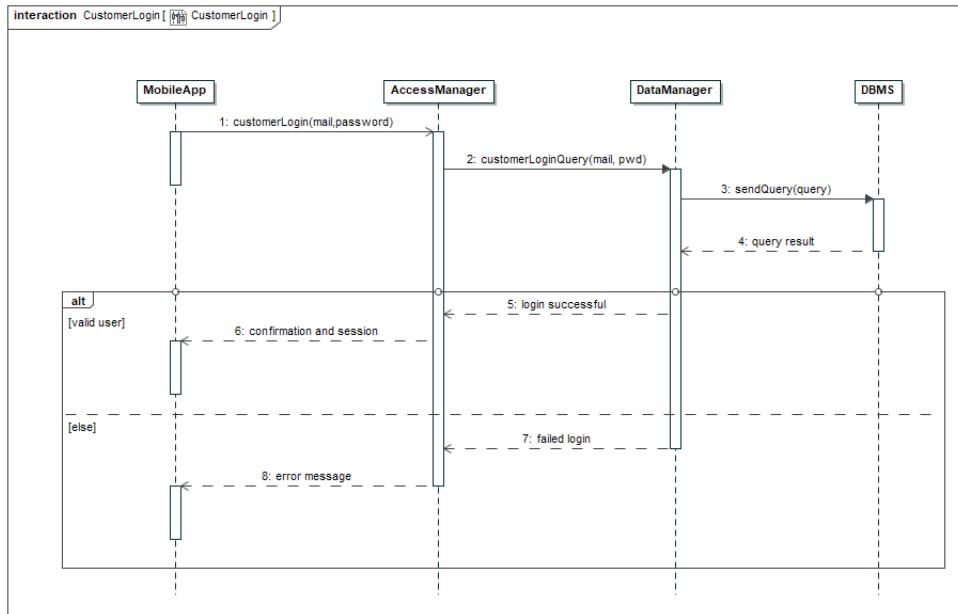


Figure 12: *Customer Login Sequence Diagram*

First of all, the **Mobile App** requests the **Access Manager** to check the credentials. This is done by asking the **Data Manager** to query the **DBMS** for the selected credentials. Once the operations on **DBMS** ended, the **Access Manager** will send an error message if the credentials are not valid, or a confirmation. Then, in the latter case, AccessManager forwards the user's session. If it's a manager to log-in, the **MobileApp** will use the *storeManagerLogin* method, passing as parameter the *StoreID* instead of the *email*.

2.4.2 Customer Registration

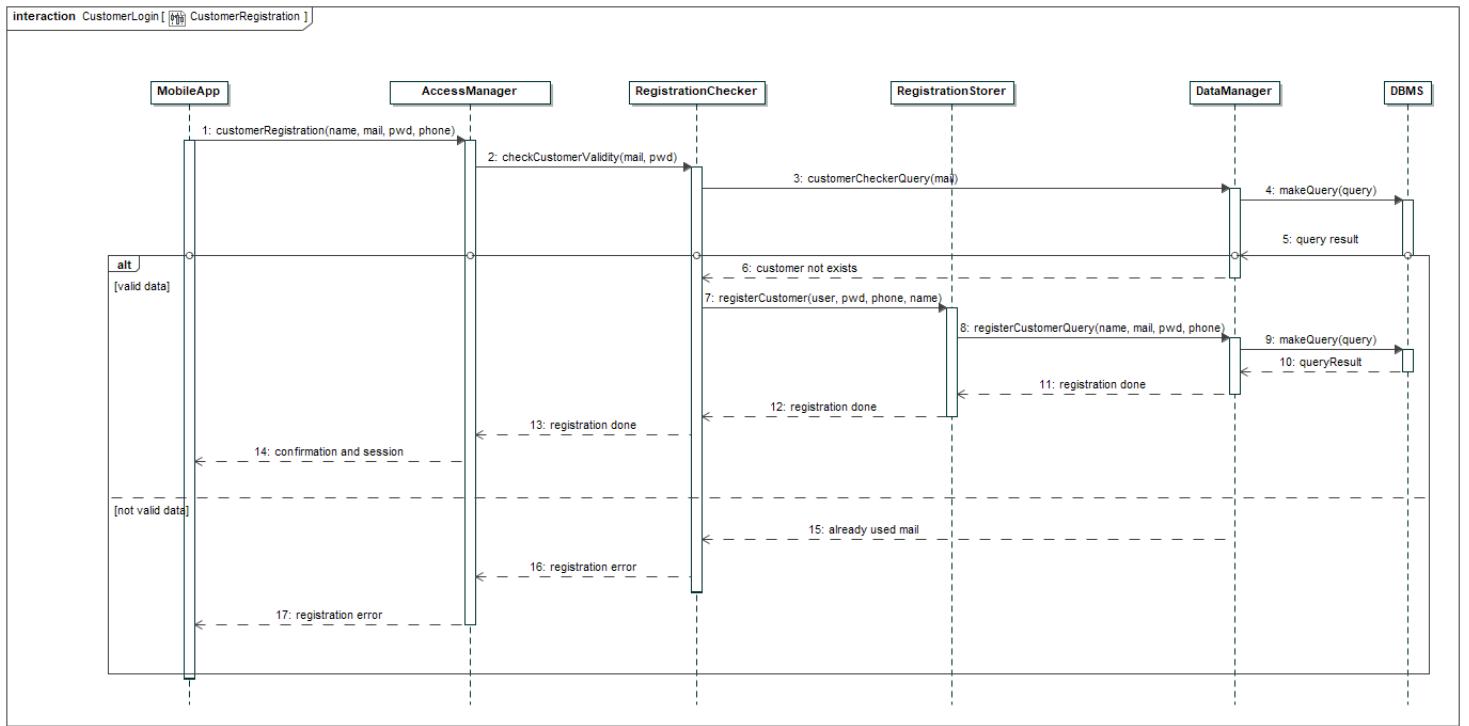
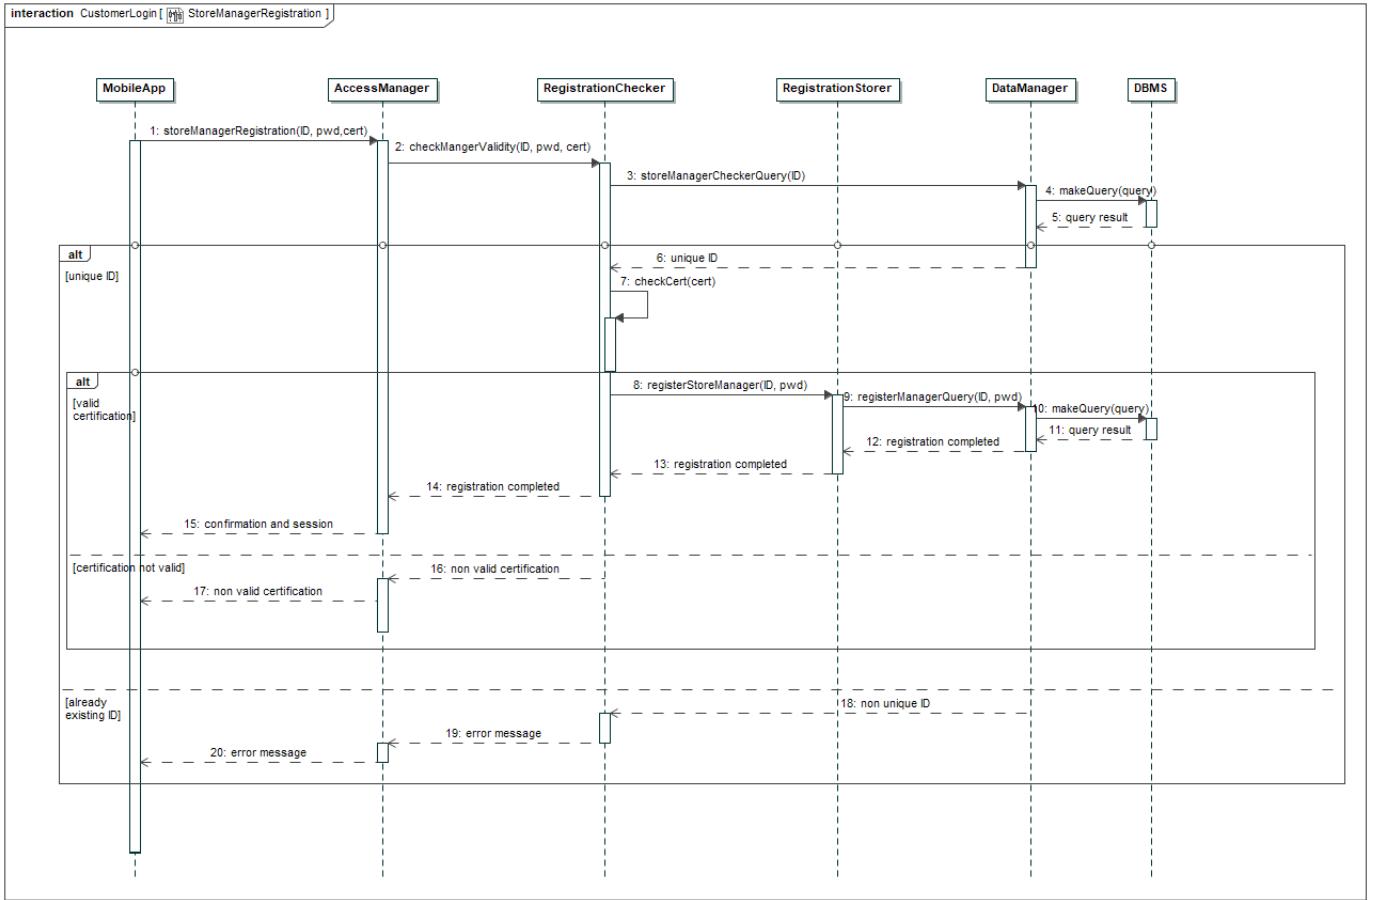


Figure 13: Customer Registration Sequence Diagram

The registration process for a customer is quite similar to the login one. In fact, the app requests the **AccessManager** to register the customer with the inserted data. Then a request to check the selected credentials is forwarded from the **RegistrationChecker** to the **DataManager**. If the selected email isn't already in the system, the registration process continues, and the user is stored in the DBMS; at the end, the *MobileApp* receives the confirmation and the session. If the credentials are not valid, an error message is sent.



2.4.3 Store Manager Registration

The registration process for a *Store Manager* is identical to *customers* one, but for the intermediate step of certification check. In fact, if the credentials are valid, before registering the user, the **RegistrationChecker** verify the validity of the uploaded certification. If valid, the process continue, else an error message is thrown to the **MobileApp**.

Figure 14: *Store Manager Registration Sequence Diagram*

2.5 Make a reservation

To make a *reservation*, it's necessary to retrieve the list of stores. So, through the **CustomerHandler**, the **MobileApp** requests to the **ReservationHandler** the list of stores. Once retrieved from the **DBMS**, this list is sent to the **MobileApp** and sorted by distance, through the *map service*. Then, after the customer select the store, the departments, and insert the shopping time estimation (here it's not treated the calculation by the CLup for the sake of simplicity), they can both make an *ASAP reservation*, or a *Booking*.

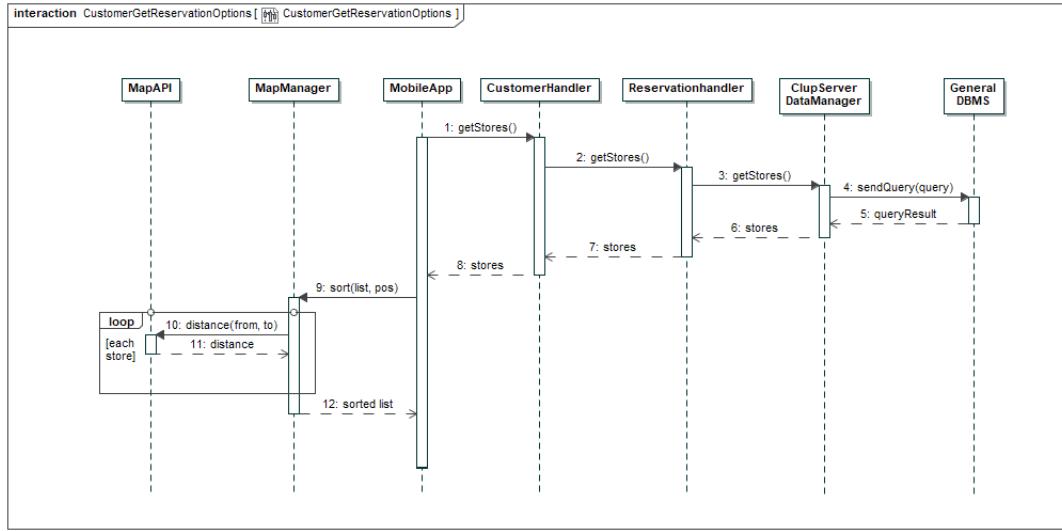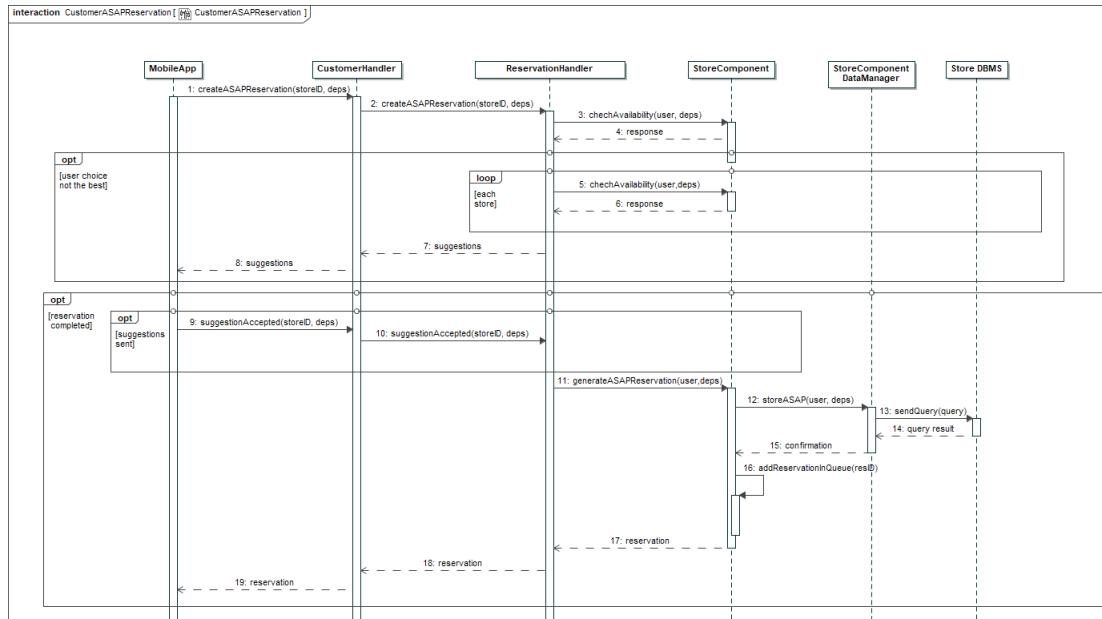Figure 15: *Reservation Options Sequence Diagram*Figure 16: *ASAP Reservation Sequence Diagram*

In the case of an ASAP reservation, a request is sent to the **Reservation-Handler**, that asks to the component of the selected store if the reservation is

possible, with the eventual waiting time. In the case the user choice is ok and optimal, the **Store Component** receives the request to save the reservation, and after queueing it, the ticket is sent to the customer; else, some *suggestions* are generated and sent to the customer, who can choose among them. After an option have been selected, it starts the previously described process.

Instead, if the customer desire to make a *booking*, the **ReservationHandler** asks the selected store's **StoreComponent** when the customer can enter the store, and forward it to the **MobileApp**. Then, the time intervals are shown to the customer. If they're not satisfied with the proposed options, it's possible to ask for suggestion. So, the **ReservationHandler** queries all the stores for time intervals, and send them back to the **MobileApp**. So, the customer can select a store, and see its time intervals. When they are satisfied, select a time interval and confirm the selection. The request arrives at the **StoreComponent**, that, if the selection is correct, creates the *reservation*, puts it in queue and forward to the customer. If the selection is wrong, an error message is sent to the **MobileApp** and the time interval page is reloaded.

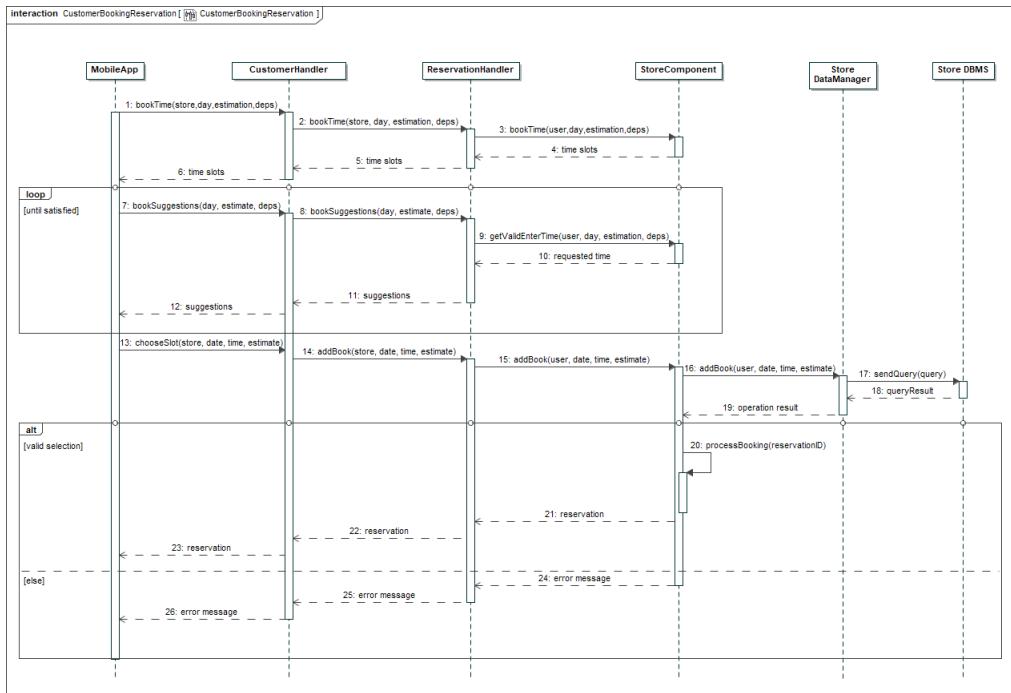


Figure 17: Book Reservation Sequence Diagram

2.6 Component Interfaces

2.7 Selected Architectural Styles and Patterns

2.8 Other design decisions


3 User Interface Design

This section shows and describes accurately the mockups of the application, in order to explain how the main functionalities will be offered. The first subsection is dedicated to the illustration of the application flow, shown using two different UX diagram, one for the customer and one for the store manager.


3.1 UX Diagrams

The following figures shows the application flow from the customer and the store manager point of view.

3.1.1 Customer Flow

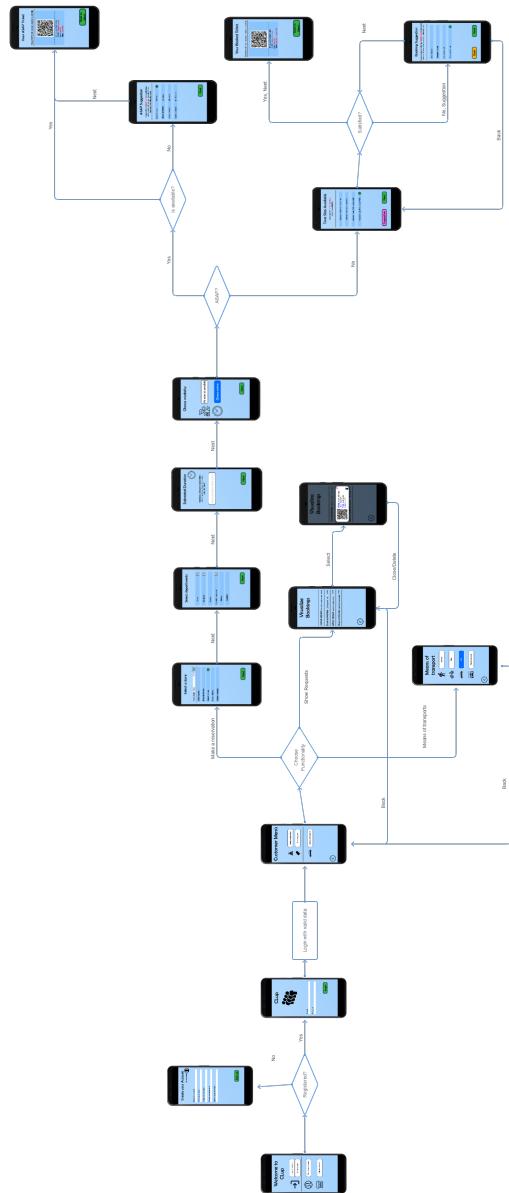Figure 18: *Customer Flow*

3.1.2 Store Manager Flow

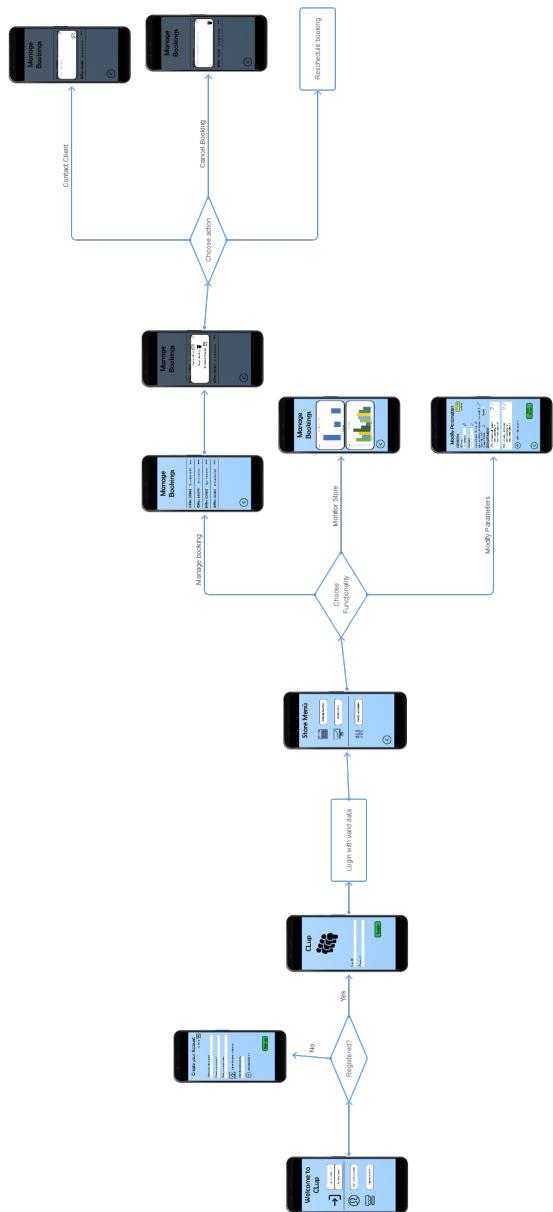

3.2 User Mobile App

In this paragraph are shown mockups that are used to define which interfaces are present within the application. All interfaces are shown and accompanied by a description explaining their functionality. The **Mobile App** version is truly intuitive and can be used without problems by everyone, customers or store managers. The application is flanked by totems placed at the entrance of each store, in case someone does not have the application or does not have a telephone and they only have one type of reservation, that is the *ASAP* one, in the shop they belong to.

3.2.1 Home Page

In this section is shown the initial page that a user finds when opening the app. From this section the user can make a new registration, if is not registered yet, or can sign-in in order to use the functionalities that the app offers.

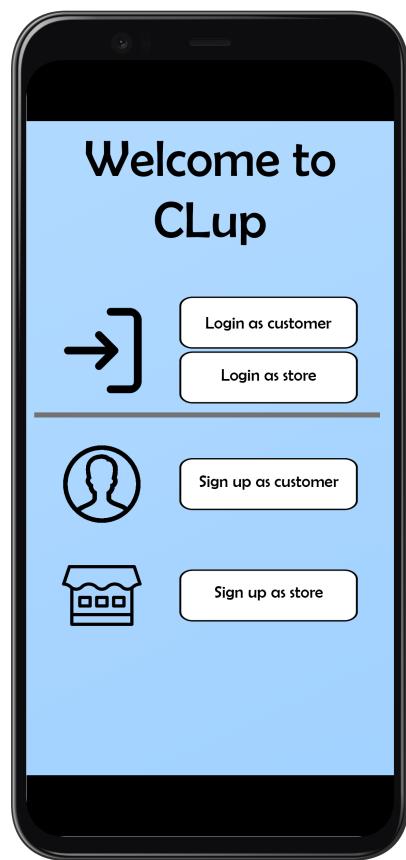


Figure 20: *Home page*

3.2.2 Registration

In this section are shown the mockups about the registration of an user. In fact an user can make a registration as a customer or as a store, based on the role it must have inside the app.

- If an user decides to create a customer account have to enter some parameter (email, name, password) in order to complete the registration.
- If an user decided to create a store manager account have to enter a valid store certification and a password.

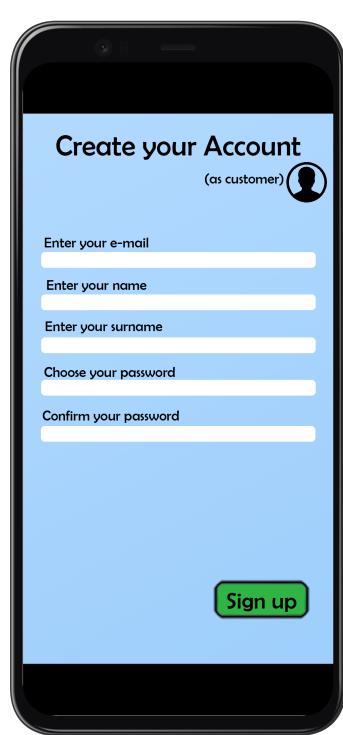


Figure 21: *Sign up as customer*

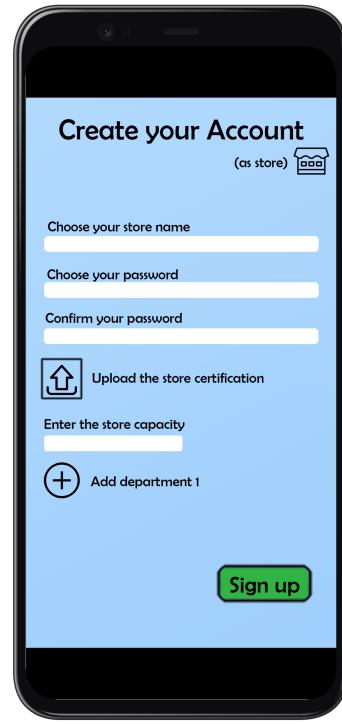


Figure 22: *Sign up as store manager*

3.2.3 Login

In this section are shown the mockups about the login of an user. In fact an user can perform two types of login based on the type of registration made at a previous time.

- If an user has registered as customer have to put email and password in the respective fields.
- If an user has registered as store manager have to put Store *ID* and password in the respective fields.

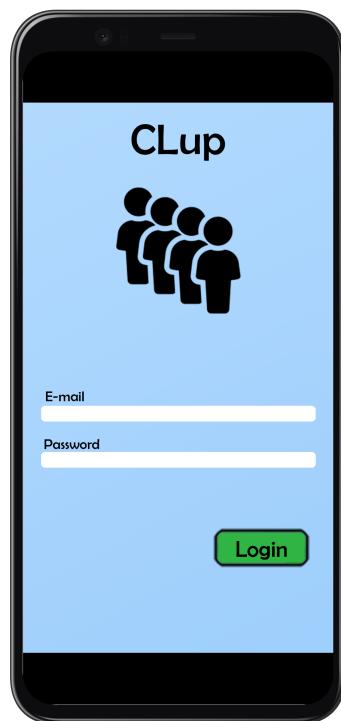


Figure 23: *Login as customer*



Figure 24: *Login as a store*

3.2.4 Menù

In this section are shown the mockups about main menù. After the login the users have a main menù that can be of two type, based on the type of the account: customer or store manager.

- In case of the customer, the menù allows to start a new reservation, show current requests and select the mean of transport.
- In case of the store manager, the menù allows to manage all reservations, see the store statistic and modify all store parameters.

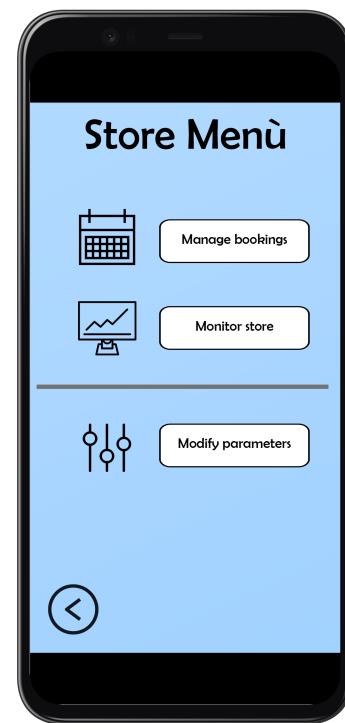
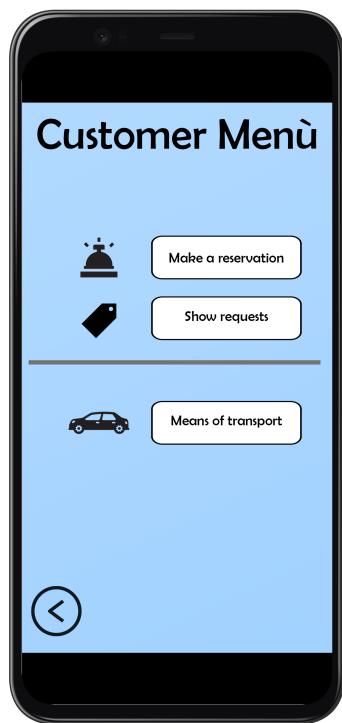


Figure 25: *Customer menù*

Figure 26: *Store manager menù*

3.2.5 Make a reservation

In this section are shown the mockups about the booking of a reservation. When a customer wants to make a reservation have to select the store where he wants to make his purchases. The store, thanks to *Maps API*, are ordered in ascending order by distance. After the selection, the customer can selected the products that he wants to purchase or, at least, the departments that he intends to visit during his purchases. After this first phase, the customer can insert

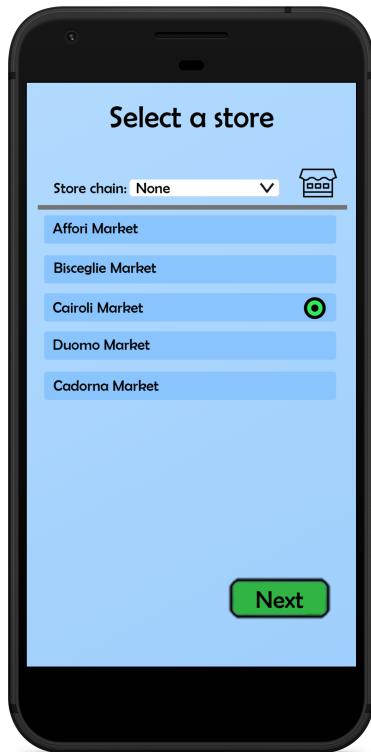


Figure 27: *Store selection*

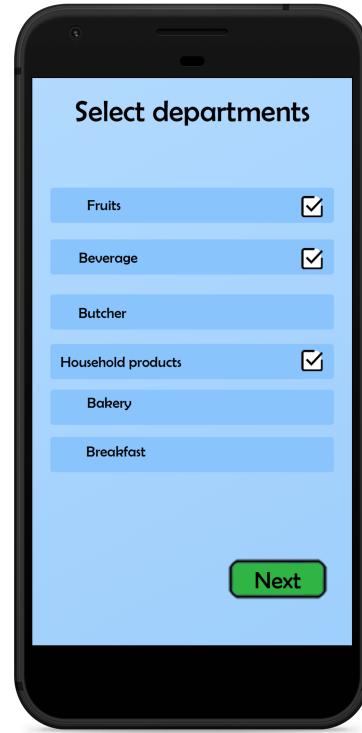


Figure 28: *Departments selection*

the estimation time of the duration of his expense. In case this parameter is not inserted by the customer, the system will calculate a reasonable estimation time with two criteria, based on the situation:

- In case of the system have sufficient data about customer, it provided to calculate the estimation time based on customer's previous expenses.
- In case of the system does not have sufficient data about customer, it provides to calculate the estimation time based on the data of other cus-

tomers who have made a similar expense, referring to the departments that the customer has previously selected.

Then, the customer must select the reservation type which can be of two types:

- **ASAP:** In this case the customer will be placed inside the queue occupying the first available slot.
- **Choose Slot:** In this case the customer is going to select an available slot with a length equal to the duration entered or calculated previously.

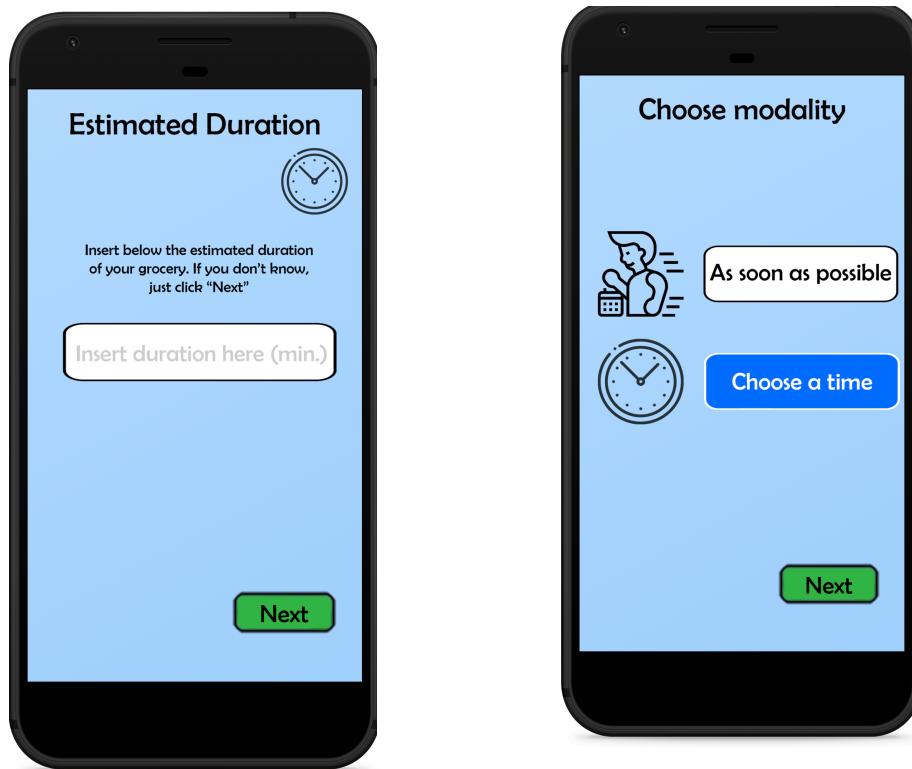


Figure 29: *Estimated duration*

Figure 30: *Choice of reservation type*

3.2.6 Choose Slot

In this section is shown the mockup about the choice of time slot. If a customer decide to plan a visit to the store, he must select a time slot which indicates the time spent by the customer inside the store. The customer can complete his reservation, but, in case of he is not fully satisfied with the time slots, he can asks for suggestions.

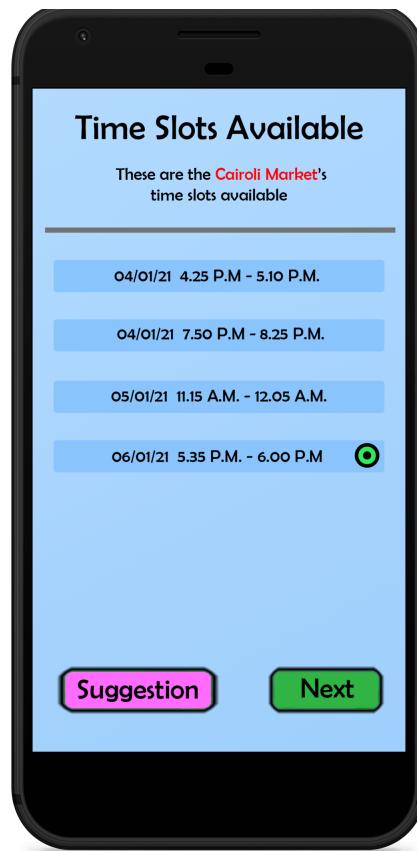


Figure 31: *Time slots*

3.2.7 Suggestions

In this section is shown the mockups about the suggestions of a reservation. If a customer is not satisfied with the available time slots the app allows to receive suggestions. These one are different based on the type of reservation selected previously:

- In case of customer has selected an *ASAP* reservation, if the wait is very long, suggestions are shown automatically. In this case are show, in order of waiting, all the stores that have a better time slot available (including the chosen one) and the customer can accept one of the suggestion or select again the initial store.
- In case of customer has planned a visit but the time slots do not fully satisfy him, he can select a new store, ordered from best to worst, and see the time slots of these new stores. When the customer identify the better choice for him, he can complete the reservation.

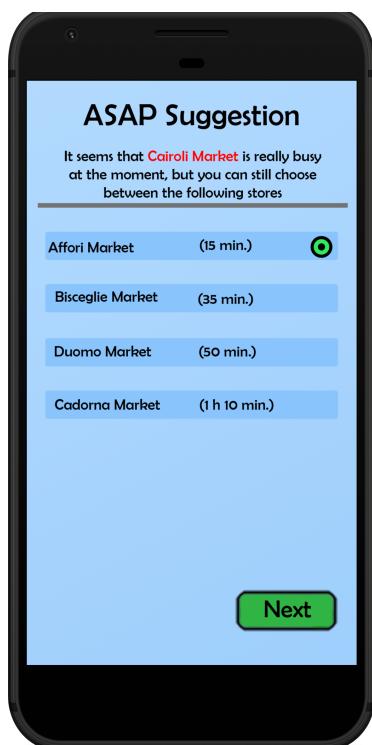


Figure 32: *ASAP suggestion*

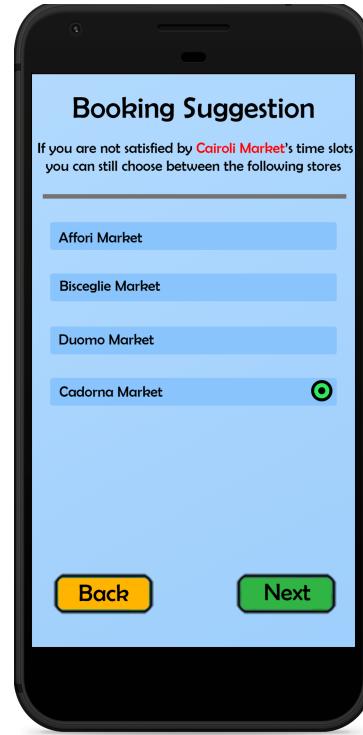


Figure 33: *Reservation suggestion*

3.2.8 Ticket

In this section are shown the mockups about the ticket reservation. When the customer terminates his reservation, a ticket with a *QR Code* is generated and saved. The ticket is used for enter and exit from the store and for both reservations it is the same. the only difference is that in the *ASAP* one the entrance time is updated in real time.



Figure 34: *ASAP ticket*

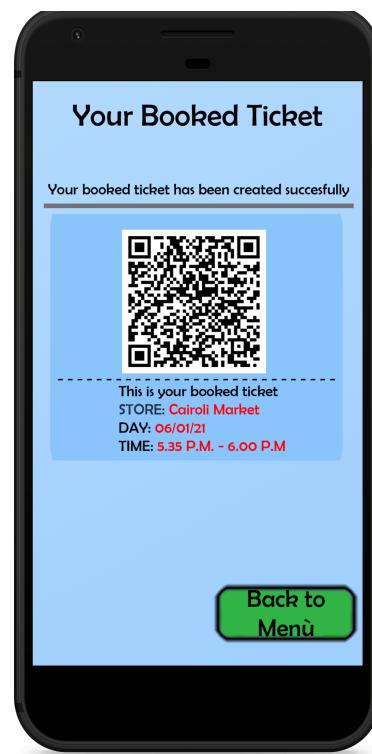


Figure 35: *Reservation ticket*

3.2.9 Visualize Booking

In this section are shown the mockups about the visualization of previous reservation. When the customer wants can see the previous reservation that he made. This functionality helps customer to build a detailed history.



Figure 36: *Visualize reservations*



Figure 37: *Visualize reservation detail*

3.2.10 Means of Transport

In this section is shown the mockup about means of transport. A customer can select his means of transport and that is very important because, based on the choice made, all travel times are calculated accordingly. Moreover, means of transport used influence also the moment in which the notification, that warns the customer to leave his current position to reach the store in time, is sent.



Figure 38: *Means of transport*

3.2.11 Manage Bookings

In this section are shown the mockups about the management of the customers' reservations. A store manager can:

- View the current entry queue
- Contact a customer via email
- Delete a customer reservation
- Reschedule a customer reservation

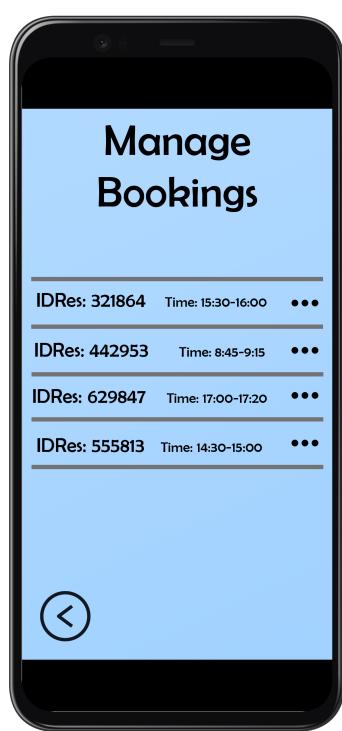


Figure 39: *Manage bookings*

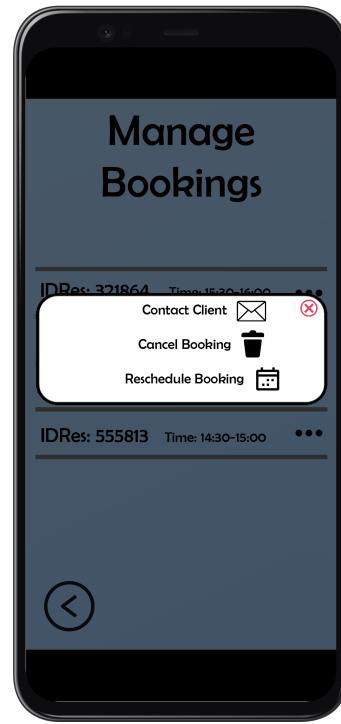


Figure 40: *Manage bookings functionalities*



Figure 41: Contact customer via email

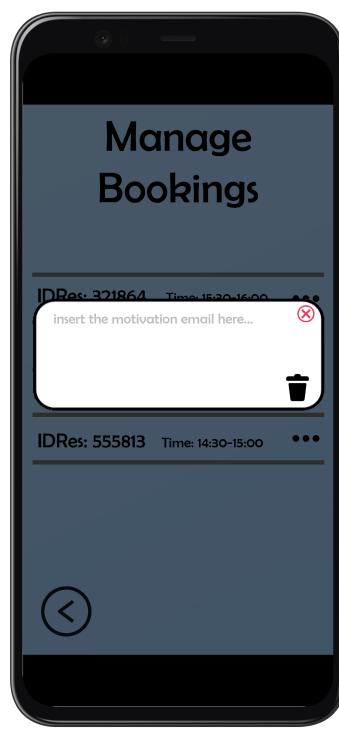


Figure 42: Delete reservation

3.2.12 Monitor store

In this section is shown the mockup about the store statistics. A store manager can view the statistics about flow of people inside the store, when he wants. Indeed statistics analyze the number of people that visit the store during an entire day and the time spent in average inside the store and each departments.

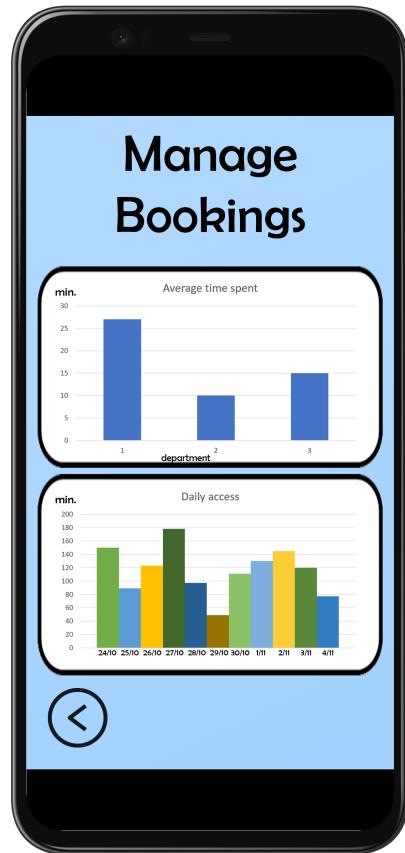


Figure 43: Monitor statistics

3.2.13 Modify parameters

In this section is shown the mockup about the management of the store parameters. A store manager can decide to modify many personal parameters like Store *ID* and password and many parameters that influence the customers' reservations. Indeed is possible to modify the opening and closure time of the store, the max simultaneous booking per week by a customer and the capacity allowed for each department and for the entire store



Figure 44: *Modify parameters*

4 Requirements Traceability

5 Implementation, Integration and Test Plan

5.1 Overview

In this section we are going to show a clear plan on how implementation, integration and test plan should be done in order to optimize the work flow. We mainly focused on a **bottom-up** approach to define the plan, starting from the essential components and, starting from there, creating all the functionalities needed.

5.2 Implementation Plan

5.3 Integration Strategy

5.4 System Testing

Once the system is completely integrated, we can proceed testing it, to verify that functional and non-functional requirements are satisfied. In order to consider all the possible issues that our system could have, we have to test it in different ways:

- **Functional Testing:** ascertains that the system meet the functional requirements described in the RASD.
- **Performance Testing:** highlights problems related to the performance and bottlenecks.
- **Load Testing:** highlights problems memory-related such as memory leaks and buffer overflows.
- **Stress Testing:** ascertains that the application recovers in the right way after failure.

5.5 Additional Specification on Testing**6 Effort Spent**

Task	Daniele Mammone's Hours
Introduction	0
Architectural Design	0
User Interface Design	0
Requirements Traceability	0
Implementation, Integration and Test Plan	0
Total Hours	0

Task	Gianmarco Naro's Hours
Introduction	0
Architectural Design	0
User Interface Design	0
Requirements Traceability	0
Implementation, Integration and Test Plan	0
Total Hours	0

Task	Massimo Parisi's Hours
Introduction	0
Architectural Design	0
User Interface Design	0
Requirements Traceability	0
Implementation, Integration and Test Plan	0
Total Hours	0