


Final Project: Minesweeper

Danny Peng

Demo!



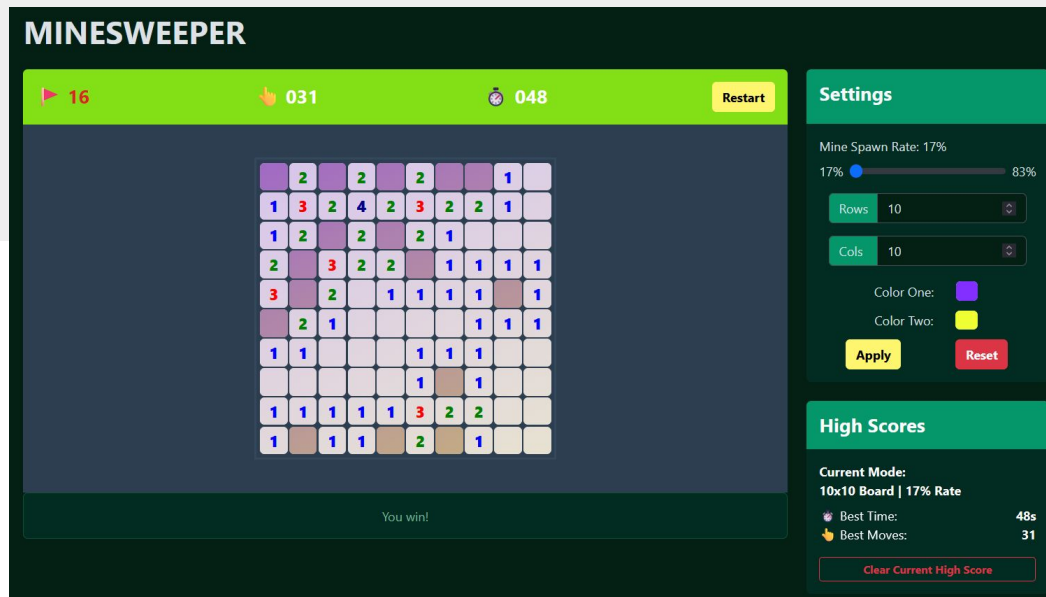


<https://vercel-js-minesweeper.vercel.app/>

Process

1. Getting a grid on the website - Bootstrap, HTML, CSS
2. Core Game Logic - Javascript
3. Customizability - Bootstrap, HTML, CSS, Javascript
4. Responsive - Properly applying Bootstrap classes
5. High Score Local Storage - Javascript

Snippet

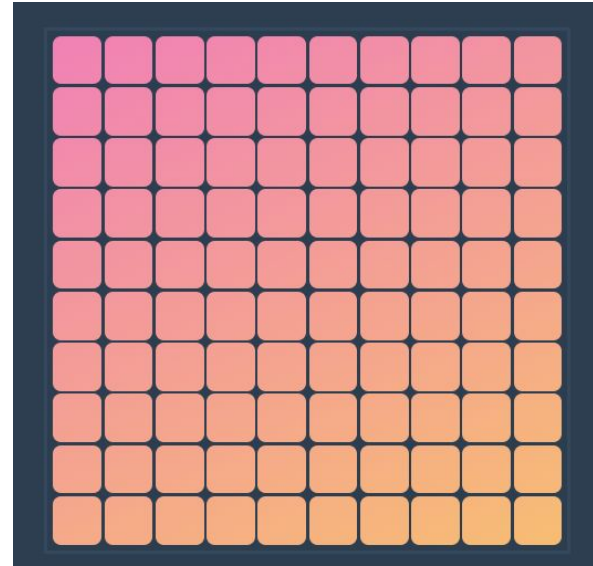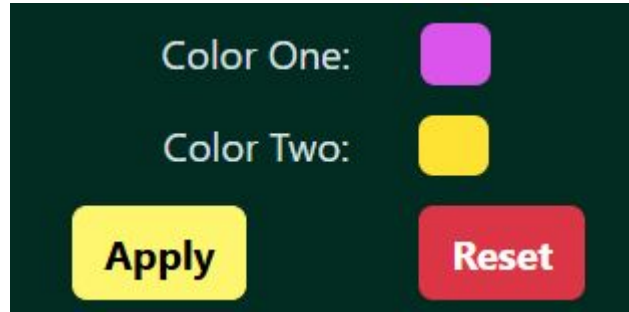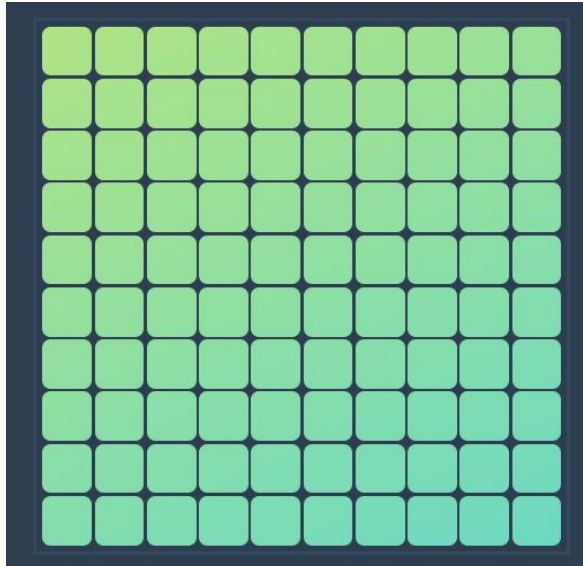

Snippet

Use CSS variables!

That way, when you change via JS, it is reflected wherever you use it in the CSS

```
:root {  
  --c-grad-one:  #e1ec57;  
  --c-grad-two:  #2ecffe;  
}
```

```
85  ... background-image: linear-gradient(to bottom right,var(--c-grad-one),var(--c-grad-two));  
86  ... background-repeat: no-repeat;  
87  ... background-attachment: fixed;  
88  }
```

Snippet

Input type: Color!

Then get the
element in JS

```
<div class="col-auto d-flex justify-content-center">
  <label for="color-one" class="form-label mt-2 lh-1">
    >Color One:
  </label>
</div>
<div class="col-auto d-flex justify-content-center">
  <input
    class="form-control form-control-color border-0 p-1 btn"
    type="color"
    id="color-one"
    name="color-one"
    value="#e1ec57"
  />
</div>
```

```
const colorOneInput = document.getElementById('color-one');
const colorTwoInput = document.getElementById('color-two');
```

Snippet

Get the element that contains the CSS variable Root in this case.

Then, update the CSS variables! Whenever this function is called (via button or whatever), the variables get updated

```
function applyColorSettings() {  
  ...let r = document.querySelector(':root');  
  ...r.style.setProperty('--c-grad-one', colorOneInput.value);  
  ...r.style.setProperty('--c-grad-two', colorTwoInput.value);  
}
```

r.style indicates you want to mess with the styling, and setProperty updates a given property—our variables in this case—with our desired value—our color input's value. Once it is updated, it is immediately reflected in the website.

Skills Learned

- Bootstrap
 - Had some issues with specificity when trying to override
- How HTML and JS interact with each other:
 - Manipulating HTML and CSS with JS
 - How HTML interacts with JS (calling functions)

Next steps:

- Using something other than emoji's for icons, svg's?
- More dynamic color elements depending on the user's chosen colors, such as the numbers
- Theme switching

Final Project: Minesweeper

Danny Peng