


Dev Ops – Lab 3


Screenshot 1

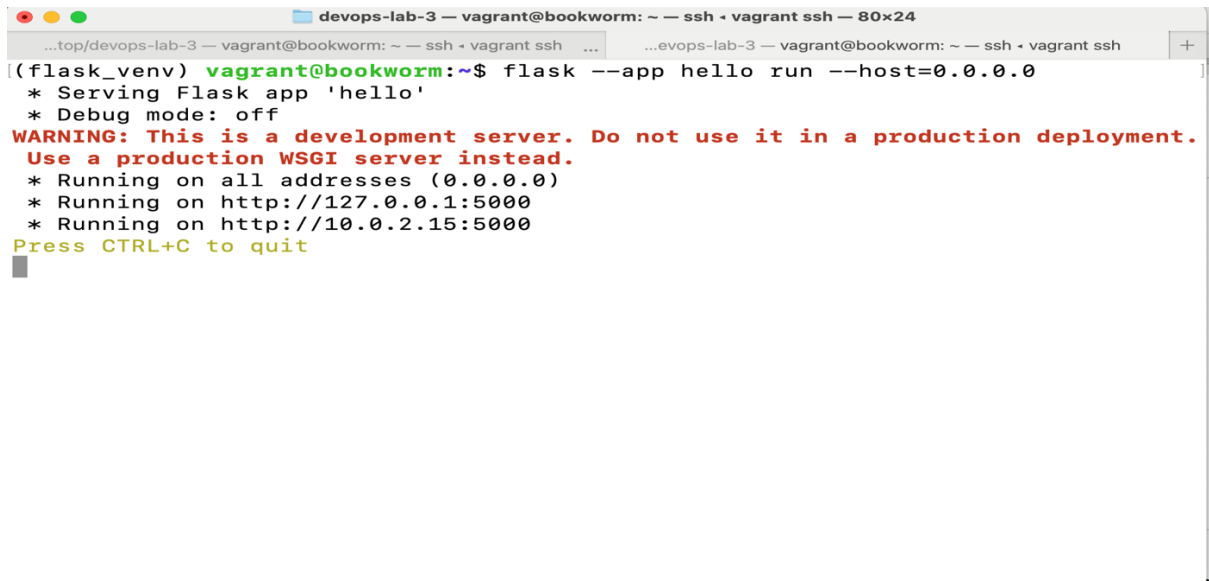

A terminal window titled "devops-lab-3 — vagrant@bookworm: ~ — ssh • vagrant ssh — 80x24". The prompt is "(flask_venv) vagrant@bookworm:~\$". The command entered is "flask --app hello run --host=0.0.0.0". The output shows the Flask app starting, serving on all addresses (0.0.0.0) and specifically on http://127.0.0.1:5000 and http://10.0.2.15:5000. A warning message is displayed: "WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead." The prompt "Press CTRL+C to quit" is shown at the bottom.

```
(flask_venv) vagrant@bookworm:~$ flask --app hello run --host=0.0.0.0
* Serving Flask app 'hello'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment.
Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:5000
* Running on http://10.0.2.15:5000
Press CTRL+C to quit
```

Screenshot 2

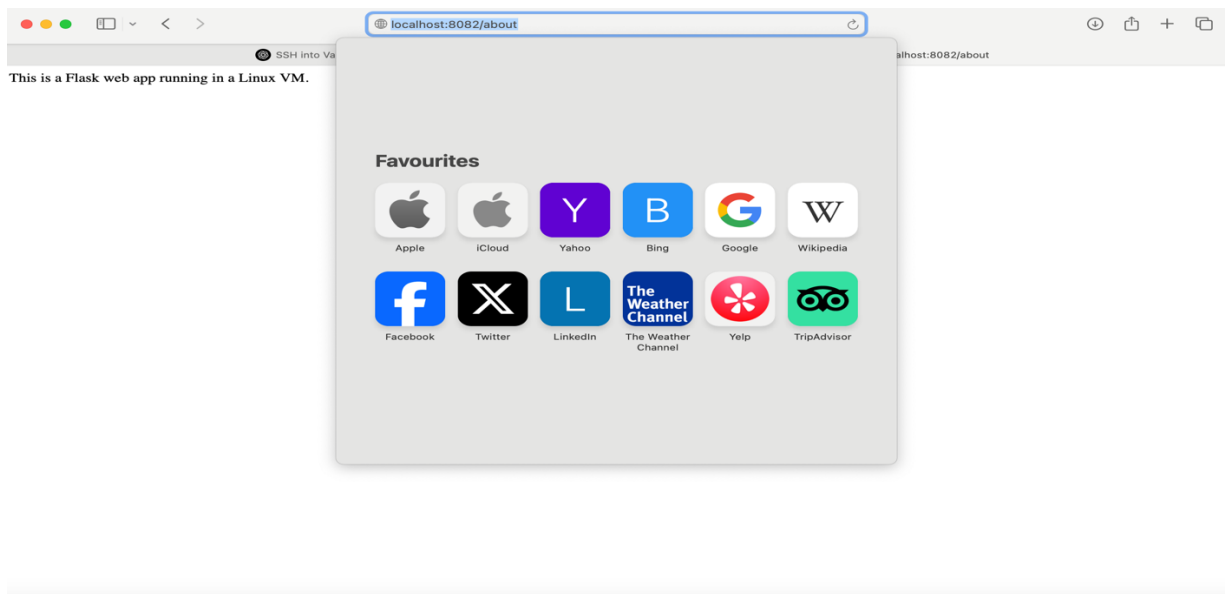

GitHub Link

<https://github.com/danocar/devops-lab-3/>