```
import java.util.Scanner;

public class GradeThresholdChecker {
    public static void main(String[] args) {
        // Create a Scanner object to read user input
        Scanner scanner = new Scanner(System.in);

        // 1. Declare variables and read student data
        System.out.print("Enter student's average grade: ");
        double average = scanner.nextDouble();

        System.out.print("Enter number of absences: ");
        int absences = scanner.nextInt();

        System.out.println("\n--- Evaluation ---");

        // 2. Base logic rule
        boolean hasPassed = (average >= 75 && absences <= 3) || (average >= 90);

        // 3. Print separate, detailed reasoning for every single scenario
        if (hasPassed) {
            System.out.println("Result: PASS");

            if (average >= 90) {
                System.out.println("Reason: Average grade is 90 or above. Attendance restrictions
are bypassed.");
            } else if (average >= 75 && absences <= 3) {
                System.out.println("Reason: Average grade is between 75 and 89, and absences are
3 or fewer.");
            }

        } else {
            System.out.println("Result: FAIL");

            if (average < 75 && absences > 3) {
                System.out.println("Reason: Failed both requirements. Grade is below 75 and
absences exceed 3.");
            } else if (average < 75) {
                System.out.println("Reason: Grade is below 75.");
            } else if (absences > 3) {
                System.out.println("Reason: Absences exceed 3 (Grade was passing, but attendance
failed).");
            }
        }
```
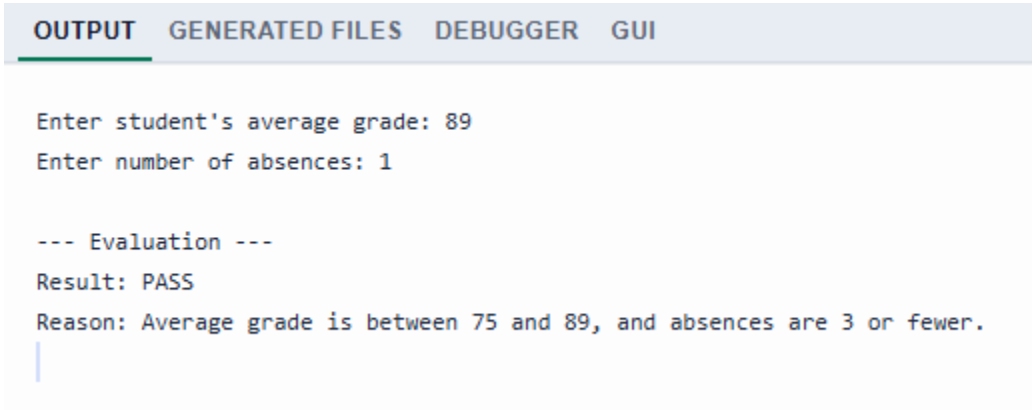
```
        scanner.close();
    }
}
```