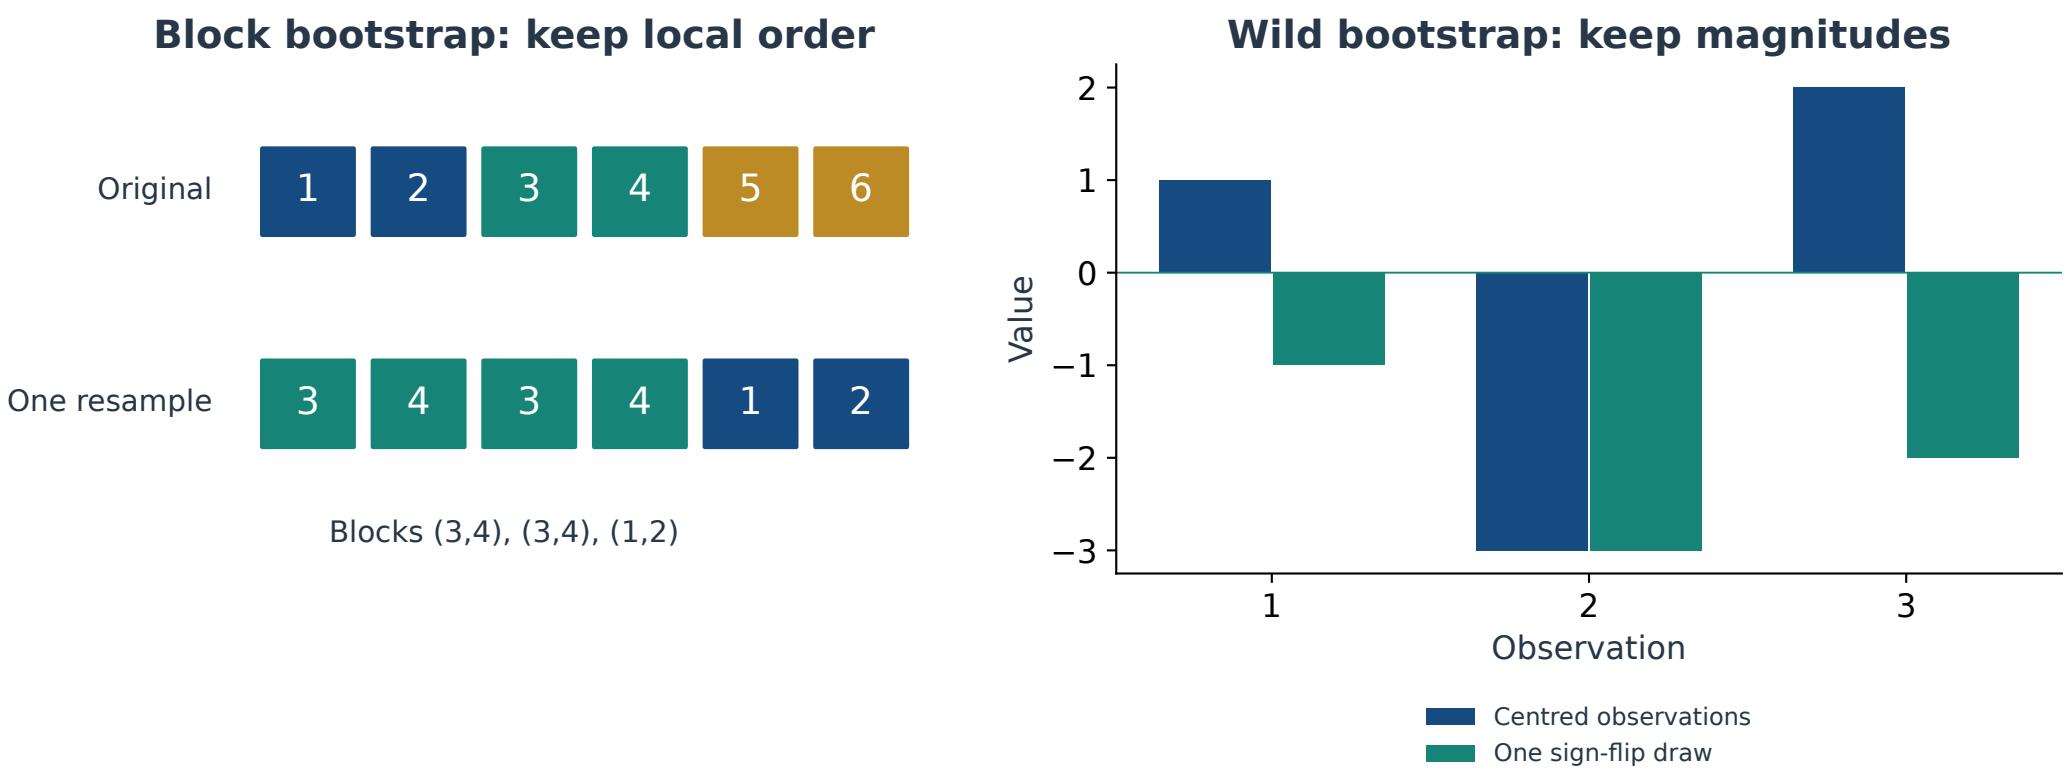
Block bootstrap: keep local order
Original
1
2
3
4
5
6
One resample
3
4
3
4
1
2
Blocks (3,4), (3,4), (1,2)
Wild bootstrap: keep magnitudes
Value
2
1
0
−1
−2
−3
1
2
3
Observation
Centred observations
One sign-flip draw