



Time Series Analysis and Forecasting

Chapter 8: Modern Extensions



Daniel Traian PELE

Bucharest University of Economic Studies

IDA Institute Digital Assets

Blockchain Research Center

AI4EFin Artificial Intelligence for Energy Finance

Romanian Academy, Institute for Economic Forecasting

MSCA Digital Finance

Contents

1. **Motivation** – From Classical to Modern Methods
2. **ARFIMA** – Long Memory Models
3. **Random Forest** – Ensemble Learning for Time Series
4. **LSTM** – Deep Learning for Sequences
5. **Comparison** – Model Selection Guidelines
6. **Case Study** – Energy Consumption Forecasting
7. **Summary and Quiz**

Learning Objectives

By the end of this chapter, you will be able to:

- ▣ **Conceptual Understanding:**

- ▶ Understand long memory and fractional integration
- ▶ Distinguish between short and long memory processes

- ▣ **Model Estimation:**

- ▶ Estimate and interpret ARFIMA models
- ▶ Apply Random Forest for time series forecasting
- ▶ Build LSTM networks for sequential data

- ▣ **Practical Skills:**

- ▶ Compare classical vs ML model performance
- ▶ Choose the appropriate method based on data characteristics
- ▶ Implement these methods in Python

From Classical Models to Machine Learning

The Evolution of Time Series Methods

- ▣ **Classical ARIMA** (Box & Jenkins, 1970) — revolutionized forecasting but has limitations:
 - ▶ Assumes **short memory**: autocorrelations decay exponentially
 - ▶ **Linear** relationships only — cannot capture complex dynamics
 - ▶ Requires **stationarity** through integer differencing

Three Paradigm Shifts

- ▣ **ARFIMA** (Granger & Joyeux, 1980)
 - ▶ Fractional integration for long memory processes
- ▣ **Random Forest** (Breiman, 2001)
 - ▶ Ensemble learning for nonlinear relationships
- ▣ **LSTM** (Hochreiter & Schmidhuber, 1997)
 - ▶ Deep learning for complex sequential patterns

When to Use Each Method?

Feature	ARIMA	ARFIMA	RF	LSTM
Long memory	×	✓	✓	✓
Nonlinear relationships	×	×	✓	✓
Interpretability	✓	✓	~	×
Small data	✓	✓	×	×
Exogenous variables	✓	✓	✓	✓
Uncertainty quantification	✓	✓	~	×

Principle of Parsimony (Occam's Razor)

Start **simple** (ARIMA), then increase complexity only if justified by **out-of-sample** performance gains.

Research Evidence: Makridakis et al. (2018) M4 Competition showed that simple methods often outperform complex ML models on standard benchmarks.

What is Long Memory?

Short Memory (ARMA)

- **ACF Behavior:**

- ▶ Autocorrelations ρ_k decay **exponentially**: $|\rho_k| \leq C \cdot r^k, r < 1$
- ▶ Finite sum: $\sum_{k=0}^{\infty} |\rho_k| < \infty$

- **Implication:** Shock effects disappear quickly

Long Memory (ARFIMA)

- **ACF Behavior:**

- ▶ Autocorrelations decay **hyperbolically**: $\rho_k \sim C \cdot k^{2d-1}$
- ▶ Infinite sum: $\sum_{k=0}^{\infty} |\rho_k| = \infty$

- **Implication:** Shock effects persist for a long time

Examples

Financial volatility, river flows, network traffic, inflation, climate data

Long Memory: An Intuitive Analogy

Short Memory (ARMA)

Analogy: A conversation where you only remember the last few sentences.

- Yesterday's news? Forgotten
- Last week's event? Gone
- Effect of shocks fades **quickly**

Example: Daily stock returns

Long Memory (ARFIMA)

Analogy: An elephant that never forgets — past events influence the present for a long time.


- Old shocks still matter
- Slow decay of influence
- **Persistent** patterns

Example: Stock volatility, river flows

Key Question

How fast do autocorrelations decay? **Exponentially** (short) or **hyperbolically** (long)?

ACF Comparison: Short Memory vs Long Memory



charts/ch8_acf_comparison.pdf

Left: AR(1) — autocorrelations decay exponentially (short memory)

Right: ARFIMA with $d = 0.35$ — autocorrelations decay hyperbolically (long memory)

The ARFIMA(p,d,q) Model

Definition 1 (ARFIMA — Granger & Joyeux (1980), Hosking (1981))

A process $\{Y_t\}$ follows an **ARFIMA(p,d,q)** model if: $\phi(L)(1-L)^d Y_t = \theta(L)\varepsilon_t$ where $d \in (-0.5, 0.5)$ is the **fractional differencing parameter**.

Fractional Differencing Operator

$$(1-L)^d = \sum_{k=0}^{\infty} \binom{d}{k} (-L)^k = 1 - dL - \frac{d(1-d)}{2!} L^2 - \frac{d(1-d)(2-d)}{3!} L^3 - \dots$$

- ▣ $d = 0$: Standard ARMA (short memory)
- ▣ $0 < d < 0.5$: Long memory, stationary
- ▣ $d = 0.5$: Stationarity boundary
- ▣ $0.5 \leq d < 1$: Non-stationary, mean-reverting
- ▣ $d = 1$: Random walk (standard ARIMA)

Interpreting the Parameter d


Value of d	ACF Behavior	Interpretation
$d = 0$	Exponential decay	Short memory
$0 < d < 0.5$	Hyperbolic decay	Long memory, stationary
$d = 0.5$	Non-summable ACF	At the boundary
$0.5 < d < 1$	Very slow decay	Long memory, non-stationary
$d = 1$	ACF = 1 (constant)	Random walk

Hurst Parameter H

Relationship with Hurst exponent: $d = H - 0.5$

- $H = 0.5$: Random walk (no memory)
- $H > 0.5$: Persistence (trend-following)
- $H < 0.5$: Anti-persistence (mean-reverting)

Effect of Parameter d on ACF




charts/ch8_arfima_d_effect.pdf

The higher d , the slower autocorrelations decay. As $d \rightarrow 0.5$, autocorrelations remain significant even at very large lags.



TSA_ch8_arfima_d_effect

Hurst Exponent: Visual Interpretation

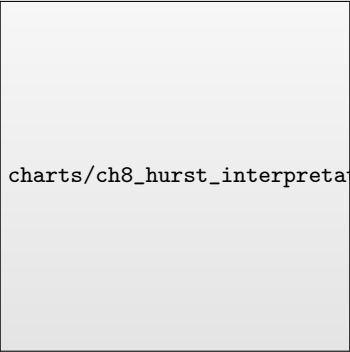

charts/ch8_hurst_interpretation.pdf

$H < 0.5$: Series that frequently returns to mean (mean-reverting)

$H = 0.5$: Random walk, unpredictable

$H > 0.5$: Persistent series, trends continue

Estimating the Hurst Exponent


Classical Methods

- ▣ **R/S Analysis** (Hurst, 1951): Regress $\log(R/S) = c + H \cdot \log(n)$
 - ▶ Simple but sensitive to short-range dependence
- ▣ **DFA** (Peng et al., 1994): Remove local trends, compute fluctuations
 - ▶ Robust to non-stationarities and trends

Frequency Domain Methods

- ▣ **GPH estimator**: $\hat{d} = -\hat{\beta}/2$ from log-periodogram; $H = d + 0.5$
- ▣ **Wavelet-based** (Abry & Veitch, 1998): Multi-scale decomposition, robust


ARIMA vs ARFIMA: Memory Decay Patterns



charts/ch8_arima_vs_arfima.pdf

- ▣ **ARIMA** (left): ACF decays **exponentially** – shocks are quickly “forgotten”
- ▣ **ARFIMA** (right, $d = 0.35$): ACF decays **hyperbolically** – shocks persist for long periods

Real Data Example: EUR/RON Long Memory Analysis



charts/ch8_eurron_long_memory.pdf

Returns: $H \approx 0.50$, $d \approx 0$ – short memory

Squared returns: $H \approx 0.65$, $d \approx 0.15$ – long memory in volatility

 TSA_ch8_eurron_long_memory

ARFIMA Example: S&P 500 Realized Volatility

charts/ch8_arfima_real_data.pdf

Estimation Results

- Data: S&P 500 (2015–2024)
- Hurst: $H = 0.92$
- $d = H - 0.5 = 0.42$
- Strong long memory

Key Insight

- Volatility has **long memory**
- Shocks persist longer than ARMA
- Use ARFIMA or FIGARCH!

ARFIMA vs ARIMA: When to Use?

Use ARFIMA when:

- ACF decays **slowly** (hyperbolically)
- H significantly $\neq 0.5$
- **Long horizon** forecasting
- Modeling **volatility**

Use ARIMA when:

- ACF decays **rapidly** (exponentially)
- Short series (< 500 obs.)
- **Short horizon** forecasting
- Simplicity is priority

ARFIMA Limitations

- More complex estimation
- Requires longer series
- Estimation of d is sensitive
- Not always better short-term

ARFIMA Advantages

- Parsimonious (single d)
- Better long-horizon forecasts
- Captures slow ACF decay

Practical Applications of Long Memory

Finance

- ▣ **Volatility modeling:** GARCH may underestimate persistence
- ▣ **Risk management:** Long-horizon VaR
- ▣ **Option pricing:** Long memory affects implied volatility
- ▣ **Portfolio optimization:** Correlations persist longer

Other Domains

- ▣ **Hydrology:** River flows, precipitation
- ▣ **Network traffic:** Internet data packets
- ▣ **Economics:** Inflation, GDP growth
- ▣ **Climate:** Temperature anomalies
- ▣ **Geophysics:** Earthquake magnitudes

Key Insight


Long memory means that **shocks have lasting effects** – important for policy, risk management, and forecasting!

ARFIMA Estimation: Step-by-Step Procedure

Recommended Workflow

1. **Test for Long Memory:**
 - ▶ Examine ACF decay pattern (slow = long memory)
 - ▶ Compute \hat{H} using R/S or GPH; test if $H \neq 0.5$
2. **Estimate d :**
 - ▶ Use GPH or Local Whittle for initial estimate
 - ▶ Verify $d \in (0, 0.5)$ for stationary long memory
3. **Fit Full ARFIMA(p, d, q):**
 - ▶ Fix \hat{d} from step 2, select p, q via AIC/BIC
 - ▶ Or estimate all parameters jointly via MLE
4. **Diagnostic Checking:**
 - ▶ Residuals should be white noise (Ljung-Box test)
 - ▶ Check for remaining autocorrelation structure

Real Example: Long Memory in Volatility

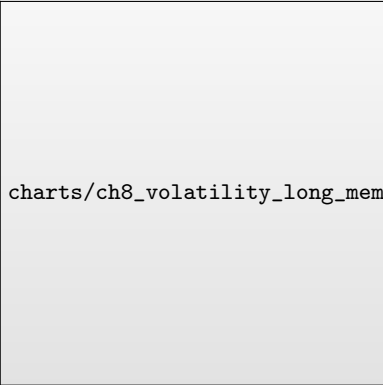

charts/ch8_volatility_long_memory.pdf

Stylized Fact: Financial returns have short memory, but volatility ($|returns|$) has long memory! This is the basis for FIGARCH models.

Random Forest: Basic Concepts

What is Random Forest? (Breiman, 2001)

- ▣ **Ensemble learning** method combining multiple decision trees:
 - ▶ Each tree trained on a **bootstrap sample** (bagging)
 - ▶ At each split, only $m \ll p$ **random features** considered
 - ▶ Final prediction = **average** of all tree predictions

Why It Works for Time Series

- ▣ **Flexibility:**
 - ▶ Captures nonlinear relationships and interactions automatically
 - ▶ No stationarity assumption required
- ▣ **Robustness:**
 - ▶ Resistant to outliers, noise, and irrelevant features
 - ▶ Built-in feature importance for interpretability

Why “Random” Forest? The Power of Diversity

Two Sources of Randomness

1. **Bootstrap Sampling:** Each tree sees a different subset of data
2. **Feature Sampling:** Each split considers only m random features

Analogy: Wisdom of Crowds

- Ask 100 people to guess weight of an ox
- Individual guesses: high variance
- **Average:** remarkably accurate!


Why It Works

- Trees make **different errors**
- Errors **cancel out** when averaging
- Result: lower variance, same bias

Mathematical Insight

If trees are uncorrelated with variance σ^2 , forest variance = $\frac{\sigma^2}{B}$ (B = number of trees)

How Does a Decision Tree Make Predictions?

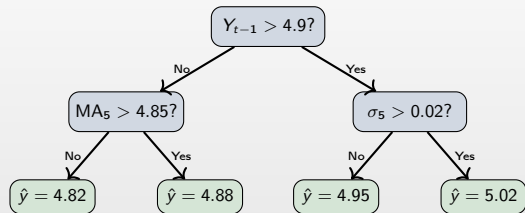

Tree Prediction

1. Start at the root
2. Check the condition (split)
3. Go left (No) or right (Yes)
4. Repeat until a leaf
5. **Leaf value = prediction**

Random Forest

$$\hat{y} = \frac{1}{B} \sum_{b=1}^B T_b(x) \text{ — Average of } B \text{ trees}$$

Random Forest: Mathematical Formulation

Prediction

$$\hat{y} = \frac{1}{B} \sum_{b=1}^B T_b(x) \quad \text{where } T_b(x) = \text{prediction of tree } b$$

Feature Importance (MDI = Mean Decrease in Impurity)

$$\text{Importance}(X_j) = \frac{1}{B} \sum_{b=1}^B \sum_{\substack{t \in T_b \\ j_t = j}} \Delta I_t$$

Sum over all nodes t in all trees where feature j was used; ΔI_t = impurity decrease

Out-of-Bag Error (OOB)

$$\text{OOB} = \frac{1}{n} \sum_{i=1}^n L \left(y_i, \frac{1}{|B_i^-|} \sum_{b \in B_i^-} T_b(x_i) \right)$$

B_i^- = trees where obs. i was **not** in the bootstrap (free validation!)

Random Forest: How It Works

Training Process

1. Draw B bootstrap samples
2. For each sample b , grow tree T_b :
 - ▶ At each node, select m features
 - ▶ Find best split: $\min_{j,s} \sum (y_i - \bar{y}_{R_1})^2$
 - ▶ Continue until stopping criterion
3. Aggregate: $\hat{y} = \frac{1}{B} \sum_{b=1}^B T_b(x)$

Key Hyperparameters

- ▣ B : number of trees (100-500)
- ▣ m : features per split (\sqrt{p})
- ▣ max_depth: tree depth
- ▣ min_samples: leaf size

Feature Engineering: The Key to ML Success

Critical Insight

ML models don't "understand" time — you must **encode temporal patterns as features!**

Lag Features

y_{t-1}, y_{t-2}, \dots — capture **AR** patterns

Rolling Statistics

Mean $\bar{y}_{k,t}$, std $\sigma_{k,t}$ — **local trends**

Calendar Features

Day, month, holiday — **seasonality**

Domain Features

Weather, economics — external **regressors**

Random Forest: Why It Works for Time Series


Strengths

- No linearity assumption
- Automatic interaction detection
- Handles mixed data types
- Built-in OOB validation
- Parallelizable training

Limitations

- Cannot extrapolate beyond training range
- Requires manual feature engineering
- Less interpretable than single tree

From Biological to Artificial Neurons



charts/ch8_neuron_comparison.pdf

The Analogy

Dendrites → Inputs x_i Synapses → Weights w_i Soma → Sum + Activation Axon → Output y

 TSA_ch8_neuron_comparison

Recurrent Neural Networks (RNN)

charts/ch8_rnn_unfolded.pdf

Key Idea

- Processes **sequences** step by step
- Hidden state h_t carries **memory**
- Update: $h_t = \tanh(W_h h_{t-1} + W_x x_t)$

Vanishing Gradient Problem

- Gradient**: derivative to update weights
- Long sequences: $\frac{\partial L}{\partial h_1} \propto \prod W_h \rightarrow 0$
- Early steps **stop learning**
- Solution**: LSTM/GRU gates

LSTM: Long Short-Term Memory

The LSTM Solution (Hochreiter & Schmidhuber, 1997)

A gated architecture with **3 learned gates** that control information flow: **Forget** (f_t) – what to discard; **Input** (i_t) – what to store; **Output** (o_t) – what to transmit

LSTM Equations

$$f_t = \sigma(W_f \cdot [h_{t-1}, x_t] + b_f) \quad (\text{Forget})$$

$$i_t = \sigma(W_i \cdot [h_{t-1}, x_t] + b_i) \quad (\text{Input})$$

$$\tilde{C}_t = \tanh(W_C \cdot [h_{t-1}, x_t] + b_C) \quad (\text{Candidate})$$

$$C_t = f_t \odot C_{t-1} + i_t \odot \tilde{C}_t \quad (\text{Cell state})$$

$$o_t = \sigma(W_o \cdot [h_{t-1}, x_t] + b_o) \quad (\text{Output})$$

$$h_t = o_t \odot \tanh(C_t) \quad (\text{Hidden state})$$

LSTM Gates: An Intuitive Explanation

Analogy: A Smart Secretary

The LSTM cell is like a secretary managing information flow in an office.

Forget Gate f_t

“What to throw away?”

- ▣ Reviews old files
- ▣ Decides what's outdated
- ▣ $f_t \approx 0$: delete
- ▣ $f_t \approx 1$: keep

Input Gate i_t

“What to file?”

- ▣ Reviews new info
- ▣ Decides importance
- ▣ $i_t \approx 0$: ignore
- ▣ $i_t \approx 1$: store

Output Gate o_t


“What to report?”

- ▣ Reviews memory
- ▣ Decides relevance
- ▣ $o_t \approx 0$: hide
- ▣ $o_t \approx 1$: share

Key Insight

Gates are **learned** during training — the network discovers what to remember and forget!

LSTM Cell Architecture

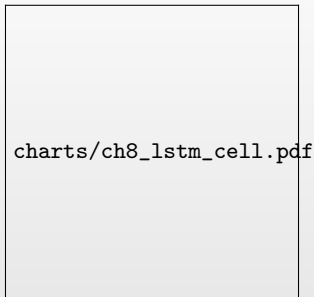


Cell State (C_t): Long-term memory

Hidden State (h_t): Short-term memory

Gates: forget, add, transmit

 TSA_ch8_lstm_cell

Activation Functions: Why Do We Need Them?



charts/ch8_activation_functions.pdf

Why Activation Functions?

- Without them, networks can only learn **linear** relationships
- In LSTM:** Sigmoid for gates (0-1), Tanh for cell state (-1 to 1)

LSTM Advantages for Time Series

Why LSTM?

- ▣ Captures long-term dependencies
- ▣ Variable-length sequences
- ▣ Complex nonlinear patterns
- ▣ Multivariate time series

Disadvantages

- ▣ Needs large datasets
- ▣ “Black box” model
- ▣ Sensitive to hyperparameters
- ▣ Prone to overfitting

LSTM: Key Hyperparameters

Architecture

- ▣ **Units:** neurons per layer (32-256)
- ▣ **Layers:** stacked LSTM (1-3)
- ▣ **Sequence length:** past observations (10-100)
- ▣ **Dropout:** regularization (0.1-0.3)

Training

- ▣ **Batch size:** samples per update (32-128)
- ▣ **Epochs:** training iterations (50-200)
- ▣ **Learning rate:** step size (0.001)
- ▣ **Early stopping:** prevents overfitting

Practical Tips

- ▣ **Normalize/scale** data to $[0,1]$ or $[-1,1]$
- ▣ Use **validation set** for hyperparameter tuning
- ▣ Monitor **training vs validation loss** for overfitting

LSTM: When to Use It

LSTM is a Good Choice When:

- **Data Characteristics:**
 - ▶ Large datasets (> 1000 observations)
 - ▶ Complex temporal patterns and long-term dependencies
- **Problem Requirements:**
 - ▶ Multiple input sequences (multivariate)
 - ▶ Accuracy is more important than interpretability

LSTM is NOT a Good Choice When:

- **Data Limitations:**
 - ▶ Small datasets (< 500 obs) or linear relationships
- **Practical Constraints:**
 - ▶ Interpretable predictions required
 - ▶ Limited computational resources
 - ▶ Simple models (ARIMA) already perform well

Evaluation Metrics

Notation: y_i = actual value, \hat{y}_i = predicted value, n = number of observations

Common Metrics

Scale-Dependent:

- ▶ RMSE: $\sqrt{\frac{1}{n} \sum (y_i - \hat{y}_i)^2}$ — penalizes large errors
- ▶ MAE: $\frac{1}{n} \sum |y_i - \hat{y}_i|$ — robust to outliers

Scale-Free:

- ▶ MAPE: $\frac{100}{n} \sum \left| \frac{y_i - \hat{y}_i}{y_i} \right|$ — percentage error
- ▶ MASE: $\frac{\text{MAE}}{\frac{1}{n-1} \sum_{i=2}^n |y_i - y_{i-1}|}$ — relative to naive (random walk)

Validation for Time Series

Critical: Do NOT use standard k-fold cross-validation!

- ▶ Use Time Series CV (walk-forward validation)
- ▶ Or temporal train/validation/test split


Time Series Cross-Validation



charts/ch8_timeseries_cv.pdf

Important: Training set grows progressively; test is always in the future \Rightarrow avoids data leakage.

Model Selection Guide

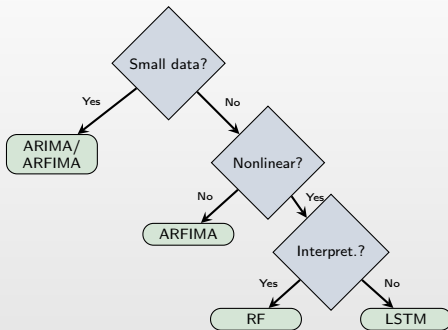

Trade-off

ML models offer better accuracy but higher computational cost. For small data or interpretability, ARIMA/ARFIMA remain excellent choices.

Key Formulas – Summary

ARFIMA(p,d,q)

$$\phi(L)(1-L)^d Y_t = \theta(L)\varepsilon_t$$

$d \in (-0.5, 0.5)$: long memory

Long Memory

ACF: $\rho_k \sim C \cdot k^{2d-1}$

Hurst: $d = H - 0.5$

$H > 0.5$: persistence

Random Forest

$$\hat{y} = \frac{1}{B} \sum_{b=1}^B T_b(x)$$

B trees, random features

LSTM Cell

$$f_t = \sigma(W_f[h_{t-1}, x_t] + b_f)$$

$$C_t = f_t \odot C_{t-1} + i_t \odot \tilde{C}_t$$

Forget, Input, Output gates

Evaluation Metrics

$$\text{RMSE} = \sqrt{\frac{1}{n} \sum (y_i - \hat{y}_i)^2}$$

$$\text{MAPE} = \frac{100}{n} \sum \left| \frac{y_i - \hat{y}_i}{y_i} \right|$$

Time Series CV

Walk-forward validation

Train \rightarrow Test (temporal split)

Case Study: Energy Consumption Forecasting

Data Source

- ▣ **Series:** Germany daily electricity consumption
- ▣ **Unit:** Gigawatt-hours (GWh)
- ▣ **Period:** Jan 2012 – Dec 2017
- ▣ **Observations:** 2,162 daily values
- ▣ **Source:** Open Power System Data

Data Split (Temporal!)

- ▣ **Training:** 70% (1,513 obs)
- ▣ **Validation:** 15% (324 obs)
- ▣ **Test:** 15% (325 obs)

Key Patterns

- ▣ **Weekly:** Lower on weekends
- ▣ **Annual:** Higher in winter
- ▣ **Holidays:** Significant drops
- ▣ **Trend:** Slight decrease

Why ML works here:

Complex multi-seasonal patterns + sufficient data
(2000+ obs) = ideal for ML!

Case Study: Feature Engineering

Lag Features

- Previous day: y_{t-1}
- Same day last week: y_{t-7}
- Two weeks ago: y_{t-14}
- Full week history: y_{t-1}, \dots, y_{t-7}

Rolling Statistics

- 7-day mean: $\bar{y}_{7,t} = \frac{1}{7} \sum_{i=1}^7 y_{t-i}$
- 7-day std: $\sigma_{7,t}$
- 30-day mean: $\bar{y}_{30,t}$

Total: 14 features for Random Forest and LSTM models

Calendar Features

- Day of week (1–7)
- Month (1–12)
- Is weekend (0/1)
- Is holiday (0/1)

Avoid Data Leakage!

- Use **only past data**
- Rolling stats: exclude y_t
- Scale with **training** stats only


Case Study: Models Compared

Model	Description	Configuration
Baseline	Seasonal naive: $\hat{y}_t = y_{t-7}$	No parameters
SARIMA	Seasonal ARIMA with weekly seasonality	Order: (1, 1, 1) Seasonal: (1, 0, 1) ₇
ARFIMA	Fractional differencing with long memory	$H = 0.77 \Rightarrow d = 0.27$ Rolling one-step forecasts
Random Forest	Ensemble of 200 trees with all 14 features	max_depth = 15 min_samples_leaf = 5
LSTM	2-layer LSTM (64, 32 units) with all 14 features	seq_length = 7 days dropout = 0.2, early stopping

Evaluation Metric: MAPE

$$\text{MAPE} = \frac{100}{n} \sum_{i=1}^n \left| \frac{y_i - \hat{y}_i}{y_i} \right| \text{ — interpretable as “average \% error”}$$


Case Study: Data Overview



charts/ch8_data_split.pdf

Train: 1513 obs (70%) **Validation:** 324 obs (15%) **Test:** 325 obs (15%)

Case Study: Model Predictions

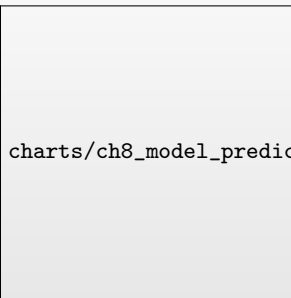

Rank	Model	MAPE	Interpretation
1	Random Forest	2.2%	Best: captures nonlinear patterns
2	LSTM	3.3%	Good, needs more data
3	Baseline	3.9%	Simple but competitive
4	ARFIMA	12.3%	Long memory not sufficient
5	SARIMA	14.6%	Struggles with patterns

Case Study: Best Model Performance

charts/ch8_best_model_prediction.pdf

Random Forest Wins

- MAPE: **2.2%**
- Captures weekly patterns

Why RF Outperformed?

- Good feature engineering
- Robust to outliers

Practical Summary: Model Selection

Criterion	ARIMA	ARFIMA	RF	LSTM
Data needed	Few	Few	Medium	Many
Long memory	No	Yes	Partial	Partial
Nonlinearity	No	No	Yes	Yes
Interpretability	Yes	Yes	Partial	No
Computation time	Fast	Fast	Medium	Slow
Exog. variables	Limited	Limited	Yes	Yes

Rule: Start simple (ARIMA), increase complexity only if out-of-sample performance improves.

Common Mistakes to Avoid

Data Leakage

- ▣ Using future data in features
- ▣ Standard k-fold CV on time series
- ▣ Scaling with full dataset stats

Solution: Always use **walk-forward** validation

Overfitting

- ▣ Too many features
- ▣ Too complex models
- ▣ Training too long (LSTM)

Solution: Use **validation set**, early stopping

Wrong Model Choice

- ▣ LSTM with 100 observations
- ▣ ARIMA for nonlinear patterns
- ▣ Ignoring interpretability needs


Solution: Match model to **data size & complexity**

Poor Evaluation

- ▣ Only using RMSE
- ▣ Ignoring prediction intervals
- ▣ No baseline comparison

Solution: Multiple metrics, **always compare to naive**

Practical Workflow: Step-by-Step

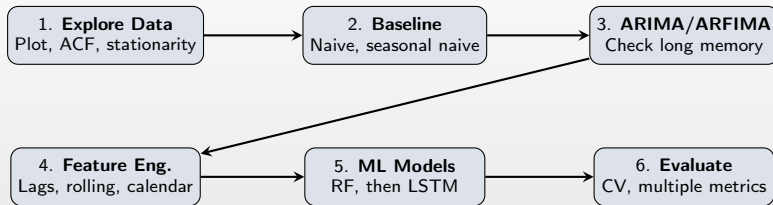

Golden Rules

- **Start simple:** Beat the baseline first, then add complexity
- **Validate properly:** Time series CV, not random splits
- **Iterate:** Feature engineering often matters more than model choice

Summary

What We Learned

- ▣ **ARFIMA:** Extends ARIMA for long memory processes (fractional d)
- ▣ **Random Forest:** Ensemble of trees for nonlinear relationships
- ▣ **LSTM:** Deep learning for complex sequential dependencies
- ▣ **Trade-offs:** Complexity vs interpretability vs data requirements

Key Takeaway

- ▣ **Parsimony Principle:**
 - ▶ Simple models often outperform complex ones
 - ▶ Always benchmark against naive methods

Quick Quiz

1. What does $d = 0.3$ mean in an ARFIMA model?
2. Why use Time Series CV instead of standard k-fold?
3. What is the main advantage of LSTM over simple RNNs?
4. What type of model would you choose with small data and linear relationships?
5. What does “data leakage” mean in the context of ML for time series?

Quiz Answers

1. $d = 0.3$: Long memory, the series is stationary but autocorrelations decay slowly (hyperbolically). Moderate persistence.
2. **Time Series CV**: To respect temporal order. Standard k-fold would use future data to predict the past (data leakage).
3. **LSTM vs RNN**: LSTM solves the “vanishing gradient” problem through the gating mechanism, allowing learning of long-term dependencies.
4. **Small data, linear relationships**: ARIMA or ARFIMA. ML requires lots of data to generalize well.
5. **Data leakage**: Using future information in features or training. E.g., calculating moving averages using future data, or standard k-fold that mixes temporal order.

What Comes Next?

Chapter 9: Multiple Seasonalities

- **The Challenge:** Real data often has multiple seasonal patterns
 - ▶ Hourly data: daily + weekly + yearly cycles
 - ▶ Standard SARIMA handles only one seasonal period
- **TBATS:** Trigonometric seasonality, Box-Cox, ARMA errors, Trend, Seasonal
 - ▶ Automatic, handles high-frequency data
 - ▶ Uses Fourier terms for efficient representation
- **Prophet** (Taylor & Letham, 2018): Decomposable model
 - ▶ Interpretable components (trend + seasonality + holidays)
 - ▶ Built-in holiday effects and external regressors

Questions?

Key References

Foundational Papers

- Box, G.E.P. & Jenkins, G.M. (1970). *Time Series Analysis: Forecasting and Control*. Holden-Day.
- Granger, C.W.J. & Joyeux, R. (1980). An introduction to long-memory time series models and fractional differencing. *Journal of Time Series Analysis*, 1(1), 15-29.
- Hosking, J.R.M. (1981). Fractional differencing. *Biometrika*, 68(1), 165-176.

Machine Learning Methods

- Breiman, L. (2001). Random Forests. *Machine Learning*, 45(1), 5-32.
- Hochreiter, S. & Schmidhuber, J. (1997). Long short-term memory. *Neural Computation*, 9(8), 1735-1780.

Forecasting Competitions & Reviews

- Makridakis, S., Spiliotis, E. & Assimakopoulos, V. (2018). The M4 Competition. *International Journal of Forecasting*, 34(4), 802-808.
- Hyndman, R.J. & Athanasopoulos, G. (2021). *Forecasting: Principles and Practice*, 3rd ed. OTexts.

Key Takeaways

- ❑ **No Free Lunch:**
 - ▶ No universally best method
 - ▶ Depends on data, sample size, objectives
- ❑ **Parsimony Principle:**
 - ▶ Simple models often outperform complex ones
 - ▶ Always benchmark against naive methods
- ❑ **Long Memory Matters:**
 - ▶ Many series exhibit long memory (volatility, hydrology)
 - ▶ ARFIMA provides a parsimonious solution
- ❑ **Feature Engineering > Model Complexity:**
 - ▶ Thoughtful features yield greater improvements
 - ▶ More important than switching algorithms
- ❑ **Proper Validation is Critical:**
 - ▶ Time series CV prevents data leakage
 - ▶ Provides reliable performance estimates