

<!doctype html>

→ To show this is Html5

First tag <html>

The if you want heading <head>

<body> → body of the page

<p> Paragraph

<h1> main header format ①

<!doctype> → Used to show Document type and show the pages correctly in web browser.

→ <!doctype> → Not a case sensitive

<h1> to <h6> heading tags

↓
most
important
heading

↓
least
important heading

05

OCTOBER
WEDNESDAY

S	M	T	W	T	F	S
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

For Paragraph use `<p>`

HTML Links `<a href=" " `
attribute

Image adding in html

``

HTML elements

`<h1>` - - `</h1>` `<p>` - - `</p>`

`
` → do not contain the end tag

HTML tags are not Case Sensitive.

HTML attributes

`<a>` Hyperlink

href (url of page the link goes to)

`` → embed image

`src` → path to the image displayed
contains

width & height attributes
in pixels (px)

also `alt` → alternative text for the image

Style attribute

`<p style="color: red;"> This is para. </p>`

↓
Style the element
with

font, color, size and more.

`<a>` → `anchor` → `tag`

→ This is
anchor tag.

`` -- `` → bold tag.

`<i>` -- `</i>` → italic tag.

`<u>` underline `</u>` → underline tag.

`<hr>` horizontal ruler.

07

OCTOBER
FRIDAY

Subscript & Super Script (chemistry)

`_{Subscript}`

`^{sup}`

`<pre>`

→ to count spaces
& line breaks.

↓
Imp

Layout

Semantic tags

↓

header

footer

`<main>`

Non-Semantic tags

↓

div

span.

`<article>`

`<aside>`

→ SEO cannot recognize.

`<a href = "`

`" target = "_blank">2/a>`

↓
to open in new tab.


 /a>

↓
Clickable image

Div tag → Non-Sementic (tags)

take whatever space it want around.

Span tag → No space (only that much you wanted is given).

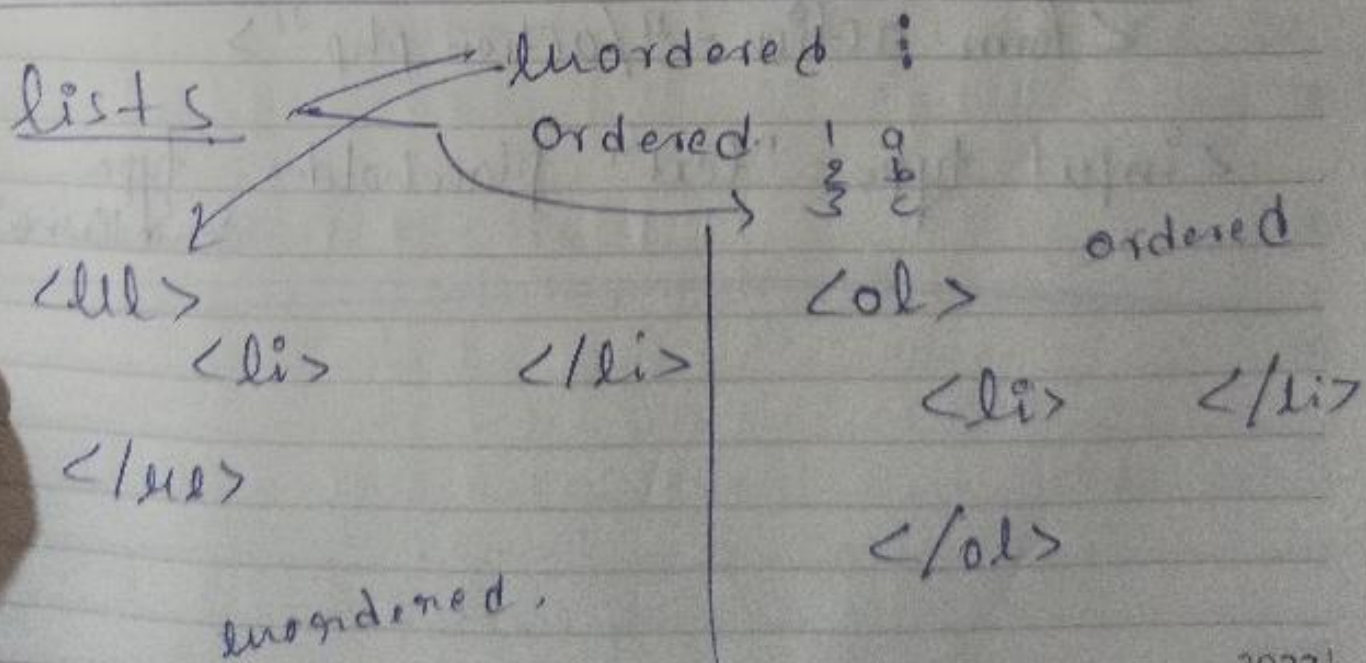

value is
used to
enter in
html -

S	M	T	W	T	F	S
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

Tables

`<tr>` → table row tag.

`<td>` → table data tag

`<th>` → table header tag.

`colspan` to add in middle.

also we can use this

`<thead>` → as a head

`<tbody>` → table body

Forms in Html

`<form>` content `</form>`.

`<form action = "/action.php">`

`<input type = "text" placeholder = "type
something">`

M	T	W	T	F	S	NOV
		1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30			

radio value name

class 10
OCTOBER
MONDAY

labels → class id

<label for="id1">

<input type="radio" value="class" name="class" id="id1">
</label>

<label for="math">

<input checked="" type="checkbox" value="math" name="subject" id="1">

For Dropdown Use

<select name="city">

<option

</option>

</select>

11

OCTOBER
TUESDAY

Liham

90% Webseiten

</i>frames

Video tag

<video src="" type="video/mp4"></video>

Controls

Contact me form

CSS (styling language)

HTML all tags

- → bold text
- → Important tag text
- <i> → italic text
- - Emphasized text
- <mark> Marked text.
- <small> → small text
- → deleted text
- <ins> → inserted text
- <sub> → subscript text
- <sup> → superscript text