


LAMP DE DANIEL

Apache

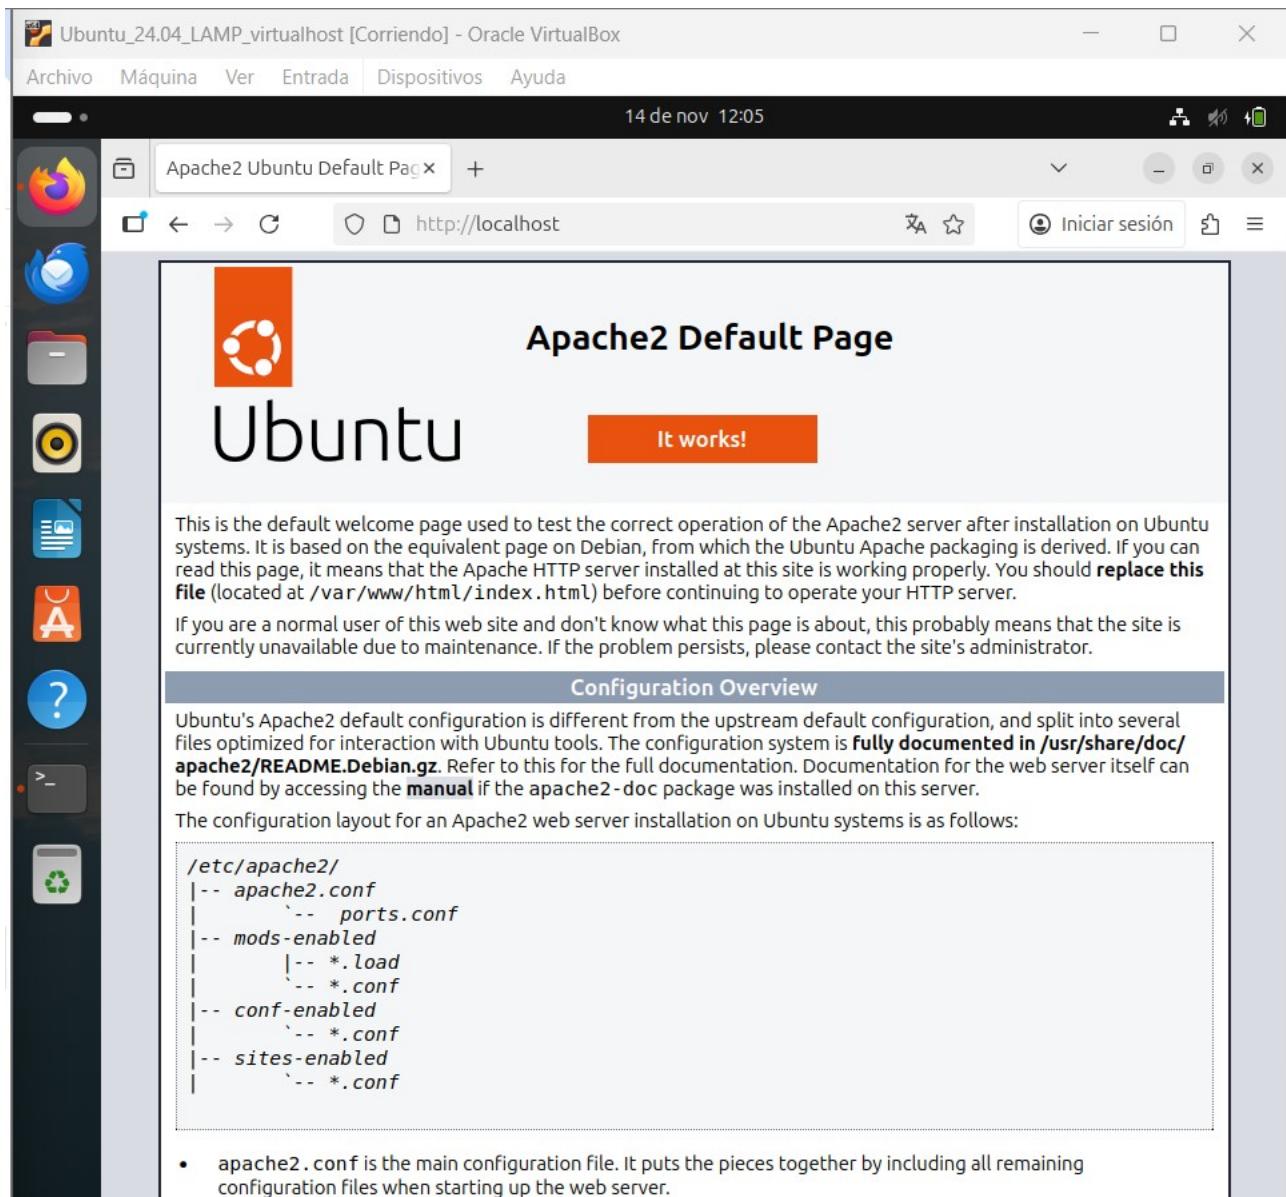

The screenshot shows a Firefox browser window titled "Apache2 Ubuntu Default Page" with the URL "http://localhost". The page content includes the Ubuntu logo, the text "Apache2 Default Page", "Ubuntu", and "It works!". Below this, there is a paragraph about the default welcome page and configuration details.

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Ubuntu systems. It is based on the equivalent page on Debian, from which the Ubuntu Apache packaging is derived. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should [replace this file](#) (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Ubuntu's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Ubuntu tools. The configuration system is [fully documented in /usr/share/doc/apache2/README.Debian.gz](#). Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the [manual](#) if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Ubuntu systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|   '-- ports.conf
|-- mods-enabled
|   '-- *.load
|       '-- *.conf
|-- conf-enabled
|   '-- *.conf
|-- sites-enabled
    '-- *.conf
```

- `apache2.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

MariaDB y PHPmyAdmin

```
examen@UBUNTU-24-04:~/Escritorio/LAMP$ sudo apt install mysql-server -y
Leyendo lista de paquetes... Hecho
Creando árbol de dependencias... Hecho
Leyendo la información de estado... Hecho
mysql-server ya está en su versión más reciente (8.0.43-0ubuntu0.24.04.2).
Los paquetes indicados a continuación se instalaron de forma automática y ya no
son necesarios.
libgl1-amber-dri libglapi-mesa libllvm17t64
Utilice «sudo apt autoremove» para eliminarlos.
0 actualizados, 0 nuevos se instalarán, 0 para eliminar y 514 no actualizados.
examen@UBUNTU-24-04:~/Escritorio/LAMP$ sudo apt install phpmyadmin -y
Leyendo lista de paquetes... Hecho
Creando árbol de dependencias... Hecho
Leyendo la información de estado... Hecho
phpmyadmin ya está en su versión más reciente (4:5.2.1+dfsg-3).
Los paquetes indicados a continuación se instalaron de forma automática y ya no
son necesarios.
libgl1-amber-dri libglapi-mesa libllvm17t64
Utilice «sudo apt autoremove» para eliminarlos.
0 actualizados, 0 nuevos se instalarán, 0 para eliminar y 514 no actualizados.
examen@UBUNTU-24-04:~/Escritorio/LAMP$ soy daniel
```

