

Menu4MultipleBrowsers

Reference Card v1.3



Variables (Parameters)

%PATH_MENUBIN
%PATH_ROOT_CONTENT
%V_MODEDEBUG
%V_LANG
%V_VERBOSELIST

V_CONFIGFILE
V_DISPLAY_TAGS
V_STR_OPT

NAME_x,
PATH_x
PROFILE_x (relative path to profile)
V_EXEC_BIN_x
V_FAMILY_x
A_CLASIF_x
V_DISABLED_x

Description

Path (menu executable)
Path (root browser & profile)
Debug Mode (display additional info)
Language (Menu UI)
Mode List (all, clasified per family)

File Name with configuration items
Display information tags (OS, bits...)
List of option Chars for menu options

Name of Browser/Title to display
Path (relative path to bin)
Path (relative path to profile)
Executable name
Family acronym
Information tags (array)
Entry disabled for menu

Value (default)

%~dp0
%CD%
N
EN
N

config_menu.conf.txt
Y
abcdefg

Value (options)


C:/xxx , D:/yyy
C:/xxx, F:/zzzz
Y/N
ES
ALL

File.ext
Y/N
String

Firefox 72

firefox.exe
FF60
FF60, NIX,..
Y/N


Folder structure

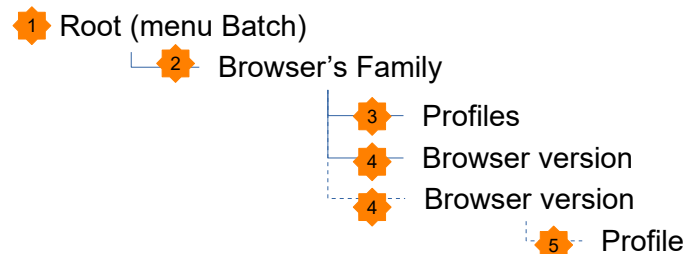

Specific features

- Basic (bash/posix)
- Advanced (bash/posix)
- Standard (batch windows)

C:\menu

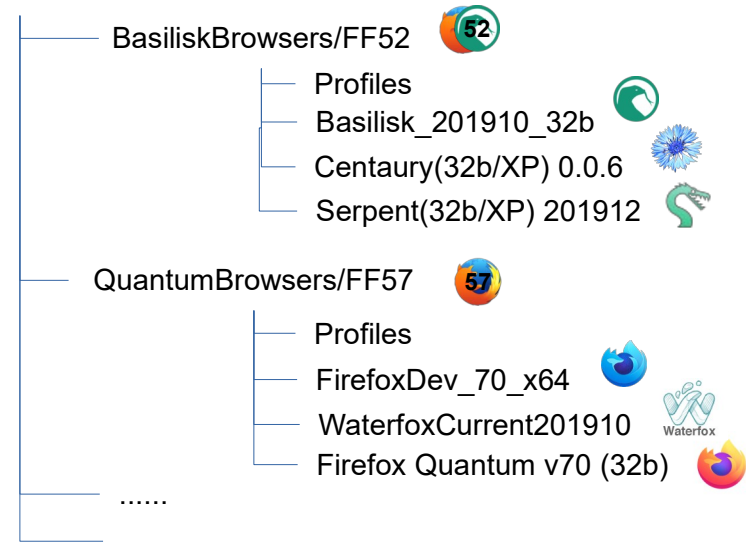

Batch version:

Section: VAR DEFINITION (Parameters)

Variables

Section: LANGUAGE STRINGS

Subsection ES


Subsection EN


Section: FAMILY DEFINITION

Logo/Header

Variables:


%NAMEx,


%PATHx (relative path to bin), 

%PROFILEx (relative path to profile) 

Section: MENU (1) FAMILY

Variables:

%BROWSERPATH 

%PROFILEPATH 


%V_FAMILY

Section: MENU (2) WEBBROWSER



Section: WEBBROWSERS


Variables:

%NAMEx

%PATHxBIN 

Section: EXECUTE

CD %BROWSERPATH%  %PATHxBIN% 

START firefox.exe -arg=%PROFILEPATH% 

or (exceptionally)

START msedge.exe -arg=%BROWSERPATH%\Profile 

Bash version:

Section: VAR DEFINITION (Parameters)

Variables

LANGUAGE STRINGS

....

Logo/Header

Load Configfile or Variables (%NAMEx, %PATHx)

.....

.....

Section: LAUNCHER




CD %BROWSERPATH% %PATHxBIN%

START firefox.exe -arg=%PROFILEPATH%

or (exceptionally)

START msedge.exe -arg=%BROWSERPATH%\Profile

MENU version and features


-  Basic (bash/posix)
-  Advanced (bash/posix)
-  Standard (batch windows)

macOS




WebBrowser version	based in FF	Win32+wXP	ReactOS	Windows >7	linux	linux portable format	linux executable from USB/FAT	MacOS	MacOS portable format	USB/FAT
Basilisk2020xx	52	N	N	Y						
Serpent2020	52	Y	N	Y	Y	tar.xz		Y	apple.app bundle	Y
Waterfox Classic	56	N	N	64b		tar.bz	N	Y	apple.app bundle	Y
Waterfox Current	68	N	N	64b		tar.bz	N	Y	apple.app bundle	Y
M. Firefox 64	64	N	N	Y	Y	appimage bundle	N			
GNU IceCat/Iceweasel 60.7	60				Y	tar.bz	N			
FF45 (roytam)	45	Y	Y	Y						
PaleMoon27	27	Y	N	Y						
NewMoon27	27	Y	Y	Y						
PM28	28	N	N	Y						
NewMoon28	28	Y	N	Y				Y	apple.app bundle	Y

Scenario1: Manual sync/copy (profile)

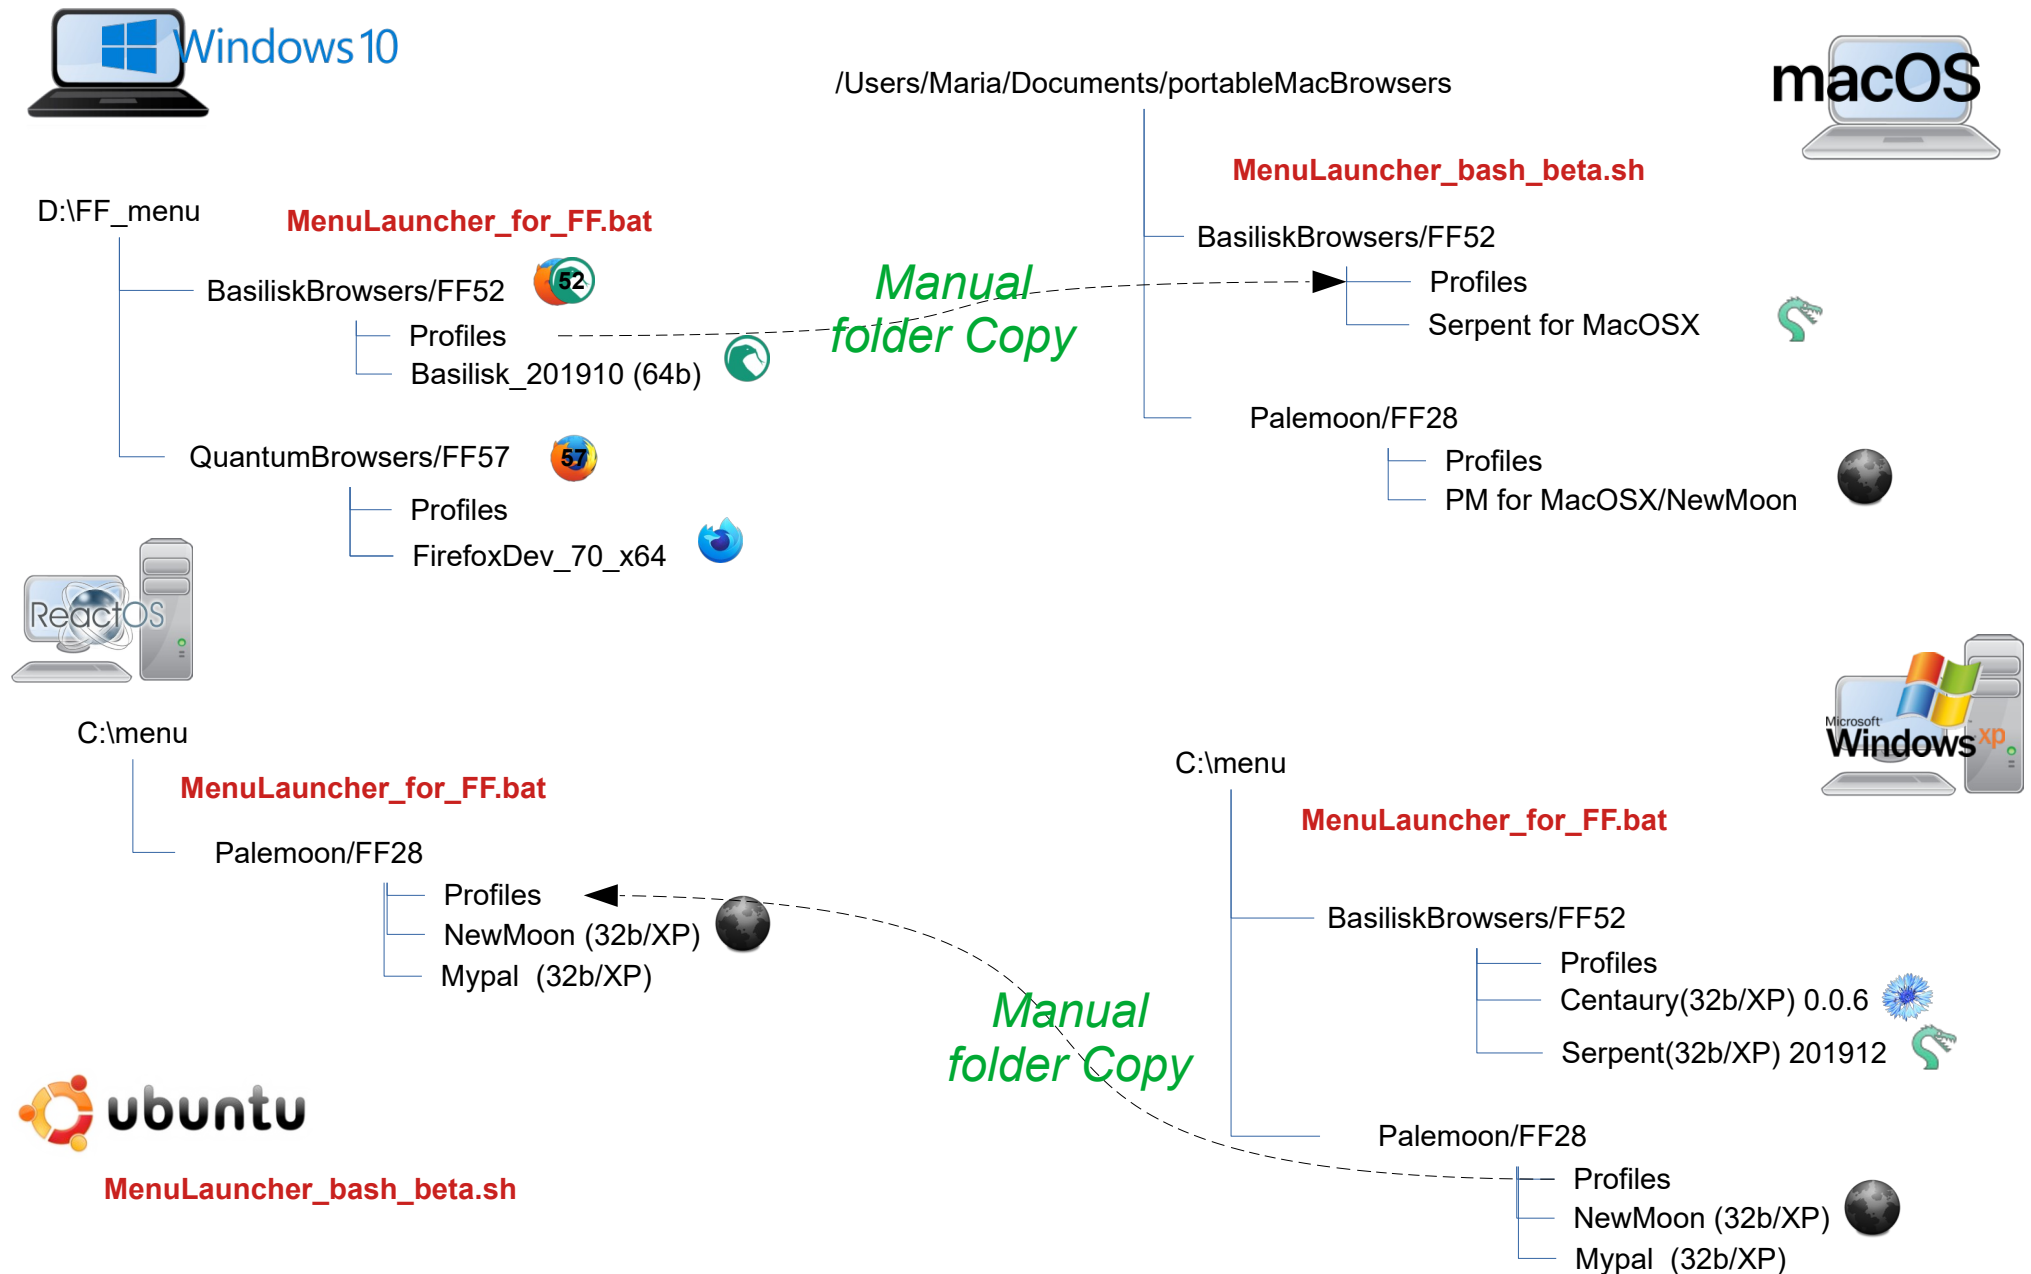

Scenario2:Portable/Launch from a USB Storage

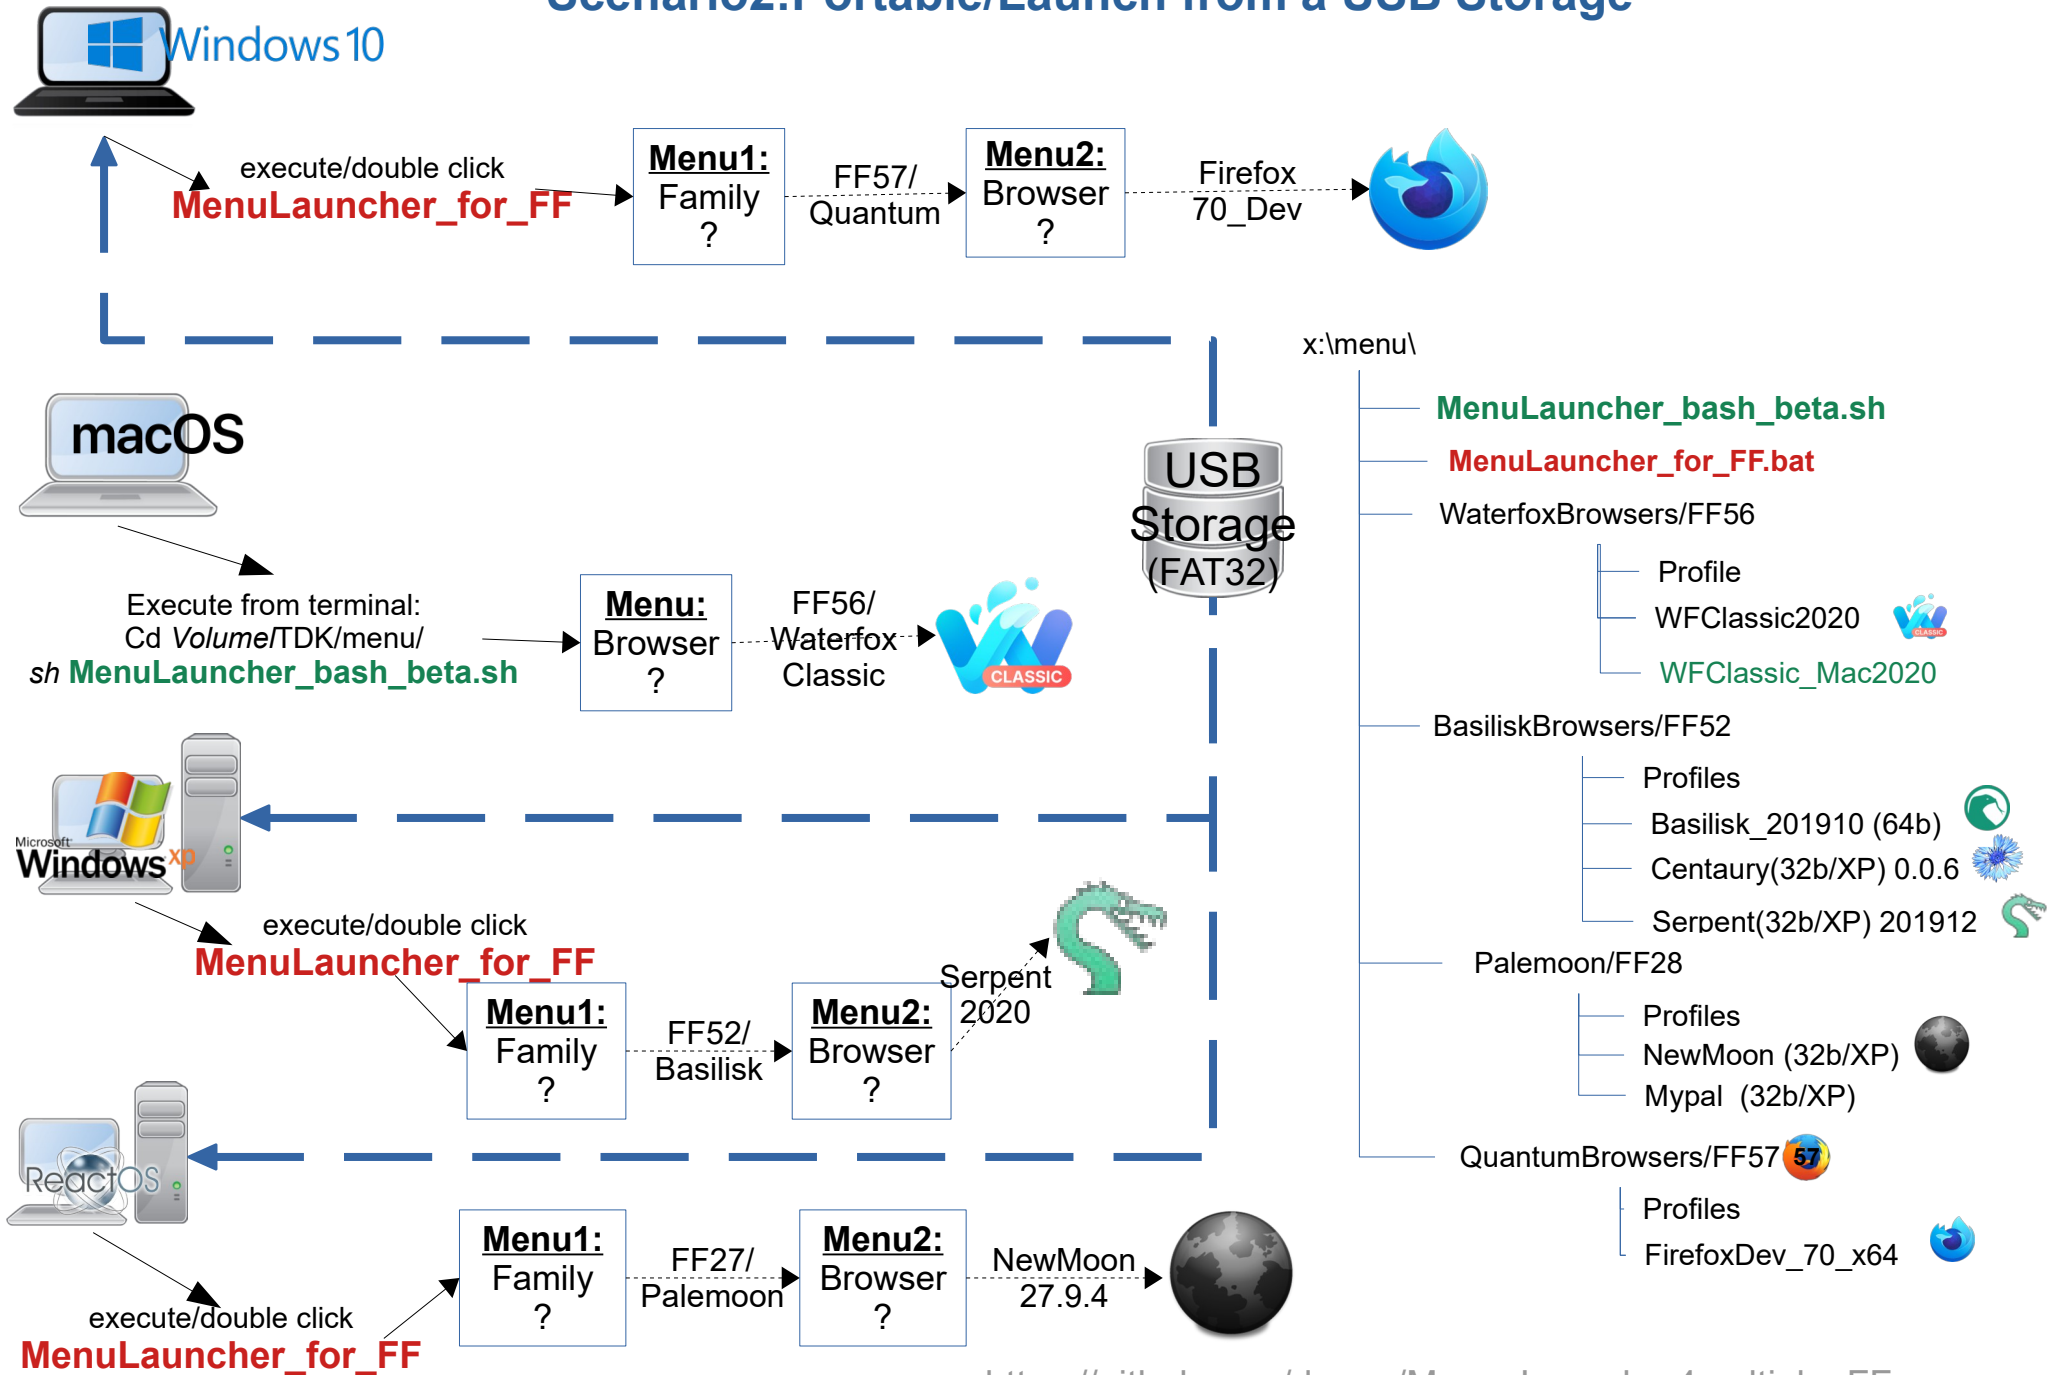

Scenario3:Portable/Launch from the cloud

