



DAPNET 2.0 CONCEPT AND INTERFACE DEFINITION

Thomas Gatzweiler, DL2IC

Philipp Thiel, DL6PT

Marvin Menzerath

Ralf Wilke, DH3WR

LAST CHANGE: JANUARY 11, 2024

Abstract

This is the concept and interface description of the version 2 of the DAPNET. It's purpose in comparison to the first version released is a more robust clustering and network interaction solution to cope with the special requirements of IP connections over HAMNET which means that all network connections have to be considered with a WAN character resulting in unreliable network connectivity. In terms of consistence of the database, "eventually consistence" is considered to be the most reachable. There are "always right" database nodes inside the so called HAMCLOUD. In case of database conflicts, the version inside the HAMCLOUD cluster is always to be considered right.

Contents

1	Introduction	7
1.1	Key Features	7
1.2	Historic Background	7
1.3	Concept presentation	7
1.4	Transmitter Software	8
1.4.1	Unipager	8
1.4.2	Backward compatibility to XOS slave protocol	8
1.4.3	DAPNET-Proxy for AX.25 transmitters	8
1.5	DAPNET Network	9
1.5.1	Overview and Concept	9
1.5.2	Used third-party Software	9
1.5.3	HAMCLOUD Description	9
1.5.4	Transmitter Group Handling Concept	9
1.5.5	Rubric Handling Concept	9
1.5.6	Queuing Priority Concept	9
2	DAPNET Network Definition	12
2.1	Cluster Description	12
2.1.1	Real-time Message delivery with RabbitMQ	12
2.1.2	Distributed Database with CouchDB	12
2.1.3	Authentication Concept	12
2.1.4	Integration of new Nodes	12
2.2	Interface Overview and Purpose	12
2.2.1	RabbitMQ Exchange	12
2.2.1.1	dapnet.calls	12
2.2.1.2	dapnet.local_calls	13
2.2.1.3	dapnet.telemetry	13
2.2.2	CouchDB Interface	13
2.2.3	Core REST API	13
2.2.4	Statistic, Status and Telemetry REST API	13
2.2.5	Websocket for real-time updates on configuration, Statistics and Telemetry API	13
2.2.6	MQTT Fanout for third-party consumers	13
2.3	Other Definitions	14
2.3.1	Scheduler	14
2.3.2	User Roles and Permissions	14

3	Internal Programming Workflows	15
3.1	Sent calls	15
3.2	Add, edit, delete User	15
3.3	Add, edit, delete Subscriber	16
3.4	Add, edit, delete Node (tbd)	16
3.5	Add, edit, delete Transmitter	16
3.6	Implementation of Transmitter Groups	16
3.7	Add, edit, delete Rubrics	16
3.8	Add, edit, delete Rubrics content	16
3.9	Add, edit, delete, assign Rubrics to Transmitter/-Groups	16
3.10	Docker integration	16
3.11	Microservices	16
3.11.1	Overview of Microservices	17
3.11.1.1	Database Service	17
3.11.1.2	Rubric Service	17
3.11.1.3	Call Service	17
3.11.1.4	Transmitter Service	17
3.11.1.5	Cluster Service	17
3.11.1.6	Telemetry Service	17
3.11.1.7	Database Changes Service	17
3.11.1.8	Status Service	17
3.11.1.9	Statistics Service	17
3.11.1.10	RabbitMQ Auth Service	17
3.11.1.11	Backward Compatibility Service	17
3.11.1.12	Coverage Service	17
3.11.2	REST Interfaces	17
3.11.3	Database Service	18
3.11.4	Call Service	18
3.11.5	Rubric Service	18
3.11.6	Transmitter Service	18
3.11.7	Cluster Service	18
3.11.8	Telemetry Service	18
3.11.9	Database Changes Service	18
3.11.10	Status Service	18
3.11.11	RabbitMQ Auth Service	18
3.11.12	Time and Identification Service	18
3.12	Ports and Loadbalancing Concept	19
3.13	Periodic Tasks (Scheduler)	19
3.14	Plugin Interface	19
3.15	Transmitter Connection	19
3.16	DAPNET-Proxy	19

4	External Usage Workflows	20
4.1	General Concept of REST and Websocket-Updates	20
4.2	Website and App	20
4.2.1	Authentication	20
4.2.2	Calls	20
4.2.3	Rubrics	20
4.2.4	Rubrics content	20
4.2.5	Transmitters and Telemetry	20
4.2.6	Nodes	20
4.2.7	Users	20
4.2.8	MQTT consumers	20
4.2.9	Scripts and automated Software for DAPNET-Input	20
5	Setup and Installation	21
5.1	Accessible ports from HAMNET	21
5.2	Unipager	21
5.3	DAPNET-Proxy	21
5.4	DAPNET Core	21
5.5	Special issues for Core running in Hamcloud	21
5.5.1	Accessible ports from internet	21
5.5.2	Load balancing and high availability	21
6	Protocol Definitions	22
6.1	Input Data Validation	22
6.1.1	Name	22
6.1.2	Bcrypt Hash	22
6.1.3	Email Address	22
6.1.4	Roles	22
6.1.5	Auth Key	22
6.1.6	Owners	22
6.1.7	Rubric Number	22
6.1.8	Rubric Label	23
6.1.9	Transmitter Groups	23
6.1.10	Rubric Cyclic Transmit Interval	23
6.1.11	Description	23
6.1.12	RIC	23
6.1.13	Function Bits	23
6.1.14	Pager Type	23
6.1.15	Transmitter Usage	23
6.1.16	Transmitter Timeslots	23
6.1.17	Transmitter Output Power	23
6.1.18	Coordinates	23
6.1.19	Transmitter Antenna Type	23
6.1.20	Transmitter Antenna Gain	23

6.1.21	Transmitter Antenna Direction	24
6.1.22	Transmitter Antenna Height	24
6.2	Microservices API	24
6.2.1	Preamble	24
6.2.2	Filtering and pagination in detailed lists	24
6.2.3	Database Service	25
6.2.3.1	GET /users	25
6.2.3.2	GET /users/<username>	26
6.2.3.3	GET /users/<usernames>	26
6.2.3.4	GET /users/<username>/avatar.jpg	26
6.2.3.5	PUT /users - Add new user	27
6.2.3.6	PUT /users - Edit existing user	27
6.2.3.7	PUT /users/<username>/avatar.jpg	28
6.2.3.8	DELETE /users/<username>?rev=<rev>	28
6.2.3.9	DELETE /users/<username>/avatar.jpg?rev=<rev>	29
6.2.3.10	GET /nodes	30
6.2.3.11	GET /nodes/<nodename>	32
6.2.3.12	GET /nodes/_names	33
6.2.3.13	GET /nodes/_descriptions	33
6.2.3.14	PUT /nodes - Add new node	34
6.2.3.15	PUT /nodes - Edit existing node	35
6.2.3.16	DELETE /nodes/<nodename>?rev=<rev>	35
6.2.3.17	GET /rubrics	36
6.2.3.18	GET /rubrics/_view/byNumber?startkey=<n>&endkey=<m>	37
6.2.3.19	GET /rubrics/_view/byTransmitter?key=<transmittername>	37
6.2.3.20	GET /rubrics/_view/byTransmitterGroup?key=<groupname>	37
6.2.3.21	GET /rubrics/_view/withCyclicTransmit	37
6.2.3.22	GET /rubrics/<rubricname>	38
6.2.3.23	GET /rubrics/_names	38
6.2.3.24	GET /rubrics/_descriptions	39
6.2.3.25	PUT /rubrics - Add new rubric	39
6.2.3.26	PUT /rubrics - Edit existing rubric	40
6.2.3.27	DELETE /rubrics/<rubricname>?rev=<rev>	41
6.2.3.28	GET /subscribers	42
6.2.3.29	GET /subscribers/<subscribername>	43
6.2.3.30	GET /subscribers/_names	44
6.2.3.31	GET /subscribers/_descriptions	44
6.2.3.32	GET /subscriber_groups	44
6.2.3.33	PUT /subscribers - Add new subscriber	45
6.2.3.34	PUT /subscribers - Edit existing subscriber	46
6.2.3.35	DELETE /subscribers/<subscribername>?rev=<rev>	47
6.2.3.36	GET /transmitters/_names	47
6.2.3.37	GET /transmitters/_groups	47

6.2.3.38	PUT /transmitters - Add new transmitter	48
6.2.3.39	PUT /transmitters - Edit existing transmitter	50
6.2.3.40	DELETE /transmitters/<transmittername>?rev=<rev>	51
6.2.4	Call Service	52
6.2.4.1	GET /calls	52
6.2.4.2	GET /calls?limit=<number>	52
6.2.4.3	GET /calls/_view/byDate	52
6.2.4.4	GET /calls/_view/byIssuer	52
6.2.4.5	GET /calls/_view/byRecipient	52
6.2.4.6	GET /calls/_view/pending	52
6.2.4.7	GET /calls/_view/pending_all	52
6.2.4.8	POST /call	52
6.2.5	Rubric Service	53
6.2.5.1	GET /news	53
6.2.5.2	GET /news/_view/byRubric	53
6.2.5.3	GET /news/_view/byRubric/message_no>	53
6.2.5.4	PUT /news/<rubricname>	53
6.2.5.5	PUT /news/<rubricname>/<message_no>	53
6.2.5.6	DELETE /news/<rubricname>?rev=	53
6.2.5.7	DELETE /news/<rubricname>/<message_no>?rev=	53
6.2.6	Transmitter Service	53
6.2.6.1	GET /transmitters	53
6.2.6.2	GET /transmitter/<transmittername>	53
6.2.6.3	POST /transmitters/_bootstrap	54
6.2.6.4	POST /transmitters/_heartbeat	54
6.2.7	Cluster Service	55
6.2.7.1	POST /cluster/discovery	55
6.2.8	Telemetry Service	55
6.2.8.1	GET /telemetry/transmitters	55
6.2.8.2	GET /telemetry/transmitters/<transmittername>	55
6.2.8.3	GET /telemetry/nodes	55
6.2.8.4	GET /telemetry/nodes/<nodesname>	55
6.2.8.5	WS /telemetry	55
6.2.9	Database Changes Service	55
6.2.9.1	WS /changes	55
6.2.10	Status Service	55
6.2.10.1	GET /status/nodes	55
6.2.10.2	GET /status/node/<nodename>	56
6.2.10.3	GET /status	56
6.2.10.4	GET /status/<service_name>	56
6.2.11	Statistics Service	56
6.2.11.1	GET /statistics	56
6.2.12	Auth Service	58

6.2.12.1	Password hashing	58
6.2.12.2	Role definition	58
6.2.12.3	Permission definition	58
6.2.12.4	Permission naming definition	58
6.2.12.5	Permission matrix	59
6.2.12.6	Auth API definition	61
6.2.12.7	Auth call reference list	63
6.2.13	RabbitMQ Service	65
6.2.13.1	GET /rabbitmq/*	65
6.3	RabbitMQ	65
6.3.1	Concept of Calls distribution	65
6.3.2	Message definition on Exchanges	65
6.3.2.1	dapnet.calls	65
6.3.2.2	dapnet.local_calls	66
6.3.3	Telemetry	66
6.3.4	MQTT API for third-party consumers	66
6.4	Telemetry from Transmitters	67
6.5	Telemetry from Nodes	69
6.6	Statistic, Status and Telemetry REST API	70
6.6.1	Telemetry from Transmitters	70
6.6.2	Telemetry from Nodes	70
6.7	Websocket API	70
6.7.1	Telemetry from Transmitters - Summary of all TX	71
6.7.2	Telemetry from Transmitters - Details of Transmitter	72
6.7.3	Telemetry from Nodes - Summary of all Nodes	73
6.7.4	Telemetry from Transmitters - Details of Node	73
6.7.5	Database Changes	74
6.7.5.1	Transmitter related	75
6.7.5.2	User related	75
6.7.5.3	Rubric related	76
6.7.5.4	Rubric content related	76
6.7.5.5	Node related	77
6.8	CouchDB Documents and Structure	78
6.8.1	Users	78
6.8.2	Nodes	78
6.8.3	Transmitters	79
6.8.4	Subscribers	80
6.8.5	Rubrics	80
6.8.6	MQTT services and subscribers	80

Chapter 1

Introduction

more
text

1.1 Key Features

The version 2 will please the user/operator with the following key features:

- Reliable clustering of Node instances over unreliable WAN connections like HAMNET
- Transmitter telemetry realtime display on Website and App with Websockets
- Use of microservices instead of one big application. Easier to develop, maintain and update
- Load-Balancing and fail-over for user and transmitter interfaces
- Real-time on-air display of transmitters on map
- Third-Party API for Brandmeister, APRS, etc.
- Priority Queuing for transmitters
- Send calls to individual transmitters and/or transmitter groups
- Inflexible concept of transmitter groups is replaced by group tags on transmitters
- Improved Cluster status monitoring

1.2 Historic Background

write
some his-
tory

1.3 Concept presentation

An overview of the DAPNET 2.0 concept is given in Fig. [1.1](#).

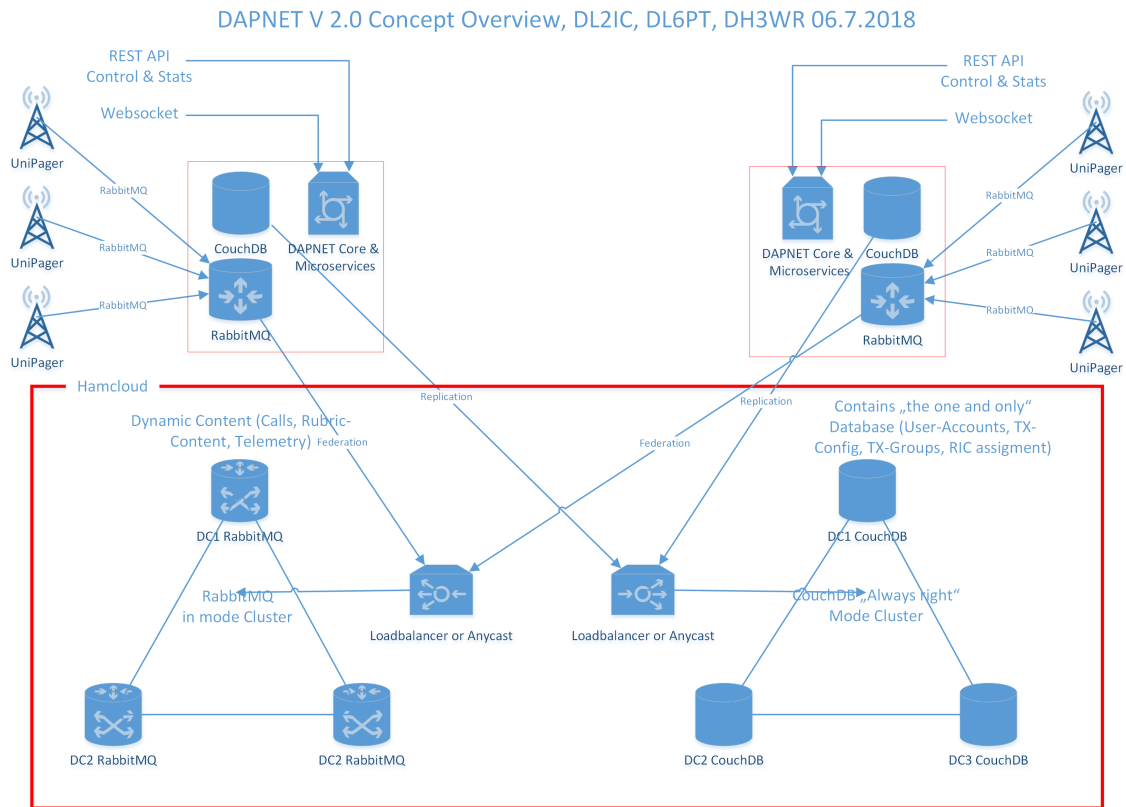


Figure 1.1: Overview of DAPNET Clustering and Network Structure

The details of a single node implementation are shown in Fig. 1.2.

1.4 Transmitter Software

1.4.1 Unipager

The default software for new transmitters is [Unipager](#). It is developed and maintained by Thomas Gatzweiler, DL2IC. There is a debian based repository available. CI technology is used to assure automated compiling of new versions. Transmitters can be updated all at once if they subscribe to the [SaltStack](#) remote management program.

1.4.2 Backward compatibility to XOS slave protocol

The former amateur radio paging transmitters use the XOS slave protocol. It is defined [here](#). There is a NTP like time sync sequence at the beginning of each connection establishment to assure the synchronicity of the transmitters for TDMA. In times of packet-radio, this approach was necessary. Nowadays NTP is used to sync the transmitter clocks; anyway it's still supported.

As DAPNET V2 introduces RabbitMQ and REST interfaces towards transmitters, there is a need for a backward compatibility module, which is also part of the DAPNET V2 package. We hope that after some month, all IP based transmitters have switched to the new interface implementation.

1.4.3 DAPNET-Proxy for AX.25 transmitters

For AX.25 only transmitters like [PR430](#), there is still a demand to support the XOS slave protocol over plain AX.25. There is a already working solution to pipe the TCP Data through a lot of intermediate programs towards a AX.25 device. The general data flow is shown in the [DAPNET DokuWiki](#). Figure 1.3 is shown for reference only.

1.5 DAPNET Network

1.5.1 Overview and Concept

1.5.2 Used third-party Software

Used third-party Software is:

- RabbitMQ for Message delivery to transmitters and between nodes
- CouchDB as distributed database backend working on unreliable WAN connections
- NGINX as low resource high performance load balancing server for default Interface endpoints
- Docker for easy deployment and update purposes
- SaltStack for easy distributed updates and maintenance

1.5.3 HAMCLOUD Description

The HAMCLOUD is a virtual server combination of server central services on the HAMNET and provide short hop connectivity to deployed service on HAMNET towards the Internet. There are three data centers at Essen, Nürnberg and Aachen, which have high bandwidth interlinks over the DFN. There are address spaces for uni- and anycast services. How this concept is deployed is still tbd.

More information is [here](#) and [here](#).

1.5.4 Transmitter Group Handling Concept

In the first Version of DAPNET, transmitters had to be member of one or more logical transmitter groups. Personal calls and rubric content could only be send to a transmitter group, which afterwards sent the data to be member transmitters. Changes in membership required the assigned owner of the group to do so.

In DAPNET V2, there will by just *virtual* transmitter groups by assigning one of more *tags* to a transmitter by its owner himself. Messages can be sent to either a single or group of individual transmitters and/or a single or group of tags. Each transmitter containing the tag will send out the message.

1.5.5 Rubric Handling Concept

1.5.6 Queuing Priority Concept

A main drawback of the original DAPNET implementation was the lack of priorities in the message queuing on a transmitter. With increasing popularity the load on the transmitters increased and the FIFO working principle led to personal calls being sent out several 10 minutes later than submitted.

To overcome this, a 5 class priority scheme is implemented in DAPNET. Messages to send out are queued

Define if uni- or anycast entry points will exist

Define if all 3 ham-cloud sites will have the same internet incoming ports, and what is the Internet DNS concept

DAPNET V 2.0 Node Details, DL2IC, DL6PT, DH3WR 19.7.2018

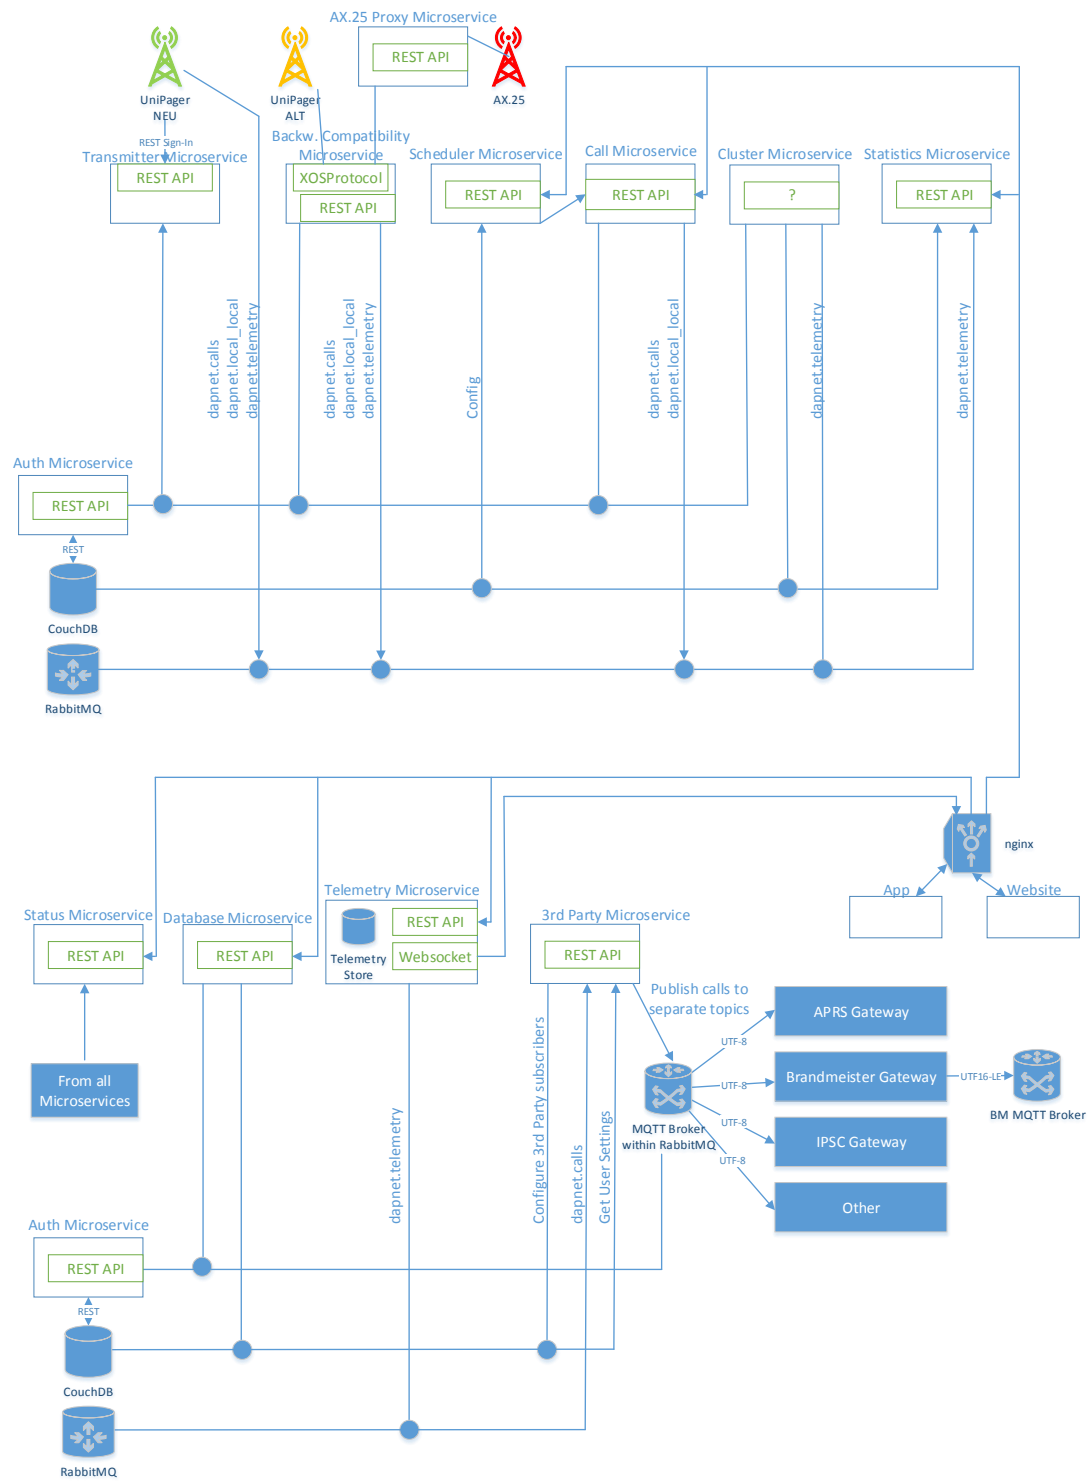


Figure 1.2: Node Details

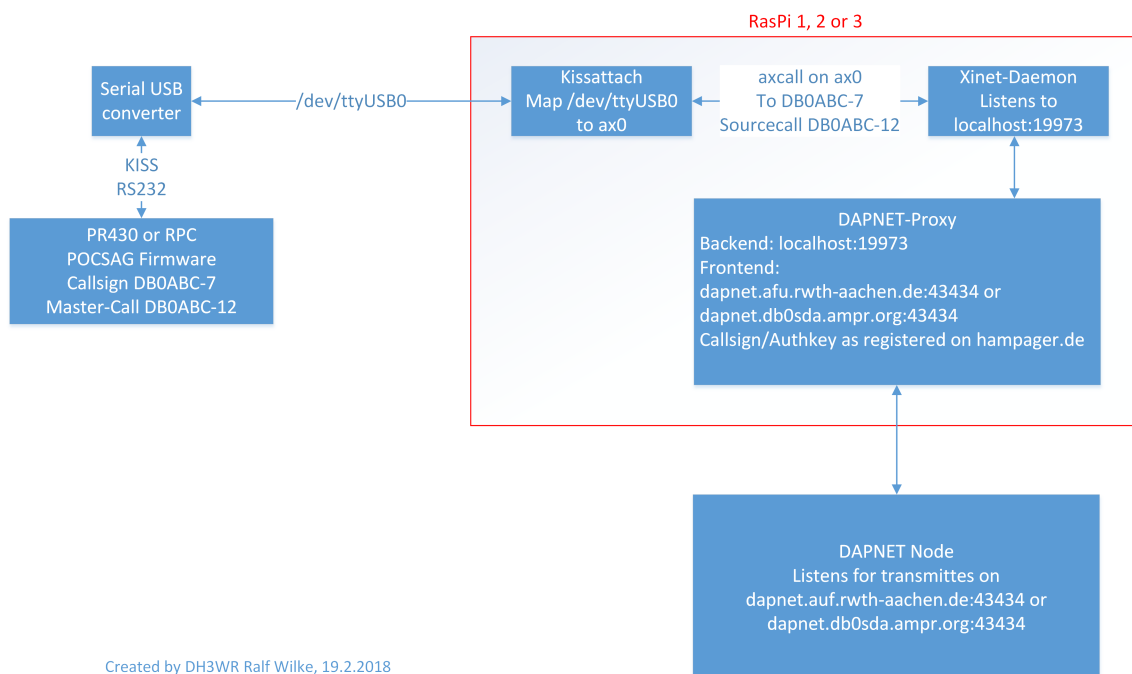


Figure 1.3: Data flow for AX.25 connections from DAPNET

Chapter 2

DAPNET Network Definition

2.1 Cluster Description

2.1.1 Real-time Message delivery with RabbitMQ

2.1.2 Distributed Database with CouchDB

2.1.3 Authentication Concept

2.1.4 Integration of new Nodes

2.2 Interface Overview and Purpose

2.2.1 RabbitMQ Exchange

There are 3 exchanges on each RabbitMQ instance available:

dapnet.calls Messages that are distributed to all nodes

dapnet.local_calls Messages coming only from the local node instance

dapnet.telemetry Messages containing telemetry from transmitters

Transmitters publish their telemetry data to the **dapnet.telemetry** exchange, while consume the data to be transmitted from a queue that is bound to the **dapnet.calls** and **dapnet.local_calls** exchanges.

The idea is to distinguish between *local* data coming from the local Core instance and data coming from the DAPNET network. This is necessary, as for example the calls to set the time on the pagers are generated by the local Core and not shall not distributed to other Cores and their connected transmitter to avoid duplicates.

2.2.1.1 dapnet.calls

This federated exchange receives calls from all Core instances. Personal calls are always published to this exchange, as they are unique and only published by the Core that receives the call via the [Core REST API](#). Rubric content is also emitted here. The transmitter to receive the call is defined via the routing key.

2.2.1.2 dapnet.local_calls

The the local Core publishes special calls to this exchange, like the time set calls, the rubric names and repetitions of rubric content for the local connected transmitters.

In short, all calls that are generated by the [Scheduler](#) on a Core instance are published to this exchange. As the scheduler runs on every node, otherwise the calls would be transmitted several times by the same transmitter. This exchange is not federated with other RabbitMQ instances on other Cores.

2.2.1.3 dapnet.telemetry

On each Core instance, the [Statistic, Status and Telemetry](#) microservice described in section 2.2.4 is consuming the telemetry of all transmitters. The received data is stored and delivered via the [Core REST API](#) and the [Websocket API](#) in section 2.2.5 to connected websites or apps.

2.2.2 CouchDB Interface

The CouchDB interface is a REST interface defined in the CouchDB documentation. All communication with the CouchDB database are done by means of the interface. No user should be able to connect to the CouchDB REST interface, only the Core software components should be able to do so. The local node can access CouchDB with randomly created credentials which are automatically generated on the first startup of the node. For database replication, the other nodes are authenticated by their authentication key in the nodes database.

2.2.3 Core REST API

The Core REST API is the main interface for user interactions with the DAPNET network.

2.2.4 Statistic, Status and Telemetry REST API

2.2.5 Websocket for real-time updates on configuration, Statistics and Telemetry API

2.2.6 MQTT Fanout for third-party consumers

In order to allow third-party application to consume the data sent out by DAPNET transmitters in an easy and most generic way, there is an MQTT broker on each Core. As the [RabbitMQ](#) instance already has a plugin to act as an MQTT broker, this solution is chosen.

To dynamically manage the third-party applications attached to DAPNET, there is a [CouchDB](#)-Database containing the existing third-party descriptive names, corresponding MQTT topic names and authentication credentials to be allowed to subscribe to the that specific MQTT topic.

It is a intention to not fan out every content on DAPNET to every third-party application but let the user decide if personal calls directed to her/him will be available on other third-party applications or not. The website will display opt-in checkboxes for each subscriber to enable or disable the message delivery for each third-party application. As we have had some issues in this topic in the past, this seems the best but still generic and dynamic solution.

The fan out consists of the source and destination callsign, the destination RIC and SubRIC and an array of callsign and geographic location of the transmitters, where this specific call is supposed to be sent out by DAPNET transmitters. The type of transmitter is also given. The reason to output also the transmitter and their location is to enable third-party applications to estimate the content's distribution geographic area and take adequate action for their own delivery or further processing. (Example: Regional Rubric content to Regional DMR Group SMS.)

The third-party applications can (if access is granted) only read from the topic. All Core instaces have read/write access to publish the data.

The MQTT topics are kept local on the Core instance and are never distributed between DAPNET-Cores.

2.3 Other Definitions

2.3.1 Scheduler

2.3.2 User Roles and Permissions

There are two types of users: Admins and Non-Admins. Admins are allowed to do everything. Non-Admins are just allowed to edit the entities that they own and send calls.

Make
overview
of data
displayed
to Non-
Admin
users
from
CouchDB
in
REST-
Calls (see
[6.2.](#)

Chapter 3

Internal Programming Workflows

3.1 Sent calls

3.2 Add, edit, delete User

Show current users

1. Get current status via `GET /users` on Core URL
2. Handle updates via Websocket

Add and Edit User

1. If edit: Get current status via `GET /users/<username>` on Core URL
2. Show edit form and place data
3. On save button event, send `POST /users/<username>` on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

Delete User

1. Ask "Are you sure?"
2. If yes, send `DELETE /users/<username>` on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

3.3 Add, edit, delete Subscriber

3.4 Add, edit, delete Node (tbd)

3.5 Add, edit, delete Transmitter

3.6 Implementation of Transmitter Groups

3.7 Add, edit, delete Rubrics

Show current configuration

1. Get current status via GET /rubrics on Core URL
2. Handle updates via websocket

Add and Edit rubrics

1. If edit: Get current status via GET /rubrics/<rubricname> on Core URL
2. Show edit form and place data
3. On save button event, send POST /users/<rubricname> on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

Delete rubric

1. Ask "Are you sure?"
2. If yes, send DELETE /users/<rubricname> on Core URL

The core will update the CouchDB and generate a RabbitMQ administration message to inform all other nodes. This information is transmitted by the Stats and Websocket Micro-Service to all connected websocket clients to get them updated. This will also happen for the website instance emitting the edit request, so its content is also updated.

3.8 Add, edit, delete Rubrics content

3.9 Add, edit, delete, assign Rubrics to Transmitter/-Groups

3.10 Docker integration

3.11 Microservices

A DAPNET node consists of several isolated microservices with different responsibilities. Each microservice runs in a container and is automatically restarted if it should crash. Some microservices can be started in multiple instances to fully utilize multiple cores.

DL2IC:
Docker
Inte-
gration
beschreiben

3.11.1 Overview of Microservices

3.11.1.1 Database Service

3.11.1.2 Rubric Service

3.11.1.3 Call Service

3.11.1.4 Transmitter Service

3.11.1.5 Cluster Service

3.11.1.6 Telemetry Service

3.11.1.7 Database Changes Service

3.11.1.8 Status Service

3.11.1.9 Statistics Service

3.11.1.10 RabbitMQ Auth Service

3.11.1.11 Backward Compatibility Service

3.11.1.12 Coverage Service

3.11.2 REST Interfaces

The access to the microservices is proxied by a NGINX webserver which can also provide load balancing and caching.

REST endpoint	Microservice
* /users/* * /nodes/* * /rubrics/* * /subscribers/* * /subscriber_group(s)/* GET /transmitter/grouptags DELETE /transmitter/<transmittername> PUT /transmitter/<transmittername>	Database Service
* /calls/*	Call Service
* /rubrics/content/*	Rubric Service
GET /transmitters GET /transmitters/:id POST /transmitters/bootstrap POST /transmitters/heartbeat	Transmitter Service
POST /cluster/discovery	Cluster Service
GET /telemetry/*	Telemetry Service
WS /telemetry/transmitters WS /telemetry/transmitter/<TxName> WS /telemetry/nodes WS /telemetry/node/<NodeName>	Summary data of all TX Details for TX <TxName> Summary data of all nodes Details for Node <NodeName>
WS /changes	Database Changes Service
GET /status/*	Status Service
GET /statistics	Statistics Service
GET /rabbitmq/*	RabbitMQ Auth Service

3.11.3 Database Service

- Proxies calls to the CouchDB database
- Controls access to different database actions
- Removes private/admin only fields from documents

3.11.4 Call Service

- Generates and publishes calls to RabbitMQ
- Receives all calls from RabbitMQ
- Maintains a database of all calls

The

3.11.5 Rubric Service

- Publishes rubric content as calls to RabbitMQ
- Periodically publishes rubric names as calls to RabbitMQ

3.11.6 Transmitter Service

- Maintains a list of all transmitters and their current status

3.11.7 Cluster Service

- Maintains a list of known nodes and their current status
- Manages federation between RabbitMQ queues
- Manages replication between CouchDB databases

3.11.8 Telemetry Service

- Maintains the telemetry state of all transmitters
- Forwards telemetry updates via websocket

3.11.9 Database Changes Service

- Forwards database changes via websocket

3.11.10 Status Service

- Periodically checks all other services and connections

3.11.11 RabbitMQ Auth Service

- Provides authentication for RabbitMQ against the CouchDB users database

3.11.12 Time and Identification Service

- Sends periodic time and identification messages to RabbitMQ

3.12 Ports and Loadbalancing Concept

3.13 Periodic Tasks (Scheduler)

3.14 Plugin Interface

3.15 Transmitter Connection

Transmitter connections consist of two connections to a Node. A REST connection for initial announcement of a new transmitter, heartbeat messages and transmitter configuration and a RabbitMQ connection to receive the data to be transmitted.

The workflow for a new transmitter connection is the following:

1. Announce the transmitter via a call to the REST API at `/transmitter/_bootstrap` ([6.2.6.3](#)).
2. The response contains either the transmitter configuration or an error message ([6.2.6.3](#)).
3. On success, initiate the RabbitMQ connection to receive calls and send telemetry ([6.3](#)).

After the connection has been established, a periodical heartbeat must be sent to the REST API at `/transmitter/_heartbeat` ([6.2.6.4](#)).

3.16 DAPNET-Proxy

Chapter 4

External Usage Workflows

4.1 General Concept of REST and Websocket-Updates

4.2 Website and App

4.2.1 Authentication

4.2.2 Calls

4.2.3 Rubrics

4.2.4 Rubrics content

4.2.5 Transmitters and Telemetry

4.2.6 Nodes

4.2.7 Users

4.2.8 MQTT consumers

4.2.9 Scripts and automated Software for DAPNET-Input

Chapter 5

Setup and Installation

5.1 Accessible ports from HAMNET

5.2 Unipager

5.3 DAPNET-Proxy

5.4 DAPNET Core

5.5 Special issues for Core running in Hamcloud

5.5.1 Accessible ports from internet

To offer the endpoints to internet-based transmitters and users, the following port have to be accessible:

Type	Port	Application
TCP	80	HTTP Webinterface and Websocket
TCP	443	HTTPS Webinterface and Websocket
TCP	4369	RabbitMQ peer discovery
TCP	5672	RabbitMQ Client connection
TCP	5671	RabbitMQ-TLS Client connection
TCP	25672	RabbitMQ Federation Internode Connection
TCP	1883	MQTT Third Party clients
TCP	8883	MQTT TLS Third Party clients

check if
TCP/25672
is correct
for feder-
ation

5.5.2 Load balancing and high availability

Internet-based

To offer load balancing and high availability, the internet-based DNS record *hampager.de* would use DNS round-robin with the static internet IPs of the Hamcloud instances.

HAMNET/Hamcloud-based

The Hamcloud instances would offer an anycast IP to for transmitter and user connections. There is a special subnet of 44.0.0.0/8 IPs designated for this anycast approach. Besides, the Hamcloud DAPNET instances will have unicast IPs for administration and their inter-node-synchronization. To connect other nodes besides from the three hamcloud instances, the endpoint to be attached will also be distributed via anycast for maximal fail-over capability.

rework
with con-
tent of
discus-
sion from
2.8.2018
on net-
work
struc-

Chapter 6

Protocol Definitions

6.1 Input Data Validation

6.1.1 Name

First transform to lowercase and remove whitespaces everywhere in the String. Then check against `^[a-z0-9._-]{3,40}$`

6.1.2 Bcrypt Hash

`^\$2[aby]?\$d{1,2}\$[.\./A-Za-z0-9]{53}$`

6.1.3 Email Address

`/.+@.+\.+\/i`

The user MMI should do a precheck on the email address. Example for NodeJs: <https://github.com/mailcheck/mailcheck>.

6.1.4 Roles

Get the actual set of allowed roles from the Auth Service at startup and check that the given value is in the returned array. See [6.2.12.6](#) for the API call to the Auth Service. The JSON Value must be an Array with at least one entry. All entries must be a valid role. All entries have to be different, no repetitions of given roles are allow. They have to be filtered out if they exist.

6.1.5 Auth Key

`^[a-zA-Z0-9]{3,40}$`

6.1.6 Owners

Each entry of the array must validate successfully against [6.1.1](#). No checking, if username is existing. The array must contain at least one element.

6.1.7 Rubric Number

The rubric number must be an integer ≥ 1 and ≤ 95 .

6.1.8 Rubric Label

String with only a-zA-Z0-9_- and max length of TBD.

6.1.9 Transmitter Groups

String with only a-zA-Z0-9_- and max length of TBD.

6.1.10 Rubric Cyclic Transmit Interval

Integer value between 0 and $60 \times 60 \times 24 \times 30$.

6.1.11 Description

The description has to be a string with arbitrary content. Max length 45 characters.

6.1.12 RIC

Integer value between 1 and $2^{21} - 1$. There are reserved ranges that are not usable (i.e. 0-7, 2007664-2007671, 2045056-2045063).

6.1.13 Function Bits

Integer value ≥ 0 and ≤ 3 .

6.1.14 Pager Type

String _____ TBD

6.1.15 Transmitter Usage

Valid values are `wirerange` or `personal`.

6.1.16 Transmitter Timeslots

A JSON Array of **exact** 16 boolean values.

6.1.17 Transmitter Output Power

Float Value, > 0 , round to 2 decimals. Max value 1000

6.1.18 Coordinates

JSON Array of two float, may be negative. _____ check ranges

6.1.19 Transmitter Antenna Type

String _____ define

6.1.20 Transmitter Antenna Gain

Float, can be negative min = -40, max = 40

6.1.21 Transmitter Antenna Direction

Integer, if given as float -> round. Then modulo 360

6.1.22 Transmitter Antenna Height

Integer, if given as float -> round. Always greater then 0.

6.2 Microservices API

6.2.1 Preamble

All HTTP(s) communication should be compress with gzip to reduce network load. That's especially important for the answers to GET-calls of all entity's details.

See [Microservices definition](#).

6.2.2 Filtering and pagination in detailed lists

For the endpoints GET /users, GET /nodes, GET /transmitters and GET /rubrics, there are the following GET parameters available for pagination and filtering.

Parameter	Description
?skip=<n>&limit=<m>	Used for pagination, just output <m> entries and skip the first <n> ones. Mapping to CouchDB: transparent
?startkey="dh3wr"\&endkey="d12ic"	Get all entries with an _id between dh3wr and d12ic. Mapping to CouchDB: transparent
?startswith="dh3"	Get all entries where the _id starts with dh3. Used for AJAX based search in tables on website. Mapping to CouchDB: ?startkey="dh3"&endkey="dh3\ufff0"

Table 6.1: Pagination and filtering syntax

Attention: The parameter ?include_docs=true has to be included by the Microservice where it is stated in the detailed description below.

6.2.3 Database Service

6.2.3.1 GET /users

Item	Description
Description	Returns all users (depending on the filtering in 6.2.2 in JSON format.
Permission	<code>user.read</code>
Mapping to CouchDB	<code>GET /users/_design/users/_view/byId?include_docs=true</code>

Special treatment for user database: The password field has always to be filtered out.

Auth response: true:

```
{
  "total_rows": 2,
  "offset": 0,
  "rows": [
    {
      "_id": "dh3wr",
      "_rev": "1-09352254509c9ddf86e80fd83868d557",
      "email": "ralf@secret.com",
      "roles": "user",
      "enabled": true,
      "created_on": "2018-07-08T11:50:02.168325Z",
      "created_by": "dl2ic",
      "changed_on": "2018-07-08T11:50:02.168325Z",
      "changed_by": "dl2ic"
    }, ...
  ]
}
```

Whitelist: Transparent, no filtering needed

Auth response: limited:

If `_id == <username>` output the corresponding document transparent. All other document's

Whitelist: `_id`, `roles`, `enabled`

```
{
  "total_rows": 2,
  "offset": 0,
  "rows": [
    {
      "_id": "dh3wr",
      "_rev": "1-09352254509c9ddf86e80fd83868d557",
      "email": "ralf@secret.com",
      "roles": ["user", "admin"],
      "enabled": true,
      "created_on": "2018-07-08T11:50:02.168325Z",
      "created_by": "dl2ic",
      "changed_on": "2018-07-08T11:50:02.168325Z",
      "changed_by": "dl2ic"
    },
    {
      "_id": "dl2abc",
      "roles": ["user"],
      "enabled": true
    }
  ]
}
```

Auth response: false:

Send 403 Forbidden.

6.2.3.2 GET /users/<username>

Item	Description
Description	Return details of <username> in JSON format.
Permission	<code>user.read/<username></code>
Mapping to CouchDB	GET /users/<username>

Special treatment for user database: The password field has always to be filtered out.

Auth response: true:

```
{
  "_id": "dh3wr",
  "_rev": "1-09352254509c9ddf86e80fd83868d557",
  "email": "ralf@secret.com",
  "roles": ["user"],
  "enabled": true,
  "created_on": "2018-07-08T11:50:02.168325Z",
  "created_by": "dl2ic",
  "changed_on": "2018-07-08T11:50:02.168325Z",
  "changed_by": "dl2ic"
}
```

Auth response: limited:

If `_id == <username>` output the corresponding document transparent.

If not:

Whitelist: `_id`, `roles`, `enabled`

Auth response: false:

Send 403 Forbidden.

6.2.3.3 GET /users/<usernames>

Item	Description
Description	Return just an JSON array of all enabled usernames. Used where selections have to be done on the website.
Permission	<code>user.list</code>
Mapping to CouchDB	GET /users/_design/users/_list/usernames/byId

Auth response: true:

```
["dh3wr", "dl2ic"]
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.4 GET /users/<username>/avatar.jpg

Item	Description
Description	Return the attachment called avatar.jpg for the given user
Permission	<code>user.list</code>
Mapping to CouchDB	GET /users/<username>/avatar.jpg

Auth response: true: Get image with Content-Type: image/jpeg

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.5 PUT /users - Add new user

Item	Description
Description	Add a non-existing new user with <code>_id</code> <username>
Permission	<code>user.create</code>
Mapping to CouchDB	<code>PUT /users/<username></code>
Mandatory fields	<code>_id</code> , <code>password</code> , <code>email</code> , <code>roles</code> , <code>enabled</code>
Field validation	<code>_id</code> : 6.1.1 <code>password</code> : 6.1.2 <code>email</code> : 6.1.3 <code>roles</code> : 6.1.4 <code>enabled</code> : boolean

Auth response: true: User to Database-Service: Example content to add user dl6pt

```
{
  "_id" : "dl6pt",
  "password": "$2y$12$lqUeRV094f439Tt7zqrZ0HPfm6YoBzNawWLLIykF3nMip3L6mxLK",
  "email": "ralf@secret.com",
  "roles": ["admin"],
  "enabled": true
}
```

Mapping to CouchDB with adding `created_*` information by database microservice:

```
{
  "_id" : "dl6pt",
  "password": "$2y$12$lqUeRV094f439Tt7zqrZ0HPfm6YoBzNawWLLIykF3nMip3L6mxLK",
  "email": "ralf@secret.com",
  "roles": ["admin"],
  "enabled": true,
  "created_on": "2018-07-08T11:50:02.168325Z",
  "created_by": <username from basic-auth>
}
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.6 PUT /users - Edit existing user

Edit is differentiated from create by the presence of the `_rev` field.

Item	Description
Description	Edit the existing user <username>.
Permission	<code>user.update/<username></code>
Mapping to CouchDB	<code>PUT /users/<username></code>
Mandatory fields	<code>_id</code> , <code>_rev</code> (<code>_rev</code> has to be obtained as in 6.2.3.2)
Optional fields	<code>password</code> , <code>email</code> , <code>roles</code> , <code>enabled</code> (minimum one)
Field validation	<code>_id</code> : Let CouchDB decide, as the entry is already present. <code>_rev</code> : Let CouchDB decide, as the entry is already present. <code>password</code> : 6.1.2 <code>email</code> : 6.1.3 <code>roles</code> : 6.1.4 <code>enabled</code> : boolean

Auth response: true: User to Database-Service: Example content to edit user dl6pt setting new password

```
{
  "_id" : "dl6pt",
  "_rev": "1-09352254509c9ddf86e80fd83868d557",
  "password": "$2y$12$lqUeRV094f439Tt7zqrZ0HPfm6YoBzNawWLLIykF3nMip3L6mxLK"
}
```

Mapping to CouchDB with adding `updated_*` information by database microservice:

PUT /users/<username>

```
{
  "_id" : "dl6pt",
  "_rev": "1-09352254509c9ddf86e80fd83868d557",
  "password": "$2y$12$1qUueRV094f439Tt7zqrZ0HPfm6YoBzNawWLLIykF3nMip3L6mxLK",
  "updated_on": "2018-07-08T11:50:02.168325Z",
  "updated_by": <username from basic-auth>
}
```

Auth response: false or limited:

Send 403 Forbidden.

Special treatment if field `roles` is present:

Item	Description
Description	Edit the existing user <username>
Permission	<code>user.change_role/<username></code>
Mapping to CouchDB	PUT /users/<username>
Mandatory fields	<code>_id</code> , <code>_rev</code> , <code>roles</code> (<code>_rev</code> has to be obtained as in 6.2.3.2)
Optional fields	<code>password</code> , <code>email</code> , <code>roles</code> , <code>enabled</code> (minimum one)
Field validation	<code>_id</code> : Let CouchDB decide, as the entry is already present. <code>_rev</code> : Let CouchDB decide, as the entry is already present. <code>password</code> : 6.1.2 <code>email</code> : 6.1.3 <code>roles</code> : 6.1.4 <code>enabled</code> : boolean

Auth response: true:

Same behavior as before.

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.7 PUT /users/<username>/avatar.jpg

Item	Description
Description	Set the attachment called <code>avatar.jpg</code> for the given user
Permission	<code>user.list</code>
Mapping to CouchDB	PUT /users/<username>/avatar.jpg
Content in body	Image as raw bytes

Auth response: true:

Transparent forwarding.

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.8 DELETE /users/<username>?rev=<rev>

Item	Description
Description	Delete user <username>
Permission	<code>user.delete/<username></code>
Mapping to CouchDB	DELETE /users/<username>/avatar.jpg?rev=<rev>
Mandatory fields	<code>rev</code> as parameter (<code>rev</code> has to be obtained as in 6.2.3.2)

Auth response: true:

Transparent forwarding.

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.9 DELETE /users/<username>/avatar.jpg?rev=<rev>

Item	Description
Description	Delete the attachment called avatar.jpg for the given user
Permission	<code>user.delete/<username></code>
Mapping to CouchDB	DELETE /users/<username>?rev=<rev>
Mandatory fields	<code>rev</code> as parameter (<code>rev</code> has to be obtained as in 6.2.3.2)

Auth response: true:

Transparent forwarding.

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.10 GET /nodes

Item	Description
Description	Returns all users (depending on the filtering in 6.2.2 in JSON format.
Permission	<code>node.read</code>
Mapping to CouchDB	<code>GET /users/_design/nodes/_view/byId?include_docs=true</code>

Auth response: true:

```
{
  "total_rows": 2,
  "offset": 0,
  "rows": [
    {
      "_id": "db0sda-dc1",
      "_rev": "1-cf7d2abfe193f476888be7108a0f548f",
      "auth_key": "8PL9eJXccQ6X9Yq",
      "coordinates": [34.123456, -23.123456],
      "description": "some words about that node",
      "hamcloud": true,
      "created_on": "2018-07-03T08:00:52.786458Z",
      "created_by": "dh3wr",
      "changed_on": "2018-07-03T08:00:52.786458Z",
      "changed_by": "dh3wr",
      "owners": ["d11abc", "dh3wr", "d12ic"]
    },
    {
      "_id": "db0sda-dc2",
      "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",
      "auth_key": "73mxX4JLttzmVZ2",
      "coordinates": [34.123456, -23.123456],
      "description": "some words about that node",
      "hamcloud": true,
      "created_on": "2018-07-03T08:00:52.786458Z",
      "created_by": "dh3wr",
      "changed_on": "2018-07-03T08:00:52.786458Z",
      "changed_by": "dh3wr",
      "owners": ["d11abc", "dh3wr", "d12ic"]
    }
  ]
}
```

Auth response: limited:

The output rows have to be checked, if the asking username is in the `owners` array.

If yes: return the complete row.

If not: return just the whitelisted fields:

Whitelist: `_id`, `coordinates`, `description`, `hamcloud`, `owners`

Example (here `dh3wr` is asking with limited permission):

```
{
  "total_rows": 2,
  "offset": 0,
  "rows": [
    {
      "_id": "db0sda-dc1",
      "coordinates": [34.123456, -23.123456],
      "description": "some words about that node",
      "hamcloud": true,
      "owners": ["d11abc", "d12ic"]
    },
    {
      "_id": "db0sda-dc2",
      "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",

```



```
    "auth_key": "73mxX4JLttzmVZ2"  
    "coordinates": [34.123456, -23.123456],  
    "description": "some words about that node",  
    "hamcloud": true,  
    "created_on": "2018-07-03T08:00:52.786458Z",  
    "created_by": "dh3wr",  
    "changed_on": "2018-07-03T08:00:52.786458Z",  
    "changed_by": "dh3wr",  
    "owners": ["dl1abc", "dh3wr", "dl2ic"]  
  }  
]  
}
```

Auth response: false:

Send 403 Forbidden.

6.2.3.11 GET /nodes/<nodename>

Item	Description
Description	Return details of <nodename> in JSON format.
Permission	<code>node.read/<nodename></code>
Mapping to CouchDB	<code>GET /users/<nodename></code>

Auth response: true:

```
{
  "_id": "db0sda-dc2",
  "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",
  "auth_key": "73mxX4JLttzmVZ2",
  "coordinates": [34.123456, -23.123456],
  "description": "some words about that node",
  "hamcloud": true,
  "created_on": "2018-07-03T08:00:52.786458Z",
  "created_by": "dh3wr",
  "changed_on": "2018-07-03T08:00:52.786458Z",
  "changed_by": "dh3wr",
  "owners": ["dl1abc", "dh3wr", "dl2ic"]
}
```

Auth response: limited:

The output has be checked, if the asking username is in the `owners` array.

If yes: return the complete output from CouchDB.

If not: return just the whitelisted fields:

Whitelist: `_id`, `coordinates`, `description`, `hamcloud`, `owners`

Example (here dh3wr is asking with limited permission):

```
{
  "_id": "db0sda-dc1",
  "coordinates": [34.123456, -23.123456],
  "description": "some words about that node",
  "hamcloud": true,
  "owners": ["dl1abc", "dl2ic"]
}
```

6.2.3.12 GET /nodes/_names

Item	Description
Description	Return just an JSON array of all nodes. Used where selections have to be done on the website.
Permission	<code>nodes.list</code>
Mapping to CouchDB	GET /nodes/_design/nodes/_list/names/byId

Auth response: true:

```
["db0sda-dc2","db0sda-dc3"]
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.13 GET /nodes/_descriptions

Item	Description
Description	Return just an JSON array of all nodenames and their description, sorted as a list. Used where descriptive selections have to be done on the website.
Permission	<code>nodes.list</code>
Mapping to CouchDB	GET /nodes/_design/nodes/_list/descriptions/descriptions

Auth response: true:

```
[
  {
    "_id": "db0sda-dc1",
    "description": "some words about that node"
  },
  {
    "_id": "db0sda-dc2",
    "description": "some words about that node"
  }
]
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.14 PUT /nodes - Add new node

Item	Description
Description	Add a non-existing new node with <code>_id</code> <nodename>
Permission	<code>node.create</code>
Mapping to CouchDB	<code>PUT /nodes/<nodesname></code>
Mandatory fields	<code>_id</code> , <code>auth_key</code> , <code>hamcloud</code> , <code>owners</code> , <code>description</code> , <code>coordinates</code>
Field validation	<code>_id</code> : 6.1.1 <code>auth_key</code> : 6.1.5 <code>hamcloud</code> : boolean <code>owners</code> : 6.1.6 <code>coordinates</code> : 6.1.18 <code>description</code> : 6.1.11

Auth response: true: User to Database-Service: Example content to add node db0sda-dc2

```
{
  "_id": "db0sda-dc2",
  "auth_key": "73mxX4JLttzmVZ2",
  "coordinates": [34.123456, -23.123456],
  "description": "some words about that node",
  "hamcloud": true,
  "owners": ["dl1abc", "dh3wr", "dl2ic"]
}
```

Mapping to CouchDB with adding `created_*` information by database microservice:

```
{
  "_id": "db0sda-dc2",
  "auth_key": "73mxX4JLttzmVZ2",
  "coordinates": [34.123456, -23.123456],
  "description": "some words about that node",
  "hamcloud": true,
  "owners": ["dl1abc", "dh3wr", "dl2ic"],
  "created_on": "2018-07-08T11:50:02.168325Z",
  "created_by": <username from basic-auth>
}
```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.15 PUT /nodes - Edit existing node

Edit is differentiated from create by the presence of the **_rev** field.

Item	Description														
Description	Edit the existing node <nodename>.														
Permission	node.update/<nodename>														
Mapping to CouchDB	PUT /nodes/<nodename>														
Mandatory fields	_id, _rev (_rev has to be obtained as in 6.2.3.11)														
Optional fields	auth_key, hamcloud, owners, description, coordinates (minimum one)														
Field validation	<table><tr><td>_id</td><td>: Let CouchDB decide, as the entry is already present.</td></tr><tr><td>_rev</td><td>: Let CouchDB decide, as the entry is already present.</td></tr><tr><td>auth_key</td><td>: 6.1.5</td></tr><tr><td>hamcloud</td><td>: boolean</td></tr><tr><td>owners</td><td>: 6.1.6</td></tr><tr><td>coordinates</td><td>: 6.1.18</td></tr><tr><td>description</td><td>: 6.1.11</td></tr></table>	_id	: Let CouchDB decide, as the entry is already present.	_rev	: Let CouchDB decide, as the entry is already present.	auth_key	: 6.1.5	hamcloud	: boolean	owners	: 6.1.6	coordinates	: 6.1.18	description	: 6.1.11
_id	: Let CouchDB decide, as the entry is already present.														
_rev	: Let CouchDB decide, as the entry is already present.														
auth_key	: 6.1.5														
hamcloud	: boolean														
owners	: 6.1.6														
coordinates	: 6.1.18														
description	: 6.1.11														

Auth response: true:

User to Database-Service: Example content to edit user dl6pt setting new password

```
{
  "_id": "db0sda-dc2",
  "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",
  "auth_key": "73mxX4JLttzmVZ2"
}
```

Mapping to CouchDB with adding updated_* information by database microservice:

PUT /users/<username>

```
{
  "_id": "db0sda-dc2",
  "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",
  "auth_key": "73mxX4JLttzmVZ2",
  "updated_on": "2018-07-08T11:50:02.168325Z",
  "updated_by": <username from basic-auth>
}
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.16 DELETE /nodes/<nodename>?rev=<rev>

Item	Description
Description	Delete node <nodename>
Permission	node.delete/<nodename>
Mapping to CouchDB	DELETE /nodes/<nodename>?rev=1-093...
Mandatory fields	rev as parameter (rev has to be obtained as in 6.2.3.11)

Auth response: true:

Transparent forwarding.

Auth response: false or limited:

Send 403 Forbidden.

Maybe the transmitter service should inform the connected transmitters of the

6.2.3.17 GET /rubrics

Item	Description
Description	Returns all rubrics (depending on the filtering in 6.2.2 in JSON format.
Permission	rubric.read
Mapping to CouchDB	GET /rubrics/_design/rubrics/_view/byId?include_docs=true

Auth response: true:

```
{
  "total_rows": 1,
  "offset": 0,
  "rows": [
    {
      "_id": "dx-kw",
      "_rev": "1-166c3257894d0aea8ee68c1861ca508a",
      "number": 4,
      "description": "DX Cluster Spots KW",
      "label": "DX KW",
      "transmitter_groups": [
        "dl-hh"
      ],
      "transmitters": [
        "db0abc"
      ],
      "cyclic_transmit": false,
      "cyclic_transmit_interval": 0,
      "owner": [
        "dh3wr",
        "dliabc"
      ]
    }
  ]
}
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.18 GET /rubrics/_view/byNumber?startkey=<n>&endkey=<m>

Item	Description
Description	Get the output as in section 6.2.3.17 , but just for rubric numbers between <n> and <m>.
Permission	<code>rubric.read</code>
Mapping to CouchDB	GET /rubrics/_view/byNumber?startkey=<n>&endkey=<m>
Field validation	startkey : 6.1.7 endkey : 6.1.7

Auth handling is the same as in section [6.2.3.17](#).

6.2.3.19 GET /rubrics/_view/byTransmitter?key=<transmittername>

Item	Description
Description	Get the output as in section 6.2.3.17 , but just for rubrics that contain <transmittername> in the "transmitters" array.
Permission	<code>rubric.read</code>
Mapping to CouchDB	GET /rubrics/_view/byTransmitter?key=<transmittername>

Auth handling is the same as in section [6.2.3.17](#).

6.2.3.20 GET /rubrics/_view/byTransmitterGroup?key=<groupname>

Item	Description
Description	Get the output as in section 6.2.3.17 , but just for rubrics that contains <groupname> in the "transmitter_groups" array.
Permission	<code>rubric.read</code>
Mapping to CouchDB	GET /rubrics/_view/byTransmitterGroup?key=<groupname>

Auth handling is the same as in section [6.2.3.17](#).

6.2.3.21 GET /rubrics/_view/withCyclicTransmit

Auth handling is the same as in section [6.2.3.17](#).

Item	Description
Description	Get the output as in section 6.2.3.17, but just for rubric that have the cyclic transmit flag enabled.
Permission	rubric.read
Mapping to CouchDB	GET /rubrics/_view/withCyclicTransmit

6.2.3.22 GET /rubrics/<rubricname>

Item	Description
Description	Return details of <rubricname> in JSON format. This does not include the content of the 10 rubric message slots.
Permission	rubric.read/<username>
Mapping to CouchDB	GET /rubric/<username>

Auth response: true:

```
{
  "_id": "dx-kw",
  "_rev": "1-166c3257894d0aea8ee68c1861ca508a",
  "number": 4,
  "description": "DX Cluster Spots KW",
  "label": "DX KW",
  "transmitter_groups": [
    "dl-hh"
  ],
  "transmitters": [
    "db0abc"
  ],
  "cyclic_transmit": false,
  "cyclic_transmit_interval": 0,
  "owner": [
    "dh3wr",
    "dl1abc"
  ]
}
```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.23 GET /rubrics/_names

Item	Description
Description	Return just an JSON array of all rubricnames. Used where selections have to be done on the website.
Permission	rubrics.list
Mapping to CouchDB	GET /rubrics/_design/rubrics/_list/names/byId

Auth response: true:

```
["dl-hh", "dl-nw"]
```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.24 GET /rubrics/_descriptions

Item	Description
Description	Return just an JSON array of all rubricnames their description in a JSON Array. Used where selections have to be done on the website.
Permission	rubrics.list
Mapping to CouchDB	GET /rubrics/_design/rubrics/_list/descriptions/descriptions

Auth response: true:

```
[
  {
    "_id": "dl-hh",
    "description": "Germany, Hamburg"
  },
  {
    "_id": "dl-by",
    "description": "Bavaria"
  }
]
```

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.25 PUT /rubrics - Add new rubric

Item	Description
Description	Add a non-existing new rubric with _id <rubricname>
Permission	rubric.create
Mapping to CouchDB	PUT /rubrics/<rubricsname>
Mandatory fields	_id, number, description, label, transmitter_groups, cyclic_transmit, cyclic_transmit_interval, owners
Field validation	_id : 6.1.1 number : 6.1.7 description : 6.1.11 label : 6.1.8 transmitter_groups : 6.1.9 cyclic_transmit : boolean cyclic_transmit_interval : 6.1.10 owners : 6.1.6

Auth response: true: User to Database-Service: Example content to add rubric dx-kw

```
{
  "_id": "dx-kw",
  "number": 4,
  "description": "DX Cluster Spots KW",
  "label": "DX KW",
  "transmitter_groups": [
    "dl-hh"
  ],
  "transmitters": [
    "db0abc"
  ],
  "cyclic_transmit": false,
  "cyclic_transmit_interval": 0,
  "owners": [
    "dh3wr",
    "dl1abc"
  ]
}
```

Mapping to CouchDB with adding created_* information by database microservice:

```
{
  "_id": "dx-kw",
  "number": 4,
  "description": "DX Cluster Spots KW",
  "label": "DX KW",
  "transmitter_groups": [
    "dl-hh"
  ],
  "transmitters": [
    "db0abc"
  ],
  "cyclic_transmit": false,
  "cyclic_transmit_interval": 0,
  "owners": [
    "dh3wr",
    "dl1abc"
  ],
  "created_on": "2018-07-08T11:50:02.168325Z",
  "created_by": <username from basic-auth>
}
```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.26 PUT /rubrics - Edit existing rubric

Edit is differentiated from create by the presence of the **_rev** field.

Item	Description
Description	Edit the existing rubric <rubricname>.
Permission	rubric.update/<rubricname>
Mapping to CouchDB	PUT /rubrics/<rubricsname>
Mandatory fields	_id, _rev (_rev has to be obtained as in 6.2.3.22)
Optional fields	number, description, label, transmitter_groups, cyclic_transmit, cyclic_transmit_interval, owners (minimum one)
Field validation	_id : Let CouchDB decide, as the entry is already present. _rev : Let CouchDB decide, as the entry is already present. number : 6.1.7 description : 6.1.11 label : 6.1.8 transmitter_groups : 6.1.9 cyclic_transmit : boolean cyclic_transmit_interval : 6.1.10 owners : 6.1.6

Auth response: true:

User to Database-Service: Example content to edit to add rubric dx-kw changing the description

```
{
  "_id": "db0sda-dc2",
  "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",
  "description": "New DX Cluster Spots KW",
}
```

Mapping to CouchDB with adding updated_* information by database microservice:

```
{
  "_id": "db0sda-dc2",
  "_rev": "1-ee070b17db9c3c58658d10fdedad2f48",
  "description": "New DX Cluster Spots KW",
  "updated_on": "2018-07-08T11:50:02.168325Z",
  "updated_by": <username from basic-auth>
}
```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.27 DELETE /rubrics/<rubricname>?rev=<rev>

Item	Description
Description	Delete node <rubricname>
Permission	rubric.delete/<rubricname>
Mapping to CouchDB	DELETE /rubrics/<rubricname>?rev=<rev>
Mandatory fields	rev as parameter (rev has to be obtained as in 6.2.3.22)

Auth response: true:
Transparent forwarding.

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.28 GET /subscribers

Item	Description
Description	Returns all subscribers (depending on the filtering in 6.2.2 in JSON format.
Permission	subscriber.read
Mapping to CouchDB	GET /subscribers/_design/subscribers/_view/byId?include_docs=true

Auth response: true or limited:

```
\begin{lstlisting}
{
  "total_rows": 1,
  "offset": 0,
  "rows": [
    {
      "_id": "dl1abc",
      "_rev": "1-44182aeb25815b19babe1c0a6bb95e68",
      "description": "Peter",
      "paggers": [
        {
          "ric": 123456,
          "function": 3,
          "name": "Peters Alphapoc",
          "type": "alphaPpoc",
          "enabled": true
        }
      ],
      "third_party_services": [
        "APRS",
        "BM"
      ],
      "owners": [
        "dh3wr",
        "dl1abc"
      ],
      "groups": [
        "rwth-afu"
      ]
    }
  ]
}
```

Auth response: false:

Send 403 Forbidden.

6.2.3.29 GET /subscribers/<subscribername>

Item	Description
Description	Return details of <subscribername> in JSON format.
Permission	subscriber.read/<subscribername>
Mapping to CouchDB	GET /subscriber/<subscribername>

Auth response: true or limited:

```
{
  "_id": "dl1abc",
  "_rev": "1-44182aeb25815b19babe1c0a6bb95e68",
  "description": "Peter",
  "pagers": [
    {
      "ric": 123456,
      "function": 3,
      "name": "Peters Alphapoc",
      "type": "alphaPpoc",
      "enabled": true
    }
  ],
  "third_party_services": [
    "APRS",
    "BM"
  ],
  "owners": [
    "dh3wr",
    "dl1abc"
  ],
  "groups": [
    "rwth-afu"
  ]
}
```

Auth response: false:

Send 403 Forbidden.

6.2.3.30 GET /subscribers/_names

Item	Description
Description	Return just an JSON array of all subscribers. Used where selections have to be done on the website.
Permission	rubric.list
Mapping to CouchDB	GET /subscribers/_design/subscribers/_list/names/byId

Auth response: true or limited:

```
["dh3wr","dl2ic"]
```

Auth response: false:

Send 403 Forbidden.

6.2.3.31 GET /subscribers/_descriptions

Item	Description
Description	Return just an JSON array of all subscribers and their descriptions. Used where selections have to be done on the website.
Permission	rubric.list
Mapping to CouchDB	GET /subscribers/_design/subscribers/_list/descriptions/descriptions

Auth response: true or limited:

```
[
  {
    "_id": "dh3wr",
    "description": "Ralf"
  },
  {
    "_id": "dl2ic",
    "description": "Thomas"
  }
]
```

Auth response: false:

Send 403 Forbidden.

6.2.3.32 GET /subscriber_groups

Item	Description
Description	Returns an array of existing subscribers_goups tags in JSON format. Used where selections have to be done on the website.
Permission	subscriber_groups.list
Mapping to CouchDB	GET /subscribers/??? unknown FIXME

Auth response: true or limited:

```
["dl.OV-G01","dl.rwth-afu"]
```

Auth response: false

Send 403 Forbidden.

Generate
CouchDB
request

6.2.3.33 PUT /subscribers - Add new subscriber

Item	Description
Description	Add a non-existing new subscriber with <code>_id</code> <subscribername>
Permission	<code>subscriber.create</code>
Mapping to CouchDB	PUT /subscribers/<subscribername>
Mandatory fields	<code>_id</code> , <code>description</code> , <code>paggers</code> , <code>ric</code> , <code>function</code> , <code>type</code> <code>enabled</code> , <code>third_party_services</code> , <code>owners</code> , <code>groups</code>
Field validation	<code>_id</code> : 6.1.1 <code>description</code> : 6.1.11 <code>paggers</code> : The key for the array, must be present. <code>ric</code> : 6.1.12 <code>function</code> : 6.1.13 <code>type</code> : 6.1.14 <code>enabled</code> : boolean <code>third_party_services</code> : The key for the array, must be present <code>owners</code> : 6.1.6 <code>groups</code> : The key for the array, must be present

Auth response: true: User to Database-Service: Example content to add subscriber dl1abc

```
{
  "_id": "dl1abc",
  "description": "Peter",
  "paggers": [
    {
      "ric": 123456,
      "function": 3,
      "name": "Peters Alphapoc",
      "type": "alphaPpoc",
      "enabled": true
    }
  ],
  "third_party_services": [
    "APRS",
    "BM"
  ],
  "owners": [
    "dh3wr",
    "dl1abc"
  ],
  "groups": []
}
```

Mapping to CouchDB with adding `created_*` information by database microservice:

```
\begin{lstlisting}
{
  "_id": "dl1abc",
  "description": "Peter",
  "paggers": [
    {
      "ric": 123456,
      "function": 3,
      "name": "Peters Alphapoc",
      "type": "alphaPpoc",
      "enabled": true
    }
  ],
  "third_party_services": [
    "APRS",
    "BM"
  ],
  "owner": [
    "dh3wr",
    "dl1abc"
  ],
}
```

```

    "groups": [],
    "created_on": "2018-07-08T11:50:02.168325Z",
    "created_by": <username from basic-auth>
}

```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.34 PUT /subscribers - Edit existing subscriber

Edit is differentiated from create by the presence of the **_rev** field.

Item	Description
Description	Add a edit a existing subscriber with _id <subscribername>
Permission	subscriber.update
Mapping to CouchDB	PUT /subscribers/<subscribername>
Mandatory fields	_id, _rev
Optional fields	description, pagers, ric, function, type, enabled, third_party_services, owners, groups (minimum one, if it's pagers, the complete pagers array has to be sent.
Field validation	<div> <div>_id</div> <div>: Let CouchDB decide, as the entry is already present.</div> </div> <div> <div>_rev</div> <div>: Let CouchDB decide, as the entry is already present.</div> </div> <div> <div>description</div> <div>: 6.1.11</div> </div> <div> <div>pagers</div> <div>: The key for the array, must be present.</div> </div> <div> <div>ric</div> <div>: 6.1.12</div> </div> <div> <div>function</div> <div>: 6.1.13</div> </div> <div> <div>type</div> <div>: 6.1.14</div> </div> <div> <div>enabled</div> <div>: boolean</div> </div> <div> <div>third_party_services</div> <div>: The key for the array, must be present</div> </div> <div> <div>owners</div> <div>: 6.1.6</div> </div> <div> <div>groups</div> <div>: The key for the array, must be present</div> </div>

Auth response: true: User to Database-Service: Example content to edit the description of subscriber dllabc

```

{
  "_id": "dllabc",
  "_rev": "1-44182aeb25815b19babe1c0a6bb95e68",
  "description": "Peter",

```

Mapping to CouchDB with adding updated_* information by database microservice:

```

{
  "_id": "dllabc",
  "_rev": "1-44182aeb25815b19babe1c0a6bb95e68",
  "description": "Peter",
  "updated_on": "2018-07-08T11:50:02.168325Z",
  "updated_by": <username from basic-auth>
}

```

Auth response: false or limited:
Send 403 Forbidden.

6.2.3.35 DELETE /subscribers/<subscribername>?rev=<rev>

Item	Description
Description	Delete subscriber <subscribername>
Permission	subscriber.delete/<subscribername>
Mapping to CouchDB	DELETE /subscribers/<subscribername>?rev=<rev>
Mandatory fields	rev as parameter (rev has to be obtained as in 6.2.3.29)

Auth response: true:

Transparent forwarding.

Auth response: false or limited:

Send 403 Forbidden.

6.2.3.36 GET /transmitters/_names

Item	Description
Description	Return an JSON array of all transmitter names. Used where selections have to be done on the website
Permission	transmitter.list
Mapping to CouchDB	GET /transmitters/_design/transmitters/_list/names/byId

Auth response: true or limited:

```
["db0sda", "db0wa"]
```

Auth response: false:

Send 403 Forbidden.

6.2.3.37 GET /transmitters/_groups

Item	Description
Description	Returns a JSON array of used transmitter groups tags from all known transmitters. Used for a suggestion of already existing transmitter group tags on the website.
Permission	transmitter.list
Mapping to CouchDB	GET /transmitters/_design/transmitters/_list/groups/byGroup?group_level=4

Auth response: true or limited:

```
["dl.nw.koeln.aachen", "dxluster.dl", "testinggroup"]
```

Auth response: false:

Send 403 Forbidden.

6.2.3.38 PUT /transmitters - Add new transmitter

Item	Description
Description	Add a non-existing new subscriber with <code>_id</code> <subscribername>
Permission	<code>subscriber.create</code>
Mapping to CouchDB	PUT <code>/subscribers/<subscribername></code>
Mandatory fields	<code>_id</code> , <code>usage</code> , <code>timeslots</code> , <code>power</code> , <code>owners</code> , <code>groups</code> , <code>coordinates</code> , <code>aprs_broadcast</code> , <code>enabled</code> , <code>auth_key</code> , <code>antenna</code> , <code>type</code> , <code>gain</code> , <code>direction</code> , <code>agl</code>
Field validation	<code>_id</code> : 6.1.1 <code>usage</code> : 6.1.15 <code>timeslots</code> : 6.1.16 <code>power</code> : 6.1.17 <code>owners</code> : 6.1.6 <code>groups</code> : The key for the array, must be present
	<code>coordinates</code> : 6.1.18 <code>aprs_broadcast</code> : boolean <code>enabled</code> : boolean <code>auth_key</code> : 6.1.5 <code>antenna</code> : The key for the array, must be present <code>type</code> : 6.1.19 <code>gain</code> : 6.1.20 <code>direction</code> : 6.1.21 <code>agl</code> : 6.1.22 <code>transmit_rubrics_format</code> : Array with possible content "SKYPER" and "PLAIN" <code>direction</code> : 6.1.21

Auth response: true: User to Database-Service: Example content to add transmitter db0wa

```
{
  "_id": "db0wa",
  "usage": "widerange",
  "timeslots": [
    true,
    true,
    false,
    true,
    true,
    false,
    true,
    true,
    false,
    false,
    true,
    true,
    false,
    true,
    true,
    false
  ],
  "power": 20,
  "owners": [
    "dh3wr"
  ],
  "groups": [
    "dl.nw.koeln.aachen"
  ],
  "emergency_power": {
    "available": true,
    "infinite": false,
    "duration": 7200
  },
  "coordinates": [
    50.71613,
    6.165481
  ]
}
```

```

],

"aprs_broadcast": false,
"enabled": true,
"auth_key": "Arj39135jAKS",
"antenna": {
  "type": "omni",
  "gain": 0,
  "direction": 0,
  "agl": 1
}
}

```

Mapping to CouchDB with adding `created_*` information by database microservice:

```

"_id": "db0wa",
"usage": "widerange",
"timeslots": [
  true,
  true,
  false,
  true,
  true,
  false,
  true,
  true,
  false,
  false,
  true,
  true,
  false,
  true,
  true,
  false
],
"power": 20,
"owners": [
  "dh3wr"
],
"groups": [
  "dl.nw.koeln.aachen"
],
"emergency_power": {
  "available": true,
  "infinite": false,
  "duration": 7200
},
"coordinates": [
  50.71613,
  6.165481
],

"aprs_broadcast": false,
"enabled": true,
"auth_key": "Arj39135jAKS",
"antenna": {
  "type": "omni",
  "gain": 0,
  "direction": 0,
  "agl": 1
},
"created_on": "2018-07-08T11:50:02.168325Z",
"created_by": <username from basic-auth>
}

```

Auth response: false or limited:
 Send 403 Forbidden.

6.2.3.39 PUT /transmitters - Edit existing transmitter

Edit is differentiated from create by the presence of the `_rev` field.

Item	Description
Description	Edit the existing transmitter <transmittername>.
Permission	<code>transmitter.update/<transmittername></code>
Mapping to CouchDB	<code>PUT /transmitters/<transmittername></code>
Mandatory fields	<code>_id</code> , <code>_rev</code> (<code>_rev</code> has to be obtained as in 6.2.6.2)
Optional fields	<code>usage</code> , <code>timeslots</code> , <code>power</code> , <code>owners</code> , <code>groups</code> , <code>coordinates</code> , <code>aprs_broadcast</code> , <code>enabled</code> , <code>auth_key</code> , <code>antenna</code> , <code>type</code> , <code>gain</code> , <code>direction</code> , <code>agl</code> (minimum one, arrays complete)
Field validation	<code>_id</code> : Let CouchDB decide, as the entry is already present. <code>_rev</code> : Let CouchDB decide, as the entry is already present. <code>usage</code> : 6.1.15 <code>timeslots</code> : 6.1.16 <code>power</code> : 6.1.17 <code>owners</code> : 6.1.6 <code>groups</code> : The key for the array, must be present
	<code>coordinates</code> : 6.1.18 <code>aprs_broadcast</code> : boolean <code>enabled</code> : boolean <code>auth_key</code> : 6.1.5 <code>antenna</code> : The key for the array, must be present <code>type</code> : 6.1.19 <code>gain</code> : 6.1.20 <code>direction</code> : 6.1.21 <code>agl</code> : 6.1.22

Auth response: true: User to Database-Service: Example to edit usage of transmitter db0wa:

```
{
  "_id": "db0wa",
  "_rev": "1-44182aeb25815b19babe1c0a6bb95e68",
  "usage": "widerange"
}
```

Mapping to CouchDB with adding `updated_*` information by database microservice:

```
{
  "_id": "dl1abc",
  "_rev": "1-44182aeb25815b19babe1c0a6bb95e68",
  "updated_on": "2018-07-08T11:50:02.168325Z",
  "updated_by": <username from basic-auth>
}
```

Auth response: false or limited:

Send 403 Forbidden.

Is an active connection reset to that transmitter necessary? If the Authkey changes, an already established connection will keep working? And

6.2.3.40 DELETE /transmitters/<transmittername>?rev=<rev>

Item	Description
Description	Delete transmitter <transmittername>
Permission	<code>transmitter.delete/<transmittername></code>
Mapping to CouchDB	DELETE /transmitter/<transmittername>?rev=<rev>
Mandatory fields	<code>rev</code> as parameter (<code>rev</code> has to be obtained as in 6.2.6.2)

Auth response: true:

Transparent forwarding.

Auth response: false or limited:

Send 403 Forbidden.

Is an active connection reset to that transmitter necessary?

6.2.4 Call Service

6.2.4.1 GET /calls

Returns the last 100 calls with all details.

6.2.4.2 GET /calls?limit=<number>

Returns the last <number> of calls with all details. If <number> is higher than the available calls, just return all available calls.

6.2.4.3 GET /calls/_view/byDate

With GET parameters:

```
GET /calls/_view/byDate?startkey="<startddate">&endkey="<endddate">"
```

Returns the calls made within the specified time span with all details. If there are no calls stored in the specified time span, return empty JSON.

6.2.4.4 GET /calls/_view/byIssuer

```
GET /calls/_view/byIssuer?key="dh3wr"
```

Returns all the calls issued from callsign dh3wr with all details. If there are no calls stored with in the specified time span, return empty JSON. (The microservice has to transfrom the request into *startkey="dh3wr"&endkey="dh3wr"* to the CouchDB GET request by itself.)

6.2.4.5 GET /calls/_view/byRecipient

```
GET /calls/_view/byRecipient?key="dh3wr"
```

Returns all the calls with recipient callsign dh3wr with all details. If there are no calls stored in the specified time span, return empty JSON. (The microservice has to transfrom the request into *startkey="dh3wr"&endkey="dh3wr"* to the CouchDB GET request by itself.)

6.2.4.6 GET /calls/_view/pending

Return all details of pending calls, that are not transmitted by at least one transmitter.

6.2.4.7 GET /calls/_view/pending_all

Return all details of pending calls, that are not transmitted by all designated transmitters.

6.2.4.8 POST /call

Insert call to the system. Send in POST content:

```
{
  "subscriber": ["dh3wr",...],
  "subscriber\_groups": ["d1.ov-g01",...]
  "priority" : 1 to 5,
  "message": "This is an example call",
  "transmitter_groups": ["d1-all","on-all"]
}
```

Any combination of the given filter method shall be possible. It this possible?

6.2.5 Rubric Service

6.2.5.1 GET /news

Returns an array of all rubrics and their content in JSON format.

zu be-
denken

6.2.5.2 GET /news/_view/byRubric

GET /news/_view/byRubric?startkey="metar-dl"&endkey="metar-dl"

Returns just the content of <rubricname> content in JSON format.

6.2.5.3 GET /news/_view/byRubric/message_no>

Returns just the content of <rubricname> content and message number <message_no> in JSON format.

6.2.5.4 PUT /news/<rubricname>

Add content to rubric <rubricname> on the first message slot and move the existing message one to the end. The 10th. entry will be lost. An automated resend of all rubric content slots will be necessary.

6.2.5.5 PUT /news/<rubricname>/<message_no>

Add or override the content of rubric <rubricname> on the message slot <message_no>. An automated resend of just this message slot will be necessary.

6.2.5.6 DELETE /news/<rubricname>?rev=

Delete all content in rubric <rubricname>. The content will be still on Skypers that have received it before, but it will not be transmitted periodically any more. No dependency check necessary.

6.2.5.7 DELETE /news/<rubricname>/<message_no>?rev=

Delete the content in rubric <rubricname> with message slot <message_no>. The content will be still on Skypers that have received it before, but it will not be transmitted periodically any more. No dependency check necessary.

6.2.6 Transmitter Service

6.2.6.1 GET /transmitters

Return all transmitters with all details in JSON format.

limited: _id, _rev, usage, timeslots, power, owners, groups, emergency_power, coordinates, aprs_bro and sub-JSON-nodes of these keys.

6.2.6.2 GET /transmitter/<transmittername>

Return all details just of transmitter <transmittername>.

limited: _id, _rev, usage, timeslots, power, owners, groups, emergency_power, coordinates, aprs_bro and sub-JSON-nodes of these keys.

6.2.6.3 POST /transmitters/_bootstrap

POST /transmitters/_bootstrap

```
{
  "callsign": "db0avr",
  "auth_key": "<secretInCleartext>",
  "software": {
    "name": "UniPager",
    "version": "1.0.2"
  }
}
```

Answers from the bootstrap REST call The application type shall be application/json.

200 OK

```
{
  "timeslots": [true, true, false, true, ...],
  "nodes": [
    {
      "host": "node1.ampr.org",
      "reachable": true,
      "last_seen": "2018-07-03T07:43:52.783611Z",
      "response_time": 42
    }
  ]
}
```

423 Locked

```
{
  "error": "Transmitter temporarily disabled by configuration."
}
```

423 Locked

```
{
  "error": "Transmitter software type not allowed due to serious bug."
}
```

6.2.6.4 POST /transmitters/_heartbeat

POST /transmitters/_heartbeat

```
{
  "callsign": "db0avr",
  "auth_key": "<secretInCleartext>"
}
```

Answers from the heartbeat REST call The application type shall be application/json.

200 OK

```
{
  "status": "ok"
}
```

If network wants to assign new timeslots without disconnecting (for dynamic timeslots).

200 OK

```
{
  "status": "ok",
  "timeslots": [true, true, false, ...],
  "valid_from": "2018-07-03T08:00:52.786458Z"
}
```

If network wants to initiate handover to other node

503 Service unavailable

```
{
  "error": "Node not available, switch to other node."
}
```


6.2.7 Cluster Service

6.2.7.1 POST /cluster/discovery

6.2.8 Telemetry Service

6.2.8.1 GET /telemetry/transmitters

Return the stored telemetry **summary** values for all transmitters.

6.2.8.2 GET /telemetry/transmitters/<transmittername>

Return all the stored telemetry values for transmitter <transmittername>.

6.2.8.3 GET /telemetry/nodes

Return the stored telemetry **summary** values for all nodes.

6.2.8.4 GET /telemetry/nodes/<nodesname>

Return all the stored telemetry values for node <nodename>.

6.2.8.5 WS /telemetry

See [the section for Websocket API](#).

6.2.9 Database Changes Service

6.2.9.1 WS /changes

See [the section for Websocket API on database changes](#).

6.2.10 Status Service

The purpose of the status service is to provide a short overview of the DAPNET network and the microservices.

6.2.10.1 GET /status/nodes

No authentication required.

Answer: 200 OK

```
{
  "nodes": [
    {
      "host": "node1.ampr.org",
      "port": 4000,
      "reachable": true,
      "last_seen": "2018-07-03T07:43:52.783611Z",
      "response_time": 42
    }
  ],
  "connections": {
    "rabbitmq": true,
    "couchdb": true,
    "hamcloud": true,
  },
  "hamcloud_node": false,
  "general_health": true
}
```

What is
"port"?

6.2.10.2 GET /status/node/<nodename>

No authentication required.

Answer: 200 OK

```
{
  "host": "node1.ampr.org",
  "port": 4000,
  "reachable": true,
  "last_seen": "2018-07-03T07:43:52.783611Z",
  "response_time": 42,
  "connections": {
    "rabbitmq": true,
    "couchdb": true,
    "hamcloud": true,
  },
  "hamcloud_node": false,
  "general_health": true
}
```

What is
"port"?

6.2.10.3 GET /status

Get status of this node. 200 OK

```
{
  "good_health" : true,
  "version" : "1.2.3"
  "microservices\_running" : {
    "database" : true,
    "call" : true,
    "rubric" : true,
    "transmitter" : true,
    "cluster" : true,
    "telemetry" : true,
    "database-changes" : true,
    "statistics" : true,
    "rabbitmq" : true,
    "thirdparty" : true
  }
}
```

6.2.10.4 GET /status/<service_name>

List of valid values for *service_name*:

database-service

call-service

rubric-service

transmitter-service

cluster-service

telemetry-service

database-changes-service

statistics-service

rabbitmq-service

200 OK

<Status output from service itself>

6.2.11 Statistics Service

6.2.11.1 GET /statistics

No authentication required.

Answer: 200 OK

```
{
  "users" : 1234,
  "transmitters": {
    "personal": {
      "online": 13
      "total": 34
    },
    "widerage": {
      "online": 53,
      "total": 97
    }
  }
  "nodes": {
    "online": 10,
    "total": 19
  },
  "processed_calls": 1234,
  "processed_rubric_content_changes": 234
}
```

On the calls and rubric content changes: Always increasing counter link traffic on network device or reset at 00:00 am?

6.2.12 Auth Service

The auth service provides authentication information to all other services. It works on the CouchDB and reads information from there.

6.2.12.1 Password hashing

In version 1, the used hashing algorithm was PBKDF2WithHmacSHA1. In DAPNET 2, the preferred algorithm is BCrypt. In order not to send emails to every already registered user to update her/his password, both hashing algorithms are supported by the Auth Service. Anyway, as soon as a user sends its credentials and in the database, still the PBKDF\ hash is stored, it is updated with the corresponding format.

The format of the hash can be distinguished by the \$2a\$, \$2b\$ or \$2y\$-Prefix. With this method, the transition happens transparently regarding the user.

6.2.12.2 Role definition

The following roles are available:

Name	Description
user	This is a normal user with the possibility of being owner of a subscriber association and transmitters.
support	Trustworthy volunteer that is working on the user support, e.g. the ticket system. Can manage user, transmitter, subscriber and rubric settings.
admin	Can do everything, especially create new nodes.
thirdparty.<X>	A machine interface user being able to subscribe to the third party MQTT topics for service <X>. Examples are APRS or Brandmeister.
guest	Any other request making entity.

Table 6.2: Role definition

A user can be part of multiple roles. The Auth service as to check for each permission, if at least one of the roles allows it. Otherwise it is denied.

6.2.12.3 Permission definition

The following permissions are available:

Name	Description
all	All data access and modification allowed.
none	Data access and modification forbidden.
if_owner	Data modification allowed, if asking username is in owners list of the entity.
limited	Data access is restricted. The consuming service has to define what that means in detail.

Table 6.3: Permission definition

6.2.12.4 Permission naming definition

The name of the permission has the following significance:

Name	Description
*.list	Get an array of all <code>_ids</code> or further summary data. Used for selections by users.
*.read	Get one or many documents in complete or limited version. A white list defined in the corresponding section of this document is given for the limited case.
*.create	Create a new document.
*.update	Modify an existing document.
*.delete	Delete an existing document.
user.change_role	Change the roles array of a user's entry.

Table 6.4: Permission naming definition

6.2.12.5 Permission matrix

The following table defines for each role which actions are permitted.

action	admin	support	user	guest	thirdparty.<X>
user.list	all	all	all	none	all
user.read	all	all	limited	none	none
user.create	all	all	none	none	none
user.update	all	all	if_owner	none	if_owner
user.delete	all	all	if_owner	none	if_owner
user.change_role	all	none	none	none	none

Table 6.5: Role's permissions for users database

action	admin	support	user	guest	thirdparty.<X>
node.list	all	all	limited	limited	all
node.read	all	all	limited	limited	all
node.create	all	all	none	none	none
node.update	all	all	none	none	none
node.delete	all	all	none	none	none

Table 6.6: Role's permissions for nodes database

action	admin	support	user	guest	thirdparty.<X>
rubric.list	all	all	all	none	all
rubric.read	all	all	all	none	all
rubric.create	all	all	none	none	none
rubric.update	all	all	none	none	none
rubric.delete	all	all	none	none	none

Table 6.7: Role's permissions for rubrics database

action	admin	support	user	guest	thirdparty.<X>
news.read	all	all	all	none	all
news.create	all	all	if_owner	none	if_owner
news.update	all	all	if_owner	none	if_owner
news.delete	all	all	if_owner	none	if_owner

Table 6.8: Role's permissions for news database

action	admin	support	user	guest	thirdparty.<X>
subscriber.list	all	all	all	none	all
subscriber.read	all	all	limited	none	limited
subscriber.create	all	all	none	none	none
subscriber.update	all	all	if_owner	none	if_owner
subscriber.delete	all	all	if_owner	none	if_owner
subscriber_groups.list	all	all	all	none	all

Table 6.9: Role's permissions for subscribers database

action	admin	support	user	guest	thirdparty.<X>
transmitter.list	all	all	all	limited	all
transmitter.read	all	all	limited	none	limited
transmitter.create	all	all	none	none	none
transmitter.update	all	all	if_owner	none	if_owner
transmitter.delete	all	all	if_owner	none	if_owner
transmitter_groups.list	all	all	all	none	all

Table 6.10: Role's permissions for transmitters database

action	comment
transmitter.new_conn_post	If transmitter credentials are ok
transmitter.rabbitmq.subscribe	If transmitter credentials are ok, for both RX of messages and TX of telemetry

Table 6.11: Role's permissions for transmitters

action	admin	support	user	guest	thirdparty.<X>
ws.telemetry.subscribe	all	all	all	all	all
ws.database_change.subscribe	all	all	limited	none	limited

Table 6.12: Role's permissions for websocket

limited: Just same content as permitted over http. Websocket authentication like in unipager.

action	admin	support	user	guest	thirdparty.<X>
status.read	all	all	all	all	all
statistics.read	all	all	all	all	all

Table 6.13: Role's permissions for status and statistics

action	admin	support	user	guest	thirdparty.<X>
thirdparty.subscribe.aprs	all	none	none	none	if_<X>=aprs
thirdparty.subscribe.brandmeister	all	none	none	none	if_<X>=brandmeister

Table 6.14: Role's permissions for MQTT subscription

6.2.12.6 Auth API definition

The following table states all Auth Service API calls and their description. The POST request has to come always with a POST content of:

```
{"username": "<asking_user>", "password": "<asking_user's_password>"}
```

There are two endpoints on the Auth service. One for overview of permissions and one explicitly answering, if a permission is granted.

POST /auth/users/login

This returns an detailed overview of all permissions of the user referred in the POST content. If a permission is not listed, it's implicitly **none**. Example output:

```
{
  "user": {
    "roles": [
      "admin",
      "support",
      "user"
    ],
    "enabled": true,
    "email": "mailmenot@dl2ic.de",
    "created_on": "2018-07-08T11:50:02.168325Z",
    "created_by": "dh3wr",
    "_rev": "4-3ebbe52b3da83a2a6c1f8093efebdc07",
    "_id": "dl2ic"
  },
  "permissions": {
    "user.update": "all",
    "user.read": "all",
    "user.list": "all",
    "user.delete": "all",
    "user.create": "all",
    "user.change\_role": "all",
    "transmitter\_groups.list": "all",
    "transmitter.update": "all",
    "transmitter.read": "all",
    "transmitter.list": "all",
    "transmitter.delete": "all",
    "transmitter.create": "all",
    "subscriber\_groups.list": "all",
    "subscriber.update": "all",
    "subscriber.read": "all",
    "subscriber.list": "all",
    "subscriber.delete": "all",
    "subscriber.create": "all",
    "rubric.update": "all",
    "rubric.read": "all",
    "rubric.list": "all",
    "rubric.delete": "all",
    "rubric.create": "all",
    "node.update": "all",
    "node.read": "all",
    "node.list": "all",
    "node.delete": "all",
    "node.create": "all",
    "news.update": "all",
    "news.read": "all",
    "news.delete": "all",
    "news.create": "all"
  }
}
```

POST /auth/users/permissions/<permission>/<entity>

This is a explicit query endpoint for a specific <permission> as listed in section [6.2.12.5](#). The entity against the permission is applied is <entity>. Ownership bf is considered in this case by the Auth Service.

POST /auth/users/permissions/<service>.read

This is a explicit query endpoint for a <service>.read permission grant to get one or many documents. Ownership is **NOT** considered in this case. The consuming service has to take care of adequate data handling.

There are three possible answers:

Access is granted completely:

```
{ "access": true }
```

Access is forbidden completely:

```
{ "access": false }
```

Access granted, but limited to a subset of data:

```
{
  "access": false,
  "limited": true
}
```

If the limited key is not present, the access is still forbidden.

GET /auth/users/roles

A JSON array of available roles can be obtained without authentication by.

Example output:

```
["user", "support", "admin", "thirdparty.brandmeister", "thirdparty.aprs"]
```


6.2.12.7 Auth call reference list

In order to shorten the table, the abbreviation **/a/u/p** is used to represent **/auth/users/permission**.

The value in < > is always the resource to be accessed.

Auth REST endpoint	Referring to	Section
POST /a/u/p/user.list	GET /users/_usernames	6.2.3.3
POST /a/u/p/user.read/<username>	GET /users/<username>	6.2.3.2
POST /a/u/p/user.read	GET /users	6.2.3.1
POST /a/u/p/user.create	PUT /users	6.2.3.5
POST /a/u/p/user.update/<username>	PUT /users	6.2.3.6
POST /a/u/p/user.delete/<username>	DELETE /users/<username>?rev=	6.2.3.8
POST /a/u/p/user.change_role/<username>	PUT /users	6.2.3.6
POST /a/u/p/transmitter.list	GET /transmitters/_transmitternames	??
POST /a/u/p/transmitter.read/<txname>	GET /transmitters/<txname>	??
POST /a/u/p/transmitter.read	GET /transmitters[?*	??
POST /a/u/p/transmitter.create	PUT /transmitters	??
POST /a/u/p/transmitter.update/<txname>	PUT /transmitters	??
POST /a/u/p/transmitter.delete/<txname>	DELETE /transmitters/<txname>?rev=	??
POST /a/u/p/transmitter_groups.list	GET /transmitters/_groups	??
POST /a/u/p/transmitter.new_conn_post	POST /transmitters/bootstrap	??
POST /a/u/p/transmitter.rabbitmq.subscribe	<i>RabbitMQ Auth</i>	??
POST /a/u/p/subscriber.list	GET /subscribers/_subscribernames	??
POST /a/u/p/subscriber.read/<subcname>	GET /subscribers/<subcname>	??
POST /a/u/p/subscriber.read	GET /subscribers[?*	??
POST /a/u/p/subscriber.create	PUT /subscribers	??
POST /a/u/p/subscriber.update/<subcname>	PUT /subscribers	??
POST /a/u/p/subscriber.delete/<subcname>	DELETE /subscribers/<subcname>?rev=	??
POST /a/u/p/subscriber_groups.list	GET /subscribers/_groups	??
POST /a/u/p/node.list	GET /nodes/_nodenames GET /nodes/_nodenamedescription	?? ??
POST /a/u/p/node.read/<nodename>	GET /nodes/<nodename>	6.2.3.11
POST /a/u/p/node.read	GET /nodes[?*	6.2.3.10
POST /a/u/p/node.create	PUT /nodes	6.2.3.14
POST /a/u/p/node.update/<nodename>	PUT /nodes	6.2.3.15
POST /a/u/p/node.delete/<nodename>	DELETE /nodes/<nodename>?rev=	6.2.3.16
POST /a/u/p/rubric.list	GET /rubrics/_rubricnames	??
POST /a/u/p/rubric.read/<rubricname>	GET /rubrics/<rubricsame>	6.2.3.22
POST /a/u/p/rubric.read	GET /rubrics[?*	??
POST /a/u/p/rubric.create	PUT /rubrics	6.2.3.25
POST /a/u/p/rubric.update/<rubricname>	PUT /rubrics	6.2.3.26
POST /a/u/p/rubric.delete/<rubricname>	DELETE /rubrics/<rubricsname>?rev=	6.2.3.27
POST /a/u/p/news.read	GET /news[?*	??
POST /a/u/p/news.create	PUT /news	??
POST /a/u/p/news.update/<rubricname>	PUT /news/<rubricname>	??
POST /a/u/p/news.delete/<rubricname>	DELETE /news/<rubricname>?rev=	??
POST /a/u/p/news.delete/<rubricname>	DELETE /news/<rubricname>/<msg_no>?rev=	??
POST /a/u/p/ws.telemetry.subscribe	WS /telemetry/*	??
POST /a/u/p/ws.database_change.subscribe	WS /changes/*	??
POST /a/u/p/status.read	GET /status/*	??
POST /a/u/p/statistics.read	GET /statistics/*	??
POST /a/u/p/thirdparty.subscribe.<service>	<i>MQTT Auth</i> to subscribe to topic <service>	??

Table 6.15: Auth REST API endpoint and references

6.2.13 RabbitMQ Service

6.2.13.1 GET /rabbitmq/*

6.3 RabbitMQ

6.3.1 Concept of Calls distribution

There are 3 exchanges available on each RabbitMQ instance:

dapnet.calls Messages shared between all nodes

dapnet.local_calls Messages to the local connected transmitters

dapnet.telemetry Messages containing telemetry from transmitters

The concept of distribution calls is a two-stage approach. On **dapnet.calls** the calls are distributed among all Nodes forming the DAPNET cluster on an abstract level, where e.g. the resolution from recipient callsigns to their corresponding RICs is not done. Each DAPNET node will listen to this exchange and generate the messages for the locally connected transmitter upon arrival. The selection of transmitters selected by transmitter group tags, explicit transmitter selection or by a polygon coverage area is done on each node. Processed calls will be sent to the **dapnet.local_calls** exchange just for the connected transmitters to each node. Receiver hardware equipment dependent encoding will also be done during the processing of the calls from **dapnet.calls** to **dapnet.local_calls** on each calls taking into account the stored hardware type of each pager stored in the CouchDB subscriber. Both personal pagings and rubric related messages are transmitted on the **dapnet.calls** exchange.

6.3.2 Message definition on Exchanges

Valid Messages are:

6.3.2.1 dapnet.calls

The messages to call transfer data between the nodes in an not-processed status are the

```
{
  "id": "016c25fd-70e0-56fe-9d1a-56e80fa20b82",
  "priority": 3,
  "created_by": "dh3wr",
  "created_on": "2018-07-03T06:00:52.786458Z",
  "expires_on": "2018-07-03T08:00:52.786458Z",
  "origin": "db0sda-dc2",
  "data": "Lorem ipsum dolor sit amet",
  "recipients": {
    "subscribers": ["subscriber1", "subscriber2"],
    "subscriber_groups": ["rwth-afu"]
  },
  "distribution": {
    "transmitters": ["db0abc"],
    "transmitter_groups": ["dl.nw"],
    "areas": [
      [[50.1, 6.0], [50.1, 7.0], [51.2, 6.0], [51.2, 7.0]]
    ]
  }
}
```

6.3.2.2 dapnet.local_calls

The RabbitMQ microservice will transform the high-level calls from `dapnet.calls` into individual messages on `texttttdapnet.local_calls`. The selection of the transmitter is done by means of the routing key. Besides, the priority is also used in the RabbitMQ queuing to deliver higher priority messages first.

Resolutions to be done are:

"recipients" Look up the RIC of every pagers in the subscriber and perform corresponding encoding dependent on the pager type.

"distribution" Resolve the `transmitter_groups` into an array of corresponding transmitters, resolve the given area to the covering transmitters using the Coverage Microservice 3.11.1.12. The generated list of transmitters is used to send individual messages to each transmitter by means of the routing key. For each of the subscribers pager entries, a separate message will be sent.

The resulting message format is:

```
{
  "id": "016c25fd-70e0-56fe-9d1a-56e80fa20b82",
  "protocol": "pocsag",
  "priority": 3,
  "expires": "2018-07-03T08:00:52.786458Z",
  "origin": "db0sda-dc2",
  "message": {
    "ric": 12345,
    "function": 0...3,
    "type": "alphanumeric" | "numeric",
    "speed": 1200,
    "data": "Lorem ipsum dolor sit amet",
  }
}
```

6.3.3 Telemetry

On the telemetry exchange, all transmitters and nodes publish their telemetry messages. The format the same as in section 6.4 and 6.5.

6.3.4 MQTT API for third-party consumers

In order to allow third-party instances like , or others to get the emitted calls and rubric contents in a real time event driven way, there is an MQTT API. It is not implemented via a dedicated MQTT broker, but uses the existing RabbitMQ instance (<https://www.rabbitmq.com/mqtt.html>). There is no distribution of the messages via this MQTT broker; it is local only. So every node publishes the messages locally on its own. Each subscriber has an array of enabled third-party applications. This allow to define the user, if call directed to her/his subscriber shall be also sent to third-party services (see 6.8.4).

check
with
DL2IC

The currently existing MQTT topics are defined in the CouchDB (see section 6.8.6). This makes it possible to add more third-party services and authorized users during runtime without the need to update the software. The valid users to subscribe to the topic are also listed in the same CouchDB database.

The only permitted access for third-party consumers is read. So the subscribe request from a third-party MQTT-Client must use authentication which is checks against the CouchDB data. If correct, read access is granted. Core software has always write access to publish the calls group messages.

The transmitters who are supposed to send out the personal call or the rubric content are published with callsign, geographic location and type of transmitter (widerange or personal). With this generic concept, every third-party application can decide what to do with the content received.

The encoding of the data is UTF-8.

The format of the data published for **personal paging calls** is

```
{
  "pagingcall" : {
    "srccallsign" : "dl2ic",
    "dstcallsign" : "dh3wr",
    "dstric" : 12354,
    "dstfunction" : 0 .. 3,
    "priority" : 3,
    "message" : "DAPNET 2.0 rocks dear YL/OM"
    "transmitted_by" : [
      {
        "callsign" : "db0abc",
        "lat" : 12.123456,
        "long" : 32.123456,
        "type" : "personal" | "widerange"
      },
      {
        "callsign" : "db0def",
        "lat" : 12.123456,
        "long" : 32.123456,
        "type" : "personal" | "widerange"
      }
    ],
    "timestamp" : "2018-07-03T08:00:52.786458Z"
  }
}
```

The format of the data published for **rubric_content paging calls** is

```
{
  "rubricmessage" : {
    "message" : ""
    "transmitted_by" : [
      {
        "callsign" : "db0abc",
        "lat" : 12.123456,
        "long" : 32.123456,
        "type" : "PERONAL" | "WIDERANGE"
      },
      {
        "callsign" : "db0def",
        "lat" : 12.123456,
        "long" : 32.123456,
        "type" : "PERONAL" | "WIDERANGE"
      }
    ],
    "timestamp" : "2018-07-03T08:00:52.786458Z"
  }
}
```

6.4 Telemetry from Transmitters

Telemetry is sent from transmitters to the RabbitMQ exchange **dapnet.telemetry** as defined in section 6.3. It is also used in the same way on the websocket API to inform the website and the app about the telemetry in real-time in section 6.7.1 and 6.7.2.

This is sent every minute in complete. If there are changes, just a subset is sent. The name of the transmitter is used as routing key for the message.

```
{
  "onair": true,
  "node": {
    "name": "db0xyz",
    "ip": "44.42.23.8",
    "port": 1234,
    "connected": true,
    "connected_since": "2018-07-03T08:00:52.786458Z"
  },
}
```

```

"ntp": {
  "synced": true,
  "offset": 124,
  "server": ["134.130.4.1", "12.2.3.2"],
},
"messages": {
  "queued": [123, 123, 123, 123, 123, 123],
  "sent": [123, 123, 123, 123, 123, 123]
},
"temperatures": {
  "unit": "C" | "F" | "K",
  "air_inlet": 12.2,
  "air_outlet": 14.2,
  "transmitter": 42.2,
  "power_amplifier": 45.2,
  "cpu": 93.2,
  "power_supply": 32.4,
  "custom": [
    {"value": 12.2, "description": "Aircon Inlet"},
    {"value": 16.2, "description": "Aircon Outlet"},
    {"value": 12.3, "description": "Fridge Next to Programmer"}
  ]
},
"power_supply": {
  "on_battery": false,
  "on_emergency_power": false,
  "dc_input_voltage": 12.4,
  "dc_input_current": 3.23
},
"rf_output" : {
  "fwd": 12.2,
  "refl" : 12.2,
  "vswr" : 1.2
},
"config": {
  "ip": "123.4.3.2",
  "timeslots" : [true, false,..., false],
  "software": {
    name: "Unipager" | "MMDVM" | "DAPNET-Proxy",
    version: "v1.2.3", | "20180504" | "v2.3.4",
  },
}
"hardware": {
  "platform": "Raspberry Pi 3B+"
},
"rf_hardware": {
  "c9000": {
    "name" : "C9000 Compact",
    "<pa_dummy>" : {
      "output_power" : 123,
      "port" : "/dev/ttyUSB0"
    }
    "<rpc>": {
      "version" : "X0S/2.23pre"
    }
  },
  "rasp pager": {
    "name": "Rasp pager",
    "modulation": 13,
    "power": 63,
    "external_pa": false,
    "version": "V2"
  },
  "audio": {
    "name" = "Audio",
    "transmitter": "GM1200" | "T7F" | "GM340" | "FREITEXT",
    "audio_level": 83,
    "tx_delay": 3
  },
  "rfm69": {
    "name" : "RFM69",
    "port": "/dev/ttyUSB0"
  },
}

```

```

    "mmdvm": {
      "name" : "MMDVM",
      "dapnet_exclusive": true
    },
    "proxy" : {
      "status": "connected" | "connecting" | "disconnected"
    }
  }
}

```

6.5 Telemetry from Nodes

Telemetry is sent from nodes to the RabbitMQ exchange **dapnet.telemetry** as defined in section 6.3. It is also used in the same way on the websocket API to inform the website and the app about the telemetry in real-time in section 6.7.3 and 6.7.4.

This is sent every minute in complete. If there are changes, just a subset is sent. The name of the nodes is used as routing key for the message.

```

{
  "good_health" : true,
  "microservices" : {
    "database" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "call" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "rubric" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "transmitter" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "cluster" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "telemetry" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "database-changes" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "statistics" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "rabbitmq" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "thirdparty" : {
      "ok" : true,
      "version" : "1.2.3"
    },
  },
  "connections" : {
    "transmitters" : 123,
    "third_party" : 3
  },
  "system" : {
    "free_disk_space_mb": 1234
    "cpu_utilization": 0.2
  }
}

```

```

    "is_hamcloud" : false
  }
}

```

6.6 Statistic, Status and Telemetry REST API

The statistic and telemetry REST API provides up-to-date information regarding the transmitters and the network via REST. This can be used by e.g. grafana to draw nice graphes or nagios plugins.

6.6.1 Telemetry from Transmitters

For authentication refer to section [Auth Service](#). GET `/telemetry/transmitters` Here all stored telemetry from all transmitters is provided.

Answer: 200 OK See [6.4](#)

GET `/telemetry/transmitters/<transmittername>` Here all stored telemetry from the specified transmitter is provided.

Answer: 200 OK

See [6.4](#)

GET `/telemetry/transmitters/<transmittername>/<section_of_telemetry>` Here all stored telemetry within the telemetry section from the specified transmitter is provided. Possible sections are 2. Level JSON groups, see [6.4](#).

Examples: onair, telemetry, transmitter_configuration

Answer: 200 OK

See [6.4](#)

6.6.2 Telemetry from Nodes

GET `/telemetry/nodes` Here all stored telemetry from all nodes is provided.

Answer: 200 OK See [6.5](#)

GET `/telemetry/nodes/<nodename>` Here all stored telemetry from the specified node is provided.

Answer: 200 OK

See [6.5](#)

6.7 Websocket API

The idea is to provide an API for the website and the app to display real-time information without the need of polling. A websocket server is listing to websocket connections. Authentication is done by a custom JOSN handshake. The connection might be encrypted with SSL if using the Internet or plain if using HAMNET.

The data is taken from the **dapnet.telemetry** exchange from the RabbitMQ instance and further other sources if necessary.

For authentication refer to section [Auth Service](#).

Table 6.7 lists the main endpoints in the websocket interface:

Endpoint	Microservice
WS /telemetry/transmitters	Summary data of all TX
WS /telemetry/transmitters/<TxName>	Details for TX <TxName>
WS /telemetry/nodes	Summary data of all Nodes
WS /telemetry/nodes/<NodeName>	Details for Node <NodeName>
WS /changes	Database changes

Table 6.16: Websocket endpoints

6.7.1 Telemetry from Transmitters - Summary of all TX

URL: ws://FQDN/telemetry/transmitters

The data is the same as received from the **dapnet.telemetry** exchange from the RabbitMQ instance. It is defined in section 6.4.

The websocket-Server generates an array of JSON Objects which have the name of the transmitter obtained from the RabbitMQ routing key.

The current time slot is also sent in the summary and updated also by its own every time a time slot change happens.

```
{
  "transmitters": [
    "db0abc" : {
      "onair": true,
      "node": {
        "name": "db0xyz",
        "ip": "44.42.23.8",
        "port": 1234,
        "connected": true,
        "connected_since": "2018-07-03T08:00:52.786458Z"
      },
      "ntp": {
        "syncd": true
      },
      "messages": {
        "queued": [123, 123, 123, 123, 123, 123],
        "sent": [123, 123, 123, 123, 123, 123]
      },
      "config": {
        "ip": "123.4.3.2",
        "timeslots" : [true, false, ..., false],
        "software": {
          name: "Unipager" | "MMDVM" | "DAPNET-Proxy",
          version: "v1.2.3", | "20180504" | "v2.3.4"
        },
      },
      "proxy" : {
        "status": "connected" | "connecting" | "disconnected"
      }
    },
    "db0xyz" : {
      "onair": true,
      "node": {
        ....
      }
    },
    "current_timeslot" : 12
  ]
}
```

6.7.2 Telemetry from Transmitters - Details of Transmitter

URL: `ws://FQDN/telemetry/transmitters/<transmittername>`

The data is the same as received from the `dapnet.telemetry` exchange from the RabbitMQ instance. It is defined in section 6.4.

The websocket-Server gives out all the telemetry data from a certain transmitter. The name of the transmitter obtained from the RabbitMQ routing key.

```
{
  "onair": true,
  "node": {
    "ip": "44.42.23.8",
    "port": 1234,
    "connected": true,
    "connected_since": "2018-07-03T08:00:52.786458Z"
  },
  "ntp": {
    "synced": true,
    "offset": 124,
    "server": ["134.130.4.1", "12.2.3.2"],
  },
  "messages": {
    "queued": [123, 123, 123, 123, 123, 123],
    "sent": [123, 123, 123, 123, 123, 123]
  },
  "temperatures": {
    "unit": "C" | "F" | "K",
    "air_inlet": 12.2,
    "air_outlet": 14.2,
    "transmitter": 42.2,
    "power_amplifier": 45.2,
    "cpu": 93.2,
    "power_supply": 32.4,
    "custom": [
      {"value": 12.2, "description": "Aircon Inlet"},
      {"value": 16.2, "description": "Aircon Outlet"},
      {"value": 12.3, "description": "Fridge Next to Programmer"}
    ]
  },
  "power_supply": {
    "on_battery": false,
    "on_emergency_power": false,
    "dc_input_voltage": 12.4,
    "dc_input_current": 3.23
  },
  "rf_output": {
    "fwd": 12.2,
    "refl": 12.2,
    "vswr": 1.2
  },
  "config": {
    "ip": "123.4.3.2",
    "timeslots": [true, false, ..., false],
    "software": {
      name: "Unipager" | "MMDVM" | "DAPNET-Proxy",
      version: "v1.2.3", | "20180504" | "v2.3.4",
    },
  },
  "hardware": {
    "platform": "Raspberry Pi 3B+"
  },
  "rf_hardware": {
    "c9000": {
      "name": "C9000 Compact",
      "<pa_dummy>": {
        "output_power": 123,
        "port": "/dev/ttyUSB0"
      }
    },
    "<rpc>": {
      "version": "X0S/2.23pre"
    }
  }
}
```

```

    }
  },
  "rasp pager": {
    "name": "Rasp pager",
    "modulation": 13,
    "power": 63,
    "external_pa": false,
    "version": "V2"
  },
  "audio": {
    "name" = "Audio",
    "transmitter": "GM1200" | "T7F" | "GM340" | "FREITEXT",
    "audio_level": 83,
    "tx_delay": 3
  },
  "rfm69": {
    "name" : "RFM69",
    "port": "/dev/ttyUSB0"
  },
  "mmdvm": {
    "name" : "MMDVM",
    "dapnet_exclusive": true
  }
},
"proxy" : {
  "status": "connected" | "connecting" | "disconnected"
}
}

```

6.7.3 Telemetry from Nodes - Summary of all Nodes

URL: `ws://FQDN/telemetry/nodes`

The websocket-Server generates an array of JSON Objects which have the name of the node obtained from the RabbitMQ routing key.

```

{
  "nodes" : [
    "db0sda" : {
      "good_health" : true,
      "connections" : {
        "transmitters" : 123,
        "third_party" : 3
      },
      "system" : {
        "is_hamcloud" : false
      }
    },
    "hamcloud1" : {
      "good_health" : true,
      "connections" : {
        "transmitters" : 658,
        "third_party" : 25
      },
      "system" : {
        "is_hamcloud" : true
      }
    },
    ....
  ]
}

```

6.7.4 Telemetry from Transmitters - Details of Node

URL: `ws://FQDN/telemetry/nodes/<nodename>`

The data is the same as received from the **dapnet.telemetry** exchange from the RabbitMQ instance. It is defined in section 6.4.

The websocket-Server gives out all the telemetry data from a certain node. The name of the transmitter obtained from the RabbitMQ routing key.

```
{
  "good_health" : true,
  "microservices" : {
    "database" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "call" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "rubric" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "transmitter" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "cluster" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "telemetry" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "database-changes" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "statistics" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "rabbitmq" : {
      "ok" : true,
      "version" : "1.2.3"
    },
    "thirdparty" : {
      "ok" : true,
      "version" : "1.2.3"
    },
  },
  "connections" : {
    "transmitters" : 123,
    "third_party" : 3
  },
  "system" : {
    "free_disk_space_mb": 1234
    "cpu_utilization": 0.2
    "is_hamcloud" : false
  }
}
```

6.7.5 Database Changes

URL: `ws://FQDN/changes`

To inform the website or the app about changes in the CouchDB database, the websocket microservice keeps a connection to the local CouchDB API and receives a stream of updated to the database. As there may be data in the changes that are confidential, the stream is parsed and sent out in a reduced form to the websocket client. Further information: <http://docs.couchdb.org/en/2.0.0/api/database/changes.html>

The format of the updates is:

define/review
format

6.7.5.1 Transmitter related

New transmitter added

```
{
  "type": "transmitter",
  "action" : "added",
  "name": "db0abc",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Existing transmitter changed

```
{
  "type": "transmitter",
  "action" : "changed",
  "name": "db0abc",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Transmitter deleted

```
{
  "type": "transmitter",
  "action" : "deleted",
  "name": "db0abc"
}
```

6.7.5.2 User related

New User added

```
{
  "type": "user",
  "action" : "added",
  "name": "db1abc",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Existing user changed

```
{
  "type": "user",
  "action" : "changed",
  "name": "db1abc",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

User deleted

```
{
  "type": "user",
  "action" : "deleted",
  "name": "db1abc"
}
```

6.7.5.3 Rubric related

New Rubric added

```
{
  "type": "rubric",
  "action" : "added",
  "id": "...",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Existing rubric changed

```
{
  "type": "user",
  "action" : "changed",
  "id": "...",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Rubric deleted

```
{
  "type": "user",
  "action" : "deleted",
  "id": "..."
}
```

6.7.5.4 Rubric content related

New Rubric content added

```
{
  "type": "rubric_content",
  "action" : "added",
  "id": "...??",
  "data" : {
    (Complete Data dump of all ten rubric messages as stored in CouchDB)
  }
}
```

Existing rubric changed

```
{
  "type": "rubric_content",
  "action" : "changed",
  "id": "...",
  "data" : {
    (Complete Data dump of all ten rubric messages as stored in CouchDB)
  }
}
```

Rubric content deleted

```
{
  "type": "rubric_content",
  "action" : "deleted",
  "id": "..."
  "data" : {
    (Complete Data dump of all ten rubric messages as stored in CouchDB, some may be empty)
  }
}
```

Check
against
CouchDB
structure

6.7.5.5 Node related

New node added

```
{
  "type": "node",
  "action" : "added",
  "name": "db0abc",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Existing node changed

```
{
  "type": "node",
  "action" : "changed",
  "name": "db0abc",
  "data" : {
    (Data from CouchDB Change feed in processed way)
  }
}
```

Node deleted

```
{
  "type": "node",
  "action" : "deleted",
  "name": "db1abc"
}
```

6.8 CouchDB Documents and Structure

als
Tabelle
darstellen

6.8.1 Users

Table 6.17: CouchDB: Users

Key	Value-Type	Valid Value Range	Example
<code>_id</code>	string		dl1abc
<code>password</code>	string	bcrypt hash	—
<code>email</code>	string		dl1abc@dar
<code>role</code>	string	"admin" "support" "user" "thirdparty.[aprs brandmeister]"	true
<code>enabled</code>	boolean		true
<code>created_on</code>	string	ISO8601	2018-07-08T
<code>created_by</code>	string	valid user name	dh3wr
<code>changed_on</code>	string	ISO8601	2018-07-08T
<code>changed_by</code>	string	valid user name	dh3wr
<code>email_lastchecked</code>	string	ISO8601	2018-07-08T
<code>avatar_picture</code>	couchdb_attachment		

```
{
  "_id": "dl1abc",
  "password": "<bcrypt hash>",
  "email": "dl1abc@dar.c.de",
  "roles": ["admin"],
  "enabled": true,
  "created_on": "2018-07-03T08:00:52.786458Z",
  "created_by": "dh3wr",
  "changed_on": "2018-07-03T08:00:52.786458Z",
  "changed_by": "dh3wr",
  "email_lastchecked": "2018-07-03T08:00:52.786458Z",
  "defaults": {
    "subscribers": ["dh3wr",...],
    "subscriber\_groups": [...],
    "transmitters": [...],
    "transmitter\_groups": [...],
    "expiration\_duration": 120,
    "priority" : 1 to 5
  }
  "avatar_picture": <couchdb attachment>
}
```

6.8.2 Nodes

Table 6.18: CouchDB: Nodes

Key	Value-Type	Valid Value Range	Example
<code>_id</code>	STRING	N/A	db0abc
<code>coordinates</code>	[number; 2]	[lat, lon]	[34.123456, 6.23144]
<code>description</code>	string	whatever	Aachen, Germany
<code>hamcloud</code>	boolean	true/false	true
<code>created_on</code>	string	ISO8601	2018-07-08T11:50:02.168325Z
<code>created_by</code>	string	valid user name	dh3wr
<code>changed_on</code>	string	ISO8601	2018-07-08T11:50:02.168325Z
<code>changed_by</code>	string	valid user name	dh3wr
<code>owners</code>	[string]	N/A	["dl1abc","dh3wr","dl2ic"]
<code>avatar_picture</code>	couchdb_attachment		

```
{
  "_id": "db0abc",
  "auth_key": "super_secret_key",
}
```



```

"coordinates": [34.123456, -23.123456],
"description": "some words about that node",
"hamcloud": true,
"created_on": "2018-07-03T08:00:52.786458Z",
"created_by": "dh3wr",
"changed_on": "2018-07-03T08:00:52.786458Z",
"changed_by": "dh3wr",
"owners": ["dl1abc", "dh3wr", "dl2ic"],
"avatar_picture": <couchdb attachment??>
}

```

6.8.3 Transmitters

Tabelle
weiter
machen

Table 6.19: CouchDB: Transmitters

Key	Value-Type	Valid Value Range	Example
<code>_id</code>	string	N/A	db0abc
<code>auth_key</code>	string	N/A	asd2FD3q3rF
<code>enabled</code>	boolean	true/false	true
<code>usage</code>	string	PERSONAL WIDERANGE	WIDERANGE
<code>coordinates</code>	[number; 2]	[lat, lon]	[34.123456, 6.23144]
<code>power</code>	number	0.001 ...	12.3
<code>created_on</code>	string	ISO8601	2018-07-08T11:50:02.168325Z
<code>created_by</code>	string	valid user name	dh3wr
<code>changed_on</code>	string	ISO8601	2018-07-08T11:50:02.168325Z
<code>changed_by</code>	string	valid user name	dh3wr
<code>owners</code>	ARRAY of STRING	N/A	["dl1abc", "dh3wr", "dl2ic"]
<code>avatar_picture</code>	couchdb_attachment		

```

{
  "_id": "db0abc",
  "auth_key": "hdjaskhdlj",
  "enabled": true,
  "usage": "personal" | "widerange",
  "coordinates": [34.123456, -23.123456],
  "power": 12.3,
  "antenna": {
    "agl": 23.4,
    "gain": 2.34,
    "type": "omni" | "directional",
    "direction": 123.2,
    "cable_loss": 4.2
  },
  "owners": ["dl1abc", "dh3wr", "dl2ic"],
  "groups": ["dl-hh", "dl-all"],
  "emergency_power": {
    "available": false,
    "infinite": false,
    "duration": 23*60*60 // seconds
  },
  "created_on": "2018-07-03T08:00:52.786458Z",
  "created_by": "dh3wr",
  "changed_on": "2018-07-03T08:00:52.786458Z",
  "changed_by": "dh3wr",
  "aprs_broadcast": false,
  "transmit_rubrics_format": ["SKYPER", "PLAIN"],
  "antenna_pattern": <couchDB attachment>,
  "avatar_picture": <couchDB attachment>,
  "simplified_coverage_polygon": [34.1, -23.3, 34.1 -23.2, 34.3, -23.3],
  "coverage_edges": [
    [lat1, long1],
    [lat2, long2],
    [lat3, long3],
    [lat4, long4]
  ]
}

```

6.8.4 Subscribers

If type is "Skyper", function is always 3. Keep this in mind

check if
[] is valid
JSON

```
{
  "_id" : "dl1abc",
  "description" : "Peter",
  "pagers" : [
    {
      "ric": 123456,
      "function": 0 .. 3,
      "name": "Peters Alphapoc",
      "type" : "UNKNOWN" | "Skyper" | "AlphaPoc" | "QUIX" | "Swissphone" | "SCALL_XT" | "Birdy"
      "enabled" : true
    },
    ...
  ],
  "third_party_services" : ["APRS", "BM"],
  "owner": ["dh3wr", "dl1abc"],
  "groups" : ["rwth-afu"]
}
```

6.8.5 Rubrics

```
{
  "_id": "wx-dl-hh"
  "number": 14,
  "description": "Wetter DL-HH",
  "label": "WX DL-HH",
  "transmitter_groups": ["dl-hh", "dl-ns"],
  "transmitters": ["db0abc"],
  "cyclic_transmit": true,
  "cyclic_transmit_interval": 3600, // seconds
  "owner" : ["dh3wr", "dl1abc"],
  "content": [
    "message1",
    ...,
    "message10"
  ]
}
```

6.8.6 MQTT services and subscribers

```
{
  "_id": "APRS",
  "topic": "aprs"
  "subscribers": [
    {
      "name": "example",
      "password": "<bcrypt hash>"
    },
    ...
  ]
}
```