

Task A: Real Website Analysis

Website analyzed: www2.hm.com — «New In» section (H&M US, women's clothing)

Meta information

The page uses `<!DOCTYPE html>` and `lang="en-US"`. The `<head>` section contains `<meta charset="utf-8">`, `<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">`, and a `<title>` tag (“New In | H&M US”).

I also found three additional meta tags, all Open Graph tags used to control how the page previews when shared on social media: `og:title`, `og:site_name`, and `og:type`.

1. Base info (doctype / lang / charset / viewport / title)

```
<html lang="en-US">
charset: UTF-8
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no" data-next-head="">
<title>New In | H&M US</title>
```

Screenshot 1 — doctype, lang, charset, viewport and title, read directly from the live page.

2. Three extra meta tags (Open Graph)

```
<meta property="og:title" content="New In | H&M US" data-next-head="">
<meta property="og:site_name" content="H&M" data-next-head="">
<meta property="og:type" content="website" data-next-head="">
```

Screenshot 2 — the three Open Graph meta tags (og:title, og:site_name, og:type).

Semantic Structure

Overall H&M uses a lot of semantic markup: 1 <header>, 7 <nav>, 1 <main>, 3 <section>, as many as 60 <article> elements (every product card on the page is its own <article>), and 1 <footer>.

3. Semantic tag counts on the page

```
header: 1
nav: 7
main: 1
section: 3
article: 60
footer: 1
form: 1
table: 0
div: 651
```

Screenshot 3 — element counts, taken by running `document.querySelectorAll(...).length` on the live page.

However, I found a clear structural inconsistency in the footer: the same three link lists (the “Women/Men/Kids...” menu, the “Career at H&M...” menu, and the “Customer Service...” menu) exist twice — once inside a real `<nav>`, and a second time with identical content inside a plain `<div>` (most likely one copy is meant for mobile and the other for desktop). So this is really a navigation block, but the tag isn't semantic — the semantics get lost specifically in that second, duplicate copy.

4. Footer menu duplication: same list inside <nav> AND inside <div>

```
<footer> contains 3 <ul> lists inside <nav>:  
  NAV -> "Women Men Kids Home Beauty Student Discount Gift Cards"  
  NAV -> "Career at H&M About H&M group Sustainability..."  
  NAV -> "Customer Service My Account Find a Store Legal & Privacy..."  
  
...and the SAME 3 lists again inside plain <div>:  
  DIV -> "Women Men Kids Home Beauty Student Discount Gift Cards"  
  DIV -> "Career at H&M About H&M group Sustainability..."  
  DIV -> "Customer Service My Account Find a Store Legal & Privacy..."  
  
=> the navigation content is duplicated, but only one copy  
    uses the semantic <nav> tag - the second copy loses semantics.
```

Screenshot 4 — the same three footer link lists found twice: inside <nav> and again inside a plain <div>.

Forms and Tables

The page has exactly one <form> — the filter/sort widget — and it does have a genuine <fieldset> with a <legend>("Filter"). But the actual control is a <button type="button"> that opens a JS drawer, not a native <input>/<select>. It works for the user, but in terms of “clean” form semantics there is no real HTML selection element there — everything runs on a JS widget.

There isn't a single <table> anywhere on the page. So if H&M had tabular data — a size chart, for example — they would most likely lay it out with div grids instead of an actual table/thead/tbody structure.

5. Forms & tables

Total `<form>` on page: 1

Total `<table>` on page: 0 (none)

The one form (filter/sort widget), simplified:

```
<form>
  <fieldset>
    <legend>Filter</legend>
    <button type="button" aria-haspopup="dialog">Filter</button>
  </fieldset>
</form>
```

=> real `<fieldset>+<legend>`, but the control itself is a `<button>` opening a JS drawer, not a native `<input>/<select>`.

Screenshot 5 — the page's only `<form>` (fieldset + legend + button), and confirmation that `<table>` count is 0.

Hand-drawn Sketch

The sketch below shows the page's nesting: `<html>` > `<header>` (logo + `<nav>` main menu) > `<main>` > `<section>` ("New In" banner) > `<section>` > several `<article>` cards (I drew 4 of the 60 product cards as an example) > `<footer>` > three `<nav>` menus ("Women", "Career", "Customer Service") + one more `<section>` for the newsletter signup.

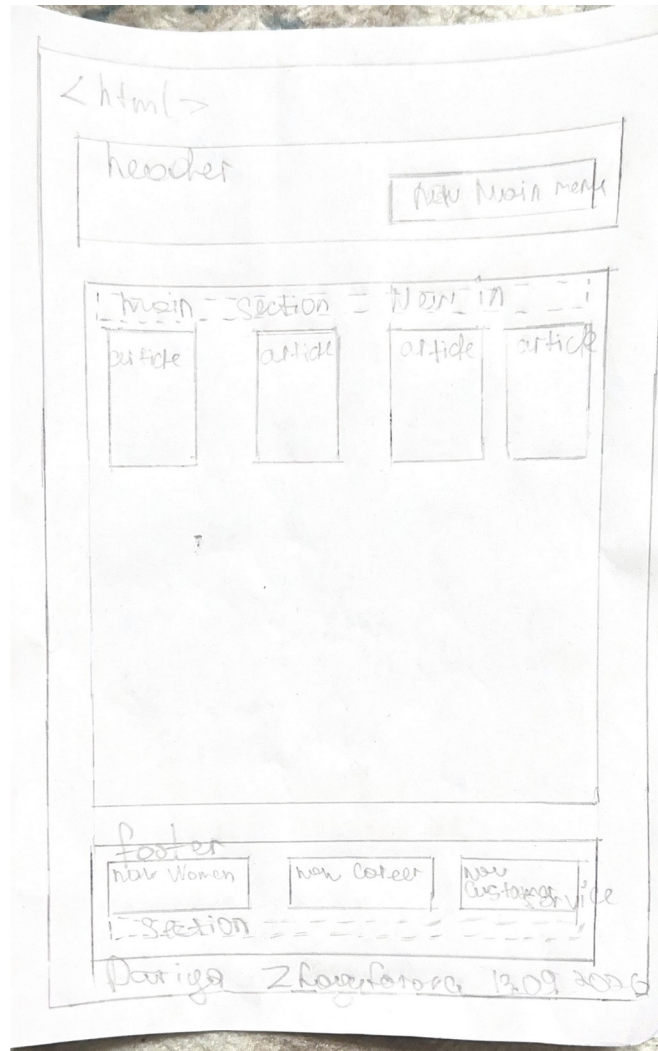


Photo of my hand-drawn box diagram, signed and dated 13.09.2026.

Structural Errors and How I Avoided Them

Error 1: The footer navigation on H&M is duplicated — the same three link lists (“Women/Men/Kids...”, “Career at H&M...”, “Customer Service...”) appear once inside a `<nav>` and a second time, with identical content, inside a plain `<div>`, so the second copy loses its semantic meaning. On my own pages, the navigation menu appears only once per page and is always wrapped in a real `<nav>` — see the `<nav>` element right after `<header>` on every page of my site, for example `order.html` (lines 19–31), `about.html` (lines 19–31), `catalog.html` (lines 19–31), and `contacts.html` (lines 19–31). There is no duplicate copy anywhere.

Error 2: The sort/filter widget on H&M is built with a `<fieldset>+<legend>`, which is correct, but the actual control is a custom `<button>` instead of a native `<input>/<select>`, so standard form semantics are lost. On my own pages, every form control is a real HTML input element correctly linked to its `<label>` via matching `id/for`. For example, in `order.html` the size selector is a genuine `<select id="size">` paired with `<label for="size">` (lines 112–119), and the fulfillment method uses real `<input type="radio">` elements paired with their labels (`<input id="pickup">/<label for="pickup">` and `<input id="courier">/<label for="courier">`, lines 125–133). The same pattern (`<label for>` matching `<input id>`) is used for every field in the reservation form on `contacts.html` (lines 146–197), for instance `<label for="c-name">` with `<input id="c-name">`.

Error 3: H&M has no `<table>` element at all, even though tabular data like a size chart would logically fit one better than a div grid. On my own pages, wherever I have tabular data I used a proper table/thead/tbody/tr/th/td structure instead of a div grid: about.html has a `<table>` with `<caption>`, `<thead>` and `<tbody>` in the “Key Information” block (lines 100–115+, inside `<section id="kontakty-tablitsa">`), and catalog.html has the same real table structure in the “Price Examples” block (lines 81–95+, inside `<section id="tseny">`).

Additional Example: gaissina.com

I also checked a second real site, gaissina.com (a Kazakhstani women's clothing store, built with Angular), to compare its structure with H&M and with my own pages. It uses `<!DOCTYPE html>`, `lang="ru"`, `charset UTF-8`, and a `<meta name="viewport">` tag, but it has no meta description tag at all and the `<title>` is just “Gaissina” with no further page context.

gaissina.com — base info

```
<!DOCTYPE html>
<html lang="ru">
  charset: UTF-8
  <meta name="viewport" content="width=device-width, initial-scale=1">
  no description meta
  <title>Gaissina</title>
```

Screenshot 6 — doctype/lang/charset/viewport/title, read from the live gaissina.com page.

Overall the page uses a fair amount of semantics: 3 `<header>`, 2 `<nav>`, 1 `<main>`, 8 `<section>`, 20 `<article>` and 1 `<footer>`, plus 2 `<h1>` elements.

gaissina.com — semantic tag counts

```
header: 3
nav: 2
main: 1
section: 8
article: 20
footer: 1
h1: 2
form: 1
table: 0
div: 112
```

Screenshot 7 — semantic element counts, taken the same way as for H&M.

The page has exactly one `<form>` (a search widget: a button that opens a search field). There is no `<label>` element anywhere in it — it relies only on `aria-label` attributes instead of a real `<label>`, so there's no `label/for` pairing at all, not even a broken one. There are also 0 `<table>` elements on the page.

gaissina.com — forms & tables

Total `<form>` on page: 1 (a search form)

Total `<table>` on page: 0 (none)

The search form:

```
<form role="search">
  <button aria-label="Открыть поиск">...</button>
  <input type="search" placeholder="Поиск" aria-label="Поиск товаров">
</form>
```

=> no `<label>` element at all – relies only on `aria-label`, there is no `label/for` pairing here either.

Screenshot 8 — the page's only `<form>` (a search widget with no `<label>`), and confirmation that `<table>` count is 0.

I also found a structural inconsistency similar in spirit to H&M's footer problem: the footer's link columns (“Каталог”, “Покупателям”, “О Gaissina”, “Связаться”) use the CSS class “navbar-nav” on their `<ul>` elements, which looks like it should be navigation — but not a single one of these lists is actually wrapped in a `<nav>` element; they sit directly inside plain `<div class="footer-column">` containers. So the footer menus read as navigation visually and even by their class name, but carry no semantic `<nav>` tag at all — a different flavor of the same underlying problem I found on H&M (semantics lost in the footer navigation), and something I avoided on my own pages, where the `<nav>` after `<header>` is the only navigation block and it is always a real `<nav>` (order.html/about.html/catalog.html/contacts.html, lines 19–31).

gaissina.com — footer navigation

`<nav>` elements inside `<footer>`: 0

The footer actually contains link lists like:


```
<div class="footer-column">
  <h6>Каталог</h6>
  <ul class="navbar-nav">
    <li><a>Новинки</a></li> ...
  </ul>
</div>
```

=> despite the CSS class name "navbar-nav", the actual tag is a plain `<div>`+`<ul>` - the footer menus are not wrapped in a semantic `<nav>` element at all.


Screenshot 9 — the footer's link lists use a "navbar-nav" class but are not wrapped in a real `<nav>` element.

My Own DevTools Screenshots (gaissina.com)


For completeness, here are my own screenshots of gaissina.com taken directly from Chrome DevTools (Elements panel) on a mobile viewport, showing the homepage, the product list, and the footer with its link columns discussed above.

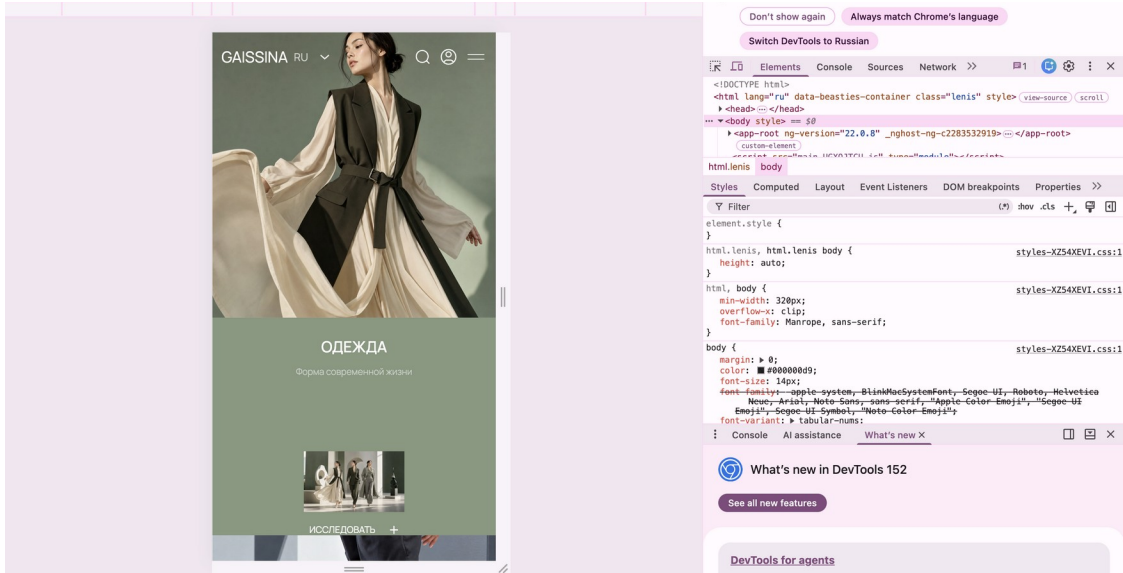


Screenshot 10 — homepage in DevTools, mobile viewport, Elements panel open on `<body>`.

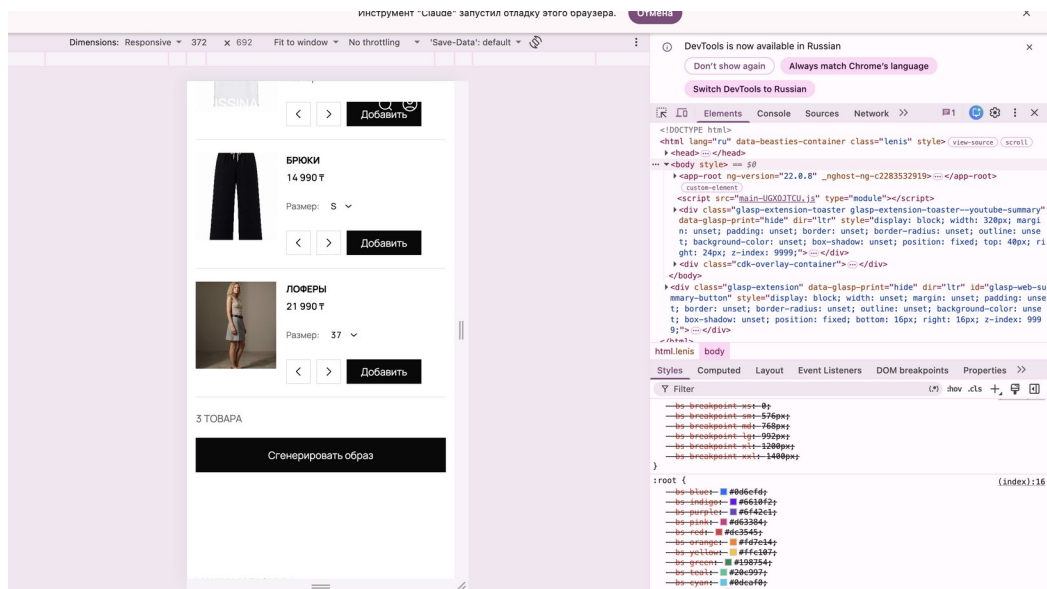

Screenshot 11 — product list (Брюки, Лоферы) with the DOM tree visible on the right.

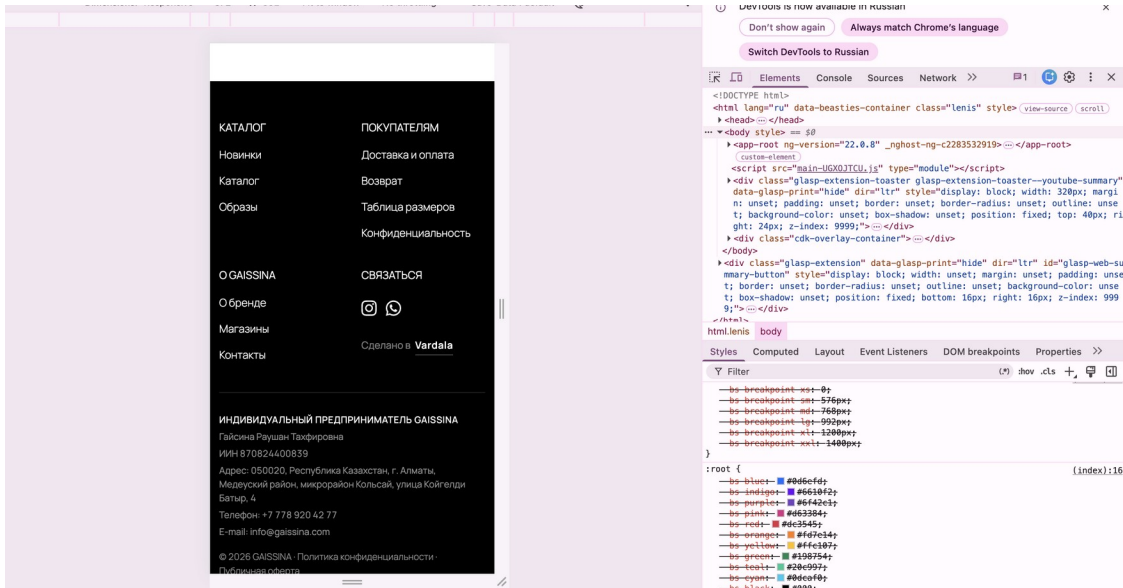

Screenshot 12 — footer with "Каталог" / "Покупателям" / "O Gaissina" / "Связаться" columns.

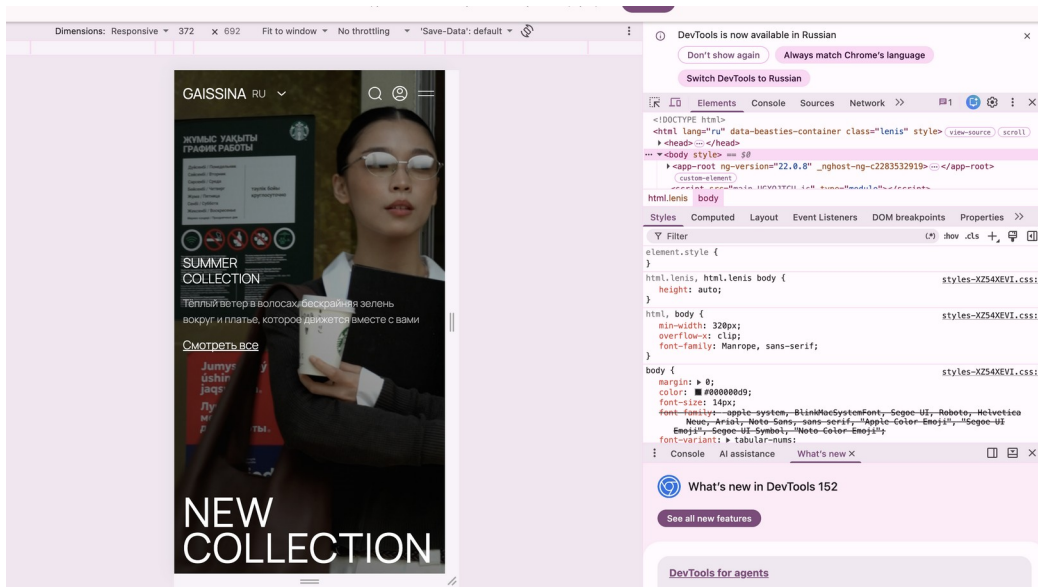

Screenshot 13 — homepage banner ("NEW COLLECTION") with DevTools Elements panel.

Task B: Written Reflection

1. What a Web Page is

HTML is a text file containing various tags, these tell the browser exactly what a specific page element is — such as a heading, paragraph, table, image, and so on. When we open a file (like `contacts.html`), the browser does not simply display the raw text exactly as we typed it; instead, it reads the code line by line and interprets each tag according to its function. For instance, the `<h1>` tag instructs the browser to display text as a large main heading, the `<table>` tag indicates that content should be arranged in rows and columns, and the `<img>` tag commands the browser to load and display an image rather than plain text. Tags such as `<nav>` or `<form>` perform a more complex task: they define the role of a specific part of the page rather than just its visual appearance. Essentially, the browser acts as a translator: it takes a standard text file filled with tags and transforms it into a structured, visual web page that the visitor sees on screen and interacts with. Without this processing by the browser, the HTML file would look like ordinary text with angle brackets scattered throughout.

2. Semantic Tags I Chose Over Div

- In the `catalog.html` file, I used the `<section>` tag instead of the `<div>` tag for the "Price Examples" block. I chose `<section>` because this part of the page does not simply serve as a regular container for styling purposes, but constitutes a unique thematic section (pricing information) with its own heading.
- In the `catalog.html` file, I used the `<article>` tag for the "Main Categories" block. I chose `<article>` because this section contains a self-contained block of product information — including main categories and subcategories — that can stand independently from the rest of the content.
- In the `contacts.html` file, I used the `<aside>` tag for the "How to Get Here" block. I preferred it over the `<div>` tag because this information supplements the primary address details and provides a brief tip on the nearest public transport stop, without being part of the main content flow.

3. What Happens When the Form Is Submitted

Clicking the "Submit" button does not actually send the data anywhere, because the form has an `action="#"` attribute and there is no real server yet — the backend will be added later in the course. Of course, the browser validates the required form fields thanks to the `required` attribute, but even if all fields are filled out correctly, submitting the form does not save or send the

reservation data. The page simply stays put or reloads, and the reservation itself is not created.

Validation Results

[Insert screenshots of the W3C validator results for each page here.]