

# CSC2515: Midterm Review

Ekansh Sharma

October 23, 2019

# Midterm Test

- ▶ Time: Wednesday, Oct. 30, from 4:10-5:40pm
- ▶ Location: Health Sciences building, room 610
- ▶ Office Hours: Fri 10/25, 12-1pm, 6-7pm in BA3201  
Mon 10/28, 11am-noon, in BA3201  
Tue 10/29, 2-4pm, in BA3201  
Wed 10/30, noon-1pm, in BA1190

# Agenda

1. A brief overview
2. Some sample questions

# Basic ML Terminology

- ▶ ~~Regression~~
- ▶ ~~Overfitting~~
- ▶ ~~Generalization~~
- ▶ Bias-Variance
- ▶ ~~Bayes Optimal~~

- ▶ ~~Classification~~
- ▶ ~~Underfitting~~
- ▶ ~~Regularization~~
- ▶ ~~Bayes Error~~
- ▶ Stochastic Gradient Descent (SGD)

# Basic ML Terminology

- ▶ Model
- ▶ Linear classifier
- ▶ Training Data
- ▶ Optimization
- ▶ 0-1 Loss
- ▶ Validation Data
- ▶ Convexity
- ▶ Features
- ▶ Test Data

# Some Questions

## Question 1

Given  $\{(x_i, t_i)\} = S \sim \mathcal{D}$ . Let  $h_S$  be the predictor for dataset  $S$ .  
Given  $x$ ,

1. Bias of the predictor is  $(\mathbb{E}_S h_S(x) - \mathbb{E}[t|x])^2$
2. Bayes error is  $\text{Var}[t|x]$

## Question2

Take labelled data  $(\mathbf{X}, \mathbf{y})$ .


1. Why should you use a validation set?
2. How do you know if your model is overfitting?
3. How do you know if your model is underfitting?

## Topics covered so far...

1. Nearest Neighbours
2. Decision Trees
3. Ensembles
4. Linear Regression
5. Linear Classification
6. SVMs
7. Neural Networks



# Nearest Neighbours

1. Decision Boundaries
2. Choice of 'k' vs. Generalization
3. Curse of dimensionality

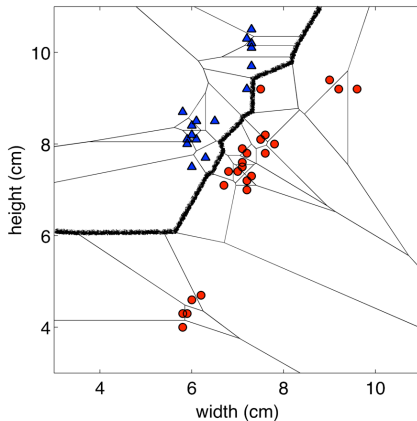



# Decision Trees

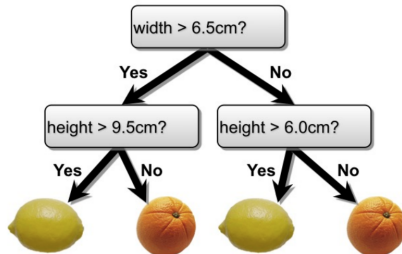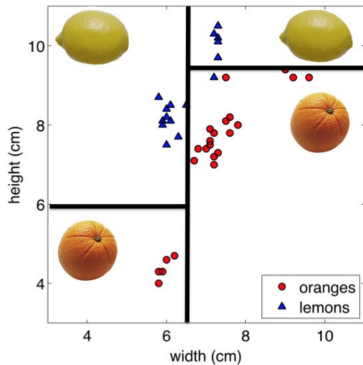

1. Entropy/Information Gain
2. Decision Boundaries


# Ensemble Methods

## Bagging

1. Bias-Variance tradeoff
2. Average the predictions of  $m$  models trained on bootstrapped datasets.
3. Random Forest


## Boosting

1. Sequentially train *weak classifiers*.
2. Additive model with exponential loss



# Linear Regression

1. Model:  $y = \mathbf{w}x + \mathbf{b}$
2. Objective: Minimize squared loss
3. Direct Solution
4. (Stochastic) Gradient Descent
5. Regularization

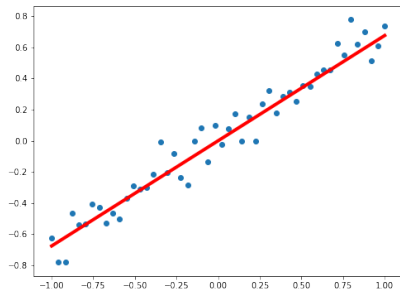


# Linear Classification

## Binary Linear Classification

1. Model:  $z = \mathbf{w}\mathbf{x} + b$ ,  
 $y = \mathbb{I}(z \geq 0)$
2. Objective: Minimize 0-1 loss
3. Surrogate loss


## Logistic Regression

1. Model:  $z = \mathbf{w}\mathbf{x} + b$ ,  
 $y = \sigma(z)$
2. Objective: Minimize cross-entropy
3. Multi-class classification with softmax function

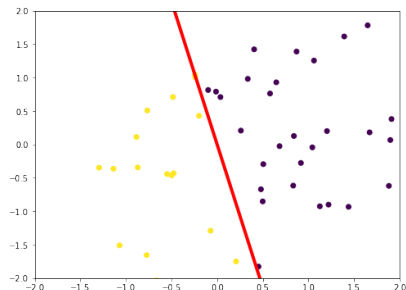


# Linear Classification: SVMs

1. Model:  $y = \text{sign}(\mathbf{w}\mathbf{x} + b)$
2. Objective: Maximize *margin*.
3. Soft-margin SVM: Linear classifier with hinge loss and  $\ell_2$ -regularization.

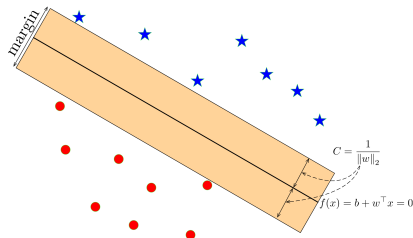


# Neural Networks

1. Model:  $y = f^{(L)} \circ \dots \circ f^{(1)}(x)$
2. Weights and activation functions
3. Depth and expressive power
4. Backpropagation
5. Non-convex problem



# Convolutional Neural Networks

1. Convolutional Neural Networks (CNN) Architecture
2. Local connections/convolutions/pooling
3. Feature Learning

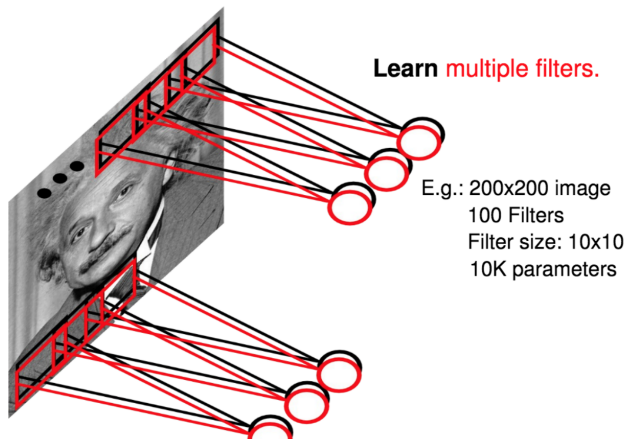

## Sample Question 1

Assume we are preprocessing our data using an **invertible** linear transformation on the features of our training data. The transformation can either be some orthogonal (i.e. rotations) matrix or some diagonal matrix.

Say if this can have any effect on the performance of the following algorithms, and explain in no more than two sentences.

- ▶ Orthogonal preprocessing on decision tree classification.
- ▶ Diagonal preprocessing on decision tree classification.
- ▶ Orthogonal preprocessing on nearest neighbor classification.
- ▶ Diagonal preprocessing on nearest neighbor classification.



# Q1 Solution

- ▶ Orthogonal preprocessing on decision tree classification.  
*Will have an effect. Rotation changes the axis.*
- ▶ Diagonal preprocessing on decision tree classification.  
*Will not have an effect. Rescaling along axis will shift split criteria but wont change decision.*
- ▶ Orthogonal preprocessing on nearest neighbor classification.  
*Will not have an effect. Orthogonal linear transformations will preserve distances.*
- ▶ Diagonal preprocessing on nearest neighbor classification.  
*Will have an effect. Will change distances between data points.*

## Sample Question 2

Given input  $\mathbf{x} \in \mathbb{R}^d$  and target  $y \in \mathbb{R}$ , define  $\hat{\mathbf{x}} = \mathbf{x} + \epsilon$  to be a noisy perturbation of  $\mathbf{x}$  where we assume

- ▶  $\mathbb{E}[\epsilon_i] = 0$
- ▶ for  $i \neq j$ :  $\mathbb{E}[\epsilon_i \epsilon_j] = 0$
- ▶  $\mathbb{E}[\epsilon_i^2] = \lambda$

We define the following objective that tries to be robust to noise

$$\mathbf{w}^* = \arg \min \mathbb{E}_{\epsilon} [(\mathbf{w}^T \hat{\mathbf{x}} - y)^2] \quad (1)$$

Show that it is equivalent to minimizing  $L_2$  regularized linear regression, i.e.

$$\mathbf{w}^* = \arg \min \left[ (\mathbf{w}^T \mathbf{x} - y)^2 + \lambda \|\mathbf{w}\|^2 \right] \quad (2)$$

We can write the inner term as,

$$(\mathbf{w}^T \hat{\mathbf{x}} - y)^2 = (\mathbf{w}^T \mathbf{x} + \mathbf{w}^T \boldsymbol{\epsilon} - y)^2 \quad (3)$$

$$= (\mathbf{w}^T \mathbf{x} - y)^2 + 2\mathbf{w}^T \boldsymbol{\epsilon} (\mathbf{w}^T \mathbf{x} - y) + (\mathbf{w}^T \boldsymbol{\epsilon})^2 \quad (4)$$

$$= (\mathbf{w}^T \mathbf{x} - y)^2 + 2\mathbf{w}^T \boldsymbol{\epsilon} (\mathbf{w}^T \mathbf{x} - y) + (\mathbf{w}^T \boldsymbol{\epsilon}^T \boldsymbol{\epsilon} \mathbf{w}) \quad (5)$$

Under the expectation the second term will be zero as it is a linear combination of the elements of  $\boldsymbol{\epsilon}$ . The final term will be the quadratic form of  $\mathbf{w}$  with the covariance of  $\boldsymbol{\epsilon}$ . The covariance is simply  $\lambda I$ . Thus we are minimizing,

$$(\mathbf{w}^T \mathbf{x} - y)^2 + \lambda \|\mathbf{w}\|^2$$

which is exactly the objective of L2-regularized linear regression.