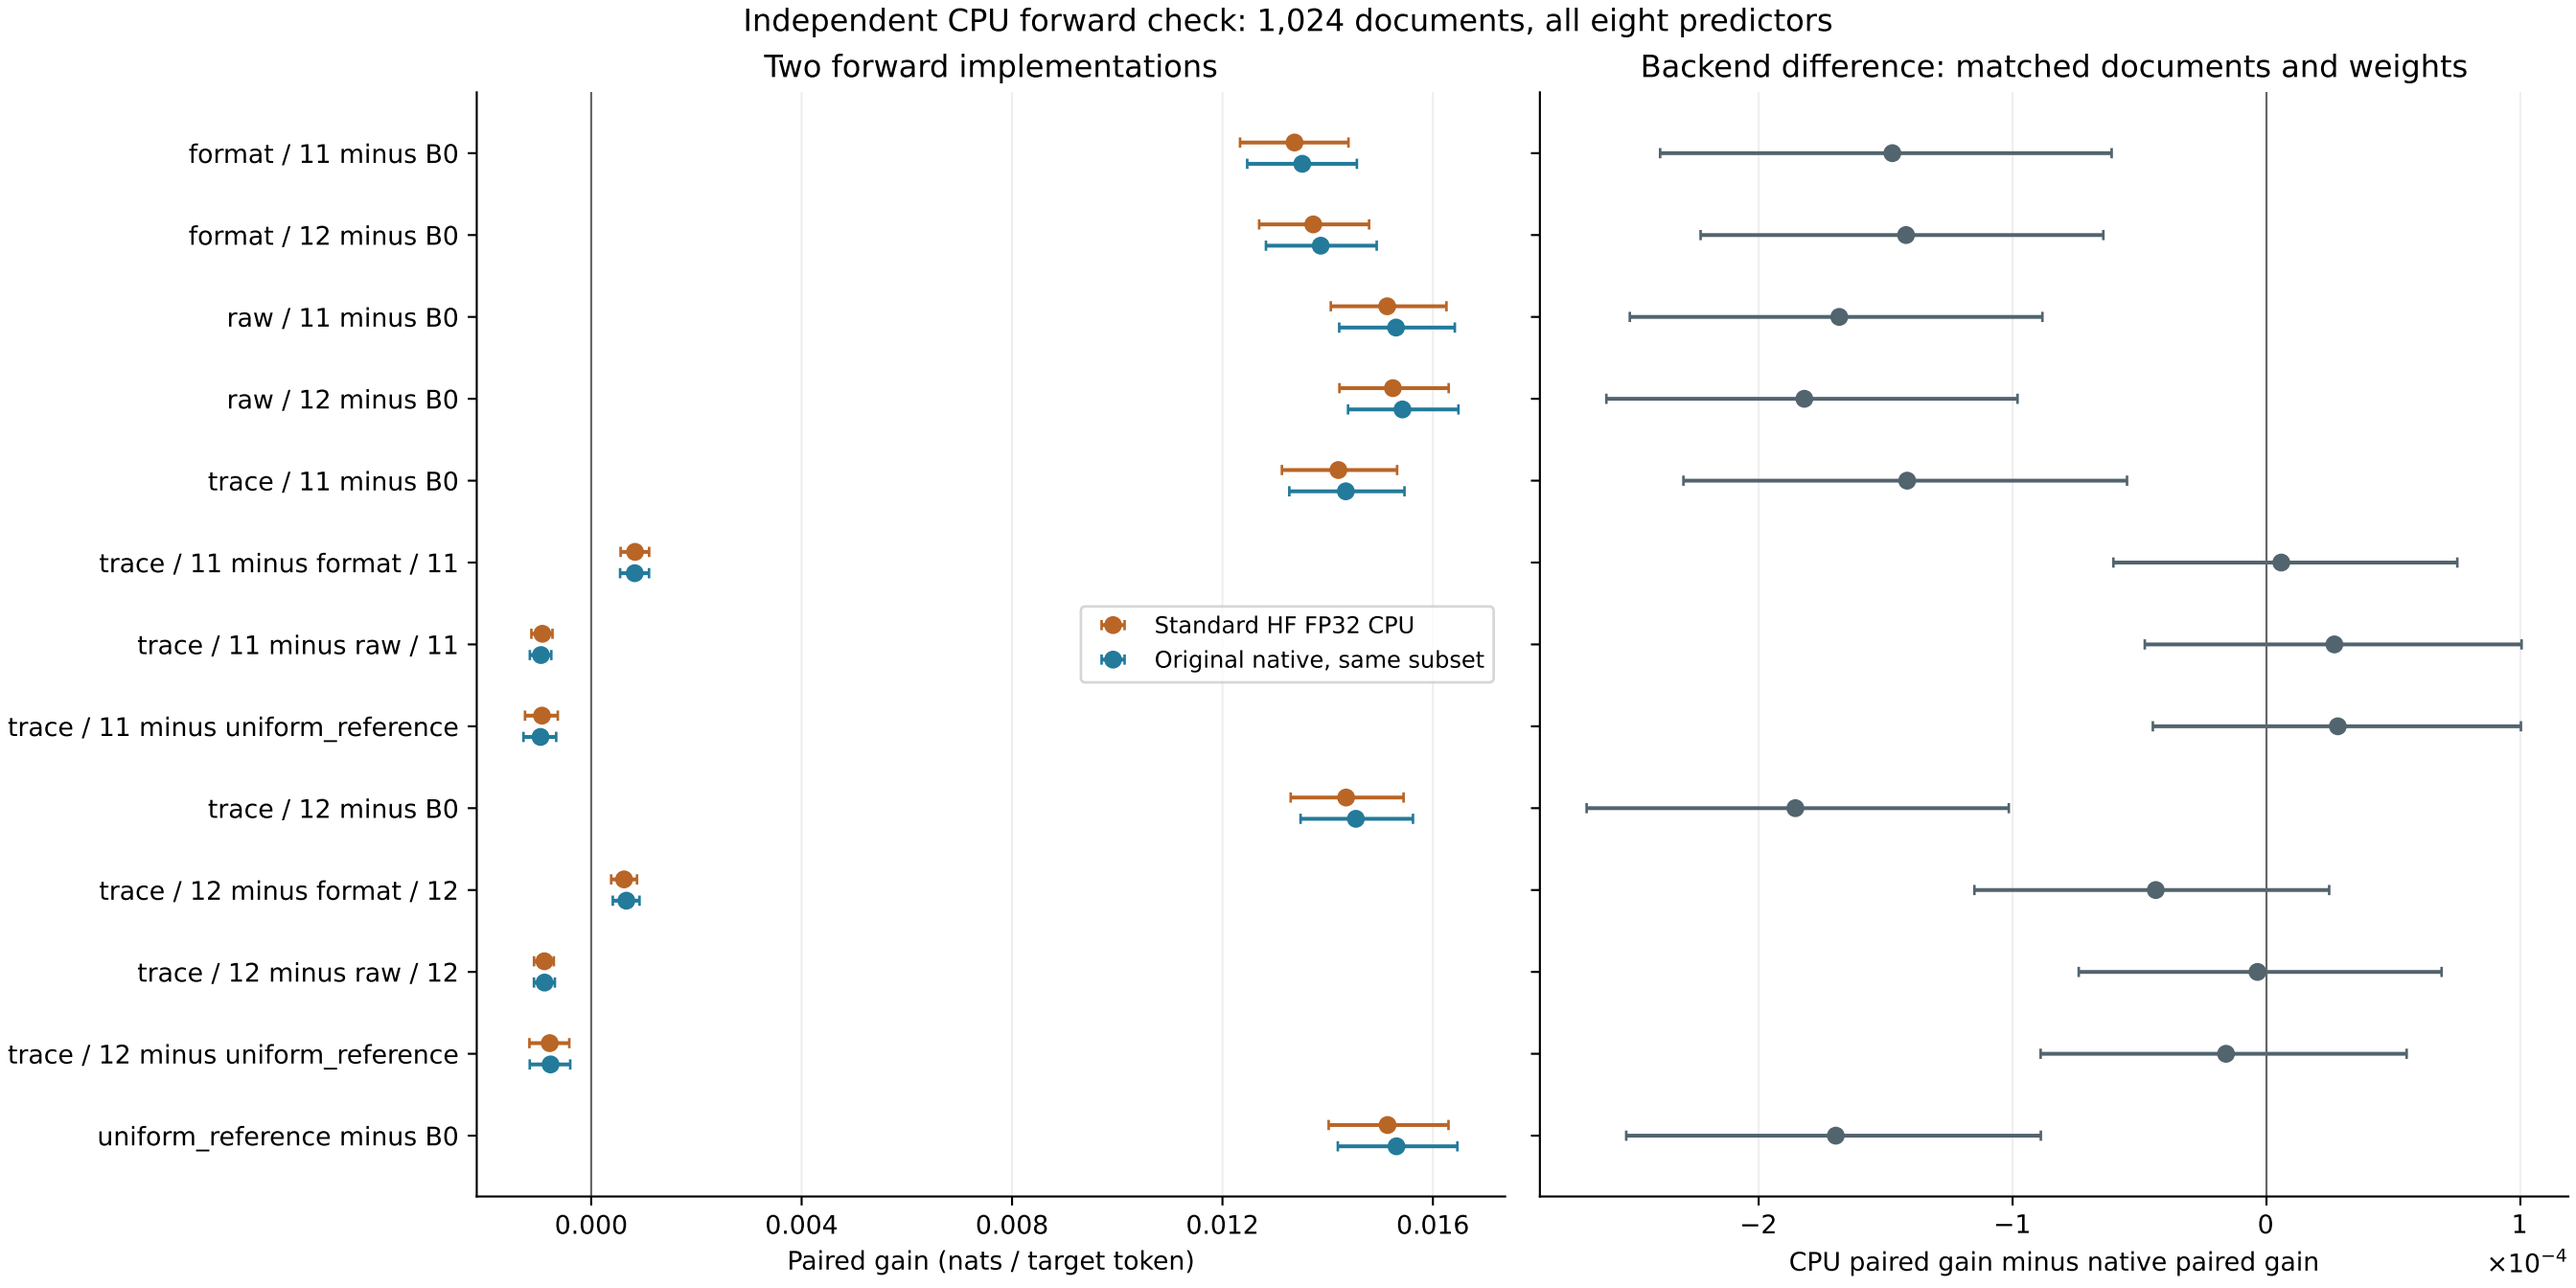
Independent CPU forward check: 1,024 documents, all eight predictors
Two forward implementations
Backend difference: matched documents and weights
format / 11 minus B0
format / 12 minus B0
raw / 11 minus B0
raw / 12 minus B0
trace / 11 minus B0
trace / 11 minus format / 11
trace / 11 minus raw / 11
trace / 11 minus uniform_reference
trace / 12 minus B0
trace / 12 minus format / 12
trace / 12 minus raw / 12
trace / 12 minus uniform_reference
uniform_reference minus B0
Standard HF FP32 CPU
Original native, same subset
0.000
0.004
0.008
0.012
0.016
Paired gain (nats / target token)
−2
−1
0
1
CPU paired gain minus native paired gain
×10⁻⁴