Four architectures

One encoder module is reused across passes in the two-pass variants.

TranAD+

2 passes · feedback

One-decoder

2 passes · feedback

One-pass

1 pass

Encoder-only
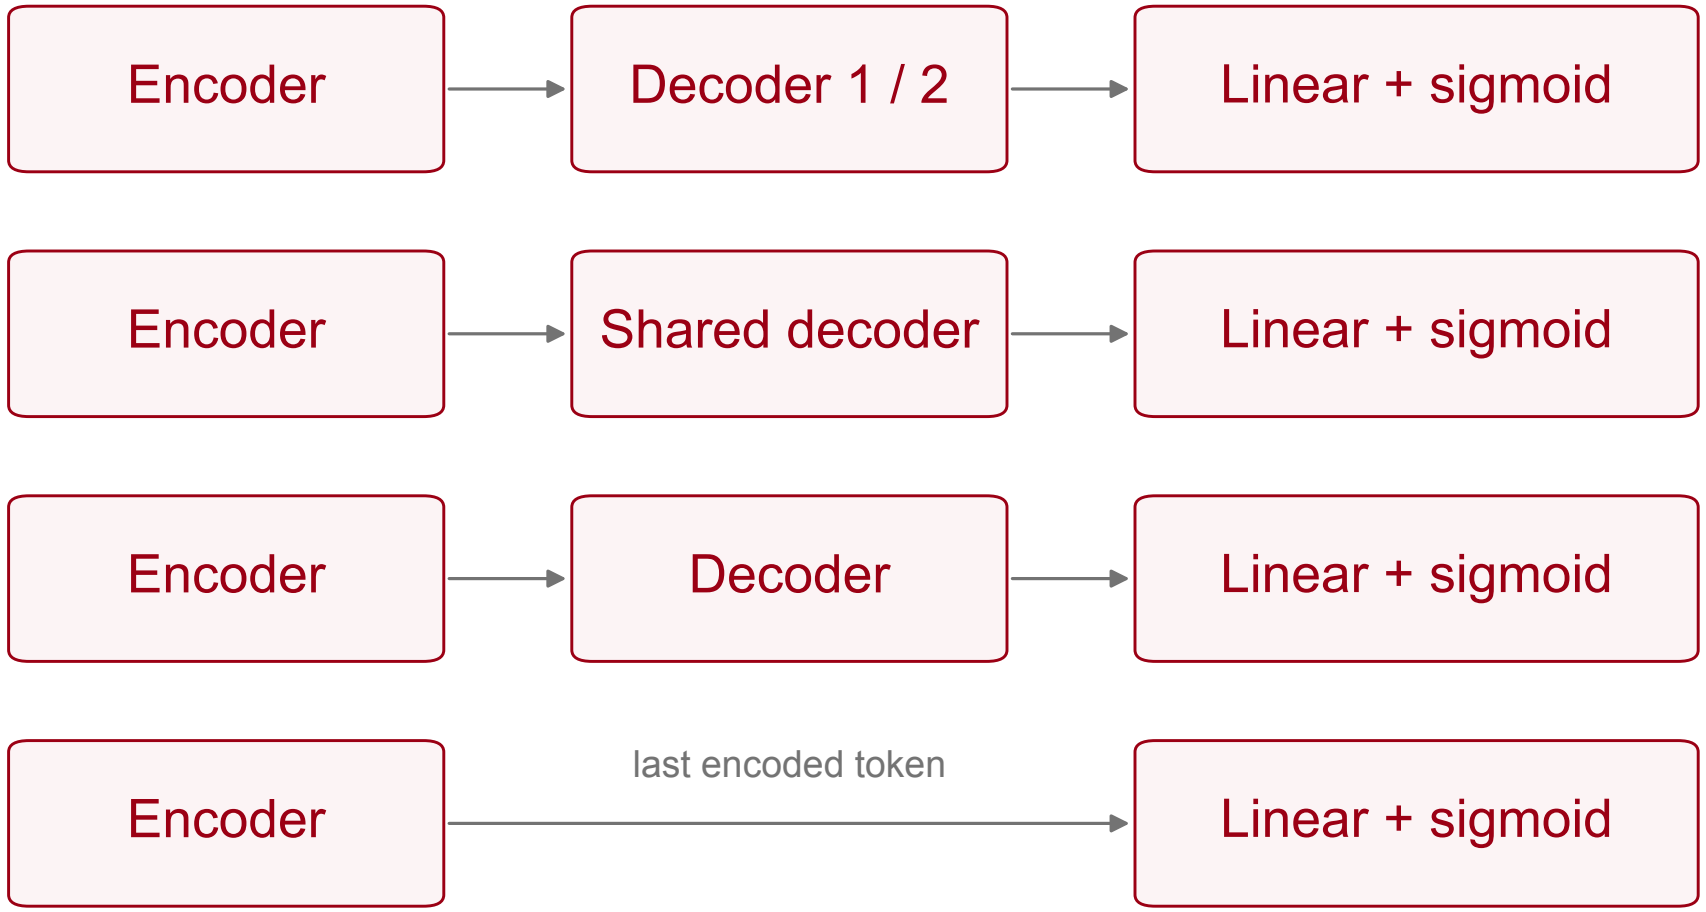
1 pass