Architectural variants

One-decoder

2 passes · same encoder and decoder

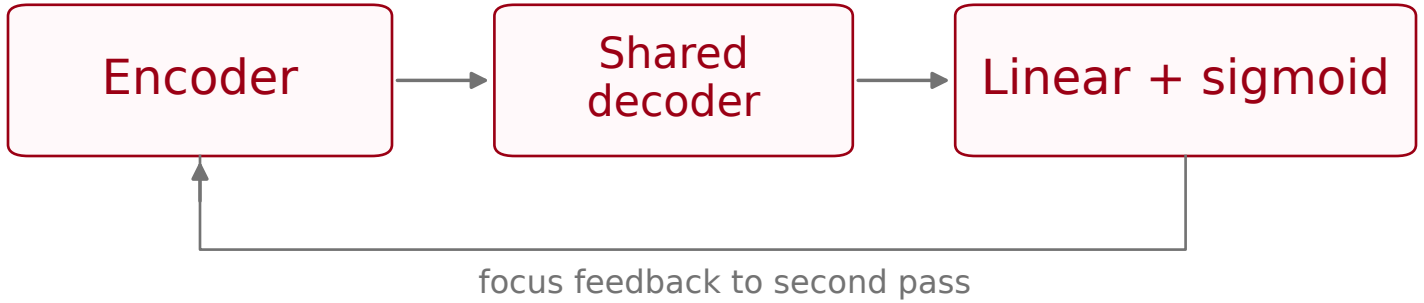

One-pass

1 encoder–decoder pass

Encoder-only

1 encoder pass + reconstruction head

The reference TranAD+ has two passes and two decoders with separate parameters.