


1. Побудуйте воронку користувача:

1.1. Визначте етапи (завантаження → реєстрація → запит поїздки → прийняття → поїздка → оплата → відгук)

```
SELECT funnel_name as procedura,  
       COUNT(funnel_step) as quantity  
FROM public.funnel_analysis  
group by procedura  
order by quantity DESC;
```

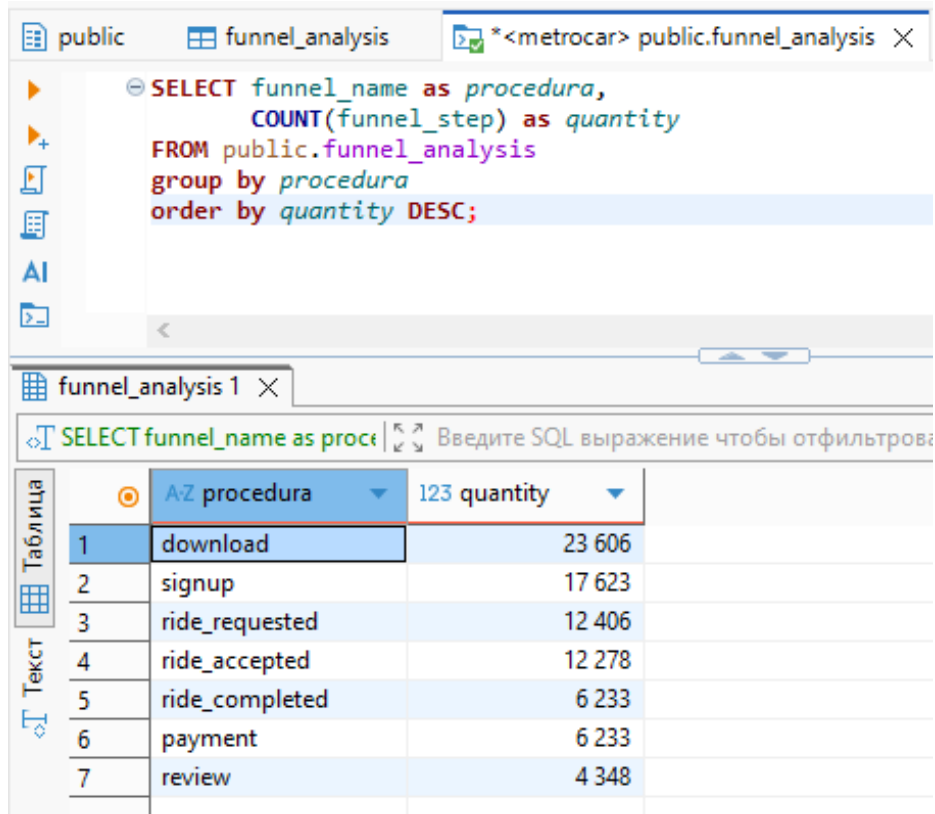

The screenshot shows a database interface with a query editor and a results table. The query editor displays the SQL query for funnel analysis. The results table, titled 'funnel_analysis 1', shows the count of users for each step in the funnel, ordered by quantity in descending order.

	AZ procedura	123 quantity
1	download	23 606
2	signup	17 623
3	ride_requested	12 406
4	ride_accepted	12 278
5	ride_completed	6 233
6	payment	6 233
7	review	4 348

2. Проаналізуйте ефективність платформ

2.1. Кількість завантажень з кожної платформи:

```
SELECT platform,  
       COUNT(platform) as quantity_download  
FROM public.funnel_analysis  
where funnel_name = 'download'  
group by platform  
order by quantity_download DESC;
```

public funnel_analysis * <metrocar> public.funnel_analysis

```

SELECT platform,
       COUNT(platform) as quantity_download
FROM public.funnel_analysis
where funnel_name = 'download'
group by platform
order by quantity_download DESC;

```

funnel_analysis 1

SELECT platform, COUNT(pla | Введите SQL выражение чтобы отфильтровать

	A-Z platform	123 quantity_download
1	ios	14 289
2	android	6 934
3	web	2 383

2.2.Кількість реєстрацій з кожної платформи:

```

SELECT platform,
       COUNT(platform) as quantity_signup
FROM public.funnel_analysis
where funnel_name = 'signup'
group by platform
order by quantity_signup DESC;

```

public funnel_analysis * <metrocar> public.funnel_analysis

```

SELECT platform,
       COUNT(platform) as quantity_signup
FROM public.funnel_analysis
where funnel_name = 'signup'
group by platform
order by quantity_signup DESC;

```

funnel_analysis 1

SELECT platform, COUNT(pla | Введите SQL выражение чтобы отфильтровать

	A-Z platform	123 quantity_signup
1	ios	10 728
2	android	5 148
3	web	1 747

2.3.Кількість замовлень з кожної платформи:

```

SELECT platform,
       COUNT(platform) as quantity_ride_requested
FROM public.funnel_analysis
where funnel_name = 'ride_requested'
group by platform
order by quantity_ride_requested DESC;

```

public funnel_analysis *metrocar> public.funnel_analysis

```

SELECT platform,
       COUNT(platform) as quantity_ride_requested
FROM public.funnel_analysis
where funnel_name = 'ride_requested'
group by platform
order by quantity_ride_requested DESC;

```

funnel_analysis 1

SELECT platform, COUNT(platform) as q1 Введите SQL выражение чтобы отф

Таблица	AZ platform	123 quantity_ride_requested
1	ios	7 550
2	android	3 619
3	web	1 237

2.4.Кількість виконаних замовлень з кожної платформи:

```

SELECT platform,
       COUNT(platform) as quantity_ride_completed
FROM public.funnel_analysis
where funnel_name = 'ride_completed'
group by platform
order by quantity_ride_completed DESC;

```

public funnel_analysis *metrocar> public.funnel_analysis

```

SELECT platform,
       COUNT(platform) as quantity_ride_completed
FROM public.funnel_analysis
where funnel_name = 'ride_completed'
group by platform
order by quantity_ride_completed DESC;

```

funnel_analysis 1

SELECT platform, COUNT(pla Введите SQL выражение чтобы отфильтровать

Таблица	AZ platform	123 quantity_ride_completed
1	ios	3 792
2	android	1 830
3	web	611

2.5.Кількість відгуків з кожної платформи:

```

SELECT platform,
       COUNT(platform) as quantity_review
FROM public.funnel_analysis
where funnel_name = 'review'
group by platform
order by quantity_review DESC;

```

public	funnel_analysis	*<metrocar> public.funnel_analysis
<pre> SELECT platform, COUNT(platform) as quantity_review FROM public.funnel_analysis where funnel_name = 'review' group by platform order by quantity_review DESC; </pre>		
funnel_analysis 1		
<pre> SELECT platform, COUNT(pla </pre>	Введите SQL выражение чтобы отфильтровать	
Таблица	AZ platform	123 quantity_review
1	ios	2 651
2	android	1 273
3	web	424

2.6.Загальний висновок ефективності платформ:

```

SELECT funnel_name as procedura,
      platform,
      COUNT(platform) as quantity
FROM public.funnel_analysis
group by procedura, platform
order by procedura, quantity DESC;

```

public

funnel_analysis

*<metrocar> public.funnel_analysis

SELECT funnel_name as procedura,
platform,
COUNT(platform) as quantity
FROM public.funnel_analysis
group by procedura, platform
order by procedura, quantity DESC;

<

funnel_analysis 1

SELECT funnel_name as procedura, platf

Введите SQL выражение чтобы отфильт

Таблица

Текст

Запись

	AZ procedura	AZ platform	123 quantity
1	download	ios	14 289
2	download	android	6 934
3	download	web	2 383
4	payment	ios	3 792
5	payment	android	1 830
6	payment	web	611
7	review	ios	2 651
8	review	android	1 273
9	review	web	424
10	ride_accepted	ios	7 471
11	ride_accepted	android	3 580
12	ride_accepted	web	1 227
13	ride_completed	ios	3 792
14	ride_completed	android	1 830
15	ride_completed	web	611
16	ride_requested	ios	7 550
17	ride_requested	android	3 619
18	ride_requested	web	1 237

public	funnel_analysis	*<metrocar> public.funnel_analysis
--------	-----------------	------------------------------------


```

SELECT funnel_name as procedura,
       platform,
       COUNT(platform) as quantity
FROM public.funnel_analysis
group by procedura, platform
order by procedura, quantity DESC;

```


funnel_analysis 1	SELECT funnel_name as procedura, platf	Введите SQL выражение чтобы отфи
-------------------	--	----------------------------------

Таблица	AZ procedura	AZ platform	123 quantity
6	payment	web	611
7	review	ios	2 651
8	review	android	1 273
9	review	web	424
10	ride_accepted	ios	7 471
11	ride_accepted	android	3 580
12	ride_accepted	web	1 227
13	ride_completed	ios	3 792
14	ride_completed	android	1 830
15	ride_completed	web	611
16	ride_requested	ios	7 550
17	ride_requested	android	3 619
18	ride_requested	web	1 237
19	signup	ios	10 728
20	signup	android	5 148
21	signup	web	1 747

3. Оцініть вікові групи користувачів

3.1. Які групи найактивніше користуються сервісом (найчастіше замовляють поїздки)?

```

SELECT age_range as age,
       COUNT(funnel_step) as quantity
FROM public.funnel_analysis
where funnel_name = 'ride_requested'
group by age
order by quantity DESC;

```

public funnel_analysis * <metrocar> public.funnel_analysis X

```

SELECT age_range as age,
       COUNT(funnel_step) as quantity
FROM public.funnel_analysis
where funnel_name = 'ride_requested'
group by age
order by quantity DESC;

```

funnel_analysis 1 X

select age_range as age, COU Введите SQL выражение чтобы отфильтровать

Таблица	AZ age	123 quantity
1	Unknown	3 734
2	35-44	3 662
3	25-34	2 425
4	18-24	1 300
5	45-54	1 285

Інший варіант запиту груп, які найактивніше користуються сервісом (найчастіше замовляють поїздки):

```

SELECT s.age_range as age,
       COUNT(distinct s.user_id) as quantity
FROM public.ride_requests as rr
join public.signups as s
on rr.user_id = s.user_id
group by age
order by quantity DESC;

```

public * <metrocar> public.funnel_analysis * <metrocar> public.reviews X

```

SELECT s.age_range as age,
       COUNT(distinct s.user_id) as quantity
FROM public.ride_requests as rr
join public.signups as s
on rr.user_id = s.user_id
group by age
order by quantity DESC;

```

signups 1 X

SELECT s.age_range as age, C Введите SQL выражение чтобы отфильтровать результаты

Таблица	AZ age	123 quantity
1	Unknown	3 734
2	35-44	3 662
3	25-34	2 425
4	18-24	1 300
5	45-54	1 285

3.2. Хто найчастіше доходить до завершення поїздки?

```

SELECT age_range as age,
       COUNT(funnel_step) as quantity
FROM public.funnel_analysis

```

```
where funnel_name = 'ride_completed'
group by age
order by quantity DESC;
```

The screenshot shows a database IDE with a query editor and a results pane. The query editor contains the following SQL code:

```
SELECT age_range as age,
       COUNT(funnel_step) as quantity
FROM public.funnel_analysis
where funnel_name = 'ride_completed'
group by age
order by quantity DESC;
```

The results pane shows a table with 5 rows and 2 columns: 'age' and 'quantity'. The table is sorted by 'quantity' in descending order.

	age	quantity
1	35-44	1 861
2	Unknown	1 845
3	25-34	1 227
4	18-24	670
5	45-54	630

Інший варіант запиту груп, які найчастіше доходять до завершення поїздки:

```
SELECT s.age_range as age,
       COUNT(distinct s.user_id) as quantity
FROM public.transactions as t
join public.ride_requests as rr
on t.ride_id = rr.ride_id
join public.signups as s
on rr.user_id = s.user_id
group by age
order by quantity DESC;
```

The screenshot shows a database IDE with a query editor and a results pane. The query editor contains the following SQL code:

```
SELECT s.age_range as age,
       COUNT(distinct s.user_id) as quantity
FROM public.transactions as t
join public.ride_requests as rr
on t.ride_id = rr.ride_id
join public.signups as s
on rr.user_id = s.user_id
group by age
order by quantity DESC;
```

The results pane shows a table with 5 rows and 2 columns: 'age' and 'quantity'. The table is sorted by 'quantity' in descending order.

	age	quantity
1	35-44	1 861
2	Unknown	1 845
3	25-34	1 227
4	18-24	670
5	45-54	630

3.3. Хто найчастіше залишає відгук?

```
SELECT age_range as age,  
       COUNT(funnel_step) as quantity  
FROM public.funnel_analysis  
where funnel_name = 'review'  
group by age  
order by quantity DESC;
```

The screenshot shows a database interface with a query editor and a results table. The query editor displays the following SQL query:

```
SELECT age_range as age,  
       COUNT(funnel_step) as quantity  
FROM public.funnel_analysis  
where funnel_name = 'review'  
group by age  
order by quantity DESC;
```

The results table, titled "funnel_analysis 1", shows the following data:

	A-Z age	quantity
1	35-44	1 332
2	Unknown	1 248
3	25-34	842
4	18-24	473
5	45-54	453

Інший варіант запиту груп, які найчастіше залишають відгук:

```
SELECT s.age_range as age,  
       COUNT(distinct s.user_id) as quantity  
FROM public.reviews as r  
join public.signups as s  
on r.user_id = s.user_id  
group by age  
order by quantity DESC;
```


public *metrocar> public.funnel_analysis *metrocar> public.reviews

```

SELECT s.age_range as age,
       COUNT(distinct s.user_id) as quantity
FROM public.reviews as r
join public.signups as s
on r.user_id = s.user_id
group by age
order by quantity DESC;

```

signups 1

SELECT s.age_range as age, COUNT(distinct s.user_id) as quantity

	AZ age	123 quantity
1	35-44	1 332
2	Unknown	1 248
3	25-34	842
4	18-24	473
5	45-54	453

3.4. Загальна оцінка вікових груп:

```

SELECT funnel_name as procedura,
       age_range as age,
       COUNT(age_range) as quantity
FROM public.funnel_analysis
group by procedura, age
order by procedura, quantity DESC;

```

public funnel_analysis *metrocar> public.funnel_analysis

```

SELECT funnel_name as procedura,
       age_range as age,
       COUNT(age_range) as quantity
FROM public.funnel_analysis
group by procedura, age
order by procedura, quantity DESC;

```

funnel_analysis 1

SELECT funnel_name as proc...

	AZ procedura	AZ age	123 quantity
1	download	Unknown	11 287
2	download	35-44	5 181
3	download	25-34	3 447
4	download	18-24	1 865
5	download	45-54	1 826
6	payment	35-44	1 861
7	payment	Unknown	1 845
8	payment	25-34	1 227
9	payment	18-24	670
10	payment	45-54	630
11	review	35-44	1 332
12	review	Unknown	1 248
13	review	25-34	842
14	review	18-24	473
15	review	45-54	453
16	ride_accepted	Unknown	3 701
17	ride_accepted	35-44	3 628
18	ride_accepted	25-34	2 393

public funnel_analysis *metrocar> public.funnel_analysis

```

SELECT funnel_name as procedura,
       age_range as age,
       COUNT(age_range) as quantity
FROM public.funnel_analysis
group by procedura, age

```

funnel_analysis 1

SELECT funnel_name as procedu Введите SQL выражение чтобы отфильтровать

	A-Z procedura	A-Z age	123 quantity
17	ride_accepted	35-44	3 628
18	ride_accepted	25-34	2 393
19	ride_accepted	18-24	1 289
20	ride_accepted	45-54	1 267
21	ride_completed	35-44	1 861
22	ride_completed	Unknown	1 845
23	ride_completed	25-34	1 227
24	ride_completed	18-24	670
25	ride_completed	45-54	630
26	ride_requested	Unknown	3 734
27	ride_requested	35-44	3 662
28	ride_requested	25-34	2 425
29	ride_requested	18-24	1 300
30	ride_requested	45-54	1 285
31	signup	Unknown	5 304
32	signup	35-44	5 181
33	signup	25-34	3 447
34	signup	18-24	1 865
35	signup	45-54	1 826

4. Оцінка рейтингу:

4.1. Загальна кількість кожної з оцінок:

```

SELECT rating,
       COUNT (rating) as quantity
FROM public.reviews
group by rating;

```

public *metrocar> public.reviews

```

SELECT rating,
       COUNT (rating) as quantity
FROM public.reviews
group by rating;

```


reviews 1

SELECT rating, COUNT (rating Введите SQL выражение

	123 rating	123 quantity
1	1	46 458
2	2	15 271
3	3	15 659
4	4	39 571
5	5	39 252

4.2. Середня оцінка та загальна кількість оцінок кожної вікової групи:

```
SELECT s.age_range as age,  
       COUNT(distinct s.user_id) as quantity,  
       AVG(r.rating) as avg_rating  
FROM public.reviews as r  
join public.signups as s  
on r.user_id = s.user_id  
group by age  
order by quantity DESC;
```

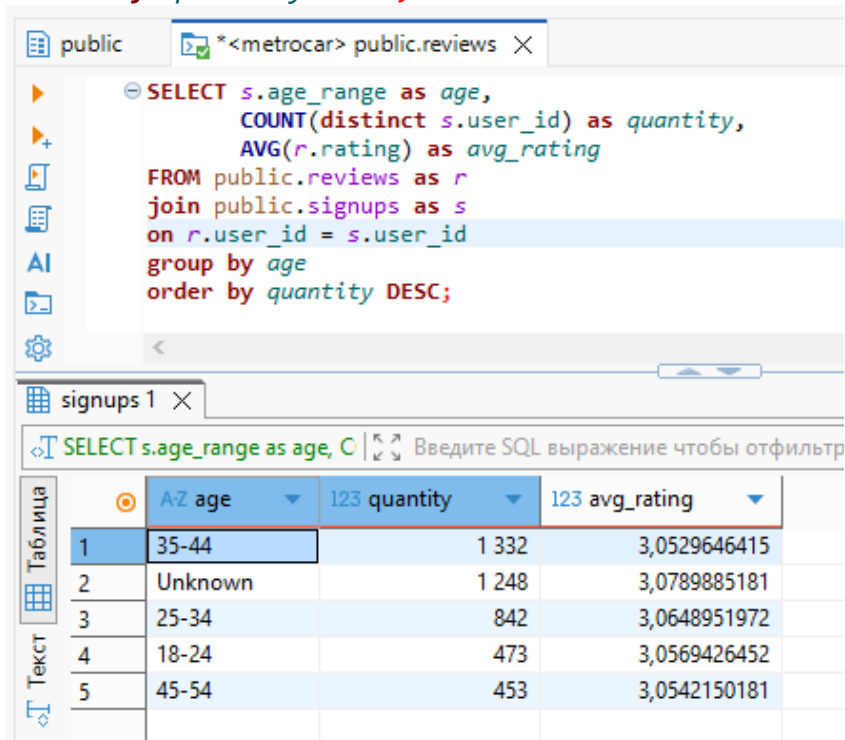

The screenshot shows a database query editor with a query window and a results window. The query window contains the SQL query for 4.2. The results window shows a table with 5 rows and 4 columns: age, quantity, and avg_rating. The table is sorted by quantity in descending order.

	AZ age	123 quantity	123 avg_rating
1	35-44	1 332	3,0529646415
2	Unknown	1 248	3,0789885181
3	25-34	842	3,0648951972
4	18-24	473	3,0569426452
5	45-54	453	3,0542150181

4.3. Середня оцінка та загальна кількість оцінок кожної платформи:

```
SELECT ad.platform,  
       COUNT(distinct s.user_id) as quantity,  
       AVG(r.rating) as avg_rating  
FROM public.reviews as r  
join public.signups as s  
on r.user_id = s.user_id  
join public.app_downloads as ad  
on ad.app_download_key = s.session_id  
group by ad.platform  
order by quantity DESC;
```

public *metrocar> public.reviews X

```

SELECT ad.platform,
       COUNT(distinct s.user_id) as quantity,
       AVG(r.rating) as avg_rating
FROM public.reviews as r
join public.signups as s
on r.user_id = s.user_id
join public.app_downloads as ad
on ad.app_download_key = s.session_id
group by ad.platform
order by quantity DESC;

```

app_downloads 1 X

SELECT ad.platform, COUNT(Введите SQL выражение чтобы отфильтров

	A-Z platform	123 quantity	123 avg_rating
1	ios	2 651	3,0606641726
2	android	1 273	3,0650190198
3	web	424	3,0746161385

Таблица

экст

4.4. Середня оцінка та загальна кількість оцінок за кожною платформою та віковою групою:

```

SELECT ad.platform,
       s.age_range as age,
       COUNT(distinct s.user_id) as quantity,
       AVG(r.rating) as avg_rating
FROM public.reviews as r
join public.signups as s
on r.user_id = s.user_id
join public.app_downloads as ad
on ad.app_download_key = s.session_id
group by ad.platform, age
order by ad.platform, quantity DESC;

```

public *metrocar> public.reviews X

```

SELECT ad.platform,
       s.age_range as age,
       COUNT(distinct s.user_id) as quantity,
       AVG(r.rating) as avg_rating
FROM public.reviews as r
join public.signups as s
on r.user_id = s.user_id
join public.app_downloads as ad
on ad.app_download_key = s.session_id
group by ad.platform, age
order by ad.platform, quantity DESC;

```

app_downloads(+) 1 X

SELECT ad.platform, s.age_rar Введите SQL выражение чтобы отфильтровать результаты

	A-Z platform	A-Z age	123 quantity	123 avg_rating
1	android	35-44	390	3,0573321809
2	android	Unknown	379	3,0778981502
3	android	25-34	241	3,063952816
4	android	45-54	137	3,0674318508
5	android	18-24	126	3,0493333333
6	ios	35-44	792	3,0483096865
7	ios	Unknown	752	3,0776005625
8	ios	25-34	531	3,0637583893

Таблица

Запись

public *metrocar> public.reviews X

```

SELECT ad.platform,
       s.age_range as age,
       COUNT(distinct s.user_id) as quantity,
       AVG(r.rating) as avg_rating
FROM public.reviews as r
join public.signups as s
on r.user_id = s.user_id

```

app_downloads(+) 1 X

SELECT ad.platform, s.age_rar | Введите SQL выражение чтобы отфильтровать результаты

	A-Z platform	A-Z age	123 quantity	123 avg_rating
1	android	35-44	390	3,0573321809
2	android	Unknown	379	3,0778981502
3	android	25-34	241	3,063952816
4	android	45-54	137	3,0674318508
5	android	18-24	126	3,0493333333
6	ios	35-44	792	3,0483096865
7	ios	Unknown	752	3,0776005625
8	ios	25-34	531	3,0637583893
9	ios	18-24	298	3,0608881855
10	ios	45-54	278	3,0440971531
11	web	35-44	150	3,0662142333
12	web	Unknown	117	3,0915189267
13	web	25-34	70	3,0764751553
14	web	18-24	49	3,052268811
15	web	45-54	38	3,0814977974

5. Загальна оцінка:

```

SELECT funnel_name as procedura,
       platform,
       age_range as age,
       COUNT(funnel_step) as quantity
FROM public.funnel_analysis
group by procedura, platform, age
order by procedura, platform, quantity DESC;

```

public funnel_analysis *metrocar> public.funnel_analysis X

```

SELECT funnel_name as procedura,
       platform,
       age_range as age,
       COUNT(funnel_step) as quantity
FROM public.funnel_analysis
group by procedura, platform, age
order by procedura, platform, quantity DESC;

```

funnel_analysis 1 X

SELECT funnel_name as procedura, platfi Введите SQL выражение чтобы отфильтровать

	A-Z procedura	A-Z platform	A-Z age	123 quantity
1	download	android	Unknown	3 333
2	download	android	35-44	1 509
3	download	android	25-34	999
4	download	android	18-24	547
5	download	android	45-54	546
6	download	ios	Unknown	6 821
7	download	ios	35-44	3 134
8	download	ios	25-34	2 117
9	download	ios	18-24	1 118
10	download	ios	45-54	1 099
11	download	web	Unknown	1 133
12	download	web	35-44	538
13	download	web	25-34	331
14	download	web	18-24	200
15	download	web	45-54	181
16	payment	android	Unknown	557
17	payment	android	35-44	544

public funnel_analysis *metrocar> public.funnel_analysis X

funnel_analysis 1 X

SELECT funnel_name as procedura, platfi Введите SQL выражение чтобы отфильтровать ре:

	A-Z procedura	A-Z platform	A-Z age	123 quantity
16	payment	android	Unknown	557
17	payment	android	35-44	544
18	payment	android	25-34	356
19	payment	android	18-24	191
20	payment	android	45-54	182
21	payment	ios	35-44	1 114
22	payment	ios	Unknown	1 112
23	payment	ios	25-34	764
24	payment	ios	18-24	408
25	payment	ios	45-54	394
26	payment	web	35-44	203
27	payment	web	Unknown	176
28	payment	web	25-34	107
29	payment	web	18-24	71
30	payment	web	45-54	54
31	review	android	35-44	390
32	review	android	Unknown	379
33	review	android	25-34	241
34	review	android	45-54	137
35	review	android	18-24	126
36	review	ios	35-44	792
37	review	ios	Unknown	752

public

funnel_analysis

*<metrocar> public.funnel_analysis

funnel_analysis 1

SELECT funnel_name as procedura, platf

Введите SQL выражение чтобы отфильтровать

Таблица

Текст

Запись

	AZ procedura	AZ platform	AZ age	123 quantity
37	review	ios	Unknown	752
38	review	ios	25-34	531
39	review	ios	18-24	298
40	review	ios	45-54	278
41	review	web	35-44	150
42	review	web	Unknown	117
43	review	web	25-34	70
44	review	web	18-24	49
45	review	web	45-54	38
46	ride_accepted	android	Unknown	1 085
47	ride_accepted	android	35-44	1 065
48	ride_accepted	android	25-34	682
49	ride_accepted	android	18-24	381
50	ride_accepted	android	45-54	367
51	ride_accepted	ios	Unknown	2 271
52	ride_accepted	ios	35-44	2 175
53	ride_accepted	ios	25-34	1 482
54	ride_accepted	ios	45-54	776
55	ride_accepted	ios	18-24	767
56	ride_accepted	web	35-44	388
57	ride_accepted	web	Unknown	345
58	ride_accepted	web	25-34	229
59	ride_accepted	web	18-24	141

public

funnel_analysis

<metrocar> public.funnel_analysis

funnel_analysis 1

SELECT funnel_name as procedura, platf

Введите SQL выражение чтобы отфильтровать ре

Таблица

Текст

Запись

	AZ procedura	AZ platform	AZ age	123 quantity
58	ride_accepted	web	25-34	229
59	ride_accepted	web	18-24	141
60	ride_accepted	web	45-54	124
61	ride_completed	android	Unknown	557
62	ride_completed	android	35-44	544
63	ride_completed	android	25-34	356
64	ride_completed	android	18-24	191
65	ride_completed	android	45-54	182
66	ride_completed	ios	35-44	1 114
67	ride_completed	ios	Unknown	1 112
68	ride_completed	ios	25-34	764
69	ride_completed	ios	18-24	408
70	ride_completed	ios	45-54	394
71	ride_completed	web	35-44	203
72	ride_completed	web	Unknown	176
73	ride_completed	web	25-34	107
74	ride_completed	web	18-24	71
75	ride_completed	web	45-54	54
76	ride_requested	android	Unknown	1 091
77	ride_requested	android	35-44	1 074
78	ride_requested	android	25-34	692
79	ride_requested	android	18-24	387
80	ride_requested	android	45-54	176

public

funnel_analysis

<metrocar> public.funnel_analysis

funnel_analysis 1

SELECT funnel_name as procedura, platfi

Введите SQL выражение чтобы отфильтровать резу

Таблица

Текст

Запись

	AZ procedura	AZ platform	AZ age	123 quantity
79	ride_requested	android	18-24	387
80	ride_requested	android	45-54	375
81	ride_requested	ios	Unknown	2 295
82	ride_requested	ios	35-44	2 196
83	ride_requested	ios	25-34	1 503
84	ride_requested	ios	45-54	784
85	ride_requested	ios	18-24	772
86	ride_requested	web	35-44	392
87	ride_requested	web	Unknown	348
88	ride_requested	web	25-34	230
89	ride_requested	web	18-24	141
90	ride_requested	web	45-54	126
91	signup	android	Unknown	1 547
92	signup	android	35-44	1 509
93	signup	android	25-34	999
94	signup	android	18-24	547
95	signup	android	45-54	546
96	signup	ios	Unknown	3 260
97	signup	ios	35-44	3 134
98	signup	ios	25-34	2 117
99	signup	ios	18-24	1 118
100	signup	ios	45-54	1 099

public

funnel_analysis

<metrocar> public.funnel_analysis

funnel_analysis 1

SELECT funnel_name as procedura, platfi

Введите SQL выражение чтобы отфильтровать резу

Таблица

Текст

Запись

	AZ procedura	AZ platform	AZ age	123 quantity
85	ride_requested	ios	18-24	772
86	ride_requested	web	35-44	392
87	ride_requested	web	Unknown	348
88	ride_requested	web	25-34	230
89	ride_requested	web	18-24	141
90	ride_requested	web	45-54	126
91	signup	android	Unknown	1 547
92	signup	android	35-44	1 509
93	signup	android	25-34	999
94	signup	android	18-24	547
95	signup	android	45-54	546
96	signup	ios	Unknown	3 260
97	signup	ios	35-44	3 134
98	signup	ios	25-34	2 117
99	signup	ios	18-24	1 118
100	signup	ios	45-54	1 099
101	signup	web	35-44	538
102	signup	web	Unknown	497
103	signup	web	25-34	331
104	signup	web	18-24	200
105	signup	web	45-54	181