




Vim cheatsheet

A useful collection of [Vim](#) 8.2 quick reference cheat sheets to help you learn vim editor faster.

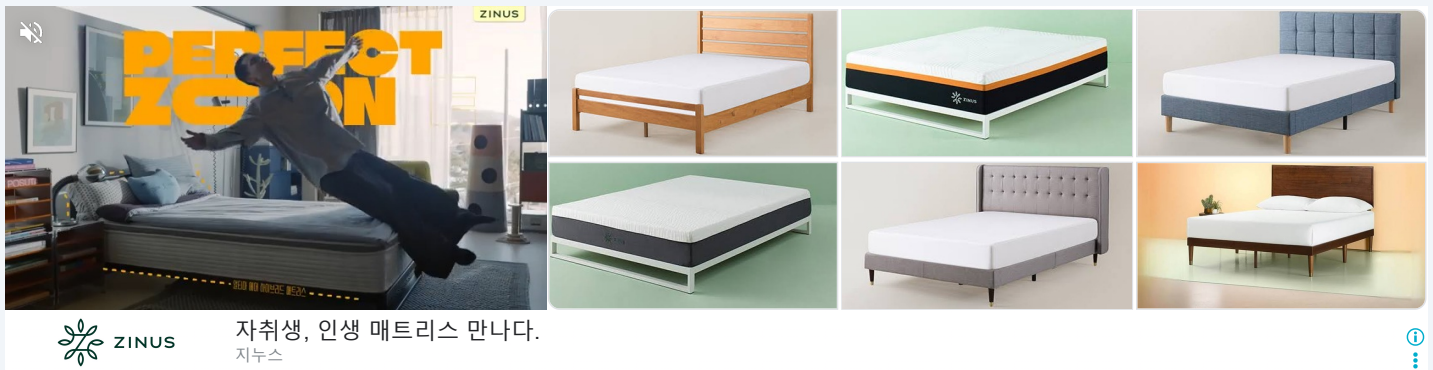


Getting Started

Motion Diagrams

▼/▶ Cursor ▼/▷ Target


Left-right motions

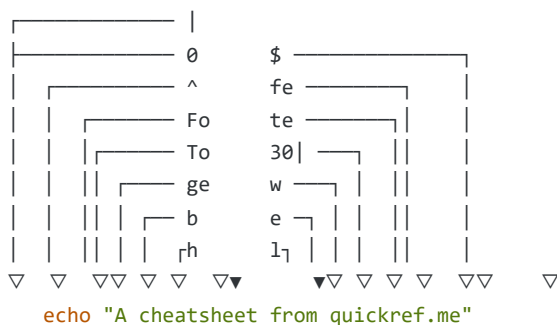

- SCREEN 1 START

▶ #!/usr/bin/python



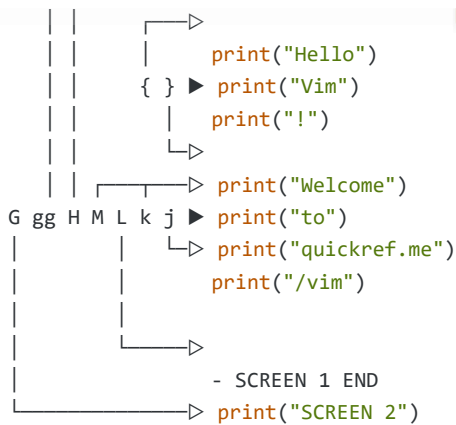

Motions

h | j | k | l

Arrow keys

<C-u> / <C-d>

Half-page up/down

<C-b> / <C-f>

Page up/down

Words

b / w

Previous/Next word

ge / e

Previous/Next end of word

Line

0 (zero) / \$

Start/End of line

^

Start of line (non-blank)

Character

Fe / fe

Move to previous/next e

To / to

Move before/after previous/next o

| / n|

Go to first/nth column

Document

gg / G

First/Last line

:n | nG

Go to line n

} / {

Next/Previous empty line

Window

H / M / L

Top/Middle/Bottom screen

zt / zz / zb

Top/Center/Bottom this line

Insert Mode

i / a

Insert before/after cursor

I / A

Insert start/end of line

o / O (letter)

Insert new line below/above

s / S

Delete char/line and insert

C / cc

Change to end of/current line

gi

Insert at last insert point

Esc | <C-[>

Exit insert mode

Saving and Exiting

:w

Save

:q

Close file

:wq | :x | ZZ

Save and quit

:wqa

Save and quit all files

:q! | ZQ

Force quit

:qa

Close all files

:qa!

Force quit all files

:w now.txt

Write to **now.txt**

:sav new.txt

Save and edit **new.txt**

:w !sudo tee %

Write to readonly file

Normal Mode

r

Replace one character

R

Enter Replace mode

u / 3u

Undo changes **1** / **3** times

U

Undo changes on one line

J

Join with next line

<C-r> / 5 <C-r>

Redo changes **1** / **5** times

Cut and paste

x

Delete character (Cut)

p / P

Paste after/before

xp

Swap two characters

D

Delete to end of line (Cut)

dw

Delete word (Cut)

dd

Delete line (Cut)

ddp

Swap two lines

yy

Yank line (Copy)

"*p | "+p

Paste from system clipboard

"*y | "+y

Paste to system clipboard

In visual mode

d | x

Delete selection (Cut)

s

Replace selection

y

Yank selection (Copy)

Repeating

.

Repeat last command

;

Repeat latest **f**, **t**, **F** or **T**

,

Repeat latest **f**, **t**, **F** or **T** reversed

&

Repeat last **:s**

@:

Repeat a command-line command

Visual mode

v

Enter visual mode

V

Enter visual line mode

<C-v>

Enter visual block mode

ggVG

Select all text

> / <

Shift text right/left

Macros

qi

Record macro **i**

q

Stop recording macro

@i

Run macro **i**

7@i

Run macro **i** 7 times

@@

Repeat last macro

You can save macro for any letters not just **i**

Vim Operators

Usage

d

w

Operator

Motion

Combine operators with motions to use them

Available Operators

d

Delete

y	Yank (copy)
c	Change (delete then insert)
p	Paste
=	Formats code
g~	Toggle case
gU	Uppercase
gu	Lowercase
>	Indent right
<	Indent left
!	Filter through external program

Examples	
Combination	Description
dd	Delete current line
dj	Delete two lines
d ^w	Delete to next word
db	Delete to beginning of word
d ^f a	Delete until ^a char
d/hello	Delete until ^{he} llo
cc	Change current line, synonym with ^S
yy	Copy current line
>j	Indent 2 lines
ggd ^G	Delete a complete document
gg= ^G	Indent a complete document
ggy ^G	Copy a whole document

Counts	
^[count] <operator> <motion> <operator> ^[count] <motion>	
2dd	Delete ² lines
6yy	Copy ⁶ lines
d3 ^w	Delete ³ words
d5j	Delete ⁵ lines downwards
>4 ^k	Indent ⁴ lines upwards

Vim Text objects

Usage		
<code>v</code>	<code>i / a</code>	<code>p</code>
Operator	inner / around	Text object
Operate with an <u>operator</u> inner or around text blocks		

Text objects	
<code>p</code>	Paragraph
<code>w</code>	Word
<code>W</code>	WORD (surrounded by whitespace)
<code>s</code>	Sentence
<code>[({ <</code>	A [], (), or {} block
<code>)] } ></code>	A [], (), or {} block
<code>'" `</code>	A quoted string
<code>b</code>	A block [(
<code>B</code>	A block in [(
<code>t</code>	A HTML tag block
See <code>:help text-objects</code>	

Delete	
<code>diw</code>	Delete inner word
<code>dis</code>	Delete inner sentence
<code>di"</code>	Delete in quotes
<code>da"</code>	Delete in quotes (including quotes)
<code>dip</code>	Delete a paragraph

Selections	
<code>vi"</code>	Select inner quotes " <u>...</u> "
<code>va"</code>	Select quotes " <u>...</u> "
<code>vi[</code>	Select inner brackets [<u>...</u>]
<code>va[</code>	Select brackets [<u>...</u>].
<code>viw</code>	Select inner word
<code>vip</code>	Select inner paragraph
<code>vipip</code>	Select more paragraph

Misc	
<code>ciw</code>	Change inner word

ci"	Change inner quotes
cit	Change inner tags (HTML)
cip	Change inner paragraph
yip	Yank inner paragraph
yap	Yank paragraph (including newline)

Vim Multiple files

Buffers	
:e file	Edit a file in a new buffer
:bn	Go to the next buffer
:bp	Go to the previous buffer
:bd	Remove file from buffer list
:b 5	Open buffer #5
:b file	Go to a buffer by file
:ls	List all open buffers
:sp file	Open and split window
:vs file	Open and vertically split window
:hid	Hide this buffer
:wn	Write file and move to next
:tab ba	Edit all buffers as tabs

Windows	
<C-w> s	Split window
<C-w> v	Split window vertically
<C-w> w	Switch windows
<C-w> q	Quit a window
<C-w> T	Break out into a new tab
<C-w> x	Swap current with next
<C-w> - / +	Decrease/Increase height
<C-w> < / >	Decrease/Increase width
<C-w>	Max out the width
<C-w> =	Equally high and wide
<C-w> h / l	Go to the left/right window

<C-w> j / k

Go to the up/down window

Tabs

<code>:tabe [file]</code>	Edit file in a new tab
<code>:tabf [file]</code>	Open if exists in new tab
<code>:tabc</code>	Close current tab
<code>:tabo</code>	Close other tabs
<code>:tabs</code>	List all tabs
<code>:tabr</code>	Go to first tab
<code>:tabl</code>	Go to last tab
<code>:tabm 0</code>	Move to position 0
<code>:tabn</code>	Go to next tab
<code>:tabp</code>	Go to previous tab

Normal mode

<code>gt</code>	Go to next tab
<code>gT</code>	Go to previous tab
<code>2gt</code>	Go to tab number 2

Vim Search and Replace

Search

<code>/foo</code>	Search forward
<code>/foo\c</code>	Search forward (case insensitive)
<code>?foo</code>	Search backward
<code>/\v\d+</code>	Search with regex
<code>n</code>	Next matching search pattern
<code>N</code>	Previous match
<code>*</code>	Search for current word forward
<code>#</code>	Search for current word backward

Replace LINE

<code>:[range]s/{pattern}/{str}/{flags}</code>	
<code>:s/old/new</code>	Replace first
<code>:s/old/new/g</code>	Replace all

<code>:s/\vold/new/g</code>	Replace all with regex
<code>:s/old/new/gc</code>	replace all (Confirm)
<code>:s/old/new/i</code>	Ignore case replace first
<code>:2,6s/old/new/g</code>	Replace between lines 2-6

Replace FILE

<code>:%s/{pattern}/{str}/{flags}</code>	
<code>:%s/old/new</code>	Replace first
<code>:%s/old/new/g</code>	Replace all
<code>:%s/old/new/gc</code>	Replace all (Confirm)
<code>:%s/old/new/gi</code>	Replace all (ignore case)
<code>:%s/\vold/new/g</code>	Replace all with regex

Ranges

<code>%</code>	Entire file
<code>'<,>'</code>	Current selection
<code>5</code>	Line 5
<code>5,10</code>	Lines 5 to 10
<code>\$</code>	Last line
<code>2,\$</code>	Lines 2 to Last
<code>.</code>	Current line
<code>,3</code>	Next 3 lines
<code>-3,</code>	Forward 3 lines

Global command

<code>:[range]g/{pattern}/{command}</code>	
<code>:g/foo/d</code>	Delete lines containing foo
<code>:g!/foo/d</code>	Delete lines not containing foo
<code>:g/^\s*\$/d</code>	Delete all blank lines
<code>:g/foo/t\$</code>	Copy lines containing foo to EOF
<code>:g/foo/m\$</code>	Move lines containing foo to EOF
<code>:g/^/m0</code>	Reverse a file
<code>:g/^/t.</code>	Duplicate every line

Inverse :g

<code>:[range]v/{pattern}/{command}</code>	
--	--

:v/foo/d

Delete lines not containing **foo**
(also :g! /foo/d)

Flags

g	Replace all occurrences
i	Ignore case
I	Don't ignore case
c	Confirm each substitution

Substitute expression (magic)

& \0	Replace with the whole matched
\1...\9	Replace with the group 0-9
\u	Uppercase next letter
\U	Uppercase following characters
\l	Lowercase next letter
\L	Lowercase following characters
\e	End of \u, \U, \l and \L
\E	End of \u, \U, \l and \L

Examples

```
:s/a\|b/xxx\0xxx/g      # Modifies "a b"      to "xxxxxxx xxxbxxx"
:s/test/\U& file/        # Modifies "test"    to "TEST FILE"
:s/\(test\)/\U\1e file/  # Modifies "test"    to "TEST file"
:s/v([abc])([efg])/\2\1/g # Modifies "af fa bg" to "fa fa gb"
:s/v\w+/\u\0/g           # Modifies "bla bla"  to "Bla Bla"
:s/v([ab])([cd])/\1x/g   # Modifies "a b c d"  to "ax bx x x"
:%s/./\L&/              # Modifies "HTML"     to "html"
:s/v<(.)(<w*)/\u\1L\2/g   # Make every first letter of a word uppercase
:s/^(<.*\>)\n\1/\1/       # Remove duplicate lines
:%s/<\ /=\(<w+\>)\>/\U&/g # Convert HTML-Tags to uppercase
:g/^pattern/s/$/mytext    # Find and append text to the end
:g/pattern/norm! @i       # Run a macro on matching lines
/^(<.*\>)\(<r\?\n\1\>\)+$  # View the duplicates lines
/\v^(<.*\>)\(<r\?\n\1\>\)+$ # View the duplicates lines (very magic)
:v/./,/./-j              # Compress blank lines into a blank line
:g/<p1>/,/<p2>/d           # Delete inclusively from <p1> to <p2>
```

Vimdiff

Usage

```
$ vimdiff file1 file2 [file3]
$ vim -d file1 file2 [file3]
```

Editing

:[\[range\]](#)[diffget](#) [[bufspec](#)]
:[\[range\]](#)[diffput](#) [[bufspec](#)]

do / :diffget	Obtain (get) difference
dp / :diffput	Put difference
:dif	Re-scan differences
:diffo	Switch off diff mode
:1,\$+1diffget	Get all differences
ZQ	Quit without changes

See: [Ranges](#)

Folds

zo / zO	Open
zc / zC	Close
za / zA	Toggle
zv	Open folds for this line
zM	Close all
zR	Open all
zm	Fold more (foldlevel += 1)
zr	Fold less (foldlevel -= 1)
zx	Update folds

Jumping

]c	Next difference
[c	Previous difference

Miscellaneous

Case

vU	Uppercase character
vu	Lowercase character
~	Toggle case character
viw U	Uppercase word
viw u	Lowercase word
viw ~	Toggle case word

VU / gUU

Uppercase line

Vu / guu

Lowercase line

V~ / g~~

Toggle case line

gggUG

Uppercase all text

ggguG

Lowercase all text

ggg~G

Toggle case all text

Jumping

<C-o>

Go back to previous

<C-i>

Go forward

gf

Go to file in cursor

ga

Display hex, ascii value

Misc command-lines

:h

Help open help view

:edit!

Reload current file

:2,8m0

Move lines 2-8 to 0

:noh

Clear search highlights

:sort

Sort lines

:ter

Open a terminal window

:set paste

Enable Insert Paste sub-mode

:set nopaste

disable Insert Paste sub-mode

:cq

Exiting with an error
(aborting Git)

Navigating

%

Nearest/matching {[()]}

[(| [{

Previous (or {

]) |] }

Next) or }

[m

Previous method start

[M

Previous method end

Counters

<C-a>

Increase number

<C-x>

Decrease number

Tags

:tag Classname

Jump to first definition of Classname

<C-]>

Jump to definition

gl

See all definitions

<C-t>

Go back to last tag

<C-o> <C-i>

Back/forward

:tselect Classname

Find definitions of Classname

:tjump Classname

Find definitions of Classname (auto-select 1st)

Formatting

:ce 8

Center lines between 8 columns

:ri 4

Right-align lines at 4 columns

:le

Left-align lines

See :help formatting

Marks

^

Last position of cursor in insert mode

.

Last change in current buffer

''

Last exited current buffer

`0

In last file edited

''

Back to line in current buffer where jumped from

``

Back to position in current buffer where jumped from

`[

To beginning of previously changed or yanked text

`]

To end of previously changed or yanked text

`<

To beginning of last visual selection

`>

To end of last visual selection

ma

Mark this cursor position as a

`a

Jump to the cursor position a

'a

Jump to the beginning of the line with position a

d'a

Delete from current line to line of mark a

d'a

Delete from current position to position of mark a

c'a

Change text from current line to line of a

y'a

Yank text from current position to position of a

:marks

List all current marks

:delm a

Delete mark a

:delm a-d

Delete marks a, b, c, d

`:delm abc`

Delete marks a, b, c

Calculator

`<C-r> = 7*7`

Shows the result

`<C-r> = 10/2`

Shows the result

Do this in INSERT mode

Shell

`:!<shell>`

Interpret Shell Command

`:r!<shell>`

Read in output of shell

`:r!date`

Insert date

`:!!date`

Replace current line with date

Command line

`<C-r><C-w>`

Insert current word into the command line

`<C-r>"`

Paste from " register

`<C-x><C-f>`

Auto-completion of path in insert mode

Tricks

Remove duplicate lines

`:sort | %!uniq -u`

To number the lines in the file

`:%!cat -n`

Copy whole doc to clipboard

```
:%w !pbcopy          # Mac OS X
:%w !xclip -i -sel c  # GNU/Linux
:%w !xsel -i -b       # GNU/Linux
```

Also see

[Devhints](#) (devhints.io)

[Vim cheatsheet](#) (vim.rotrr.com)

[Vim documentation](#) (vimdoc.sourceforge.net)

[Interactive Vim tutorial](#) (openvim.com)

Related Cheatsheet

Emacs Cheatsl

Quick Referen

VSCode Cheat

Quick Referen

Remote Work

Quick Referen

Homebrew Cf

Quick Referen

Sed Cheatshe

Quick Referen

Awk Cheatshe

Quick Referen

PyTorch Cheat

Quick Referen

Taskset Cheat

Quick Referen

Recent Cheatsheet



QuickRef.ME

Share quick reference and cheat sheet for developers.

中文版 #Notes

