lets create a pod with ubuntu container

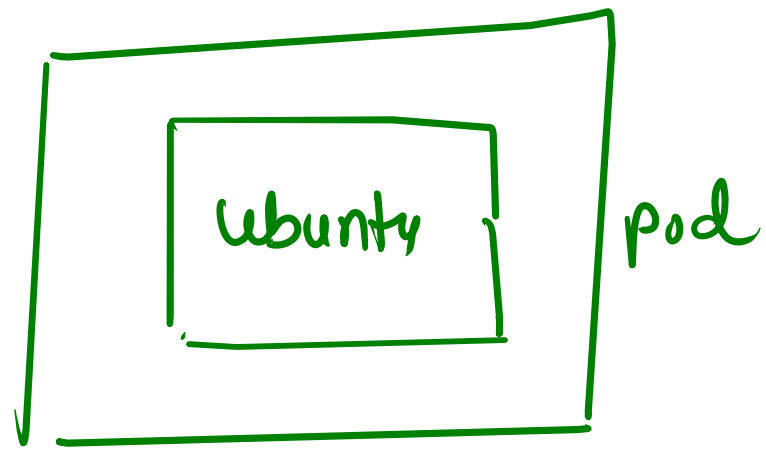

vi pod2.yml

```
# vi pod2.yml
```

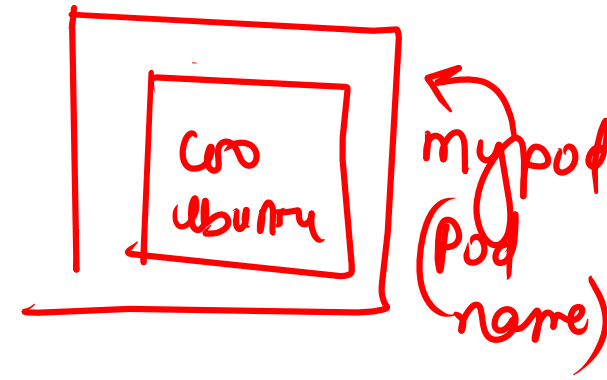

for pod as the kind apiversion is v1

The name of the pod is mypod

pod will have containers

The name of the container is c00

Base Image of container

```yaml
apiVersion: v1
kind: Pod
metadata:
  name: mypod
spec:
  containers:
    - name: c00
      image: ubuntu
      command: ["/bin/bash", "-c", "while true; do echo hello-kubernetes; sleep 10; done"]
~
```

What is the spec of the pod

In the Bash Terminal

command

It will keep printing hello-kubernetes in every 10 sec in a loop until contain is running

command which will be executed inside container

```
root@ip-172-31-6-141:/home/ubuntu# kubectl apply -f pod2.yml
pod/mypod created
root@ip-172-31-6-141:/home/ubuntu#
```

pod name

kubernetes controller

To execute

file

```
root@ip-172-31-6-141:/home/ubuntu# kubectl get pods -o wide
NAME          READY   STATUS    RESTARTS   AGE   IP               NODE
myfirstpod    1/1     Running   0          39m   192.168.9.129    ip-172-31-2-109
mypod         1/1     Running   0          68s   192.168.122.65   ip-172-31-15-78
root@ip-172-31-6-141:/home/ubuntu#
```

ip add of the pod

node in which pod is created

See logs of pods :-

To see the logs.

force

```
root@ip-172-31-6-141:/home/ubuntu# kubectl logs -f mypod
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
hello-kubernetes
```

Every 10 sec it is printing hello-kubernetes