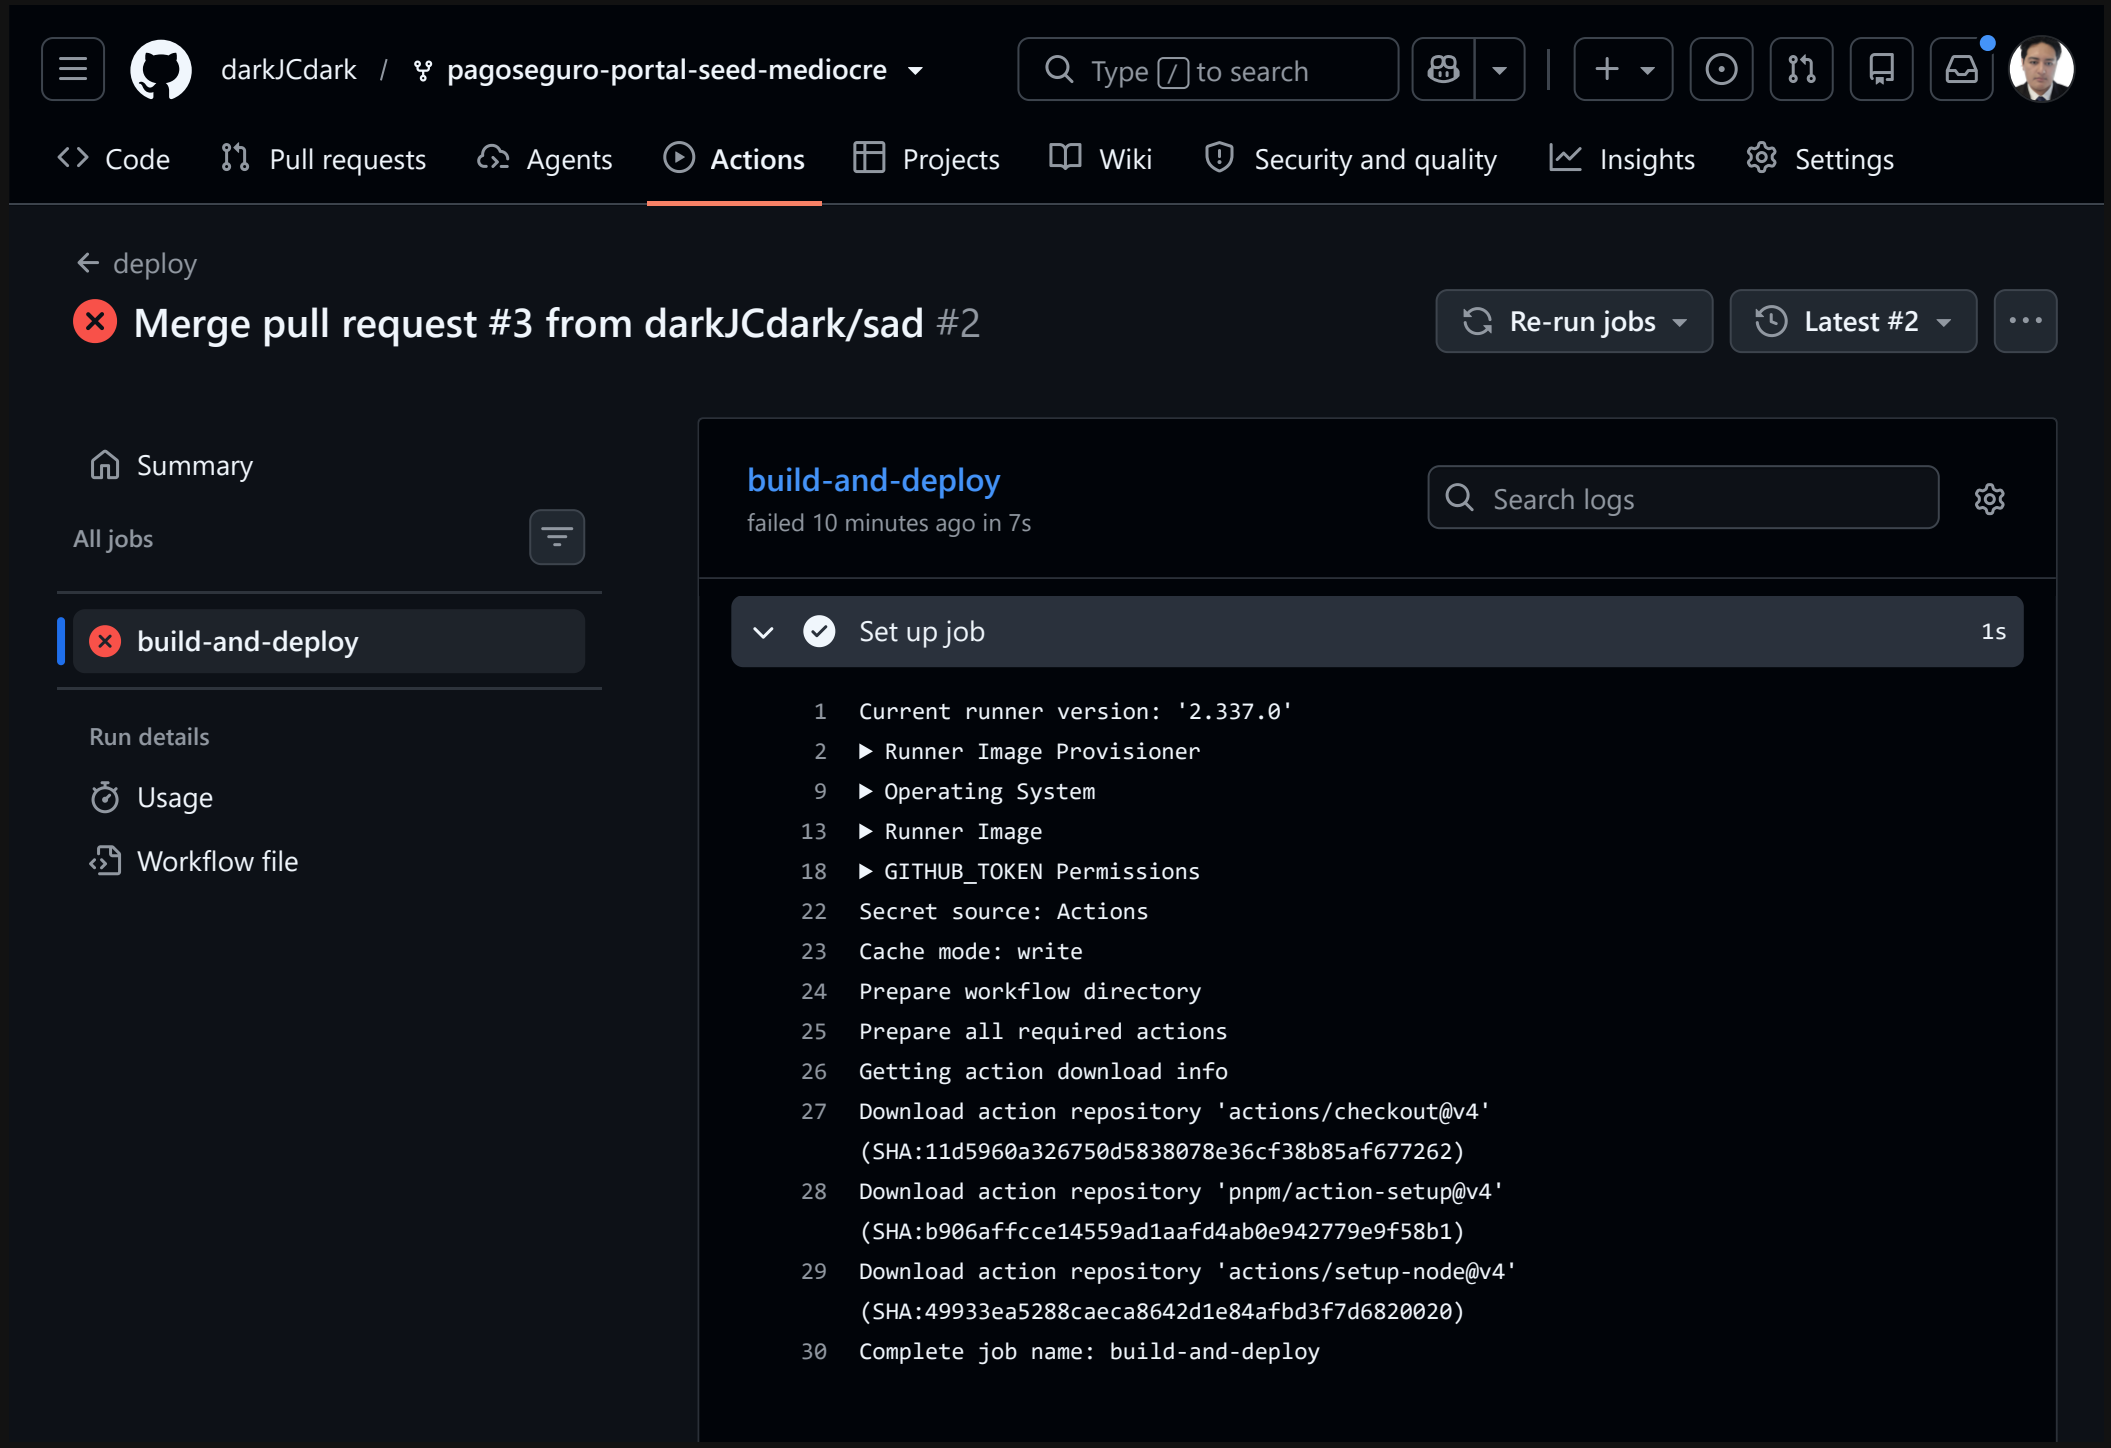

darkJCdark / pagoseguro-portal-seed-mediocre
Type / to search
Code
Pull requests
Agents
Actions
Projects
Wiki
Security and quality
Insights
Settings
deploy
Merge pull request #3 from darkJCdark/sad #2
Re-run jobs
Latest #2
Summary
All jobs
build-and-deploy
Run details
Usage
Workflow file
build-and-deploy
failed 10 minutes ago in 7s
Search logs
Set up job
1s
1 Current runner version: '2.337.0'
2 ▶ Runner Image Provisioner
9 ▶ Operating System
13 ▶ Runner Image
18 ▶ GITHUB_TOKEN Permissions
22 Secret source: Actions
23 Cache mode: write
24 Prepare workflow directory
25 Prepare all required actions
26 Getting action download info
27 Download action repository 'actions/checkout@v4'
(SHA:11d5960a326750d5838078e36cf38b85af677262)
28 Download action repository 'pnpm/action-setup@v4'
(SHA:b906affcce14559ad1aafd4ab0e942779e9f58b1)
29 Download action repository 'actions/setup-node@v4'
(SHA:49933ea5288caeca8642d1e84afbd3f7d6820020)
30 Complete job name: build-and-deploy

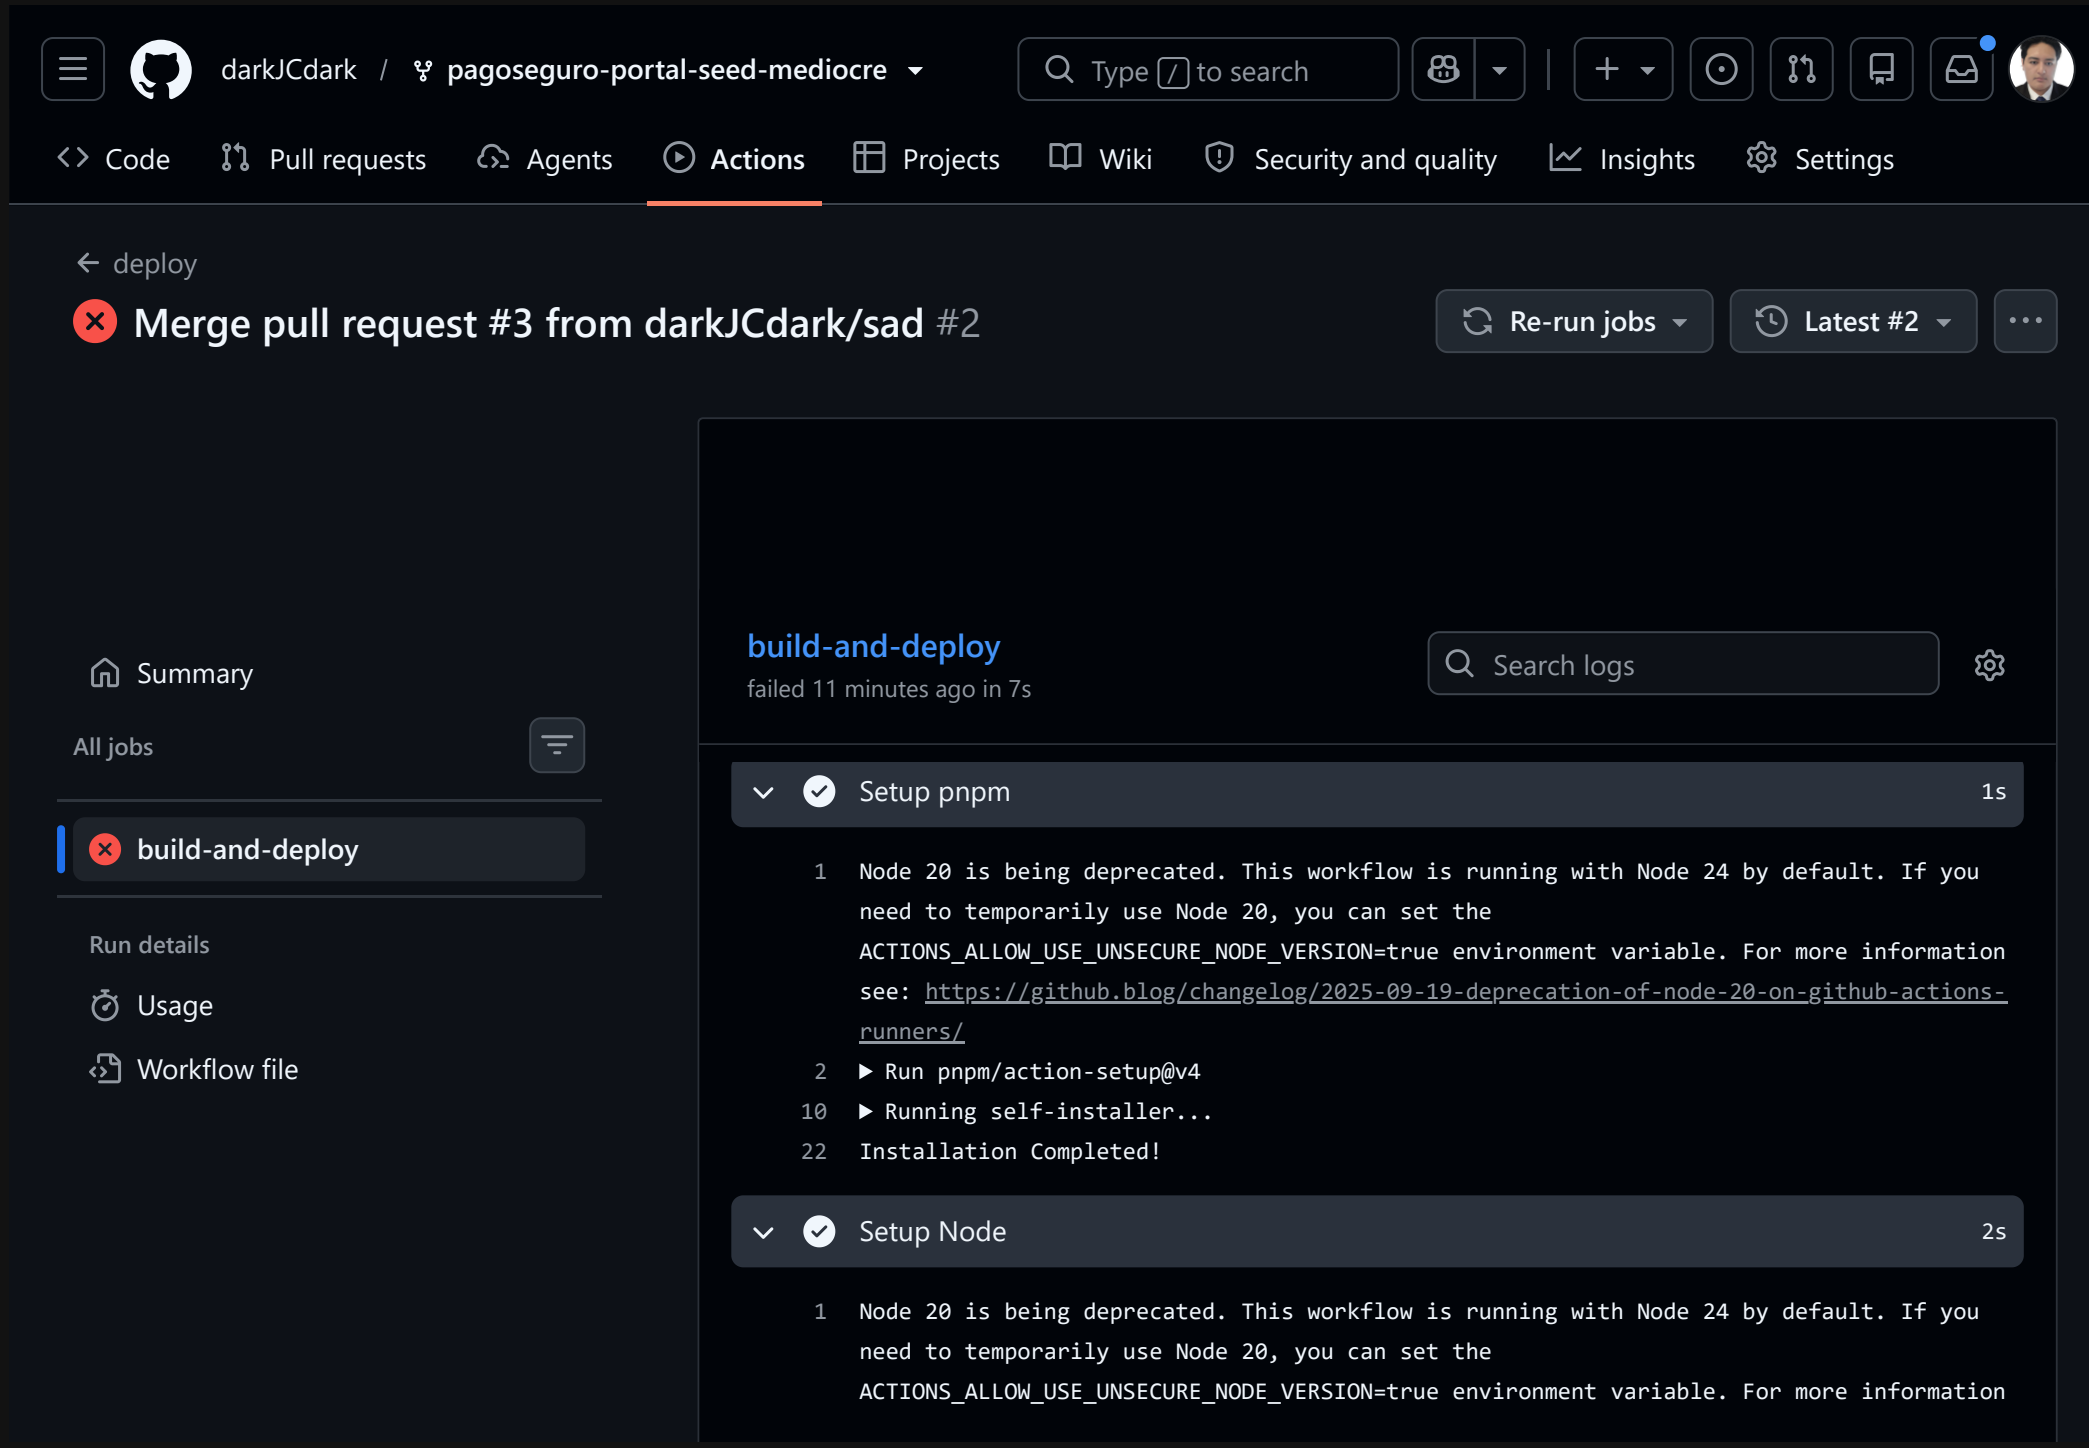
Checkout 0s

```
1  Node 20 is being deprecated. This workflow is running with Node 24 by default. If you need to temporarily use Node 20, you can set the ACTIONS_ALLOW_USE_UNSECURE_NODE_VERSION=true environment variable. For more information see: https://github.blog/changelog/2025-09-19-deprecation-of-node-20-on-github-actions-runners/
2  ▼ Run actions/checkout@v4
3    with:
4      repository: darkJCdark/pagoseguro-portal-seed-mediocre
5      token: ***
6      ssh-strict: true
7      ssh-user: git
8      persist-credentials: true
9      clean: true
10     sparse-checkout-cone-mode: true
11     fetch-depth: 1
12     fetch-tags: false
13     show-progress: true
14     lfs: false
15     submodules: false
16     set-safe-directory: true
17     allow-unsafe-pr-checkout: false
18 Syncing repository: darkJCdark/pagoseguro-portal-seed-mediocre
19 ▼ Getting Git version info
20   Working directory is '/home/runner/work/pagoseguro-portal-seed-mediocre/pagoseguro-portal-seed-mediocre'
21   /usr/bin/git version
22   git version 2.55.0
23 Temporarily overriding HOME='/home/runner/work/_temp/7927e56a-3555-4f96-9478-1573bbbb7de3' before making global git config changes
24 Adding repository directory to the temporary git global config as a safe directory
25 /usr/bin/git config --global --add safe.directory /home/runner/work/pagoseguro-portal-seed-mediocre/pagoseguro-portal-seed-mediocre
```

```
26  Deleting the contents of '/home/runner/work/pagoseguro-portal-seed-mediocre/pagoseguro-
    portal-seed-mediocre'
27  ▶ Initializing the repository
44  ▶ Disabling automatic garbage collection
46  ▶ Setting up auth
```

Setup pnpm 1s

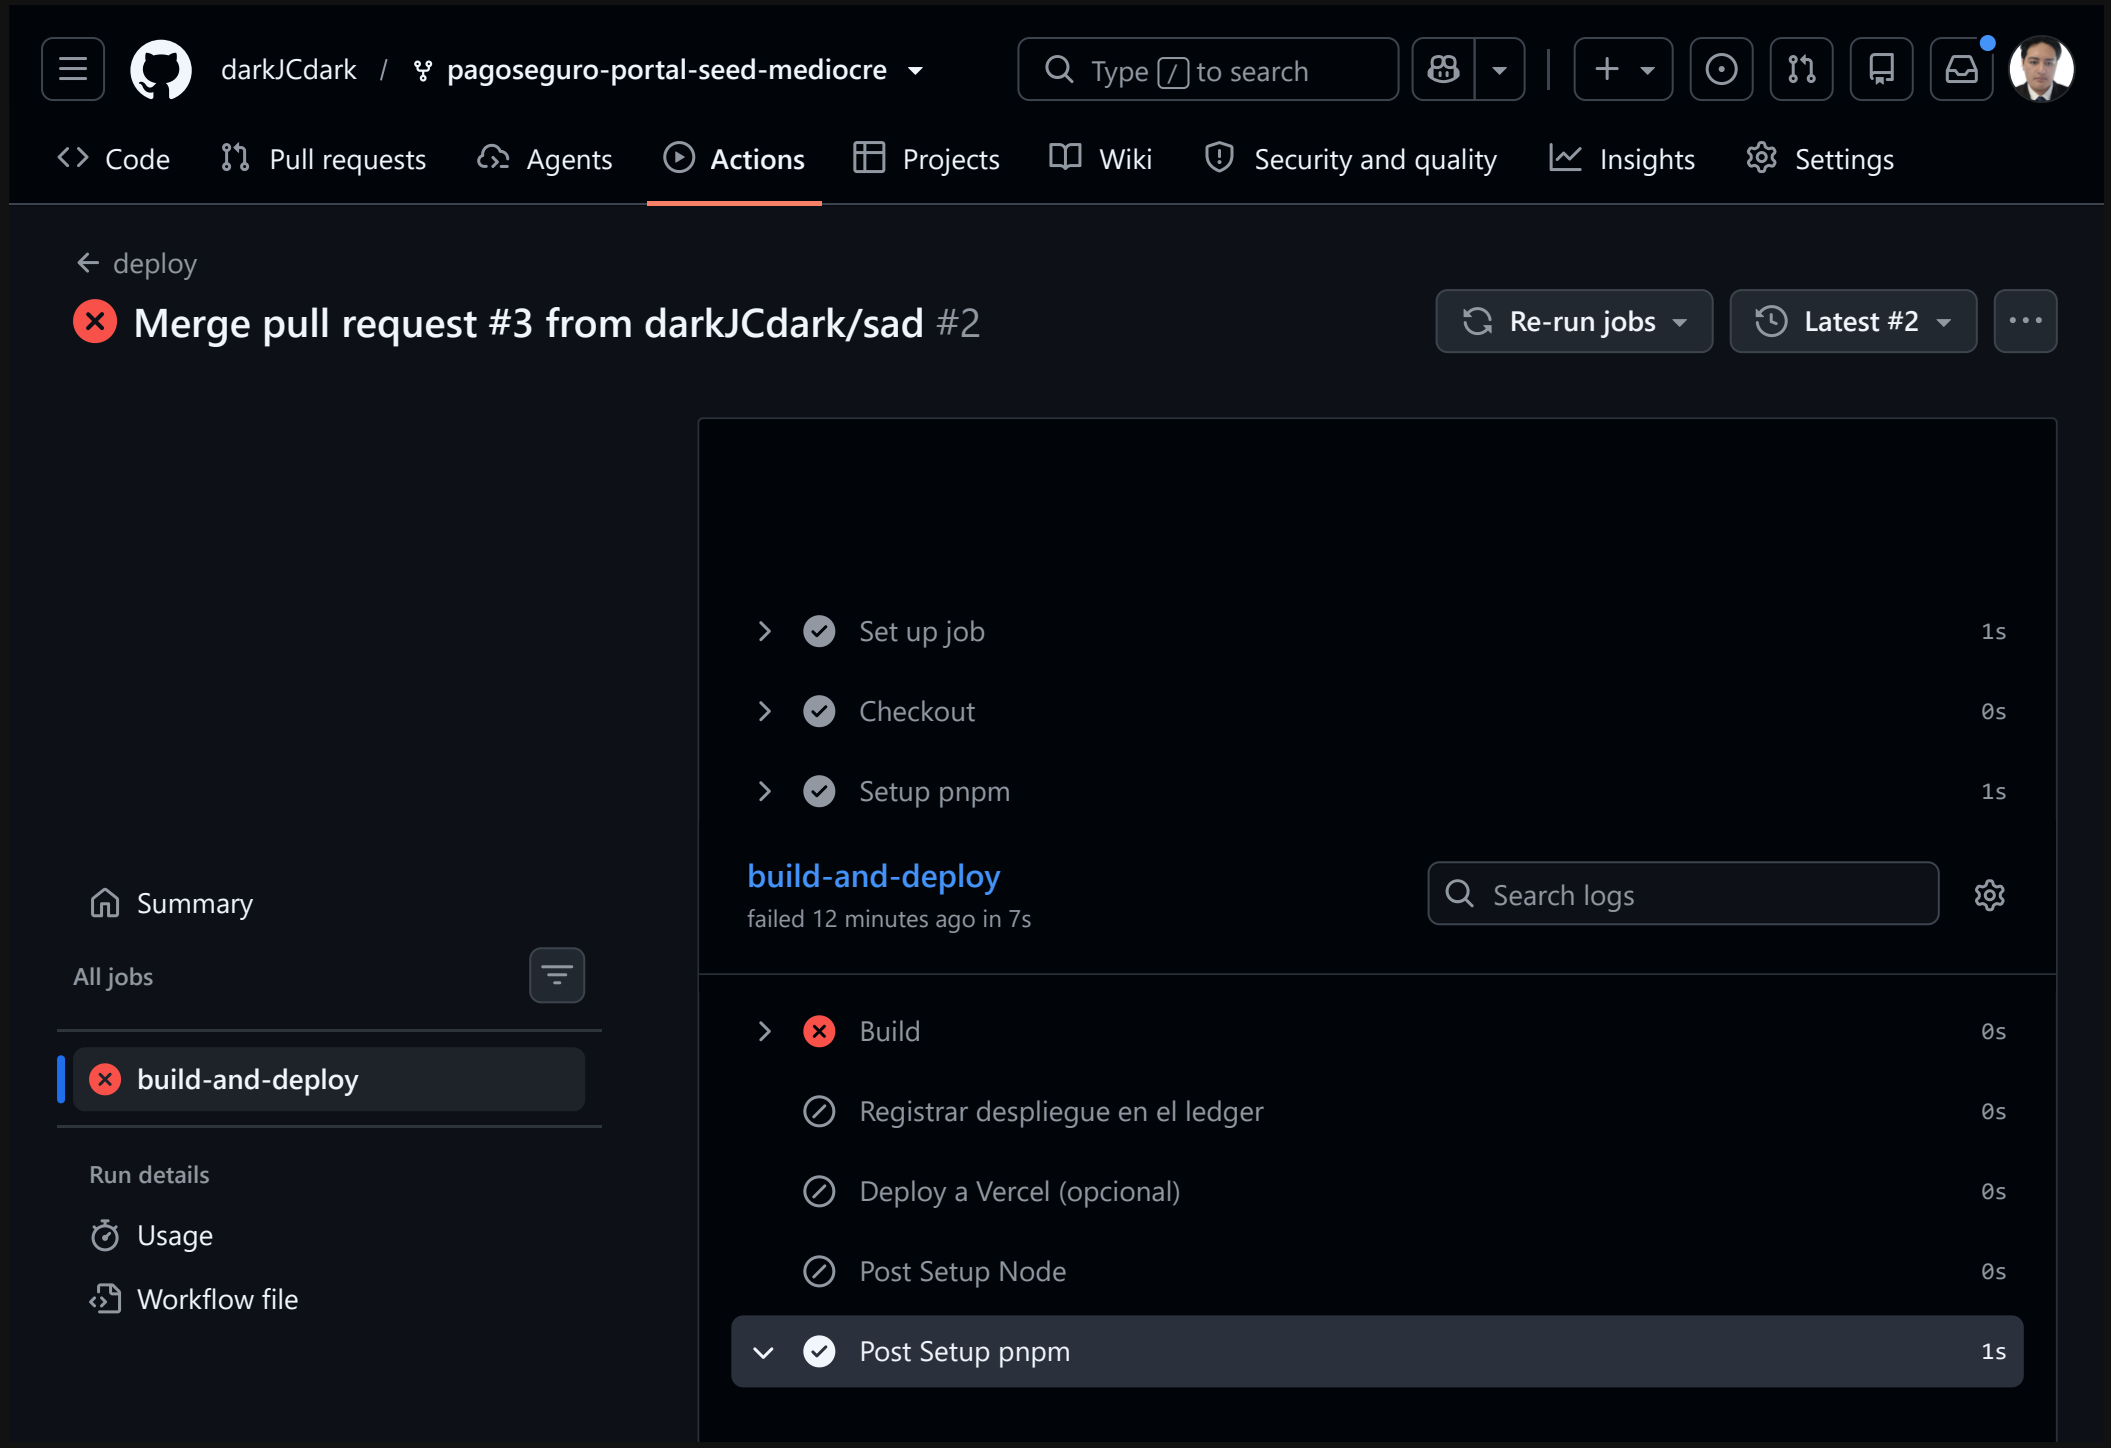
Setup Node 2s


darkJCdark / pagoseguro-portal-seed-mediocre
Type / to search
Code
Pull requests
Agents
Actions
Projects
Wiki
Security and quality
Insights
Settings
deploy
Merge pull request #3 from darkJCdark/sad #2
Re-run jobs
Latest #2
Summary
All jobs
build-and-deploy
Run details
Usage
Workflow file
build-and-deploy
failed 11 minutes ago in 7s
Search logs
Setup pnpm 1s
1 Node 20 is being deprecated. This workflow is running with Node 24 by default. If you need to temporarily use Node 20, you can set the ACTIONS_ALLOW_USE_UNSECURE_NODE_VERSION=true environment variable. For more information see: https://github.blog/changelog/2025-09-19-deprecation-of-node-20-on-github-actions-runners/
2 ▶ Run pnpm/action-setup@v4
10 ▶ Running self-installer...
22 Installation Completed!
Setup Node 2s
1 Node 20 is being deprecated. This workflow is running with Node 24 by default. If you need to temporarily use Node 20, you can set the ACTIONS_ALLOW_USE_UNSECURE_NODE_VERSION=true environment variable. For more information

```
see: https://github.blog/changelog/2025-09-19-deprecation-of-node-20-on-github-actions-runners/
▼ Run actions/setup-node@v4
  with:
    node-version-file: .nvmrc
    cache: pnpm
    always-auth: false
    check-latest: false
    token: ***
  env:
    PNPM_HOME: /home/runner/setup-pnpm/node_modules/.bin
Resolved .nvmrc as 22
Found in cache @ /opt/hostedtoolcache/node/22.23.2/x64
(node:2053) [DEP0040] DeprecationWarning: The `punycode` module is deprecated. Please use a userland alternative instead.
(Use `node --trace-deprecation ...` to show where the warning was created)
▶ Environment details
/home/runner/setup-pnpm/node_modules/.bin/pnpm store path --silent
/home/runner/setup-pnpm/node_modules/.bin/store/v10
pnpm cache is not found
```

Install (instalacion reproducible) 0s

Build 0s


darkJCdark / pagoseguro-portal-seed-mediocre
Type / to search
Code
Pull requests
Agents
Actions
Projects
Wiki
Security and quality
Insights
Settings
deploy
Merge pull request #3 from darkJCdark/sad #2
Re-run jobs
Latest #2
Set up job 1s
Checkout 0s
Setup pnpm 1s
build-and-deploy
failed 12 minutes ago in 7s
Search logs
Summary
All jobs
build-and-deploy
Run details
Usage
Workflow file
Build 0s
Registrar despliegue en el ledger 0s
Deploy a Vercel (opcional) 0s
Post Setup Node 0s
Post Setup pnpm 1s

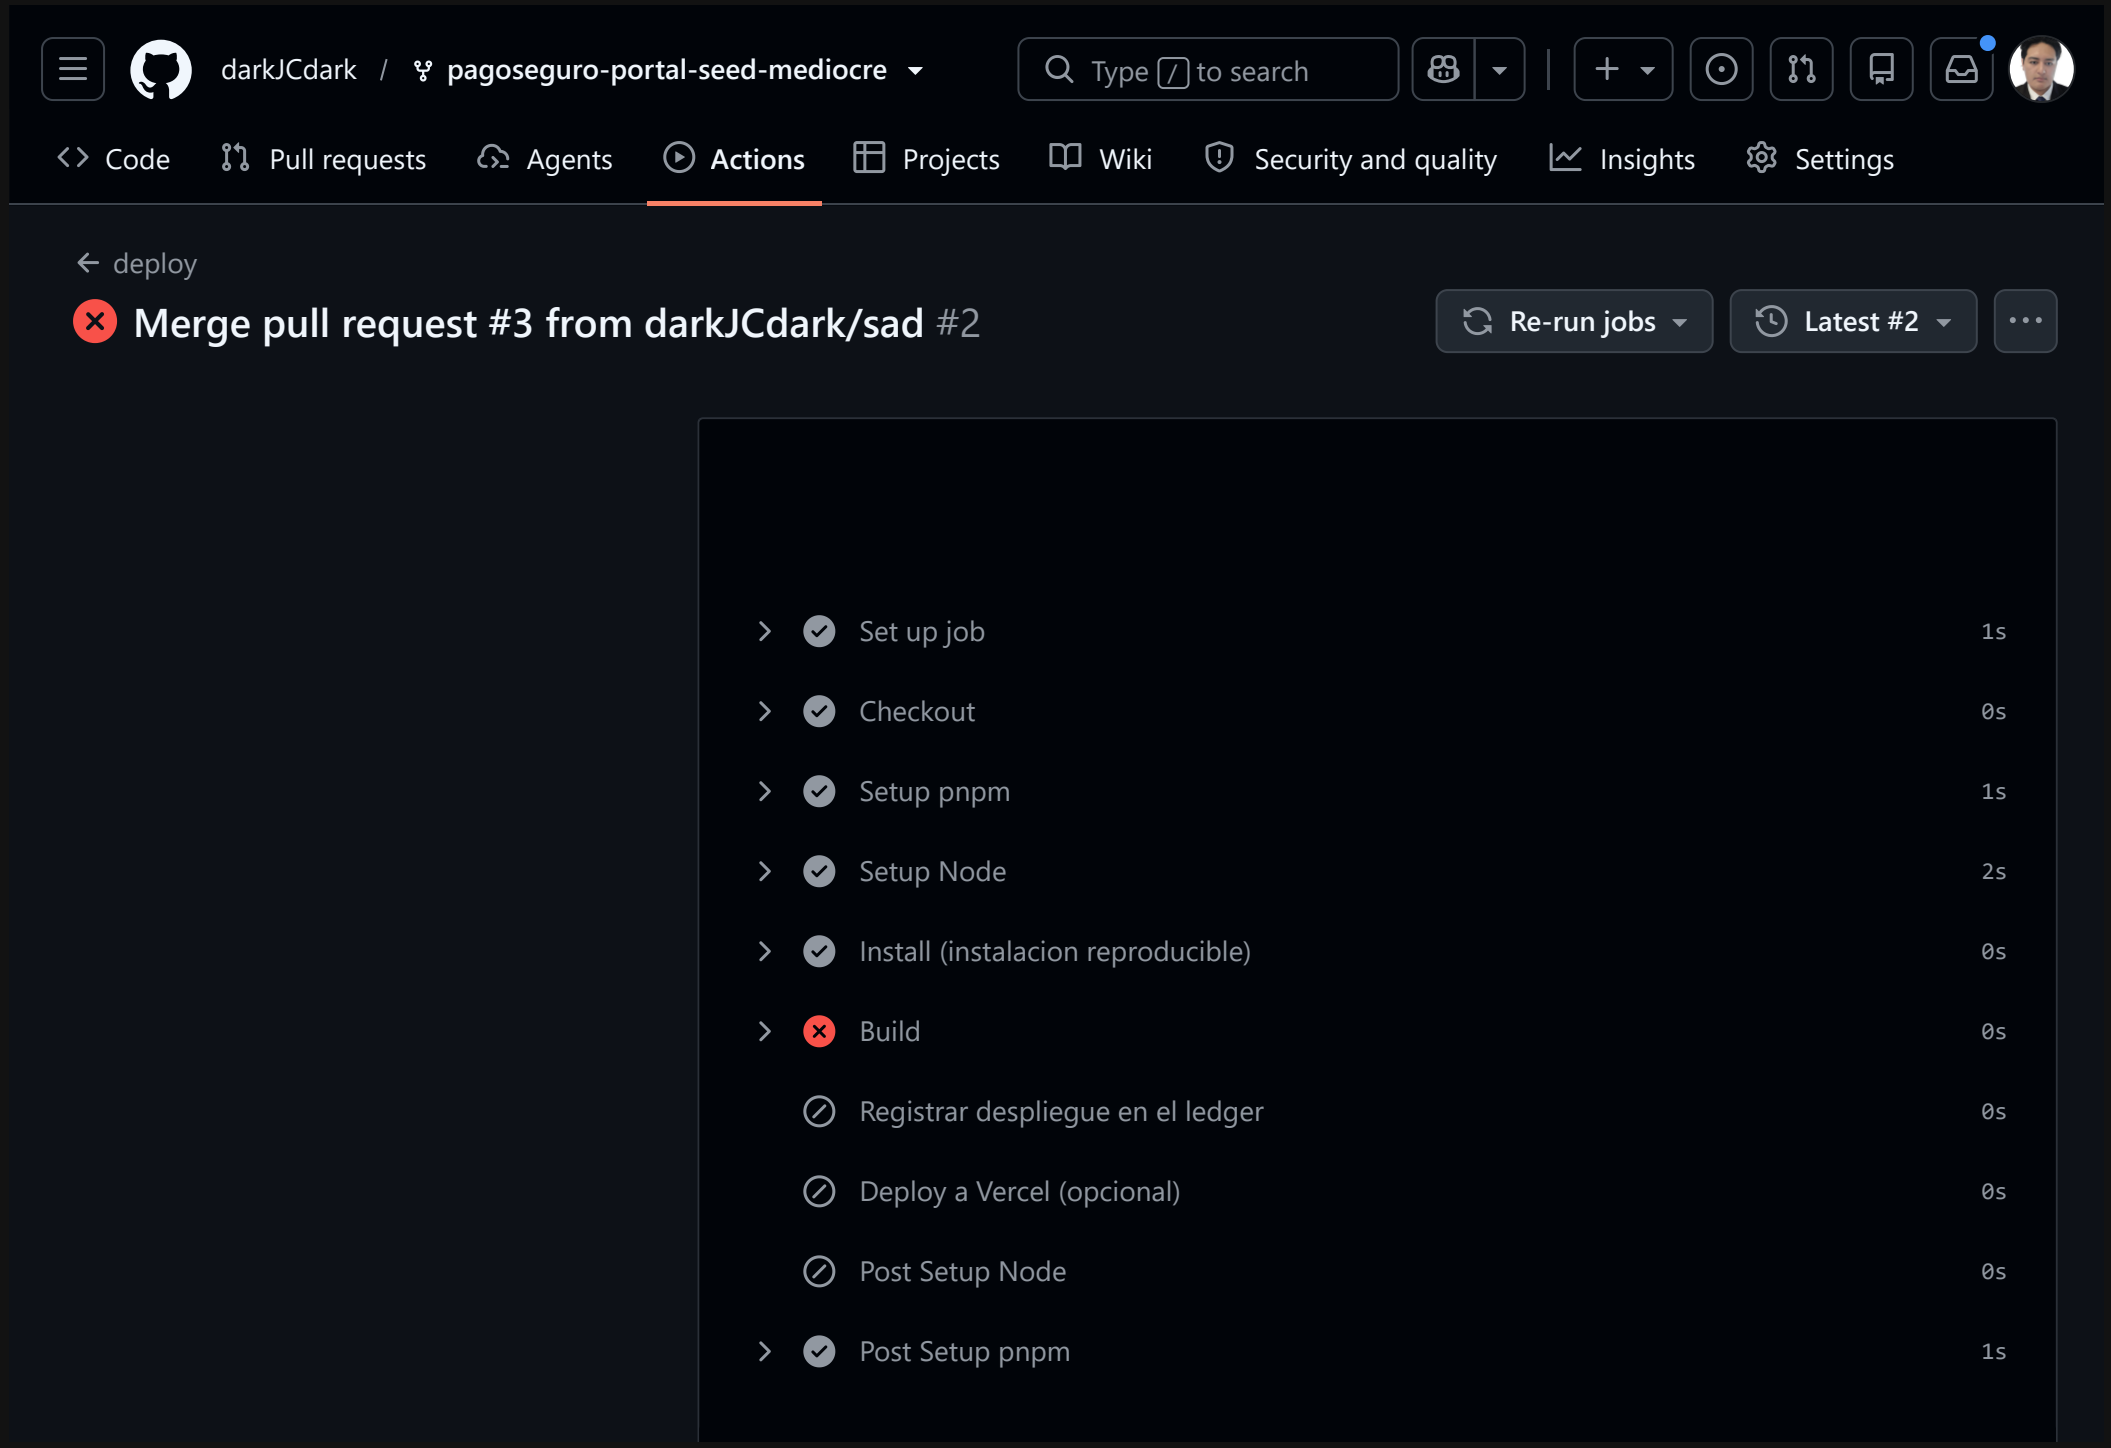
```
1  Node 20 is being deprecated. This workflow is running with Node 24 by default. If you need to temporarily use Node 20, you can set the ACTIONS_ALLOW_USE_UNSECURE_NODE_VERSION=true environment variable. For more information see: https://github.blog/changelog/2025-09-19-deprecation-of-node-20-on-github-actions-runners/
2  Post job cleanup.
3  Pruning is unnecessary.
```

Post Checkout 0s

```
1  Node 20 is being deprecated. This workflow is running with Node 24 by default. If you need to temporarily use Node 20, you can set the ACTIONS_ALLOW_USE_UNSECURE_NODE_VERSION=true environment variable. For more information see: https://github.blog/changelog/2025-09-19-deprecation-of-node-20-on-github-actions-runners/
2  Post job cleanup.
3  /usr/bin/git version
4  git version 2.55.0
5  Temporarily overriding HOME='/home/runner/work/_temp/25ef00ca-2b57-4df3-92c5-546a02955ebb' before making global git config changes
6  Adding repository directory to the temporary git global config as a safe directory
7  /usr/bin/git config --global --add safe.directory /home/runner/work/pagoseguro-portal-seed-mediocre/pagoseguro-portal-seed-mediocre
8  /usr/bin/git config --local --name-only --get-regexp core\.sshCommand
9  /usr/bin/git submodule foreach --recursive sh -c "git config --local --name-only --get-regexp 'core\.sshCommand' && git config --local --unset-all 'core.sshCommand' || :"
10 /usr/bin/git config --local --name-only --get-regexp http\.https\:\/\/github\.com\/\.extraheader
11 http.https://github.com/.extraheader
12 /usr/bin/git config --local --unset-all http.https://github.com/.extraheader
13 /usr/bin/git submodule foreach --recursive sh -c "git config --local --name-only --get-regexp 'http\.https\:\/\/github\.com\/\.extraheader' && git config --local --unset-all 'http.https://github.com/.extraheader' || :"
14 /usr/bin/git config --local --name-only --get-regexp ^includeIf\.gitdir:
```

```
15  /usr/bin/git submodule foreach --recursive git config --local --show-origin --name-only
    --get-regexp remote.origin.url
```

Complete job 0s


darkJCdark / pagoseguro-portal-seed-mediocre
Type / to search
Code
Pull requests
Agents
Actions
Projects
Wiki
Security and quality
Insights
Settings
deploy
Merge pull request #3 from darkJCdark/sad #2
Re-run jobs
Latest #2
Set up job 1s
Checkout 0s
Setup pnpm 1s
Setup Node 2s
Install (instalacion reproducible) 0s
Build 0s
Registrar despliegue en el ledger 0s
Deploy a Vercel (opcional) 0s
Post Setup Node 0s
Post Setup pnpm 1s

Summary

All jobs

build-and-deploy

Run details

Usage

Workflow file

build-and-deploy

failed 13 minutes ago in 7s

Search logs

need to temporarily use Node 20, you can set the ACTIONS_ALLOW_USE_UNSECURE_NODE_VERSION=true environment variable. For more information see: https://github.blog/changelog/2025-09-19-deprecation-of-node-20-on-github-actions-runners/

```
2  Post job cleanup.
3  /usr/bin/git version
4  git version 2.55.0
5  Temporarily overriding HOME='/home/runner/work/_temp/25ef00ca-2b57-4df3-92c5-546a02955ebb' before making global git config changes
6  Adding repository directory to the temporary git global config as a safe directory
7  /usr/bin/git config --global --add safe.directory /home/runner/work/pagoseguro-portal-seed-mediocre/pagoseguro-portal-seed-mediocre
8  /usr/bin/git config --local --name-only --get-regexp core\.sshCommand
9  /usr/bin/git submodule foreach --recursive sh -c "git config --local --name-only --get-regexp 'core\.sshCommand' && git config --local --unset-all 'core.sshCommand' || :"
10 /usr/bin/git config --local --name-only --get-regexp http\.https\:\/\/github\.com\/\.extraheader
11 http.https://github.com/.extraheader
12 /usr/bin/git config --local --unset-all http.https://github.com/.extraheader
13 /usr/bin/git submodule foreach --recursive sh -c "git config --local --name-only --get-regexp 'http\.https\:\/\/github\.com\/\.extraheader' && git config --local --unset-all 'http.https://github.com/.extraheader' || :"
14 /usr/bin/git config --local --name-only --get-regexp ^includeIf\.gitdir:
15 /usr/bin/git submodule foreach --recursive git config --local --show-origin --name-only --get-regexp remote.origin.url
```

Complete job 0s

```
1  Cleaning up orphan processes
2  Warning: Node.js 20 is deprecated. The following actions target Node.js 20 but are being forced to run on Node.js 24: actions/checkout@v4, actions/setup-node@v4, pnpm/action-
```

```
setup@v4. For more information see: https://github.blog/changelog/2025-09-19-
deprecation-of-node-20-on-github-actions-runners/
```