

# Home

## GDS4AE - Geographic Data Science for Applied Economists

- [Dani Arribas-Bel \[@darribas\]](#).
- [Diego Puga \[@ProfDiegoPuga\]](#).

### Note

A PDF version of this course is available for download [here](#)

## Contact

### Dani Arribas-Bel - [D.Arribas-Bel \[at\] liverpool.ac.uk](mailto:D.Arribas-Bel@liverpool.ac.uk)

Senior Lecturer in Geographic Data Science  
Office 508, Roxby Building,  
University of Liverpool - 74 Bedford St S,  
Liverpool, L69 7ZT,  
United Kingdom.

### Diego Puga - [diego.puga \[at\] cemfi.es](mailto:diego.puga@cemfi.es)

Professor  
CEMFI,  
Casado del Alisal 5,  
28014 Madrid,  
Spain.

## Citation

If you use materials from this resource in your own work, we recommend the following citation:

```
@article{darribas_gds_course,
  author = {Dani Arribas-Bel and Diego Puga},
  title = {Geographic Data Science for Applied Economists},
  year = 2021,
  annote = {\url{https://darribas.org/gds4ae}}
}
```

## Overview

This resource provides an introduction to Geographic Data Science for applied economists using Python. It has been designed to be delivered within 15 hours of teaching, split into ten sessions of 1.5h each.

## How to follow along

[GDS4AE](#) is best followed if you can interactively tinker with its content. To do that, you will need two things:

1. A computer set up with the Jupyter Lab environment and all the required libraries (please see the [Software stack](#) part in the [Infrastructure](#) section for instructions)
2. A local copy of the materials that you can run on your own computer (see the [repository](#) section in the [Infrastructure](#) section for instructions)

Blocks have different components:

- *Ahead of time...*: materials to go on your own ahead of the live session
- *Hands-on coding*: content for the live session
- *Next steps*: a few pointers to continue your journey on the area the block covers

## Content


The structure of content is divided in nine blocks:

- [Introduction](#): get familiar with the computational environment of modern data science
- [Spatial Data](#): what do spatial data look like in Python?
- [Geovisualisation](#): make (good) data maps
- [Spatial Feature Engineering \(Part I and Part II\)](#): augment and massage your data using Geography before you feed them into your model
- [OpenStreetMap](#): acquire data from the largest geo-table in the world
- [Spatial Networks](#): understand and work with spatial graphs
- [Transport Costs](#): “getting there” doesn’t always cost the same

Each block has its own section and is designed to be delivered in 1.5 hours approximately. The content of some of these blocks relies on external resources, all of them freely available. When that is the case, enough detail is provided in the to understand how additional material fits in.

## Why Python?

There are several reasons why we have made this choice. Many of them are summarised nicely in [this article by The Economist](#) (paywalled).:w

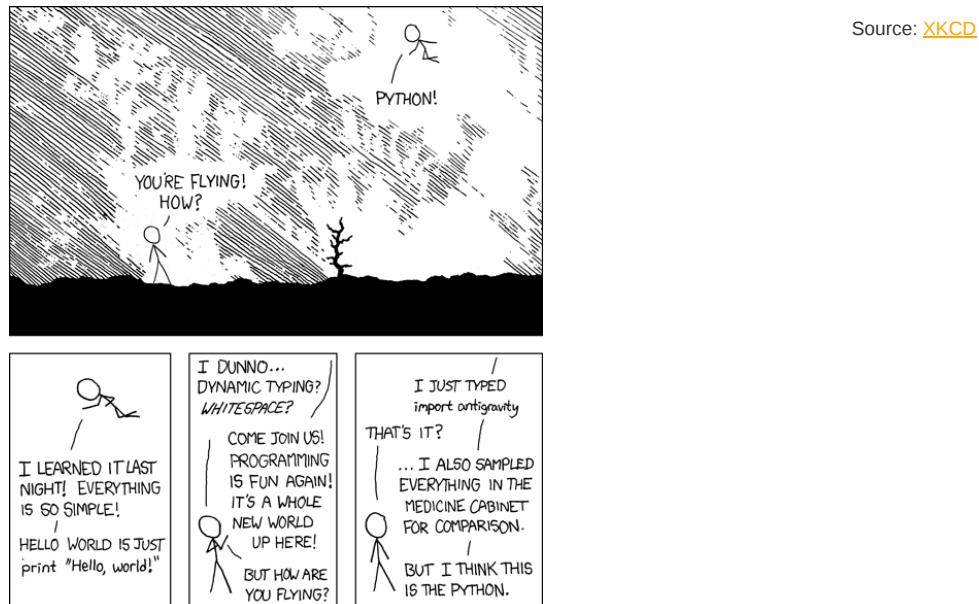

## Data

All the datasets used in this resource is freely available. Some of them have been developed in the context of the resource, others are borrowed from other resources. A full list of the datasets used, together with links to the original source, or to reproducible code to generate the data used is available in the [Datasets](#) page.

## License

The materials in this course are published under a [Creative Commons BY-SA 4.0](#) license. This grants you the right to use them freely and (re-)distribute them so long as you give credit to the original creators (see the [Home page](#) for a suggested citation) and license derivative work under the same license.

## Infrastructure

This page covers a few technical aspects on how the course is built, kept up to date, and how you can create a computational environment to run all the code it includes.

### Software stack

This course is best followed if you can not only read its content but also interact with its code and even branch out to write your own code and play on your own. For that, you will need to have installed on your computer a series of interconnected software packages; this is what we call a *stack*.

Instructions on how to install a software stack that allows you to run the materials of this course depend on the operating system you are using. Detailed guides are available for the main systems on the following resource, provided by the [Geographic Data Science Lab](#):



### Github repository

All the materials for this course and this website are available on the following Github repository:



If you are interested, you can download a compressed [.zip](#) file with the most up-to-date version of all the materials, including the HTML for this website at:

Icon made by [Freepik](#) from [www.flaticon.com](#)



### Containerised backend

The course is developed, built and tested using the [gds\\_env](#), a containerised platform for Geographic Data Science. You can read more about the [gds\\_env](#) project at:

## Binder

[Binder](#) is a service that allows you to run scientific projects in the cloud for free. Binder can spin up “ephemeral” instances that allow you to run code on the browser without any local setup. It is possible to run the course on Binder by clicking on the button below:

 launch binder

### Warning

It is important to note Binder instances are *ephemeral* in the sense that the data and content created in a session is **NOT** saved anywhere and is deleted as soon as the browser tab is closed.

Binder is also the backend this website relies on when you click on the rocket icon () on a page with code. Remember, you can play with the code interactively but, once you close the tab, all the changes are lost.

## Introduction

### Geographic Data Science

#### Note

This section is adapted from [Block A](#) of the GDS Course [[AB19](#)].


Before we learn *how* to do Geographic Data Science or even *why* you would want to do it, let's start with *what* it is. We will rely on two resources:

- First, in this video, Dani Arribas-Bel covers the building blocks at the First [Spatial Data Science Conference](#), organised by [CARTO](#)



- Second, *Geographic Data Science*, by Alex Singleton and Dani Arribas-Bel [[SAB19](#)]

#### URL

 geographical analysis

Geographical Analysis (2021) 53, 61–75

Special Issue

**Geographic Data Science**

Alex Singleton , Daniel Arribas-Bel 

Department of Geography and Planning, University of Liverpool, Liverpool, L69 3ZT, U.K.

## The computational stack

One of the core learning outcomes of this course is to get familiar with the modern computational environment that is used across industry and science to “do” Data Science. In this section, we will learn about ecosystem of concepts and tools that come together to provide the building blocks of much computational work in data science these days.

The screenshot shows the header of The Atlantic website with a search bar and navigation links for 'Popular' and 'Latest'. The main title of the article is 'Genomic analysis of elongated skulls demonstrates strong female-biased immigration in early Medieval Bavaria'. Below the title is a large image of flames. The article text discusses ancient DNA analysis and includes a figure showing a capture array. At the bottom right is a credit to PNAS/Richard Goerg.

- *Ten simple rules for writing and sharing computational analyses in Jupyter Notebooks*, by Adam Rule et al. [RBZ+19]



## EDITORIAL Ten simple rules for writing and sharing computational analyses in Jupyter Notebooks

Adam Rule<sup>1</sup>, Amanda Birmingham<sup>2</sup>, Cristal Zuniga<sup>3</sup>, Ilkay Altintas<sup>4</sup>, Shih-Cheng Huang<sup>4</sup>, Rob Knight<sup>5</sup>, Niema Moshiri<sup>6</sup>, Mai H. Nguyen<sup>4</sup>, Brin Rosenthal<sup>2</sup>, Fernando Pérez<sup>7</sup>, Peter W. Rose<sup>4,8</sup>

<sup>1</sup> Design Lab, UC San Diego, La Jolla, California, United States of America, <sup>2</sup> Center for Computational Biology and Bioinformatics, UC San Diego, La Jolla, California, United States of America, <sup>3</sup> Department of Psychology, UC San Diego, La Jolla, California, United States of America, <sup>4</sup> Data Science Hub, San Diego Supercomputer Center, UC San Diego, La Jolla, California, United States of America, <sup>5</sup> Departments of Bioengineering, Computer Science and Engineering, and Center for Microbiome Innovation, UC San Diego, La Jolla, California, United States of America, <sup>6</sup> Bioinformatics and Systems Biology Graduate Program, UC San Diego, La Jolla, California, United States of America, <sup>7</sup> Department of Statistics and Berkeley Institute for Data Science, UC Berkeley, and Lawrence Berkeley National Laboratory, Berkeley, California, United States of America

- *GIS and Computational Notebooks*, by Geoff Boeing and Dani Arribas-Bel [BAB20]


The screenshot shows a web browser with the URL https://gisbook.usgs.org/book-topics/gis-and-computational-notebooks. The page has a header with the University Consortium for Geographic Information Science logo and navigation links for 'ABOUT', 'TOPICS', and 'CONTACT US'. The main content is titled 'CP-27 - GIS and Computational Notebooks'. It includes a sidebar with links for 'Topic Description', 'References', 'Author and citation info', 'Instructional Resources', 'Additional Resources', 'Related Topics', and 'Keywords'. The main text discusses the benefits of using notebooks for GIS research and provides an example of a notebook workflow. At the bottom is an 'Author and Citation Info' section with the authors' names and the book's details.

Now we are familiar with the conceptual pillars on top of which we will be working, let's switch gears into a more practical perspective. The following two clips cover the basics of Jupyter Lab, the frontend that glues all the pieces together, and Jupyter Notebooks, the file format, application, and protocol that allows us to record, store and share workflows.


## Note

The clips are sourced from [Block A](#) of the GDS Course [[AB19](#)]

## Jupyter Lab

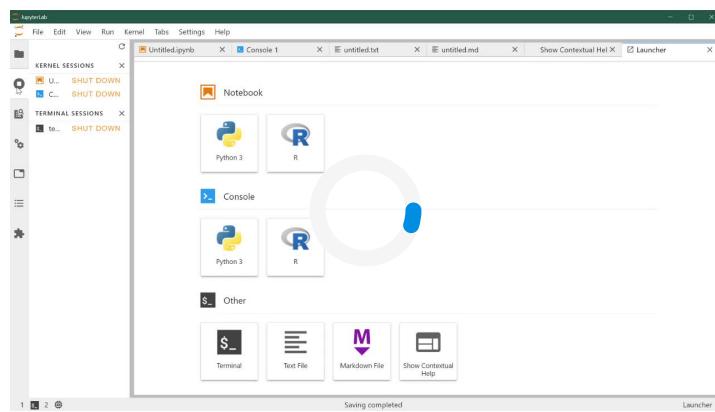

## Jupyter Notebooks

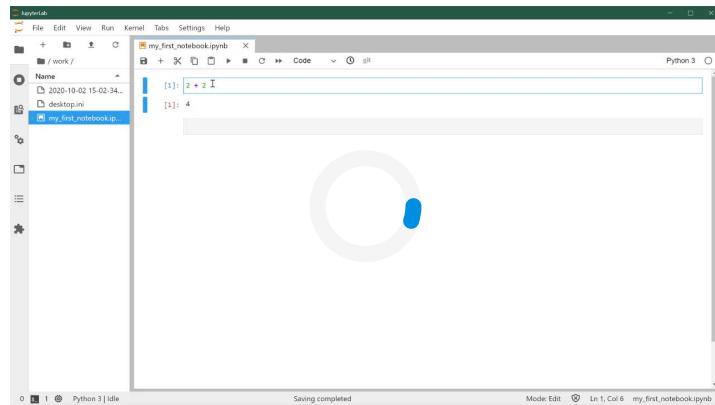

## Spatial Data

### Ahead of time...

This block is all about understanding spatial data, both conceptually and practically. Before your fingers get on the keyboard, the following readings will help you get going and familiar with core ideas:

- [Chapter 1](#) of the GDS Book [[RABWng](#)], which provides a conceptual overview of representing Geography in data
- [Chapter 3](#) of the GDS Book [[RABWng](#)], a sister chapter with a more applied perspective on how concepts are implemented in computer data structures

Additionally, parts of this block are based and source from [Block C](#) in the GDS Course [[AB19](#)].

### Hands-on coding

(Geographic) tables

```
import pandas
import geopandas
import xarray, rioxarray
import contextily
import matplotlib.pyplot as plt
```

Points

Data

If you want to read more about the data sources behind this dataset, head to the [Datasets](#) section

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path `../data/madrid_abb.gpkg`:

```
pts = geopandas.read_file("../data/madrid_abb.gpkg")
```

### Point geometries from columns

```
pts.info()
```

```
<class 'geopandas.geodataframe.GeoDataFrame'>
RangeIndex: 18399 entries, 0 to 18398
Data columns (total 16 columns):
 #   Column      Non-Null Count  Dtype  
--- 
 0   price       18399 non-null   object 
 1   price_usd   18399 non-null   float64
 2   log1p_price_usd  18399 non-null   float64
 3   accommodates 18399 non-null   int64  
 4   bathrooms    18399 non-null   object 
 5   bedrooms    18399 non-null   float64
 6   beds        18399 non-null   float64
 7   neighbourhood 18399 non-null   object 
 8   room_type   18399 non-null   object 
 9   property_type 18399 non-null   object 
 10  WiFi        18399 non-null   object 
 11  Coffee      18399 non-null   object 
 12  Gym         18399 non-null   object 
 13  Parking     18399 non-null   object 
 14  km_to_retiro 18399 non-null   float64
 15  geometry    18399 non-null   geometry
dtypes: float64(5), geometry(1), int64(1), object(9)
memory usage: 2.2+ MB
```

```
pts.head()
```

	price	price_usd	log1p_price_usd	accommodates	bathrooms	bedro
0	\$60.00	60.0	4.110874	2	1 shared bath	
1	\$31.00	31.0	3.465736	1	1 bath	
2	\$60.00	60.0	4.110874	6	2 baths	
3	\$115.00	115.0	4.753590	4	1.5 baths	
4	\$26.00	26.0	3.295837	1	1 private bath	

## Lines

[Local files](#) [Online read](#)

Assuming you have the file locally on the path `../data/`:

```
pts = geopandas.read_file("../data/arturo_streets.gpkg")
```

```
lines.info()
```

```
<class 'geopandas.geodataframe.GeoDataFrame'>
RangeIndex: 66499 entries, 0 to 66498
Data columns (total 7 columns):
 #   Column      Non-Null Count  Dtype  
--- 
 0   OGC_FID    66499 non-null   object  
 1   dm_id       66499 non-null   object  
 2   dist_barri  66483 non-null   object  
 3   X           66499 non-null   float64 
 4   Y           66499 non-null   float64 
 5   value        5465  non-null   float64 
 6   geometry    66499 non-null   geometry
dtypes: float64(3), geometry(1), object(3)
memory usage: 3.6+ MB
```

```
lines.loc[0, "geometry"]
```



## Polygons

```
<iPython.display.GeoJSON object>
```

[Local files](#) [Online read](#)

Assuming you have the file locally on the path `../data/`:

```
polys = geopandas.read_file("../data/neighbourhoods.geojson")
```

```
polys.head()
```

	neighbourhood	neighbourhood_group	geometry
0	Palacio	Centro	MULTIPOLYGON (((-3.70584 40.42030, -3.70625 40...))
1	Embajadores	Centro	MULTIPOLYGON (((-3.70384 40.41432, -3.70277 40...))
2	Cortes	Centro	MULTIPOLYGON (((-3.69796 40.41929, -3.69645 40...))
3	Justicia	Centro	MULTIPOLYGON (((-3.69546 40.41898, -3.69645 40...))
4	Universidad	Centro	MULTIPOLYGON (((-3.70107 40.42134, -3.70155 40...))

```
polys.query("neighbourhood_group == 'Retiro'")
```

	neighbourhood	neighbourhood_group	geometry
13	Pacífico	Retiro	MULTIPOLYGON (((-3.67015 40.40654, -3.67017 40...))
14	Adelfas	Retiro	MULTIPOLYGON (((-3.67283 40.39468, -3.67343 40...))
15	Estrella	Retiro	MULTIPOLYGON (((-3.66506 40.40647, -3.66512 40...))
16	Ibiza	Retiro	MULTIPOLYGON (((-3.66916 40.41796, -3.66927 40...))
17	Jerónimos	Retiro	MULTIPOLYGON (((-3.67874 40.40751, -3.67992 40...))
18	Niño Jesús	Retiro	MULTIPOLYGON (((-3.66994 40.40850, -3.67012 40...))

```
polys.neighbourhood_group.unique()
```

```
array(['Centro', 'Arganzuela', 'Retiro', 'Salamanca', 'Chamartín',  
'Moratalaz', 'Tetuán', 'Chamberí', 'Fuencarral - El Pardo',  
'Moncloa - Aravaca', 'Puente de Vallecas', 'Latina', 'Carabanchel',  
'Usera', 'Ciudad Lineal', 'Hortaleza', 'Villaverde',  
'Villa de Vallecas', 'Vicálvaro', 'San Blas - Canillejas',  
'Barajas'], dtype=object)
```

## Surfaces

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path [..../data/](#):

```
sat = xarray.open_rasterio("../data/madrid_scene_s2_10_tc.tif")
```

```
sat
```

xarray.DataArray (**band**: 3, **y**: 3681, **x**: 3129)

34553547 values with dtype=uint8]

▼ Coordinates:

<b>band</b>	(band)	int64 1 2 3	
<b>y</b>	(y)	float64 4.499e+06 4.499e+06 ... 4.463e+06	
<b>x</b>	(x)	float64 4.248e+05 4.248e+05 ... 4.56e+05	
<b>spatial_ref</b>	()	int64 0	

▼ Attributes:

scale\_factor : 1.0  
add\_offset : 0.0  
grid\_mappi... spatial\_ref

```
sat.sel(band=1)
```

```
xarray.DataArray (y: 3681, x: 3129)
```

```
  [11517849 values with dtype=uint8]
```

▼ Coordinates:

band	(0)	int64	1
y	(y)	float64	4.499e+06 4.499e+06 ... 4.463e+06
x	(x)	float64	4.248e+05 4.248e+05 ... 4.56e+05
spatial_ref	(0)	int64	0



▼ Attributes:

scale_factor	:	1.0
add_offset	:	0.0
grid_mappi...		spatial_ref

```
sat.sel(  
    x=slice(430000, 440000), # x is ascending  
    y=slice(4480000, 4470000) # y is descending  
)
```

```
xarray.DataArray (band: 3, y: 1000, x: 1000)
```

```
  [3000000 values with dtype=uint8]
```

▼ Coordinates:

band	(band)	int64	1 2 3
y	(y)	float64	4.48e+06 4.48e+06 ... 4.47e+06
x	(x)	float64	4.3e+05 4.3e+05 ... 4.4e+05 4.4e+05
spatial_ref	(0)	int64	0



▼ Attributes:

scale_factor	:	1.0
add_offset	:	0.0
grid_mappi...		spatial_ref

## Visualisation

```
polys.plot()
```

```
<AxesSubplot:>
```



```
ax = lines.plot(linewidth=0.1, color="black")  
contextily.add_basemap(ax, crs=lines.crs)
```



```
ax = pts.plot(color="red", figsize=(12, 12), markersize=0.1)  
contextily.add_basemap(  
    ax,  
    crs = pts.crs,  
    source = contextily.providers.CartoDB.DarkMatter  
)
```

See more basemap options [here](#).



```
sat.plot.imshow(figsize=(12, 12))
```

```
<matplotlib.image.AxesImage at 0x7f4155e07df0>
```



```
f, ax = plt.subplots(1, figsize=(12, 12))
sat.plot.imshow(ax=ax)
contextily.add_basemap(
    ax,
    crs=sat.rio.crs,
    source=contextily.providers.Stamen.TonerLabels,
    zoom=11
);
```

#### IMPORTANT

You will need version 1.1.0 of `contextily` to use label layers. Install it with:

```
pip install \
-U --no-deps \
contextily
```



## Spatial operations

### (Re-)Projections

```
pts.crs
```

```
<Geographic 2D CRS: EPSG:4326>
Name: WGS 84
Axis Info [ellipsoidal]:
- Lat[north]: Geodetic latitude (degree)
- Lon[east]: Geodetic longitude (degree)
Area of Use:
- name: World.
- bounds: (-180.0, -90.0, 180.0, 90.0)
Datum: World Geodetic System 1984
- Ellipsoid: WGS 84
- Prime Meridian: Greenwich
```

```
sat.rio.crs
```

```
CRS.from_epsg(32630)
```

```
pts.to_crs(sat.rio.crs).crs
```

```
<Projected CRS: EPSG:32630>
Name: WGS 84 / UTM zone 30N
Axis Info [cartesian]:
- [east]: Easting (metre)
- [north]: Northing (metre)
Area of Use:
- undefined
Coordinate Operation:
- name: UTM zone 30N
- method: Transverse Mercator
Datum: World Geodetic System 1984
- Ellipsoid: WGS 84
- Prime Meridian: Greenwich
```

```
sat.rio.reproject(pts.crs).rio.crs
```

```
CRS.from_epsg(4326)
```

```

# All into Web Mercator (EPSG:3857)
f, ax = plt.subplots(1, figsize=(12, 12))
## Satellite image
sat.rio.reproject(
    "EPSG:3857"
).plot.imshow(
    ax=ax
)
## Neighbourhoods
polys.to_crs(epsg=3857).plot(
    linewidth=2,
    edgecolor="xkcd:lime",
    facecolor="none",
    ax=ax
)
## Labels
contextily.add_basemap( # No need to reproject
    ax,
    source=contextily.providers.Stamen.TonerLabels,
);

```



## Centroids

```
polys.centroid
```

Note the warning that geometric operations with non-project CRS object result in biases.

```
<ipython-input-27-5ecleefde6d0>:1: UserWarning: Geometry is in a geographic CRS.
Results from 'centroid' are likely incorrect. Use 'GeoSeries.to_crs()' to re-project
geometries to a projected CRS before this operation.
```

```
polys.centroid
```

```

0      POINT (-3.71398 40.41543)
1      POINT (-3.70237 40.40925)
2      POINT (-3.69674 40.41485)
3      POINT (-3.69657 40.42367)
4      POINT (-3.70698 40.42568)
...
123     POINT (-3.59135 40.45656)
124     POINT (-3.59723 40.48441)
125     POINT (-3.55847 40.47613)
126     POINT (-3.57889 40.47471)
127     POINT (-3.60718 40.46415)
Length: 128, dtype: geometry

```

```
lines.centroid
```

```

0      POINT (444133.737 4482808.936)
1      POINT (444192.064 4482878.034)
2      POINT (444134.563 4482885.414)
3      POINT (445612.661 4479335.686)
4      POINT (445606.311 4479354.437)
...
66494    POINT (451980.378 4478407.920)
66495    POINT (436975.438 4473143.749)
66496    POINT (442218.600 4478415.561)
66497    POINT (442213.869 4478346.700)
66498    POINT (442233.760 4478278.748)
Length: 66499, dtype: geometry

```

```

ax = polys.plot(color="purple")
polys.centroid.plot(
    ax=ax, color="lime", markersize=1
)

```

```
<ipython-input-29-47fdef35535>:2: UserWarning: Geometry is in a geographic CRS.
Results from 'centroid' are likely incorrect. Use 'GeoSeries.to_crs()' to re-project
geometries to a projected CRS before this operation.
```

```
polys.centroid.plot()
```

```
<AxesSubplot:>
```



## Spatial joins

```
sj = geopandas.sjoin(  
    lines,  
    polys.to_crs(lines.crs)  
)
```

More information about spatial joins in [geopandas](#) is available on its [documentation page](#)

```
sj.info()
```



build/jupyter\_execute/content/pages/02-Spatial\_data\_53\_0.png

```
<class 'geopandas.geodataframe.GeoDataFrame'>  
Int64Index: 69420 entries, 0 to 66438  
Data columns (total 10 columns):  
 #   Column           Non-Null Count  Dtype     
 ---  --  
 0   OGC_FID         69420 non-null   object    
 1   dm_id           69420 non-null   object    
 2   dist_barri      69414 non-null   object    
 3   X                69420 non-null   float64   
 4   Y                69420 non-null   float64   
 5   value            5769 non-null   float64   
 6   geometry         69420 non-null   geometry  
 7   index_right     69420 non-null   int64    
 8   neighbourhood    69420 non-null   object    
 9   neighbourhood_group 69420 non-null   object    
dtypes: float64(3), geometry(1), int64(1), object(5)  
memory usage: 5.8+ MB
```

## Areas

```
areas = polys.to_crs(  
    epsg=25830  
) .area * 1e-6 # Km2  
areas.head()
```

```
0    1.471037  
1    1.033253  
2    0.592049  
3    0.742031  
4    0.947616  
dtype: float64
```

## Distances

```
cemfi = geopandas.tools.geocode(  
    "Calle Casado del Alisal, 5, Madrid"  
) .to_crs(epsg=25830)  
cemfi
```

	geometry	address
0	POINT (441473.624 4473943.520)	Calle de Casado del Alisal 5, 28014 Madrid, Sp...

```
polys.to_crs(  
    cemfi.crs  
) .distance(  
    cemfi.geometry  
)
```

```
/opt/conda/lib/python3.8/site-packages/geopandas/base.py:32: UserWarning: The indices  
of the two GeoSeries are different.  
    warn("The indices of the two GeoSeries are different.")
```


```
0      1487.894214  
1            NaN  
2            NaN  
3            NaN  
4            NaN  
..  
123           NaN  
124           NaN  
125           NaN  
126           NaN  
127           NaN  
Length: 128, dtype: float64
```

```
d2cemfi = polys.to_crs(  
    cemfi.crs  
).distance(  
    cemfi.geometry[0] # NO index  
)  
d2cemfi.head()
```

```
0      1487.894214  
1      567.196279  
2      275.166923  
3      645.807884  
4     1191.537001  
dtype: float64
```

## ❖ Next steps

If you are interested in following up on some of the topics explored in this block, the following pointers might be useful:



build/jupyter\_execute/content/pages/02-Spatial\_data\_61\_0.png

- Although we have seen here [geopandas](#) only, all non-geographic operations on geo-tables are really thanks to [pandas](#), the workhorse for tabular data in Python. Their [official documentation](#) is an excellent first stop. If you prefer a book, McKinney (2012) [[McK12](#)] is a great one.
- For more detail on geographic operations on geo-tables, the [Geopandas official documentation](#) is a great place to continue the journey.
- Surfaces, as covered here, are really an example of multi-dimensional labelled arrays. The library we use, [xarray](#) represents the cutting edge for working with these data structures in Python, and [their documentation](#) is a great place to wrap your head around how data of this type can be manipulated. For geographic extensions (CRS handling, reprojections, etc.), we have used [rioxarray](#) under the hood, and [its documentation](#) is also well worth checking.

## Geovisualisation

### 📖 Ahead of time...

This block is all about visualising statistical data on top of a geography. Although this task looks simple, there are a few technical and conceptual building blocks that it helps to understand before we try to make our own maps. Aim to complete the following readings by the time we get our hands on the keyboard:

- [Block D](#) of the GDS course [[AB19](#)], which provides an introduction to choropleths (statistical maps)
- [Chapter 5](#) of the GDS Book [[RABWng](#)], discussing choropleths in more detail

### 💻 Hands-on coding


```
import geopandas
import xarray, rioxarray
import contextily
import seaborn as sns
from pysal.viz import mapclassify as mc
from legendgram import legendgram
import matplotlib.pyplot as plt
import palettablematplotlib as palmpl
```

Local files    Online read

Assuming you have the file locally on the path `../data/`:

```
db = geopandas.read_file("../data/cambodia_regional.gpkg")
```

```
db.info()
```



build/jupyter\_execute/content/pages/03-Geovisualisation\_7\_0.png

```
<class 'geopandas.geodataframe.GeoDataFrame'>
RangeIndex: 198 entries, 0 to 197
Data columns (total 6 columns):
 #   Column      Non-Null Count  Dtype  
--- 
 0   adm2_name    198 non-null    object  
 1   adm2_altname 122 non-null    object  
 2   motor_mean   198 non-null    float64 
 3   walk_mean    198 non-null    float64 
 4   no2_mean     198 non-null    float64 
 5   geometry     198 non-null    geometry 
dtypes: float64(3), geometry(1), object(2)
memory usage: 9.4+ KB
```

We will use the average measurement of [nitrogen dioxide](#) (`no2_mean`) by region throughout the block.

To make visualisation a bit easier below, we create an additional column with values rescaled:

```
db["no2_viz"] = db["no2_mean"] * 1e5
```

This way, numbers are larger and will fit more easily on legends:

```
db[["no2_mean", "no2_viz"]].describe()
```

	no2_mean	no2_viz
<b>count</b>	198.000000	198.000000
<b>mean</b>	0.000032	3.236567
<b>std</b>	0.000017	1.743538
<b>min</b>	0.000014	1.377641
<b>25%</b>	0.000024	2.427438
<b>50%</b>	0.000029	2.922031
<b>75%</b>	0.000034	3.390426
<b>max</b>	0.000123	12.323324

Choropleths

## Data

If you want to read more about the data sources behind this dataset, head to the [Datasets](#) section



```
sns.displot(  
    db, x="no2_viz", kde=True, aspect=2  
);
```



### ! Attention

To build an intuition behind each classification algorithm more easily, we create a helper method (`plot_classi`) that generates a visualisation of a given classification.

Toggle the cell below if you are interested in the code behind it.

- Equal intervals

```
classi = mc.EqualInterval(db["no2_viz"], k=7)  
classi
```

Interval	Count
[ 1.38, 2.94]	103
( 2.94, 4.50]	80
( 4.50, 6.07]	6
( 6.07, 7.63]	1
( 7.63, 9.20]	3
( 9.20, 10.76]	0
(10.76, 12.32]	5



- Quantiles

```
classi = mc.Quantiles(db["no2_viz"], k=7)  
classi
```

Interval	Count
[ 1.38, 2.24]	29
( 2.24, 2.50]	28
( 2.50, 2.76]	28
( 2.76, 3.02]	28
( 3.02, 3.35]	28
( 3.35, 3.76]	28
( 3.76, 12.32]	29



- Fisher-Jenks

```
classi = mc.FisherJenks(db["no2_viz"], k=7)
classi
```

```
FisherJenks
  Interval      Count
  -----|-----
  [ 1.38,  2.06] |    20
  ( 2.06,  2.69] |    58
  ( 2.69,  3.30] |    62
  ( 3.30,  4.19] |    42
  ( 4.19,  5.64] |     7
  ( 5.64,  9.19] |     4
  ( 9.19, 12.32] |     5
```



Now let's dig into the internals of `classi`:

```
classi
```

```
FisherJenks
  Interval      Count
  -----|-----
  [ 1.38,  2.06] |    20
  ( 2.06,  2.69] |    58
  ( 2.69,  3.30] |    62
  ( 3.30,  4.19] |    42
  ( 4.19,  5.64] |     7
  ( 5.64,  9.19] |     4
  ( 9.19, 12.32] |     5
```

```
classi.k
```

```
7
```

```
classi.bins
```

```
array([ 2.05617382,  2.6925931 ,  3.30281182,  4.19124954,  5.63804861,
       9.19190206, 12.32332434])
```

```
classi.yb
```

```
array([2, 3, 3, 1, 1, 2, 1, 1, 0, 0, 3, 2, 1, 1, 1, 3, 1, 1, 1, 2, 0,
       0, 4, 2, 1, 3, 1, 0, 0, 0, 1, 2, 2, 6, 5, 4, 2, 1, 3, 2, 3, 2, 1,
       2, 3, 2, 3, 1, 1, 3, 1, 2, 3, 3, 1, 3, 3, 1, 0, 1, 1, 3, 2, 0, 0,
       2, 1, 0, 0, 0, 2, 0, 1, 3, 3, 3, 2, 3, 2, 3, 1, 2, 3, 1, 1, 1, 1,
       2, 1, 2, 2, 1, 2, 2, 2, 1, 3, 2, 3, 2, 2, 2, 1, 2, 3, 3, 2, 0, 3,
       1, 0, 1, 2, 1, 1, 2, 1, 2, 6, 5, 6, 2, 2, 3, 6, 3, 4, 3, 4, 2, 3,
       0, 2, 5, 6, 4, 5, 2, 2, 2, 1, 1, 1, 2, 1, 2, 3, 3, 2, 2, 2, 3, 2,
       1, 1, 3, 4, 2, 1, 3, 1, 2, 3, 4, 0, 1, 1, 2, 1, 2, 2, 2, 2, 1, 2,
       2, 2, 0, 0, 1, 2, 3, 3, 3, 3, 2, 1, 1, 1, 2, 2, 1, 3, 1])
```

How many colors?

### Attention

The code used to generate this figure uses more advanced features than planned for this course.

If you want to inspect it, toggle the cell below.



Using the *right* color

- **Categories**, non-ordered
- Graduated, **sequential**
- Graduated, **divergent**

For a safe choice, make sure to visit  
[ColorBrewer](#)

## Choropleths on Geo-Tables

How can we create classifications from data on geo-tables? Two ways:

- Directly within `plot` (only for some algorithms)

```
db.plot(  
    "no2_viz", scheme="quantiles", k=7, legend=True  
)
```



- Manually attaching the data (for any algorithm)

See [this tutorial](#) for more details on fine tuning choropleths manually

```
classi = mc.Quantiles(db["no2_viz"], k=7)  
db.assign(  
    classes=classi.yb  
) .plot("classes");
```



## Legendgrams:

```
f, ax = plt.subplots(figsize=(9, 9))  
  
classi = mc.Quantiles(db["no2_viz"], k=7)  
  
db.assign(  
    classes=classi.yb  
) .plot("classes", ax=ax)  
  
legendgram(  
    f,                      # Figure object  
    ax,                      # Axis object of the map  
    db["no2_viz"],           # Values for the histogram  
    classi.bins,             # Bin boundaries  
    pal=palmpl.Viridis_7, # color palette (as palettable object)  
    legend_size=(.5,.2), # legend size in fractions of the axis  
    loc = 'lower right', # matplotlib-style legend locations  
)  
ax.set_axis_off();
```



## Surface visualisation

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path `../data/`:

### Data

If you want to read more about the data sources behind this dataset, head to the [Datasets](#) section

```
grid = xarray.open_rasterio(  
    "../data/cambodia_s5_no2.tif"  
) .sel(band=1)
```

- (Implicit) continuous equal interval

```
grid.where(  
    grid != grid.rio.nodata  
) .plot(cmap="viridis");
```



```
grid.where(  
    grid != grid.rio.nodata  
) .plot(cmap="viridis", robust=True);
```



- Discrete equal interval

```
grid.where(  
    grid != grid.rio.nodata  
) .plot(cmap="viridis", levels=7)
```

```
<matplotlib.collections.QuadMesh at 0x7f46b93a8c40>
```



- Combining with `mapclassify`

```
grid_nona = grid.where(  
    grid != grid.rio.nodata  
)  
  
classi = mc.Quantiles(  
    grid_nona.to_series().dropna(), k=7  
)  
  
grid_nona.plot(  
    cmap="viridis", levels=classi.bins  
)  
plt.title(classi.name);
```



## ❖ Next steps


If you are interested in statistical maps based on classification, here are two recommendations to check out next:

- On the technical side, the [documentation for `mapclassify`](#) (including its [tutorials](#)) provides more detail and illustrates more classification algorithms than those reviewed in this block

- On a more conceptual note, Cynthia Brewer's "Designing better maps" [Bre15] is an excellent blueprint for good map making.

## Spatial Feature Engineering (I)

### Map Matching




Ahead of time...

Feature Engineering is a common term in machine learning that refers to the processes and transformations involved in turning data from the state in which the modeller access them into what is then fed to a model. This can take several forms, from standardisation of the input data, to the derivation of numeric scores that better describe aspects (*features*) of the data we are using.

*Spatial* Feature Engineering refers to operations we can use to derive "views" or summaries of our data that we can use in models, *using space* as the key medium to create them.

There is only one reading to complete for this block, [Chapter 12](#) of the GDS Book [[RABWng](#)]. The first block of Spatial Feature Engineering in this course loosely follows the first part of the chapter ([Map Matching](#)), so focus on this first sections for the block.



Hands-on coding

```
import pandas
import geopandas
import xarray, rioxarray
import contextily
import numpy as np
import matplotlib.pyplot as plt
```

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path `../data/`:

```
regions = geopandas.read_file("../data/cambodia_regional.gpkg")
cities = geopandas.read_file("../data/cambodian_cities.geojson")
pollution = rioxarray.open_rasterio(
    "../data/cambodia_s5_no2.tif"
).sel(band=1)
friction = rioxarray.open_rasterio(
    "../data/cambodia_2020_motorized_friction_surface.tif"
).sel(band=1)
```

#### Data

If you want to read more about the data sources behind this dataset, head to the [Datasets](#) section

Check both geo-tables and the surface are in the same CRS:

```
regions.crs.to_epsg() == \
cities.crs.to_epsg() == \
pollution.rio.crs.to_epsg()
```

True

Polygons to points

*In which region is a city?*

```
sj = geopandas.sjoin(  
    cities,  
    regions  
)
```

```
# City name | Region name  
sj[["UC_NM_MN", "adm2_name"]]
```

	UC_NM_MN	adm2_name
0	Sampov Lun	Sampov Lun
1	Khum Pech Chenda	Phnum Proek
2	Poipet	Paoy Paet
3	Sisophon	Serei Saophoan
4	Battambang	Battambang
5	Siem Reap	Siem Reap
6	Sihanoukville	Preah Sihanouk
7	N/A	Trapeang Prasat
8	Kampong Chhnang	Kampong Chhnang
9	Phnom Penh	Tuol Kouk
10	Kampong Cham	Kampong Cham

Points to polygons

If we were after the number of cities per region, it is a similar approach, with a (`groupby`) twist at the end:

```
regions.set_index(  
    "adm2_name")  
.assign(  
    city_count=sj.groupby("adm2_name").size()  
)
```

```
<class 'geopandas.geodataframe.GeoDataFrame'>  
Index: 198 entries, Mongkol Borei to Administrative unit not available  
Data columns (total 6 columns):  
 #   Column      Non-Null Count  Dtype     
---  --          --          --  
 0   adm2_altnm  122 non-null    object    
 1   motor_mean  198 non-null    float64  
 2   walk_mean   198 non-null    float64  
 3   no2_mean    198 non-null    float64  
 4   geometry    198 non-null    geometry  
 5   city_count  11 non-null    float64  
dtypes: float64(4), geometry(1), object(1)  
memory usage: 10.8+ KB
```

#### Note

1. We `set_index` to align both tables
2. We `assign` to create a new column

If you want no missing values, you can `fillna(0)` since you know missing data are zeros

Surface to points

Consider attaching to each city in `cities` the pollution level, as expressed in `pollution`.

The code for generating this figure is a bit more advanced as it fiddles with text, but if you want to explore it you can toggle it on



```
from rasterstats import point_query

city_pollution = point_query(
    cities,
    pollution.values,
    affine=pollution.rio.transform(),
    nodata=pollution.rio.nodata
)
city_pollution
```

```
[3.9397064813333136e-05,
 3.4949825609644426e-05,
 3.825255125820345e-05,
 4.103826573585785e-05,
 3.067677208474005e-05,
 5.108273256655399e-05,
 2.2592785882580366e-05,
 4.0560414400882722e-05,
 2.4383652926989897e-05,
 0.0001285838935209779,
 3.258245740282522e-05]
```

And we can map these on the city locations:

```
ax = cities.assign(
    pollution=city_pollution
).plot(
    "pollution",
    cmap="YlOrRd",
    legend=True
)

contextily.add_basemap(
    ax=ax, crs=cities.crs,
);
```



Surface to polygons

Instead of transferring to points, we want to aggregate all the information in a surface that falls *within* a polygon.

For this case, we will use the motorised friction surface. The question we are asking thus is: *what is the average degree of friction of each region?* Or, in other words: *what regions are harder to get through with motorised transport?*



Again, we can rely on **rasterstats**:

```
from rasterstats import zonal_stats

regional_friction = pandas.DataFrame(
    zonal_stats(
        regions,
        friction.values,
        affine=friction.rio.transform(),
        nodata=friction.rio.nodata
    ),
    index=regions.index
)
regional_friction.head()
```

The output is returned from **zonal\_stats** as a list of dicts. To make it more manageable, we convert it into a **pandas.DataFrame**.

	min	max	mean	count
0	0.001200	0.037000	0.006494	979
1	0.001200	0.060000	0.007094	1317
2	0.001200	0.024112	0.006878	324
3	0.001333	0.060000	0.009543	758
4	0.001200	0.060132	0.008619	55

This can then also be mapped onto the polygon geography:



Surface to surface

If we want to align the `pollution` surface with that of `friction`, we need to resample them to make them “fit on the same frame”.

```
pollution.shape
```

```
(138, 152)
```

```
friction.shape
```

```
(574, 636)
```

This involves either moving one surface to the frame of the other one, or both into an entirely new one. For the sake of the illustration, we will do the latter and select a frame that is 300 by 400 pixels. Note this involves stretching (upsampling) `pollution`, while compressing (downsampling) `friction`.

```
# Define dimensions
dimX, dimY = 300, 400
minx, miny, maxx, maxy = pollution.rio.bounds()
# Create XY indices
ys = np.linspace(miny, maxy, dimY)
xs = np.linspace(minx, maxx, dimX)
# Set up placeholder array
canvas = xarray.DataArray(
    np.zeros((dimY, dimX)),
    coords=[ys, xs],
    dims=["y", "x"]
).rio.write_crs(4326) # Add CRS
```

```
cvs_pollution = pollution.rio.reproject_match(canvas)
cvs_friction = friction.rio.reproject_match(canvas)
```

```
cvs_pollution.shape
```

```
(400, 300)
```

```
cvs_pollution.shape == cvs_friction.shape
```

```
True
```

## ! Attention

The following methods involve modelling and are thus more sophisticated. Take these as a conceptual introduction with an empirical illustration, but keep in mind there are extensive literatures on each of them and these cover some of the simplest cases.

Points to points

For this example, we will assume that, instead of a surface with pollution values, we only have available a sample of points and we would like to obtain estimates for other locations.

For that we will first generate 100 random points within the extent of `pollution` which we will take as the location of our measurement stations:

```
np.random.seed(123456)

bb = pollution.rio.bounds()
station_xs = np.random.uniform(bb[0], bb[2], 100)
station_ys = np.random.uniform(bb[1], bb[3], 100)
stations = geopandas.GeoSeries(
    geopandas.points_from_xy(station_xs, station_ys),
    crs="EPSG:4326"
)
```

See [this section](#) of Chapter 12 of the GDS Book [\[RABWng\]](#) for more details on the technique

## ! Note

The code in this cell contains bits that are a bit more advanced, do not despair if not everything makes sense!

Our station values come from the `pollution` surface, but we assume we do not have access to the latter, and we would like to obtain estimates for the location of the cities:



We will need the location and the pollution measurements for every station as separate arrays.

Before we do that, since we will be calculating distances, we convert our coordinates to [a system](#) expressed in metres.

```
stations_mt = stations.to_crs(epsg=5726)
station_xys = np.array([
    [stations_mt.geometry.x, stations_mt.geometry.y]
]).T
```

We also need to extract the pollution measurements for each station location:

```
station_measurements = np.array(
    point_query(
        stations,
        pollution.values,
        affine=pollution.rio.transform(),
        nodata=pollution.rio.nodata
    )
)
```

And finally, we will also need the locations of each city expressed in the same coordination system:

```
cities_mt = cities.to_crs(epsg=5726)
city_xys = np.array([
    [cities_mt.geometry.x, cities_mt.geometry.y]
]).T
```

For this illustration, we will use a  $\backslash(k)$ -nearest neighbors regression that estimates the value for each target point (`cities` in our case) as the average weighted by distance of its  $\backslash(k)$  nearest neighbors. In this illustration we will use  $\backslash(k=10)$ .

```
from sklearn.neighbors import KNeighborsRegressor
model = KNeighborsRegressor(
    n_neighbors=10, weights="distance"
).fit(station_xys, station_measurements)
```

Note how `sklearn` relies only on array data structures, hence why we first had to express all the required information in that format


Once we have trained the model, we can use it to obtain predictions for each city location:

```
predictions = model.predict(city_xys)
```

These can be compared with the originally observed values:

```
p2p_comparison = pandas.DataFrame(
    {
        "Observed": city_pollution,
        "Predicted": predictions
    },
    index=cities["UC_NM_MN"]
)
```

```
p2p_comparison
```



A screenshot of a Jupyter Notebook cell showing a DataFrame named 'p2p\_comparison'. The DataFrame has two columns: 'Observed' and 'Predicted'. The 'Observed' column contains values like 0.000039, 0.000035, etc., and the 'Predicted' column contains values like 0.000027, 0.000025, etc. The rows are indexed by city names: Sampov Lun, Khum Pech Chenda, Poipet, Sisophon, Battambang, Siem Reap, Sihanoukville, N/A, Kampong Chhnang, Phnom Penh, and Kampong Cham.

**Observed Predicted**

UC_NM_MN		
	Observed	Predicted
<b>Sampov Lun</b>	0.000039	0.000027
<b>Khum Pech Chenda</b>	0.000035	0.000025
<b>Poipet</b>	0.000038	0.000030
<b>Sisophon</b>	0.000041	0.000030
<b>Battambang</b>	0.000031	0.000027
<b>Siem Reap</b>	0.000051	0.000027
<b>Sihanoukville</b>	0.000023	0.000019
<b>N/A</b>	0.000041	0.000028
<b>Kampong Chhnang</b>	0.000024	0.000032
<b>Phnom Penh</b>	0.000129	0.000042
<b>Kampong Cham</b>	0.000033	0.000033

Points to surface

Imagine we do not have a surface like `pollution` but we need it. In this context, if you have measurements from some locations, such as in `stations`, we can use the approach reviewed above to generate a surface. The trick to do this is to realise that we can generate a *uniform* grid of target locations that we can then express as a surface.

We will set as our target locations those of the pixels in the target surface we have seen [above](#):

```
canvas_mt = canvas.rio.reproject(5726)
```

```
xy_pairs = canvas_mt.to_series().index
xys = np.array([
    xy_pairs.get_level_values("x"),
    xy_pairs.get_level_values("y")
]).T
```

To obtain pollution estimates at each location, we can `predict` with `model`:

```
predictions_grid = model.predict(xys)
```

And with these at hand, we can convert them into a surface:

```
predictions_series = pandas.DataFrame(
    {"predictions_grid": predictions_grid}
).join(
    pandas.DataFrame(xys, columns=["x", "y"])
).set_index(["y", "x"])

predictions_surface = xarray.DataArray().from_series(
    predictions_series["predictions_grid"]
).rio.write_crs(canvas_mt.rio.crs)
```

```
f, axs = plt.subplots(1, 2, figsize=(16, 6))

cvs_pollution.where(
    cvs_pollution>0
).plot(ax=axs[0])
axs[0].set_title("Observed")

predictions_surface.where(
    predictions_surface>0
).rio.reproject_match(
    cvs_pollution
).plot(ax=axs[1])
axs[1].set_title("Predicted")

plt.show()
```



```
f, ax = plt.subplots(1, figsize=(9, 4))
cvs_pollution.where(
    cvs_pollution>0
).plot.hist(
    bins=100, alpha=0.5, ax=ax, label="Observed"
)
predictions_surface.rio.reproject_match(
    cvs_pollution
).plot.hist(
    bins=100, alpha=0.5, ax=ax, color="g", label="predicted"
)
plt.legend()
plt.show()
```



Room for improvement but, remember this was a rough first pass!

### Polygons to polygons

In this final example, we transfer data from a polygon geography to *another* polygon geography. Effectively, we re-apportion values from one set of areas to another based on the extent of shared area.

Our illustration will cover how to move pollution estimates from `regions` into a uniform hexagonal grid we will first create.

```
import tobler

hex_grid = tobler.util.h3fy(
    regions, resolution=5
)
```

#### Important

This code requires `tobler` 0.7.0 or above

Not that pollution is expressed as an *intensive* (rate) variable. We need to recognise this when specifying the interpolation model:

```
%time
pollution_hex = tobler.area_weighted.area_interpolate(
    regions.assign(geometry=regions.buffer(0)).to_crs(epsg=5726),
    hex_grid.to_crs(epsg=5726),
    intensive_variables=["no2_mean"]
)
```

```
CPU times: user 469 ms, sys: 6.89 ms, total: 476 ms
Wall time: 474 ms
```

### Attention

This feature requires **tobler** 6.0 or above

And the results look like:



### Next steps

If you are interested in learning more about spatial feature engineering through map matching, the following pointers might be useful to delve deeper into specific types of “data transfer”:

- The [datashader](#) library is a great option to transfer geo-tables into surfaces, providing tooling to perform these operations in a highly efficient and performant way.
- When aggregating surfaces into geo-tables, the library [rasterstats](#) contains most if not all of the machinery you will need.
- For transfers from polygon to polygon geographies, [tobler](#) is your friend. Its official documentation contains examples for different use cases.

## Spatial Feature Engineering (II)

### Map Synthesis

#### Ahead of time...

In this second part of Spatial Feature Engineering, we turn to Map Synthesis. There is only one reading to complete for this block, [Chapter 12](#) of the GDS Book [[RABWng](#)]. This block of Spatial Feature Engineering in this course loosely follows the second part of the chapter ([Map Synthesis](#)).

#### Hands-on coding

```
import pandas, geopandas
import numpy as np
import contextily
import tobler
```

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path [../data/](#):

```
pts = geopandas.read_file("../data/madrid_abb.gpkg")
```

#### Data

If you want to read more about the data sources behind this dataset, head to the [Datasets](#) section

We will be working with a modified version of `pts`:

- Since we will require distance calculations, we will switch to the Spanish official projection

- To make calculations in the illustration near-instantaneous, we will work with a smaller (random) sample of Airbnb properties (10% of the total)

```
db = pts.sample(
    frac=0.1, random_state=123
).to_crs(epsg=25830)
```

As you can see in the description, the new CRS is expressed in metres:

```
db.crs
```

```
<Projected CRS: EPSG:25830>
Name: ETRS89 / UTM zone 30N
Axis Info [cartesian]:
- E[east]: Easting (metre)
- N[north]: Northing (metre)
Area of Use:
- name: Europe between 6°W and 0°W: Faroe Islands offshore; Ireland - offshore; Jan
Mayen - offshore; Norway including Svalbard - offshore; Spain - onshore and offshore.
- bounds: (-6.0, 35.26, 0.0, 80.53)
Coordinate Operation:
- name: UTM zone 30N
- method: Transverse Mercator
Datum: European Terrestrial Reference System 1989
- Ellipsoid: GRS 1980
- Prime Meridian: Greenwich
```

## Distance buffers

*How many Airbnb's are within 500m of each Airbnb?*

```
from pysal.lib import weights
```

Using `DistanceBand`, we can build a spatial weights matrix that assigns `1` to each observation within 500m, and `0` otherwise.

```
%%time
w500m = weights.DistanceBand.from_dataframe(
    db, threshold=500, binary=True
)
```

```
/opt/conda/lib/python3.8/site-packages/libpysal/weights/weights.py:172: UserWarning:
The weights matrix is not fully connected:
There are 86 disconnected components.
There are 47 islands with ids: 6878, 16772, 15006, 1336, 3168, 15193, 1043, 5257,
4943, 12849, 10609, 11309, 10854, 10123, 3388, 9380, 10288, 13071, 3523, 15316, 3856,
205, 7720, 10454, 18307, 3611, 12405, 10716, 14813, 15467, 1878, 16597, 14329, 7933,
16215, 13525, 13722, 11932, 14456, 8848, 15197, 8277, 9922, 13072, 13852, 5922, 17151.
warnings.warn(message)
```

```
CPU times: user 1.21 s, sys: 44 ms, total: 1.25 s
Wall time: 1.25 s
```

The number of neighbors can be accessed through the `cardinalities` attribute:

```
n_neis = pandas.Series(w500m.cardinalities)
n_neis.head()
```

11297	213
2659	5
16242	21
15565	9
14707	159
dtype: int64	



## Distance rings

How many Airbnb's are between 500m and 1km of each Airbnb?

```
%time
w1km = weights.DistanceBand.from_dataframe(
    db, threshold=1000, binary=True
)
```

```
/opt/conda/lib/python3.8/site-packages/libpysal/weights/weights.py:172: UserWarning:
The weights matrix is not fully connected:
There are 20 disconnected components.
There are 5 islands with ids: 4943, 12849, 15467, 13525, 11932.
warnings.warn(message)
```

```
CPU times: user 2.88 s, sys: 228 ms, total: 3.1 s
Wall time: 3.12 s
```

Now, we could do simply a subtraction:

```
n_ring_neis = pandas.Series(w1km.cardinalities) - n_neis
```

Or, if we need to know *which is which*, we can use set operations on weights:

```
w_ring = weights.w_difference(w1km, w500m, constrained=False)
```

```
/opt/conda/lib/python3.8/site-packages/libpysal/weights/weights.py:172: UserWarning:
The weights matrix is not fully connected:
There are 34 disconnected components.
There are 23 islands with ids: 3744, 4143, 4857, 4943, 6986, 8345, 8399, 9062, 10592,
10865, 11574, 11613, 11785, 11840, 11932, 12015, 12635, 12714, 12849, 13091, 13317,
13525, 15467.
warnings.warn(message)
```

And we can confirm they're both the same:

```
(pandas.Series(w_ring.cardinalities) - n_ring_neis).sum()
```

```
0
```

## Cluster membership (points)

We can use the spatial configuration of observations to classify them as part of clusters or not, which can then be encoded, for example, as dummy variables in a model.

```
from sklearn.cluster import DBSCAN
min_pct = 2
min_pts = len(db) * min_pct // 100
eps = 500
```

These *magic* numbers need to be preset and you can play with both `min_pct` (or `min_pts` directly) and `eps` to see how they affect the results (spoiler: a lot!)

We will illustrate it with a minimum number of points of `min_pct` % of the sample and a maximum radius of `eps` metres.

```

model = DBSCAN(min_samples=min_pts, eps=eps)
model.fit(
    np.array(
        [db.geometry.x, db.geometry.y]
    ).T
);

```

We will attach the labels to `db` for easy access:

```
db["labels"] = model.labels_
```

We can define boundaries to turn point clusters into polygons if that fits our needs better:

```

from pysal.lib import cg

boundaries = []
cl_ids = [i for i in db["labels"].unique() if i != -1]
for cl_id in cl_ids:
    sub = db.query(f"labels == {cl_id}")
    cluster_boundaries = cg.alpha_shape_auto(
        np.array(
            [sub.geometry.x, sub.geometry.y]
        ).T,
    )
    boundaries.append(cluster_boundaries)
boundaries = geopandas.GeoSeries(
    boundaries, index=cl_ids, crs=db.crs
)

```

### ⚠️ Attention

The code in this cell is a bit more advanced than expected for this course, but is used here as an illustration.

And we can see what the clusters look like:



Cluster membership (polygons)

We can take a similar approach as above if we have polygon geographies instead of points. Rather than using DBSCAN, here we can rely on local indicators of spatial association (LISAs) to pick up spatial concentrations of high or low values.

For the illustration, we will aggregate the location of Airbnb properties to a regular hexagonal grid, similar to how we generated it when [transferring from polygons to polygons](#). First we create a polygon covering the extent of points:

```

one = geopandas.GeoSeries(
    [cg.alpha_shape_auto(
        np.array(
            [db.geometry.x, db.geometry.y]
        ).T,
    )],
    crs=db.crs
)

```

Then we can tessellate:

```

abb_hex = tobler.util.h3fy(
    one, resolution=8
)

```

And obtain a count of points in each polygon:

```
counts = geopandas.sjoin(
    db, abb_hex
).groupby(
    "index_right"
).size()

abb_hex["count"] = counts
abb_hex["count"] = abb_hex["count"].fillna(0)

abb_hex.plot("count", scheme="fisherjenks");
```



To identify spatial clusters, we rely on [esda](#):

```
from pysal.explore import esda
```

And compute the LISA statistics:

```
w = weights.Queen.from_dataframe(abb_hex)
lisa = esda.Moran_Local(abb_hex["count"], w)
```

For a visual inspection of the clusters, [splot](#):

```
from pysal.viz import splot
from splot.esda import lisa_cluster
```

```
lisa_cluster(lisa, abb_hex, p=0.01);
```



And, if we want to extract the labels for each polygon, we can do so from the [lisa](#) object:

```
lisa.q * (lisa.p_sim < 0.01)
```

```
array([0, 3, 3, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 1, 0, 0, 0, 0, 3, 0, 1, 0, 0, 3, 0, 0, 0, 1, 0, 0, 0,
       0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 3, 0, 0, 0, 0, 3, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 3, 2, 0, 0, 0, 0, 0, 0, 0, 0, 3, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0])
```

## Next steps

If you want a bit more background into some of the techniques reviewed in this block, the following might be of interest:

- [Block E](#) of the GDS Course [AB19] will introduce you to more techniques like the LISAs seen above to explore the spatial dimension of the statistical properties of your data. If you want a more detailed read, [Chapter 4](#) of the GDS Book [RABWng] will do just that.
- [Block E](#) of the GDS Course [AB19] will introduce you to more techniques like the LISAs seen above to explore the spatial dimension of the statistical properties of your data. If you want a more detailed read, [Chapter 7](#) of the GDS Book [RABWng] will do just that.

- [Block H](#) of the GDS Course [[AB19](#)] will introduce you to more techniques for exploring point patterns. If you want a more comprehensive read, [Chapter 8](#) of the GDS Book [[RABWng](#)] will do just that.

## OpenStreetMap

### Ahead of time...

This session is all about OpenStreetMap. To provide an overview of what the project is, whether you have never heard of it or you are somewhat familiar, the following will set your mind “on course”:

- The following short clip provides a general overview of what OpenStreetMap is

Two Minute Tutorials: What is OpenStreetMap?



- [This recent piece](#) contains several interesting points about how OpenStreetMap is currently being created and some of the implications this model may have.
- Anderson et al. (2019) [[ASP19](#)] provides some of the academic underpinnings to the views expressed in Morrison’s piece

### Hands-on coding

```
import geopandas
import contextily
from IPython.display import GeoJSON
```

Since some of the query options we will discuss involve pre-defined extents, we will read the Madrid neighbourhoods dataset first:

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path [./data/](#):

```
neis = geopandas.read_file("../data/neighbourhoods.geojson")
```

To make some of the examples below easy on OpenStreetMap servers, we will single out the smallest neighborhood:

```
areas = neis.to_crs(
    epsg=32630
).area

smallest = neis[areas == areas.min()]
smallest
```

## neighbourhood neighbourhood\_group geometry

98	Atalaya	Ciudad Lineal	MULTIPOLYGON (((-3.66195 40.46338, -3.66364 40...))
----	---------	---------------	--

```
ax = smallest.plot(  
    facecolor="none", edgecolor="blue", linewidth=2  
)  
contextily.add_basemap(  
    ax,  
    crs=smallest.crs,  
    source=contextily.providers.OpenStreetMap.Mapnik  
);
```



osmnx

```
import osmnx as ox
```

### 💡 Tip

Much of the methods covered here rely on the `osmnx.geometries` module. Check out its reference [here](#)

Here is a trick to pin all your queries to OpenStreetMap to a specific date, so results are always reproducible, even if the map changes in the meantime.

Tip courtesy of [Martin Fleischmann](#).

There are two broad areas to keep in mind when querying data on OpenStreetMap through `osmnx`:

- The interface to specify the *extent* of the search
- The *nature* of the entities being queried. Here, the interface relies entirely on OpenStreetMap's tagging system. Given the distributed nature of the project, this is variable, but a good place to start is:

```
https://wiki.openstreetmap.org/wiki/Tags
```

Generally, the interface we will follow involves the following:

```
received_entities = ox.geometries_from_XXX(  
    <extent>, tags={<key>: True/<value(s)>}, ...  
)
```

The `<extent>` can take several forms:

```
['geometries_from_address',  
'geometries_from_bbox',  
'geometries_from_place',  
'geometries_from_point',  
'geometries_from_polygon',  
'geometries_from_xml']
```

The `tags` follow the [official feature spec](#).

Buildings

```
blgs = ox.geometries_from_polygon(  
    smallest.squeeze().geometry, tags={"building": True})
```

```
blgs.plot();
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
and should_run_async(code)
```



```
blgs.info()
```

```
<class 'geopandas.geodataframe.GeoDataFrame'>  
Int64Index: 115 entries, 0 to 114  
Data columns (total 30 columns):  
 #   Column           Non-Null Count  Dtype     
---  --    
 0   unique_id        115 non-null    object    
 1   osmid            115 non-null    int64    
 2   element_type     115 non-null    object    
 3   amenity          2 non-null     object    
 4   name              2 non-null     object    
 5   geometry          115 non-null    geometry    
 6   nodes             115 non-null    object    
 7   building          115 non-null    object    
 8   addr:housenumber 21 non-null    object    
 9   addr:postcode     3 non-null     object    
 10  addr:street       9 non-null     object    
 11  denomination      1 non-null     object    
 12  phone             2 non-null     object    
 13  religion          1 non-null     object    
 14  source             1 non-null     object    
 15  source:date       1 non-null     object    
 16  url               1 non-null     object    
 17  wheelchair         1 non-null     object    
 18  building:levels   11 non-null    object    
 19  addr:city          8 non-null     object    
 20  addr:country       6 non-null     object    
 21  country            1 non-null     object    
 22  diplomatic          1 non-null     object    
 23  name:en            1 non-null     object    
 24  name:fr            1 non-null     object    
 25  name:ko            1 non-null     object    
 26  office              1 non-null     object    
 27  target              1 non-null     object    
 28  website             1 non-null     object    
 29  wikidata            1 non-null     object    
dtypes: geometry(1), int64(1), object(28)  
memory usage: 27.9+ KB
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
and should_run_async(code)
```

```
blgs.head()
```

	unique_id	osmid	element_type	amenity	name	geometry
0	way/442595762	442595762	way	NaN	NaN	POLYGON [4((-3.663774, 40.463174), (-3.663634, 40.463224), (-3.663464, 40.463394), (-3.663194, 40.463144), (-3.663514, 40.463714), (-3.662934, 40.462894), (-3.662814, 40.462944), (-3.663774, 40.463174))]
1	way/442595763	442595763	way	NaN	NaN	POLYGON [4((-3.663944, 40.463464), (-3.664154, 40.463394), (-3.663944, 40.463394), (-3.663944, 40.463464), (-3.663944, 40.463464))]
2	way/442595764	442595764	way	NaN	NaN	POLYGON [4((-3.663794, 40.463214), (-3.664014, 40.463144), (-3.663794, 40.463144), (-3.663794, 40.463214), (-3.663794, 40.463214))]
3	way/442595765	442595765	way	NaN	NaN	POLYGON [4((-3.663514, 40.463564), (-3.662944, 40.463714), (-3.663514, 40.463714), (-3.663514, 40.463564), (-3.663514, 40.463564))]
4	way/442596830	442596830	way	NaN	NaN	POLYGON [4((-3.662934, 40.462894), (-3.662814, 40.462944), (-3.662934, 40.462944), (-3.662934, 40.462894), (-3.662934, 40.462894))]

5 rows × 30 columns

If you want to visit the entity online, you can do so at:

[https://www.openstreetmap.org/<unique\\_id>](https://www.openstreetmap.org/<unique_id>)

Other polygons

```
park = ox.geometries_from_place(
    "Parque El Retiro, Madrid", tags={"leisure": "park"}
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
'should_run_async' will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)
```

```
ax = park.plot(
    facecolor="none", edgecolor="blue", linewidth=2
)
contextily.add_basemap(
    ax,
    crs=smallest.crs,
    source=contextily.providers.OpenStreetMap.Mapnik
);
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
'should_run_async' will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)
```



Points of interest

Bars around Atocha station:

```
bars = ox.geometries_from_address(  
    "Madrid Puerta de Atocha", tags={"amenity": "bar"}, dist=1500  
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

We can quickly explore with **GeoJSON**:

```
GeoJSON(bars.__geo_interface__)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

```
<IPython.display.GeoJSON object>
```

And stores within Malasaña:

```
shops = ox.geometries_from_address(  
    "Malasaña, Madrid, Spain", # Boundary to search within  
    tags={  
        "shop": True,  
        "landuse": ["retail", "commercial"],  
        "building": "retail"  
    },  
    dist=1000  
)
```

We use **geometries\_from\_place** for delineated areas ("polygonal entities"):

```
cs = ox.geometries_from_place(  
    "Madrid, Spain",  
    tags={"amenity": "charging_station"}  
)  
GeoJSON(cs.__geo_interface__)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

```
<IPython.display.GeoJSON object>
```

Similarly, we can work with location data. For example, searches around a given point:

```
bakeries = ox.geometries_from_point(  
    (40.418881103417675, -3.6920446157455444),  
    tags={"shop": "bakery", "craft": "bakery"},  
    dist=500  
)  
GeoJSON(bakeries.__geo_interface__)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

```
<IPython.display.GeoJSON object>
```

## Streets

Street data can be obtained as another type of entity, as above; or as a graph object.

## Geo-tables

```
centro = ox.geometries_from_polygon(  
    neis.query("neighbourhood == 'Sol'").squeeze().geometry,  
    tags={"highway": True}  
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

We can get a quick peak into what is returned (grey), compared to the region we used for the query:

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```



This however will return all sorts of things:

```
centro.geometry
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

```
0           POINT (-3.70427 40.41662)  
1           POINT (-3.70802 40.41612)  
2           POINT (-3.70847 40.41677)  
3           POINT (-3.69945 40.41786)  
4           POINT (-3.70054 40.41645)  
...  
604      LINESTRING (-3.70686 40.41380, -3.70719 40.41369)  
605      LINESTRING (-3.70705 40.42021, -3.70680 40.42020)  
606      POLYGON ((-3.70948 40.41551, -3.70952 40.41563...  
607      POLYGON ((-3.70243 40.41716, -3.70242 40.41714...  
608      POLYGON ((-3.70636 40.41475, -3.70635 40.41481...  
Name: geometry, Length: 609, dtype: geometry
```

## Spatial graphs

This returns clean, processed *graph* objects for the street network:

```
centro_gr = ox.graph_from_polygon(  
    neis.query("neighbourhood == 'Sol'").squeeze().geometry,  
)
```

```
[i for i in dir(ox) if "graph_from_" in i]
```

## Note

For more on graph representations of street networks, see [block 07](#)

```
centro_gr
```

```
<networkx.classes.multidigraph.MultiDiGraph at 0x7fe6f9033b50>
```

And to visualise it:

```
ox.plot_figure_ground(centro_gr);
```



```
ox.plot_graph_folium(centro_gr)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283:  
DeprecationWarning: `should_run_async` will not call `transform_cell`  
automatically in the future. Please pass the result to `transformed_cell`  
argument and any exception that happen during the transform in  
`preprocessing_exc_tuple` in IPython 7.17 and above.  
and should_run_async(code)
```



```
/opt/conda/lib/python3.8/site-  
packages/ipykernel/ipkernel.py:283:  
DeprecationWarning: `should_run_async` will not  
call `transform_cell` automatically in the  
future. Please pass the result to  
`transformed_cell` argument and any exception  
that happen during the transform in  
`preprocessing_exc_tuple` in IPython 7.17 and  
above.  
and should_run_async(code)
```

```
['graph_from_address',  
'graph_from_bbox',  
'graph_from_gdfs',  
'graph_from_place',  
'graph_from_point',  
'graph_from_polygon',  
'graph_from_xml']
```

```
[i for i in dir(ox) if "plot_graph" in i]
```

```
['plot_graph', 'plot_graph_folium',  
'plot_graph_route', 'plot_graph_routes']
```

## pyrosm

If you are planning to read full collections of OpenStreetMap entities for a given region, [osmnx](#) might not be the ideal tool. Instead, it is possible to access extracts of regions and read them in full with [pyrosm](#), which is faster for *these* operations.

```
import pyrosm
```

More information about the [pyrosm](#) project is available on its [website](#)

If you are working on a “popular” place, there are utilities to acquire the data:

```
mad = pyrosm.get_data("Madrid")  
mad
```

```
'/tmp/pyrosm/Madrid.osm.pbf'
```

Once downloaded, we can start up the database:

```
mad_osm = pyrosm.OSM(mad)
```

And we can then read parts of all of OpenStreetMap data available for Madrid through queries to `mad_osm`. It is important to note that `pyrosm` will return queries as `GeoDataFrame` objects, but can also interoperate with graph data structures.

Over to you...

The best way to get a hang on OpenStreetMap tags is by playing with it yourself. To facilitate just that, here are some challenges to get you started.

### Challenges

- Extract the building footprints for the Sol neighbourhood in `neis`
- How many music shops does OSM record within 750 metres of Puerta de Alcalá?
- Are there more restaurants or clothing shops within the polygon that represents the Pacífico neighbourhood in `neis` table?
- How many bookshops are within a 50m radius of the Paseo de la Castellana? (**NOTE** this one involves extracting the street segment, [drawing a buffer](#) and querying OSM for bookshops)

### Next steps

If you found the content in this block useful, the following resources represent some suggestions on where to go next:

- Parts of the block are inspired and informed by Geoff Boeing's excellent [course on Urban Data Science](#)
- More in depth content about `osmnx` is available in the [official examples collection](#)
- Boeing (2020) [[Boe20a](#)] illustrates how OpenStreetMap can be used to analyse urban form ([Open Access](#))

## Spatial Networks

### Ahead of time...

In this block we cover some of the analytics you can obtain when you consider street networks as spatial graphs rather than as geo-tables.

Thank you very much to [Martin Fleischmann](#) for providing support and ideas in the development of this block

- A good example of applying concepts and ideas presented in this block is Boeing (2020) [[Boe20b](#)]
- Boeing (2017) [[Boe17](#)] provides a general overview on the `osmnx` project
- A brief overview of `momepy`, the package for urban morphometrics, available in Fleischmann (2019) [[Fle19](#)]

### Hands-on coding

```
import pandas
import geopandas
import momepy
import networkx as nx
import contextily
import matplotlib.pyplot as plt
```


Assuming you have the file locally on the path `../data/`:

```
db = geopandas.read_file("../data/arturo_streets.gpkg")
```

To make things easier later, we “explode” the table so it is made up of **LINESTRINGS** instead of **MULTILINESTRINGS**:

```
db_tab = db.explode().reset_index()
```

```
db_tab.head()
```



	level_0	level_1	OGC_FID	dm_id	dist_barri	X
0	0	0	1	1	1606	444133.736820 4.482809e-
1	1	0	2	2	1606	444192.038205 4.482878e-
2	2	0	3	3	1606	444134.537507 4.482885e-
3	3	0	4	4	1603	445612.690578 4.479336e-
4	4	0	5	5	1603	445606.319326 4.479354e-

Analysing street geo-tables

Length

```
length = db_tab.to_crs(  
    epsg=32630 # Expressed in metres  
).geometry.length  
length.head()
```

0	118.699481
1	62.210799
2	95.164472
3	23.503065
4	16.090295

dtype: float64



## Linearity

```
linearity = momepy.Linearity(db_tab).series  
linearity.head()
```

```
0    1.000000  
1    0.999999  
2    1.000000  
3    1.000000  
4    1.000000  
dtype: float64
```



## Streets as spatial graphs

From geo-table to spatial graph:

```
db_graph = momepy.gdf_to_nx(db_tab)  
db_graph
```

```
<networkx.classes.multigraph.MultiGraph at 0x7f88c5a76bb0>
```

Now `db_graph` is a different animal than `db` that emphasizes *connections* rather than observation attributes.

```
db_graph.is_directed()
```

```
False
```

```
db_graph.is_multigraph()
```

```
True
```

The (first and last) coordinates of each street segment become the ID for each segment in the graph:

```
print(db_tab.loc[0, "geometry"])
```

```
LINESTRING (444096.3161762458 4482762.870216271, 444171.158127317 4482855.001910598)
```

```
l = db_tab.loc[0, "geometry"]  
l.coords
```

```
<shapely.coords.CoordinateSequence at 0x7f88a4619670>
```

```
node0a, node0b = edge0 = list(  
    db_tab.loc[0, "geometry"].coords  
)  
edge0
```

```
[(444096.3161762458, 4482762.870216271),  
(444171.15812731703, 4482855.001910598)]
```

We can use those to extract adjacencies to each node:

```
db_graph[node0a]
```

```
AdjacencyView({(444171.15812731703, 4482855.001910598): {0: {'level_0': 0, 'level_1': 0, 'OGC_FID': '1', 'dm_id': '1', 'dist_barri': '1606', 'X': 444133.736820226, 'Y': 4482808.89166328, 'value': nan, 'geometry': <shapely.geometry.linestring.LineString object at 0x7f88b3e34a00>, 'mm_len': 118.69948078964639}}, (444083.8275243509, 4482747.422611062): {538: {'level_0': 538, 'level_1': 0, 'OGC_FID': '539', 'dm_id': '539', 'dist_barri': '1606', 'X': 444090.105664431, 'Y': 4482755.13506047, 'value': nan, 'geometry': <shapely.geometry.linestring.LineString object at 0x7f88b43281c0>, 'mm_len': 19.864413729824115}}})
```

We can access edge information for each pair of nodes with a concatenated dict query:

```
db_graph[node0a][node0b]
```

```
AtlasView({0: {'level_0': 0, 'level_1': 0, 'OGC_FID': '1', 'dm_id': '1', 'dist_barri': '1606', 'X': 444133.736820226, 'Y': 4482808.89166328, 'value': nan, 'geometry': <shapely.geometry.linestring.LineString object at 0x7f88b3e34a00>, 'mm_len': 118.69948078964639}})
```

```
db_graph[node0a][node0b][0]
```

```
{'level_0': 0, 'level_1': 0, 'OGC_FID': '1', 'dm_id': '1', 'dist_barri': '1606', 'X': 444133.736820226, 'Y': 4482808.89166328, 'value': nan, 'geometry': <shapely.geometry.linestring.LineString at 0x7f88b3e34a00>, 'mm_len': 118.69948078964639}
```

```
db_graph[node0a][node0b][0]["geometry"]
```



If we need all the node IDs:

```
list(db_graph.nodes)[:5] # Limit to the first five elements
```

```
[(444096.3161762458, 4482762.870216271), (444171.15812731703, 4482855.001910598), (444212.942998509, 4482901.090971609), (444097.96831143444, 4482915.825653204), (445608.8837672261, 4479346.814511424)]
```

And same for edges:

```
list(db_graph.edges)[:5] # Limit to the first five elements
```

#### Note

`edges` returns a triplet with the origin and destination node IDs, *and* the ID of the edge, which is linked to the ID of the segment in the geo-table

```
[((444096.3161762458, 4482762.870216271),
 (444171.15812731703, 4482855.001910598),
 0),
 ((444096.3161762458, 4482762.870216271),
 (444083.8275243509, 4482747.422611062),
 538),
 ((444171.15812731703, 4482855.001910598),
 (444212.942998509, 4482901.090971609),
 1),
 ((444171.15812731703, 4482855.001910598),
 (444097.96831143444, 4482915.825653204),
 2),
 ((444212.942998509, 4482901.090971609),
 (444254.9705938099, 4482866.143285849),
 10886)]
```

Or:

```
db_graph.edges[node0a, node0b, 0]
```

```
{'level_0': 0,
 'level_1': 0,
 'OGC_FID': '1',
 'dm_id': '1',
 'dist_barri': '1606',
 'X': 444133.736820226,
 'Y': 4482808.89166328,
 'value': nan,
 'geometry': <shapely.geometry.linestring.LineString at 0x7f88b3e34a00>,
 'mm_len': 118.69948078964639}
```

If you want fast access to adjacencies:

```
db_graph.adj[node0a]
```

```
AdjacencyView({(444171.15812731703, 4482855.001910598): {0: {'level_0': 0, 'level_1': 0, 'OGC_FID': '1', 'dm_id': '1', 'dist_barri': '1606', 'X': 444133.736820226, 'Y': 4482808.89166328, 'value': nan, 'geometry': <shapely.geometry.linestring.LineString object at 0x7f88b3e34a00>, 'mm_len': 118.69948078964639}, (444083.8275243509, 4482747.422611062): {538: {'level_0': 538, 'level_1': 0, 'OGC_FID': '539', 'dm_id': '539', 'dist_barri': '1606', 'X': 444090.105664431, 'Y': 4482755.13506047, 'value': nan, 'geometry': <shapely.geometry.linestring.LineString object at 0x7f88b43281c0>, 'mm_len': 19.864413729824115}}})
```

Analysing graphs

There are *many* ways to extract information and descriptives from a graph. In this section we will explore a few that can tell us important information about the position of a node or edge in the network and about the broader characteristics of sections of the graph.

Degree

Degree tells us the number of neighbors of every edge, that is how many other nodes it is directly connected to.

```
degree = list(db_graph.degree)
degree[:5]
```

```
[((444096.3161762458, 4482762.870216271), 2),
 ((444171.15812731703, 4482855.001910598), 3),
 ((444212.942998509, 4482901.090971609), 3),
 ((444097.96831143444, 4482915.825653204), 3),
 ((445608.8837672261, 4479346.814511424), 2)]
```

Node centrality

Fraction of nodes a node is connected to:

```
nc = pandas.Series(  
    nx.degree_centrality(db_graph)  
)  
nc.head()
```

```
444096.316176 4.482763e+06 0.00004  
444171.158127 4.482855e+06 0.00006  
444212.942999 4.482901e+06 0.00006  
444097.968311 4.482916e+06 0.00006  
445608.883767 4.479347e+06 0.00004  
dtype: float64
```

```
nc.plot.hist(bins=100, figsize=(6, 3));
```



## 💡 Tip

Other variations of centrality measures are available in `networkx`. They are computationally demanding but relatively straightforward to calculate using the library. For a few of those, you can check:

- [This networkx example](#)
- [The momepy documentation on centrality](#)

## Meshedness

The `meshedness` of a graph captures the degree of node edge density as compared to that of nodes. Higher meshedness is related to denser, more inter-connected grids.

```
%time meshd = momepy.meshedness(db_graph, distance=500)
```

```
100%|██████████| 49985/49985 [00:57<00:00, 876.55it/s]
```

```
CPU times: user 57.8 s, sys: 132 ms, total: 57.9 s  
Wall time: 57.8 s
```

```
meshd.nodes[node0a]
```

```
{'meshedness': 0.058823529411764705}
```

```
pandas.Series(  
    {i: meshd.nodes[i][“meshedness”] for i in meshd.nodes}  
) .plot.hist(bins=100, figsize=(9, 4));
```



## Attaching information to street segments

The trick here is to be able to transfer back the information stored as graphs into geo-tables so we can apply everything we already know about manipulating and mapping data in that structure. With `momepy`, we can bring a graph back into a geo-table:

```
nodes = momepy.nx_to_gdf(  
    meshd, points=True, lines=False  
)
```

```
nodes.head()
```

	meshedness	nodeID	geometry
0	0.058824	1	POINT (444096.316 4482762.870)
1	0.092308	2	POINT (444171.158 4482855.002)
2	0.101449	3	POINT (444212.943 4482901.091)
3	0.065574	4	POINT (444097.968 4482915.826)
4	0.000000	5	POINT (445608.884 4479346.815)

```
ax = nodes.plot(  
    "meshedness",  
    scheme="fisherjenkssampled",  
    markersize=0.1,  
    legend=True,  
    figsize=(12, 12)  
)  
contextily.add_basemap(  
    ax,  
    crs=nodes.crs,  
    source=contextily.providers.CartoDB.DarkMatterNoLabels  
)  
ax.set_title("Meshedness");
```



With other measures index on node IDs, we can use joining machinery in [pandas](#):

```
nc.head()
```

```
444096.316176  4.482763e+06   0.00004  
444171.158127  4.482855e+06   0.00006  
444212.942999  4.482901e+06   0.00006  
444097.968311  4.482916e+06   0.00006  
445608.883767  4.479347e+06   0.00004  
dtype: float64
```

```
degree_tab = pandas.DataFrame(  
    degree, columns=["id", "degree"]  
)  
degree_tab.index = pandas.MultiIndex.from_tuples(  
    degree_tab["id"]  
)  
degree_tab = degree_tab["degree"]  
degree_tab.head()
```

```
444096.316176  4.482763e+06   2  
444171.158127  4.482855e+06   3  
444212.942999  4.482901e+06   3  
444097.968311  4.482916e+06   3  
445608.883767  4.479347e+06   2  
Name: degree, dtype: int64
```

```
net_stats = pandas.DataFrame(  
    {"degree": degree_tab, "centrality": nc},  
)  
net_stats.index.names = ["x", "y"]  
net_stats.head()
```

### degree centrality

x	y	degree	centrality
444096.316176	4.482763e+06	2	0.00004
444171.158127	4.482855e+06	3	0.00006
444212.942999	4.482901e+06	3	0.00006
444097.968311	4.482916e+06	3	0.00006
445608.883767	4.479347e+06	2	0.00004

```
net_stats_geo = nodes.assign(
    x=nodes.geometry.x
).assign(
    y=nodes.geometry.y
).set_index([
    "x", "y"
]).join(net_stats)

net_stats_geo.head()
```


x	y	meshedness	nodeID	geometry	degree
444096.316176	4.482763e+06	0.058824	1	POINT (444096.316 4482762.870)	2
444171.158127	4.482855e+06	0.092308	2	POINT (444171.158 4482855.002)	3
444212.942999	4.482901e+06	0.101449	3	POINT (444212.943 4482901.091)	3
444097.968311	4.482916e+06	0.065574	4	POINT (444097.968 4482915.826)	3
445608.883767	4.479347e+06	0.000000	5	POINT (445608.884 4479346.815)	2



### Next steps

If you found the content in this block useful, the following resources represent some suggestions on where to go next:

- The [NetworkX tutorial](#) is a great place to get a better grasp of the data structures we use to represent (spatial) graphs
- Parts of the block benefit from the section on [urban networks](#) in Geoff Boeing's excellent [course on Urban Data Science](#)
- If you are interested in urban morphometric analysis (the study of the shape of different elements making up cities), the [momepy](#) library is an excellent reference to absorb, including its [user guide](#)



Ahead of time...

## 💻 Hands-on coding

```
import momepy
import geopandas
import contextily
import xarray, rioxarray
import osmnx as ox
import numpy as np
import matplotlib.pyplot as plt
```

Moving along (street) networks

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path `../data/`:

```
streets = geopandas.read_file("../data/arturo_streets.gpkg")
abbs = geopandas.read_file("../data/madrid_abb.gpkg")
neis = geopandas.read_file("../data/neighbourhoods.geojson")
```

Shortest-path routing

```
import pandana
```

Before building the routing network, we convert to graph and back in `momepy` to “clean” the network and ensure it complies with requirements for routing.

```
%%time
nodes, edges = momepy.nx_to_gdf(
    momepy.gdf_to_nx(
        streets.explode() # We "explode" to avoid multi-part rows
    )
)
nodes = nodes.set_index("nodeID") # Reindex nodes on ID
```

```
CPU times: user 5.3 s, sys: 28.1 ms, total: 5.33 s
Wall time: 5.33 s
```

Once we have nodes and edges “clean” from the graph representation, we can build a `pandana.Network` object we will use for routing:

```
streets_pdn = pandana.Network(
    nodes.geometry.x,
    nodes.geometry.y,
    edges["node_start"],
    edges["node_end"],
    edges[["mm_len"]]
)
streets_pdn
```

```
<pandana.network.Network at 0x7f7c3b9954f0>
```

How do I go from A to B?

For example, from the first Airbnb in the geo-table...

```
first = abbs.loc[[0], :].to_crs(streets.crs)
```

...to Puerta del Sol.

```

import geopy
geopy.geocoders.options.default_user_agent = "gds4ae"
sol = geopandas.tools.geocode(
    "Puerta del Sol, Madrid", geopy.Nominatim
).to_crs(streets.crs)
sol

```

	geometry	address
0	POINT (440247.912 4474264.981)	Puerta del Sol, Sol, Centro, Madrid, Área metr...

First we snap locations to the network:

```

pt_nodes = streets_pdn.get_node_ids(
    [first.geometry.x, sol.geometry.x],
    [first.geometry.y, sol.geometry.y]
)
pt_nodes

```

0	3072
1	35732
Name: node_id, dtype: int64	

Then we can route the shortest path:

```

route_nodes = streets_pdn.shortest_path(
    pt_nodes[0], pt_nodes[1]
)
route_nodes

```

array([ 3072, 3477, 8269, 8267, 8268, 18696, 18694, 1433, 1431, 354, 8176, 8177, 18122, 17477, 16859, 14323, 16858, 17811, 44796, 41221, 41218, 41222, 41653, 18925, 18929, 48944, 18932, 21095, 21096, 23220, 15399, 15400, 15401, 47447, 47448, 23277, 47449, 23260, 23261, 23262, 27952, 27953, 27954, 48328, 11951, 11950, 11945, 19476, 19477, 27334, 30089, 43295, 11941, 11942, 11943, 48326, 37485, 48317, 15894, 15891, 15892, 29955, 25454, 7342, 34992, 23609, 28218, 21649, 21650, 21652, 39076, 25109, 25103, 25102, 25101, 48519, 47288, 34624, 31188, 29616, 48557, 22845, 48554, 48556, 40923, 40922, 40924, 48586, 46373, 46372, 46371, 45676, 45677, 38779, 38778, 19145, 20499, 20498, 20500, 47738, 42304, 42303, 35731, 35728, 35730, 35732])
---

With this information, we can build the route line manually:

```

from shapely.geometry import LineString

def route_nodes_to_line(nodes, network):
    pts = network.nodes_df.loc[nodes, :]
    s = geopandas.GeoDataFrame(
        {"src_node": [nodes[0]], "tgt_node": [nodes[1]]},
        geometry=[LineString(pts.values)],
        crs=streets.crs
    )
    return s

```

We can calculate the route:

```

route = route_nodes_to_line(route_nodes, streets_pdn)

```

And we get it back as a geo-table (with one row):

route
-------



	src_node	tgt_node	geometry
0	3072	3477	LINESTRING (442606.507 4478714.516, 442597.100...)

### Attention

The code to generate the route involves writing a function and is a bit more advanced than expected for this course. If this looks too complicated, do not despair.

Also, please note this builds a *simplified* line for the route, not one that is based on the original geometries (distance calculations are based on the original network).

If we wanted to obtain the length of the route:


```
route_len = streets_pdn.shortest_path_length(  
    pt_nodes[0], pt_nodes[1]  
)  
round(route_len / 1000, 3) # Dist in Km
```

5.514

“Third party-driven” routing

How do I go from A to B passing by the “best” buildings?

The overall process is the same; the main difference is, when we build the **Network** object, to replace distance (**mm\_len**) with a measure that *combines* distance and building quality. Note that we want to *maximise* building quality, but the routing algorithms use a *minimisation* function. Hence, our composite index will need to reflect that.



The strategy is divided in the following steps:

1. Re-scale distance between 0 and 1
2. Build a measure inverse to building quality in the  $\{[0, 1]\}$  range
3. Generate a combined measure (**wdist**) by picking a weighting parameter
4. Build a new **Network** object that incorporates **wdist** instead of distance
5. Compute route between the two points of interest


For 1., we can use the scaler in **scikit-learn**:

```
from sklearn.preprocessing import minmax_scale
```

Then generate and attach to **edges** a scaled version of **mm\_len**:


```
edges["scaled_dist"] = minmax_scale(edges["mm_len"])
```

We move on to 2., with a similar approach. We will use the negative of the building quality average (**average\_quality**):



```
edges["scaled_inv_bquality"] = minmax_scale(  
    -edges["average_quality"]  
)
```

Taking 1. and 2. into 3. we can build **wdist**. For this example, we will give each dimension the same weight (0.5), but this is at discretion of the researcher.



```
w = 0.5  
edges["wdist"] = (  
    edges["scaled_dist"] * w +  
    edges["scaled_inv_bquality"] * (1-w))
```

Now we can recreate the **Network** object based on our new measure (4.) and provide routing. Since it is the same process as with distance, we will do it all in one go:

```

# Build new graph object
w_graph = pandana.Network(
    nodes.geometry.x,
    nodes.geometry.y,
    edges["node_start"],
    edges["node_end"],
    edges[["wdist"]]
)
# Snap locations to their nearest node
pt_nodes = w_graph.get_node_ids(
    [first.geometry.x, sol.geometry.x],
    [first.geometry.y, sol.geometry.y]
)
# Generate route
w_route_nodes = w_graph.shortest_path(
    pt_nodes[0], pt_nodes[1]
)
# Build LineString
w_route = route_nodes_to_line(
    w_route_nodes, w_graph
)

```



## Proximity

*What is the nearest internet cafe for Airbnb's without WiFi?*

First we identify Airbnb's without WiFi:

```

no_wifi = abbs.query(
    "WiFi == '0'"
).to_crs(streets.crs)

```

Then pull WiFi spots in Madrid from OpenStreetMap:

```

icafes = ox.geometries_from_place(
    "Madrid, Spain", tags={"amenity": "internet_cafe"}
).to_crs(streets.crs).reset_index()

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
and should_run_async(code)

```



The logic for this operation is the following:

1. Add the points of interest (POIs, the internet cafes) to the network object (`streets_pdn`)
2. Find the nearest node to each POI
3. Find the nearest node to each Airbnb without WiFi
4. Connect each Airbnb to its nearest internet cafe

We can add the internet cafes to the network object (1.) with the `set_pois` method:

```

import numpy as np

streets_pdn.set_pois(
    category="Internet cafes",
    maxitems=1,
    maxdist=100000, # 100km so everything is included
    x_col=icafes.geometry.x,
    y_col=icafes.geometry.y,
)

```

Note we set `max_items=1` because we are only going to query for the nearest cafe. This will make computations much faster

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)
/opt/conda/lib/python3.8/site-packages/pandana/network.py:660: DeprecationWarning: The
default dtype for empty Series will be 'object' instead of 'float64' in a future
version. Specify a dtype explicitly to silence this warning.
    elif isinstance(maxitems, type(pd.Series())):
/opt/conda/lib/python3.8/site-packages/pandana/network.py:668: DeprecationWarning: The
default dtype for empty Series will be 'object' instead of 'float64' in a future
version. Specify a dtype explicitly to silence this warning.
    elif isinstance(maxdist, type(pd.Series())):

```

Once the cafes are added to the network, we can find the nearest one to each node (2.):

```

cafe2nnode = streets_pdn.nearest_pois(
    100000,           # Max distance to look for
    "Internet cafes", # POIs to look for
    num_pois=1,        # No. of POIs to include
    include_poi_ids=True # Store POI ID
# Then add the internet cafee IDs and name
).join(
    icafees[['osmid', 'name']],
    on="poil"
# Rename the distance from node to cafe
).rename(
    columns={1: "dist2icafe"}
)
cafe2nnode.info()

```

Note there are some nodes for which we can't find a nearest cafe. These are related to disconnected parts of the network

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)

```

```

<class 'pandas.core.frame.DataFrame'>
Int64Index: 49985 entries, 1 to 49985
Data columns (total 5 columns):
 #   Column      Non-Null Count  Dtype  
--- 
 0   dist2icafe  49985 non-null   float64
 1   poil         49113 non-null   float64
 2   unique_id    49113 non-null   object  
 3   osmid        49113 non-null   float64
 4   name         25684 non-null   object  
dtypes: float64(3), object(2)
memory usage: 3.3+ MB

```

Note that, to make things easier down the line, we can link `cafe2nnode` to the cafe IDs.

And we can also link Airbnb's to nodes (3.) following a similar approach as we have seen above:

```

abbs_nnode = streets_pdn.get_node_ids(
    no_wifi.geometry.x, no_wifi.geometry.y
)
abbs_nnode.head()

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)

```

26	8873
50	10906
62	41159
63	34258
221	32216

Name: node\_id, dtype: int64

Finally, we can bring together both to find out what is the nearest internet cafe for each Airbnb (4.):

```

abb_icafe = no_wifi[
    ["geometry"]
].assign(
    nnode=abbs_nnode
).join(
    cafe2nnode.drop('geometry', axis=1),
    on="nnode"
)
abb_icafe.head()

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)

```

	<b>geometry</b>	<b>nnode</b>	<b>dist2icafe</b>	<b>poi1</b>	<b>unique_id</b>	<b>osm</b>
<b>26</b>	POINT (443128.256 4483599.841)	8873	4926.223145	9.0	node/3770327498	3.770327e+1
<b>50</b>	POINT (441885.677 4475916.602)	10906	1876.392944	19.0	node/6922981312	6.922981e+1
<b>62</b>	POINT (440439.640 4476480.771)	41159	1164.812988	17.0	node/5573414444	5.573414e+1
<b>63</b>	POINT (438485.311 4471714.377)	34258	1466.537964	5.0	node/2304484515	2.304485e+1
<b>221</b>	POINT (439941.104 4473117.914)	32216	354.268005	15.0	node/5412144560	5.412145e+1

## Accessibility

```

%%time
parks = ox.geometries_from_place(
    "Madrid, Spain", tags={"leisure": "park"}
).to_crs(streets.crs)

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)

```

```

CPU times: user 429 ms, sys: 12 ms, total: 441 ms
Wall time: 437 ms

```

How many parks are within 500m(-euclidean) of an Airbnb?

We draw a radius of 500m around each Airbnb:

```

buffers = geopandas.GeoDataFrame(
    geometry=abbs.to_crs(
        streets.crs
    ).buffer(
        500
    )
)

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)

```

Then intersect it with the location of parks, and count by buffer (ie. Airbnb):

```
park_count = geopandas.sjoin(  
    parks, buffers  
)  
.groupby(  
    "index_right"  
)  
.size()
```

How many parks are within 500m(-network) of an Airbnb?

We need to approach this as a calculation *within* the network. The logic of steps thus looks like:

1. Use the aggregation module in [pandana](#) to count the number of parks within 500m of each node in the network
2. Extract the counts for the nodes nearest to Airbnb properties
3. Assign park counts to each Airbnb

We can set up the aggregate engine (1.). This involves three steps:

a. Obtain nearest node for each park

```
parks_nnode = streets_pdn.get_node_ids(  
    parks.centroid.x, parks.centroid.y  
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

b. Insert the parks' nearest node through [set](#) so it can be “aggregated”

```
streets_pdn.set(  
    parks_nnode, name="Parks"  
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

c. “Aggregate” for a distance of 500m, effectively counting the number of parks within 500m of each node

```
parks_by_node = streets_pdn.aggregate(  
    distance=500, type="count", name="Parks"  
)  
parks_by_node.head()
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

```
nodeID  
1    5.0  
2    5.0  
3    6.0  
4    8.0  
5    1.0  
dtype: float64
```

At this point, we have the number of parks within 500m of every node in the network. To identify those that correspond to each Airbnb (3.), we query those nodes:

```
abbs_xys = abbs.to_crs(streets.crs).geometry  
abbs_nnode = streets_pdn.get_node_ids(  
    abbs_xys.x, abbs_xys.y  
)
```

And use the list to assign the count of the nearest node to each Airbnb:

```
park_count_network = abbs_nnode.map(  
    parks_by_node  
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:  
`should_run_async` will not call `transform_cell` automatically in the future. Please  
pass the result to `transformed_cell` argument and any exception that happen during  
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.  
    and should_run_async(code)
```

For which areas do both differ most?

We can compare the two counts above to explore to what extent the street layout is constraining access to nearby parks.

```
park_comp = geopandas.GeoDataFrame(  
    {  
        "Euclidean": park_count,  
        "Network": park_count_network  
    },  
    geometry=abbs.geometry,  
    crs=abbs.crs  
)
```

```
park_comp.plot.scatter("Euclidean", "Network");
```



And, geographically:

Note there are a few cases where there are more network counts than Euclidean. These are due to the slight inaccuracies introduced by calculating network distances from nodes rather than the locations themselves



Moving along surfaces

[Local files](#)    [Online read](#)

Assuming you have the file locally on the path `../data/`:

```
friction_walk = rioxarray.open_rasterio(
    "../data/cambodia_2020_walking_friction_surface.tif"
)
friction_motor = rioxarray.open_rasterio(
    "../data/cambodia_2020_motorized_friction_surface.tif"
)
cities = geopandas.read_file("../data/cambodian_cities.geojson")
```


Shortest-path routing

```
import osmnx as ox
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)
```

```
main_roads = ox.geometries_from_place(
    "Cambodia", tags={"highway": "trunk"}
)
```

From the geo-table of roads, we can generate a surface that has a value of 1 on cells where a road crosses, and 0 otherwise (rasterisation).



```
from geocube.api.core import make_geocube

roads_surface = make_geocube(
    main_roads.assign(
        one=1
    ).to_crs(epsg=3148),
    measurements=["one"],
    resolution=(500, 500)
)["one"]
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)
```

Now we turn it into a binary mask:

```
road_mask = xarray.where(
    roads_surface.isnull(), 0, 1
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
    and should_run_async(code)
```

```
xarray.DataArray 'one' (y: 745, x: 847)
```

```
array([[0, 0, 0, ..., 0, 0, 0],  
       [0, 0, 0, ..., 0, 0, 0],  
       [0, 0, 0, ..., 0, 0, 0],  
       ...  
       [0, 0, 0, ..., 0, 0, 0],  
       [0, 0, 0, ..., 0, 0, 0],  
       [0, 0, 0, ..., 0, 0, 0]])
```

▼ Coordinates:

y	(y) float64 1.167e+06 1.168e+06 ... 1.539e+06	
x	(x) float64 2.348e+05 2.352e+05 ... 6.578e+05	
spatial_ref	(0) int64 0	

► Attributes: (0)

Then we can generate the routing from, say Phnom Penh to Poipet, using `xarray-spatial`'s A\* algorithm:

```
a_star_search?
```

```
Object `a_star_search` not found.
```

```
from xrspatial import a_star_search

# Pull out starting point
start = cities.query(
    "UC_NM_MN == 'Phnom Penh'"
).to_crs(
    epsg=3148
).squeeze().geometry

# Pull out ending point
end = cities.query(
    "UC_NM_MN == 'Poipet'"
).to_crs(
    epsg=3148
).squeeze().geometry

# Routing
route = a_star_search(
    road_mask,          # Road surface
    (start.x, start.y), # Starting point
    (end.x, end.y),    # Destination point
    barriers=[0],       # Cell values that cannot be crossed
    snap_start=True,    # Snap starting point to valid cells
    snap_goal=True      # Snap ending point to valid cells
)
```

```

/opt/conda/lib/python3.8/site-packages/numba/cuda/api.py:112: DeprecationWarning:
`np.float` is a deprecated alias for the builtin `float`. To silence this warning, use
`float` by itself. Doing this will not modify any behavior and is safe. If you
specifically wanted the numpy scalar type, use `np.float64` here.
Deprecated in NumPy 1.20; for more details and guidance:
https://numpy.org/devdocs/release/1.20.0-notes.html#deprecations
    def device_array(shape, dtype=np.float, strides=None, order='C', stream=0):
/opt/conda/lib/python3.8/site-packages/numba/cuda/api.py:124: DeprecationWarning:
`np.float` is a deprecated alias for the builtin `float`. To silence this warning, use
`float` by itself. Doing this will not modify any behavior and is safe. If you
specifically wanted the numpy scalar type, use `np.float64` here.
Deprecated in NumPy 1.20; for more details and guidance:
https://numpy.org/devdocs/release/1.20.0-notes.html#deprecations
    def managed_array(shape, dtype=np.float, strides=None, order='C', stream=0,
/opt/conda/lib/python3.8/site-packages/numba/cuda/api.py:154: DeprecationWarning:
`np.float` is a deprecated alias for the builtin `float`. To silence this warning, use
`float` by itself. Doing this will not modify any behavior and is safe. If you
specifically wanted the numpy scalar type, use `np.float64` here.
Deprecated in NumPy 1.20; for more details and guidance:
https://numpy.org/devdocs/release/1.20.0-notes.html#deprecations
    def pinned_array(shape, dtype=np.float, strides=None, order='C'):
/opt/conda/lib/python3.8/site-packages/numba/cuda/api.py:170: DeprecationWarning:
`np.float` is a deprecated alias for the builtin `float`. To silence this warning, use
`float` by itself. Doing this will not modify any behavior and is safe. If you
specifically wanted the numpy scalar type, use `np.float64` here.
Deprecated in NumPy 1.20; for more details and guidance:
https://numpy.org/devdocs/release/1.20.0-notes.html#deprecations
    def mapped_array(shape, dtype=np.float, strides=None, order='C', stream=0,
/opt/conda/lib/python3.8/site-packages/numba/cuda/simulator/cudadrv/devicearray.py:313: DeprecationWarning:
`np.float` is a deprecated alias for the builtin `float`. To silence this warning, use
`float` by itself. Doing this will not modify any behavior and is safe. If you
specifically wanted the numpy scalar type, use `np.float64` here.
Deprecated in NumPy 1.20; for more details and guidance:
https://numpy.org/devdocs/release/1.20.0-notes.html#deprecations
    def pinned_array(shape, dtype=np.float, strides=None, order='C'):
/opt/conda/lib/python3.8/site-packages/numba/cuda/simulator/cudadrv/devicearray.py:317: DeprecationWarning:
`np.float` is a deprecated alias for the builtin `float`. To silence this warning, use
`float` by itself. Doing this will not modify any behavior and is safe. If you
specifically wanted the numpy scalar type, use `np.float64` here.
Deprecated in NumPy 1.20; for more details and guidance:
https://numpy.org/devdocs/release/1.20.0-notes.html#deprecations
    def managed_array(shape, dtype=np.float, strides=None, order='C'):

```

## route

xarray.DataArray (y: 745, x: 847)

```

array([[nan, nan, nan, ..., nan, nan, nan],
       [nan, nan, nan, ..., nan, nan, nan],
       [nan, nan, nan, ..., nan, nan, nan],
       ...,
       [nan, nan, nan, ..., nan, nan, nan],
       [nan, nan, nan, ..., nan, nan, nan],
       [nan, nan, nan, ..., nan, nan, nan]])

```

### Coordinates:

y	(y)	float64	1.167e+06	1.168e+06	...	1.539e+06
x	(x)	float64	2.348e+05	2.352e+05	...	6.578e+05
spatial_ref	(0)	int64	0			


### Attributes: (0)

```

/opt/conda/lib/python3.8/site-
packages/ipykernel/ipkernel.py:283:
DeprecationWarning: `should_run_async` will not
call `transform_cell` automatically in the
future. Please pass the result to
`transformed_cell` argument and any exception
that happen during the transform in
`preprocessing_exc_tuple` in IPython 7.17 and
above.
    and should_run_async(code)

```

<matplotlib.collections.QuadMesh at  
0x7f7c3b7fc370>

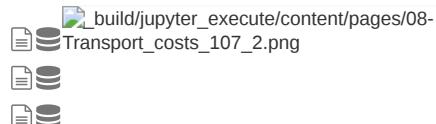

And we can turn the route surface into a line that connects the pixels in the route:

```
from shapely.geometry import LineString

route_line = LineString(
    route.to_series().dropna().reset_index().rename(
        columns={0: "order"})
    .sort_values(
        "order"
    )[
        ["x", "y"]
    ].values
)
route_line
```



## Continuous surfaces

We can use a continuous surface instead of a road network to set the surface cells where it is allowed to “pass”. For example, with the motorised surface, we can explore the degree of friction:



We can determine that, above 0.01, a cell is not available for routing. Using this, we can build a mask similar as above that can be used for generating routes:

```
# Set surface up
surface = friction_motor.where(
    friction_motor!=friction_motor.rio.nodata
).rio.reproject(3148).sel(
    band=1
)
# Swap nodata value for N/A
surface = surface.where(
    surface!=surface.rio.nodata
)
# Turn into binary mask
# Valid for routing if < 0.01
surface = xarray.where(
    surface < 0.01, 1, 0
)
```

```
/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
and should_run_async(code)
```

```

# Swap order of Y coordinate
surface.coords["y"] = surface.coords["y"][::-1]

# Pull out starting point
start = cities.query(
    "UC_NM_MN == 'Siem Reap'"
).to_crs(
    epsg=3148
).squeeze().geometry

# Pull out ending point
end = cities.query(
    "UC_NM_MN == 'Sihanoukville'"
).to_crs(
    epsg=3148
).squeeze().geometry

# Routing
route = a_star_search(
    surface,           # (Reprojected) road surface
    (start.x, start.y), # Starting point
    (end.x, end.y),   # Destination point
    barriers=[0],      # Cell values that cannot be crossed
    snap_start=True,   # Snap starting point to valid cells
    snap_goal=True     # Snap ending point to valid cells
)

# Swap order of Y coordinate back
surface.coords["y"] = surface.coords["y"][::-1]

# Parse route into line
route_line = LineString(
    route.to_series().dropna().reset_index().rename(
        columns={0: "order"})
    .sort_values(
        "order"
    )[
        ["x", "y"]
    ].values
)
route_line = geopandas.GeoSeries([route_line])

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
and should_run_async(code)

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
and should_run_async(code)

```



```

f, ax = plt.subplots(1, figsize=(30, 30))
surface.plot(add_colorbar=False)
route_line.plot(
    ax=ax, color="red"
)
cities.to_crs(epsg=3148).plot(
    ax=ax, label="Main cities"
)
plt.show()

```

```

/opt/conda/lib/python3.8/site-packages/ipykernel/ipkernel.py:283: DeprecationWarning:
`should_run_async` will not call `transform_cell` automatically in the future. Please
pass the result to `transformed_cell` argument and any exception that happen during
the transform in `preprocessing_exc_tuple` in IPython 7.17 and above.
and should_run_async(code)

```



- Recreate weighted routing using the linearity of street segments. How can you go from A to B avoiding long streets?
- Explore the differences in the output of weighted routing if you change the weight between distance and the additional variable.
- Explore the difference in routing when you vary the friction threshold to allow usage of a cell

## Next steps

If you found the content in this block useful, the following resources represent some suggestions on where to go next:

- The [pandana tutorial](#) and [documentation](#) are excellent places to get a more detailed and comprehensive view into the functionality of the library
- More about [xarray-spatial](#), the library that provides geospatial techniques on top of surfaces is available at the project's [documentation](#)

## Datasets

This section covers the datasets required to run the course interactively. For archival reasons, all of those listed here have been mirrored in the repository for this course so, if you have [downloaded the course](#), you already have a local copy of them.

### Madrid

Airbnb properties

#### Source

This dataset has been sourced from the course "[Spatial Modelling for Data Scientists](#)". The file imported here corresponds to the [v0.1.0](#) version.

This dataset contains a pre-processed set of properties advertised on the Airbnb website within the region of Madrid (Spain), together with house characteristics.

-  Data file [madrid\\_abb.gpkg](#)
-  Code used to generate the file [\[URL\]](#).
-  Furhter information [\[URL\]](#).



This dataset is licensed under a [CC0 1.0 Universal Public Domain Dedication](#).

Airbnb neighbourhoods

#### Source

This dataset has been directly sourced from the website [Inside Airbnb](#). The file was imported on February 10th 2021.

This dataset contains neighbourhood boundaries for the city of Madrid, as provided by Inside Airbnb.

-  Data file [neighbourhoods.geojson](#)
-  Furhter information [\[URL\]](#).



This dataset is licensed under a [CC0 1.0 Universal Public Domain Dedication](#).

## Arturo

This dataset contains the street layout of Madrid as well as scores of habitability, where available, associated with street segments. The data originate from the [Arturo Project](#), by [300,000Km/s](#), and the available file here is a slimmed down version of their official [street layout](#) distributed by the project.

- 📁 Data file [arturo\\_streets.gpkg](#)
- 💻 Code used to generate the file [\[Page\]](#).
- 🌐 Furhter information [\[URL\]](#).



This dataset is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

## Sentinel 2 - 120m mosaic

This dataset contains four scenes for the region of Madrid (Spain) extracted from the [Digital Twin Sandbox Sentinel-2 collection](#), by the SentinelHub. Each scene corresponds to the following dates in 2019:

- January 1st
- April 1st
- July 10th
- November 17th

Each scene includes red, green, blue and near-infrared bands.

- 📁 Data files ([Jan 1st](#), [Apr 1st](#), [Jul 10th](#), [Nov 27th](#))
- 💻 Code used to generate the file [\[Page\]](#).
- 🌐 Furhter information [\[URL\]](#).



This dataset is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

## Sentinel 2 - 10m GHS composite

This dataset contains a scene for the region of Madrid (Spain) extracted from the [GHS Composite S2](#), by the European Commission.

- 📁 Data file [madrid\\_scene\\_s2\\_10\\_tc.tif](#)
- 💻 Code used to generate the file [\[Page\]](#).
- 🌐 Furhter information [\[URL\]](#).



This dataset is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).

## Cambodia

### Pollution

Surface with \(\text{NO}\_2\)) measurements (tropospheric column) information attached from Sentinel 5.

-  Data file [cambodia\\_s5\\_no2.tif](#)
-  Code used to generate the file [\[Page\]](#).
-  Furhter information [\[URL\]](#).

## Friction surfaces

This dataset is an extraction of the following two data products by Weiss et al. (2020) [\[WNVR+20\]](#) and distributed through the [Malaria Atlas Project](#):

- Global friction surface enumerating land-based travel walking-only speed without access to motorized transport for a nominal year 2019 (Minutes required to travel one metre)
- Global friction surface enumerating land-based travel speed with access to motorized transport for a nominal year 2019 (Minutes required to travel one metre)

Each is provided on a separate file.

-  Data files ([Motorized](#) and [Walking](#))
-  Code used to generate the file [\[Page\]](#).
-  Furhter information [\[URL\]](#).

## Regional aggregates

### Source

This dataset relies on boundaries from the [Humanitarian Data Exchange](#). The file is provided by the World Food Programme through the Humanitarian Data Exchange and was accessed on February 15th 2021.

[Pollution](#) and [friction](#) aggregated at Level 2 (municipality) administrative boundaries for Cambodia.

-  Data file [cambodia\\_regional.gpkg](#)
-  Code used to generate the file [\[Page\]](#).



This dataset is licensed under a [Creative Commons Attribution 4.0 International License](#).

## Cambodian cities

Extract from the Urban Centre Database (UCDB), version 1.2, of the centroid for Cambodian cities.

-  Data file [cambodian\\_cities.geojson](#)
-  Code used to generate the file [\[Page\]](#).
-  Furhter information [\[URL\]](#).



This dataset is licensed under a [Creative Commons Attribution 4.0 International License](#).

## Further Resources

If this course is successful, it will leave you wanting to learn more about using Python for (Geographic) Data Science. See below a few resources that are good “next steps”.

## Courses

- The “Automating GIS processes”, by Vuokko Heikinheimo and Henrikki Tenkanen is a great overview of GIS with a modern Python stack:

<https://autogis-site.readthedocs.io/>

- The “GDS Course” by Dani Arribas-Bel [AB19] is an introductory level overview of Geographic Data Science, including notebooks, slides and video clips.

[https://darribas.org/gds\\_course](https://darribas.org/gds_course)

## Books

- “Python for Geographic Data Analysis”, by Henrikki Tenkanen, Vuokko Heikinheimo and David Whipp:

<https://pythongis.org/>

- “Geographic Data Science in Python”, by Sergio J. Rey, Dani Arribas-Bel and Levi J. Wolf:

<https://geographicdata.science>

## Bibliography

### [ASP19]

Jennings Anderson, Dipto Sarkar, and Leysia Palen. Corporate editors in the evolving landscape of openstreetmap. *ISPRS International Journal of Geo-Information*, 8(5):232, 2019.

### [AB19]

Dani Arribas-Bel. A course on geographic data science. *The Journal of Open Source Education*, 2019. [doi:https://doi.org/10.21105/jose.00042](https://doi.org/10.21105/jose.00042).

### [Boe17]

Geoff Boeing. OSMnx: New Methods for Acquiring, Constructing, Analyzing, and Visualizing Complex Street Networks. *Computers, Environment and Urban Systems*, 2017.  
[doi:10.1016/j.compenvurbsys.2017.05.004](https://doi.org/10.1016/j.compenvurbsys.2017.05.004).

### [Boe20a]

Geoff Boeing. Exploring urban form through openstreetmap data: a visual introduction. *arXiv preprint arXiv:2008.12142*, 2020.

### [Boe20b]

Geoff Boeing. Off the grid... and back again? the recent evolution of american street network planning and design. *Journal of the American Planning Association*, pages 1–15, 2020.

### [BAB20]

Geoff Boeing and Dani Arribas-Bel. Gis and computational notebooks. In John P. Wilson, editor, *The Geographic Information Science & Technology Body of Knowledge*. UCGIS, 2020.

### [Bre15]

Cynthia Brewer. *Designing better Maps: A Guide for GIS users*. ESRI press, 2015.

### [Fle19]

Martin Fleischmann. Momepy: urban morphology measuring toolkit. *Journal of Open Source Software*, 4(43):1807, 2019.

**[McK12]**

Wes McKinney. *Python for data analysis: Data wrangling with Pandas, NumPy, and IPython*. O'Reilly Media, Inc., 2012.

**[RABWng]**

Sergio J. Rey, Daniel Arribas-Bel, and Levi J. Wolf. *Geographic Data Science with PySAL and the PyData stack*. CRC press, forthcoming.

**[RBZ+19]**

Adam Rule, Amanda Birmingham, Cristal Zuniga, Ilkay Altintas, Shih-Cheng Huang, Rob Knight, Niema Moshiri, Mai H Nguyen, Sara Brin Rosenthal, Fernando Pérez, and others. Ten simple rules for writing and sharing computational analyses in jupyter notebooks. *PLoS Comput Biol*, 2019. [doi:<https://doi.org/10.1371/journal.pcbi.1007007>](https://doi.org/10.1371/journal.pcbi.1007007).

**[SAB19]**

Alex Singleton and Daniel Arribas-Bel. Geographic data science. *Geographical Analysis*, 2019.

**[WNVR+20]**

DJ Weiss, A Nelson, CA Vargas-Ruiz, K Gligorić, S Bavadekar, E Gabrilovich, A Bertozzi-Villa, J Rozier, HS Gibson, T Shekel, and others. Global maps of travel time to healthcare facilities. *Nature Medicine*, 26(12):1835–1838, 2020.

---

By Dani Arribas-Bel & Diego Puga



Data Science Studio by [Dani Arribas-Bel](#) and [Diego Puga](#) is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).