REEP: every role, feature and CRUD operation, as n8n draws it

The n8n workflow reep-roles-features-crud.n8n.json, drawn by n8n at 100% zoom and cut into 33 pages. Every page is vector, so the text stays sharp however far you zoom.

Tap a numbered box below, or a line of the contents, to go to that page. Each page's band has a link back here.

Each lane reads left to right: role, feature area, feature (its CREATE / READ / UPDATE / DELETE outputs), API call, FastAPI handler, tables and AWS services, then the feature card.

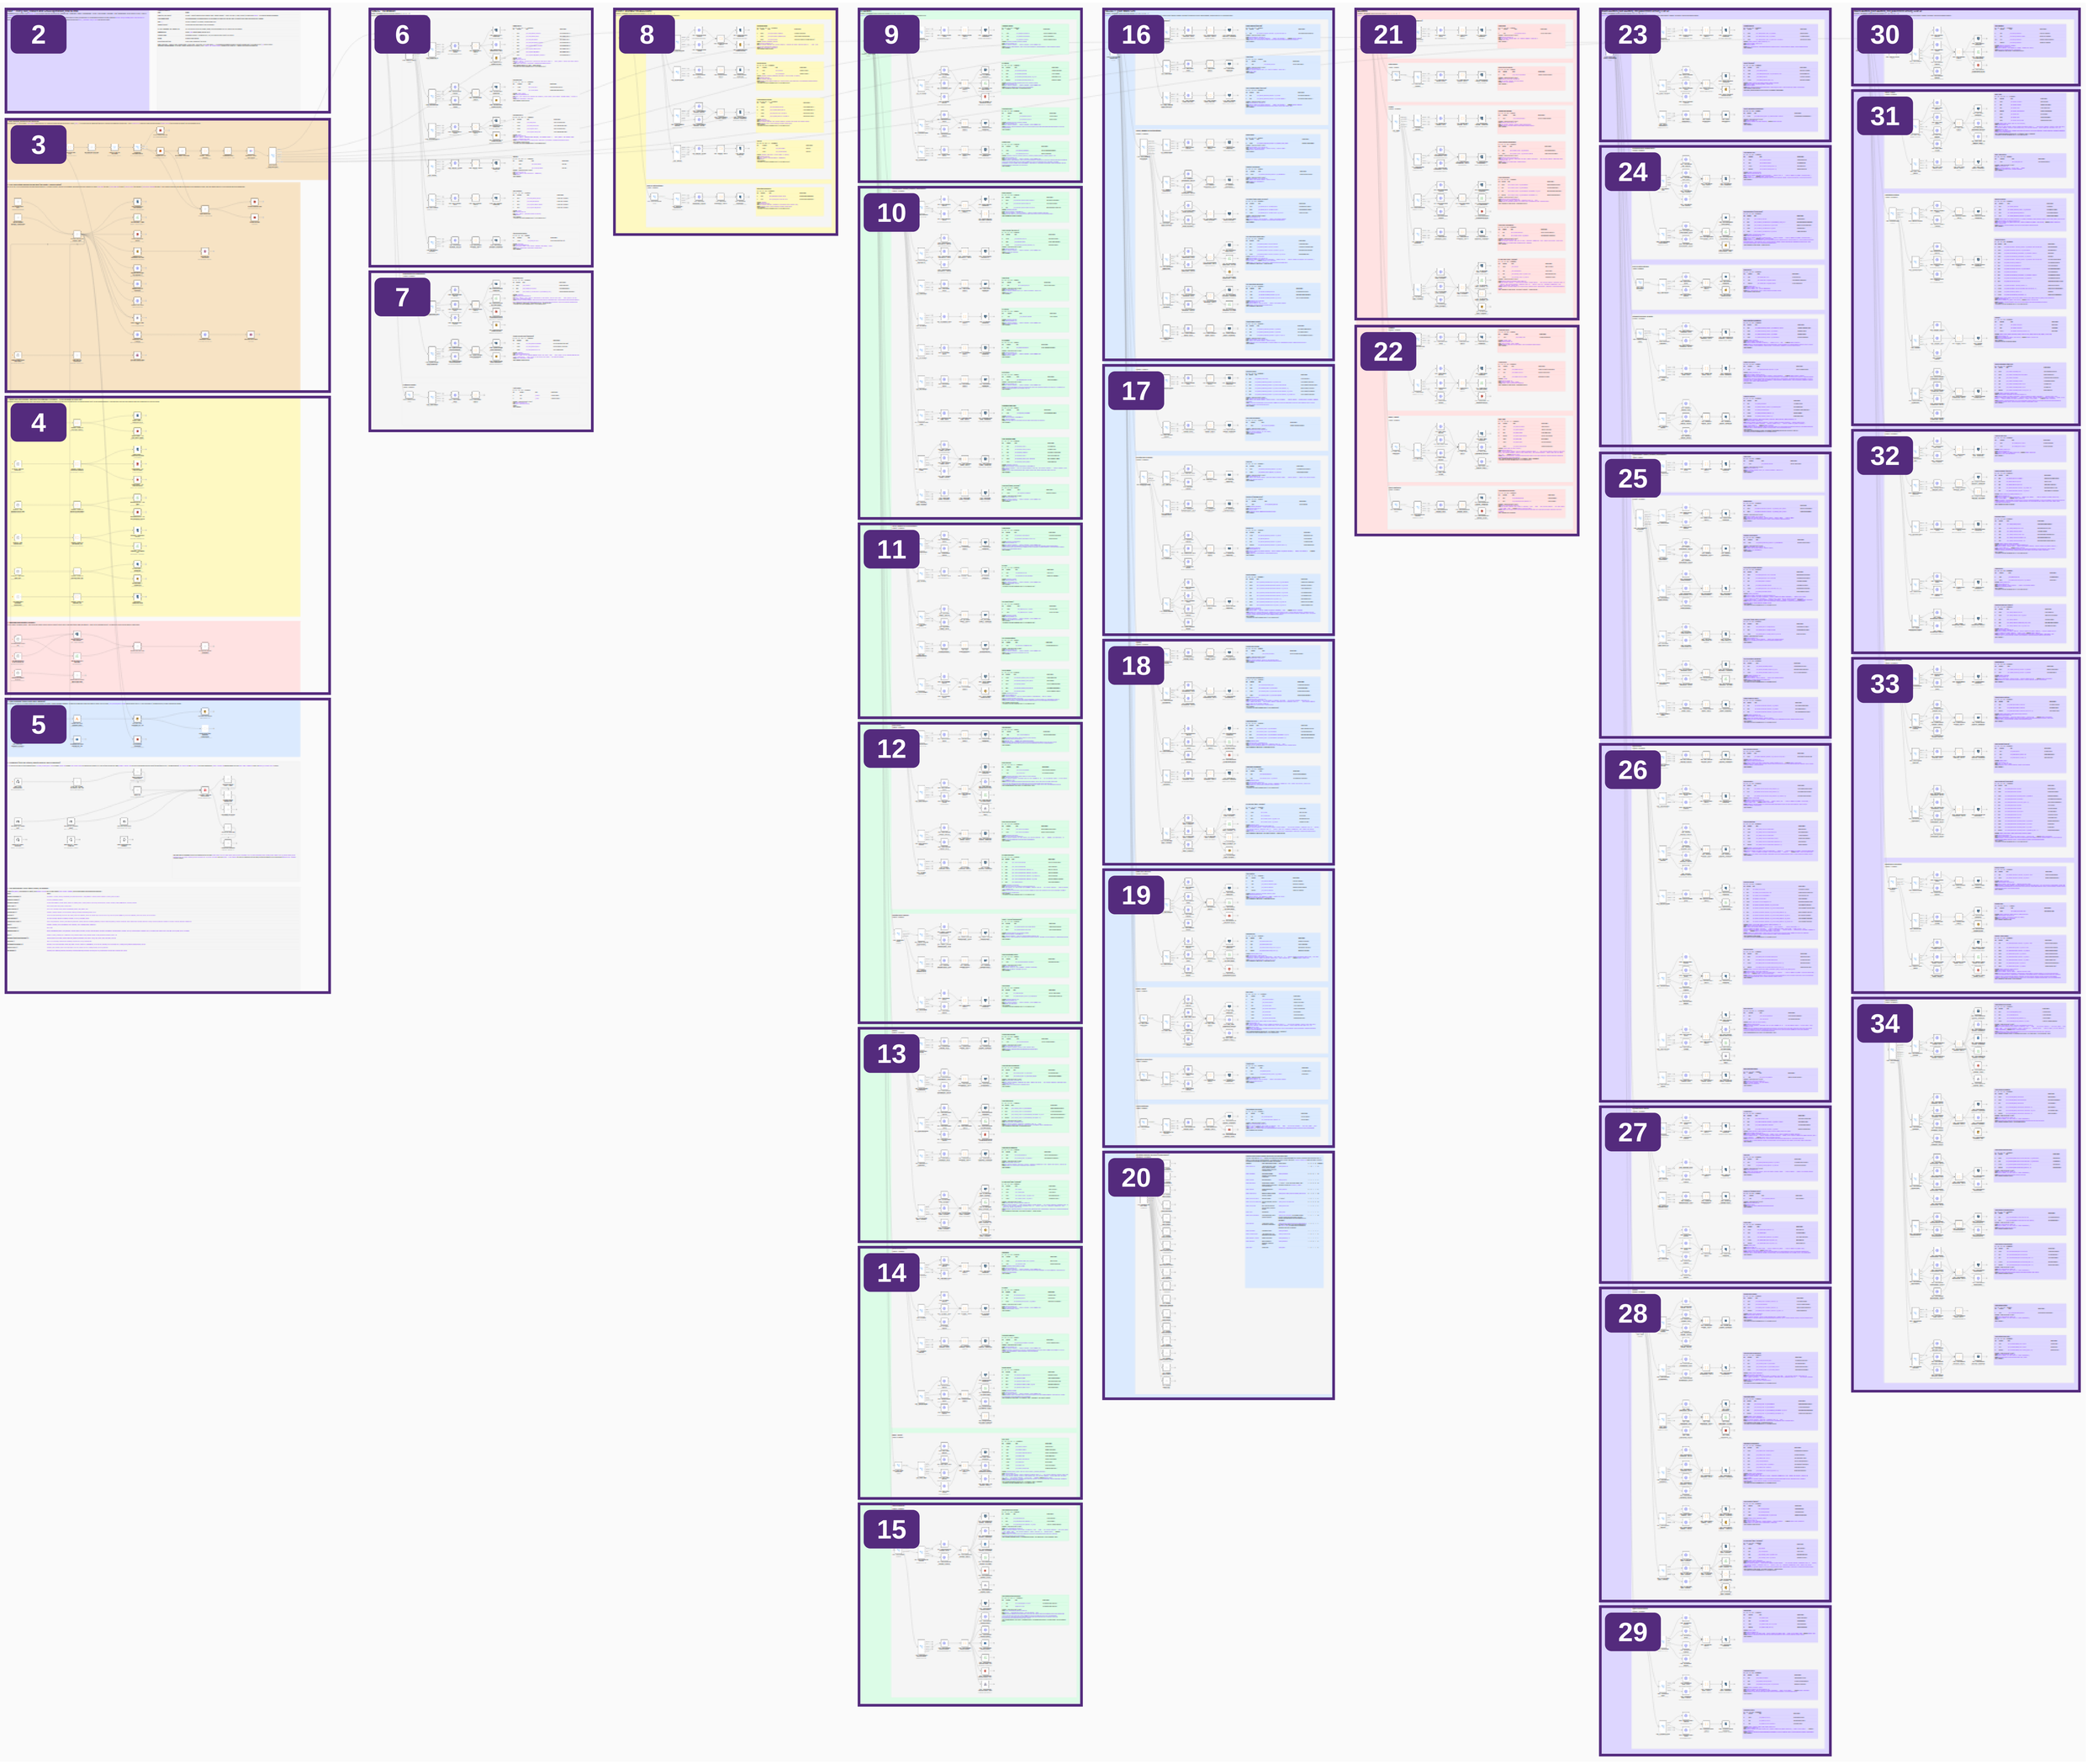

Contents

Request path, AWS and the data model

REEP - every role, feature and CRUD operation, end to end; How to read it **page 2**

1 · One request, phone to role decision; 2 · The AWS estate behind the api task (ap-south-1 unless noted) **page 3**

3 · What runs with nobody watching (EventBridge Scheduler -> ECS RunTask on reep-api); 4 · Backups and disaster recovery **page 4**

5 · Voice platform (stack reep-voice-platform); 6 · Shipping it (GitHub Actions; agents hold no AWS credentials); 7 · The data model: every table in RDS, by domain **page 5**

PUBLIC - no session

Identity & sign-in **page 6**

Registration & onboarding; Platform health **page 7**

EVERY SIGNED-IN ACCOUNT

Identity & sign-in; Mail & notifications **page 8**

STUDENT

Student records & roster **page 9**

Programme (ledger, English, milestones) **page 10**

Skills, badges & certifications **page 11**

Interviews; Mentoring & SWOC **page 12**

Leave **page 13**

Jobs & placement; REEP Agent **page 14**

Voice platform **page 15**

FACULTY (role MENTOR)

Programme (ledger, English, milestones); Skills, badges & certifications **page 16**

Interviews; Mentoring & SWOC **page 17**

Leave **page 18**

Staff self-service; REEP Agent; Imports & analytics; Voice platform **page 19**

Granted console screens (Governance) **page 20**

ALUMNI

Programme (ledger, English, milestones); Interviews; Leave **page 21**

Alumni; REEP Agent; Voice platform **page 22**

MAIN ADMIN (role ADMIN, the placement office) (1 of 2)

Identity & sign-in **page 23**

Registration & onboarding; Mail & notifications; Student records & roster **page 24**

Programme (ledger, English, milestones); Skills, badges & certifications **page 25**

Interviews **page 26**

Mentoring & SWOC **page 27**

Leave **page 28**

Jobs & placement **page 29**

MAIN ADMIN (role ADMIN, the placement office) (2 of 2)

Staff self-service **page 30**

REEP Agent; Institution setup **page 31**

Imports & analytics **page 32**

Governance & audit; Deletion & retention **page 33**

Voice platform **page 34**

REEP - every role, feature and CRUD operation, end to end

379 endpoints served by the FastAPI app (`apps/api-py`), every one drawn under each role that can call it, grouped as **role → feature area → feature → CRUD operation → API call → FastAPI handler → RDS tables → AWS / external service**. 166 role-features in 6 lanes; Angular 22 SPA (`apps/web`), FastAPI + SQLAlchemy 2.0 + Pydantic v2 on Python 3.14, PostgreSQL 17 on RDS, AWS CDK.

Inventory taken 2026-10-03 at `f67b27b` from the live route table (`app.routes`, 379 rows incl. 3 WebSockets) and classified handler by handler, then adversarially re-checked against the guards in the code. Regenerate: `python tools/diagrams/render_n8n_workflow.py`.

This is a diagram, not an automation: it imports inactive, the credentials are named stubs with no secret, and every URL points at the dev stack (`http://localhost:4200`, `ng serve` proxying /api to :3300).

How to read it

Node	Means
Switch (role, area, feature)	a choice. A feature's outputs are always **CREATE · READ · UPDATE · DELETE** (+ ACTION for a sign-in, a code, a socket); an output written `DELETE ✗` is an operation **that role is not offered**.
HTTP Request (globe)	one offered operation: the method and path of its first endpoint; the subtitle says how many more. The feature's yellow-green-blue card lists every endpoint.
Code `{ }`	the FastAPI handler(s): file, function, line and the gate it runs
Postgres (elephant)	the RDS tables that feature reads or writes, per operation
S3 · SES · DynamoDB · SQS · Lambda · ELB	the AWS service by its own icon; Bedrock, Google, SSM and CloudWatch are HTTP nodes on their real endpoints
Read/Write Files	the EFS `/data` volume (uploads, interview WAVs)
Schedule Trigger	EventBridge Scheduler / AWS Backup cron, in IST, or the Route 53 health checker's 30 s interval
GitHub	a GitHub Actions workflow
greyed (deactivated) node	exists in code, not deployed / not running

Lanes: PUBLIC grey · ACCOUNT yellow · STUDENT green · FACULTY blue · ALUMNI pink · MAIN ADMIN purple. A '+' in a card marks an endpoint no screen in that role's navigation calls (API or typed URL only); `C/U` marks an upsert.
Two fences, checked separately: the role gate / capability decides WHICH SCREENS; rule 2 (`_assert_can_access_student`) decides WHICH STUDENTS. A capability never relaxes the student filter.

Request path, AWS and the data model · 2 of 4

1 · One request, phone to role decision · 2 · The AWS estate behind the api task (ap-south-1 unless noted)

Back to the map

1 · One request, phone to role decision

Same origin under `/api`, so the httpOnly `reep_session` cookie rides every call. CloudFront's default behaviour serves the SPA from S3; `/api/*` (HTTP and the interview WebSockets) goes to the ALB and an ECS Fargate task running uvicorn + FastAPI. `security.py` verifies the HS256 JWT and the account's `token_version` (one live session per account), then the role decides the lane.

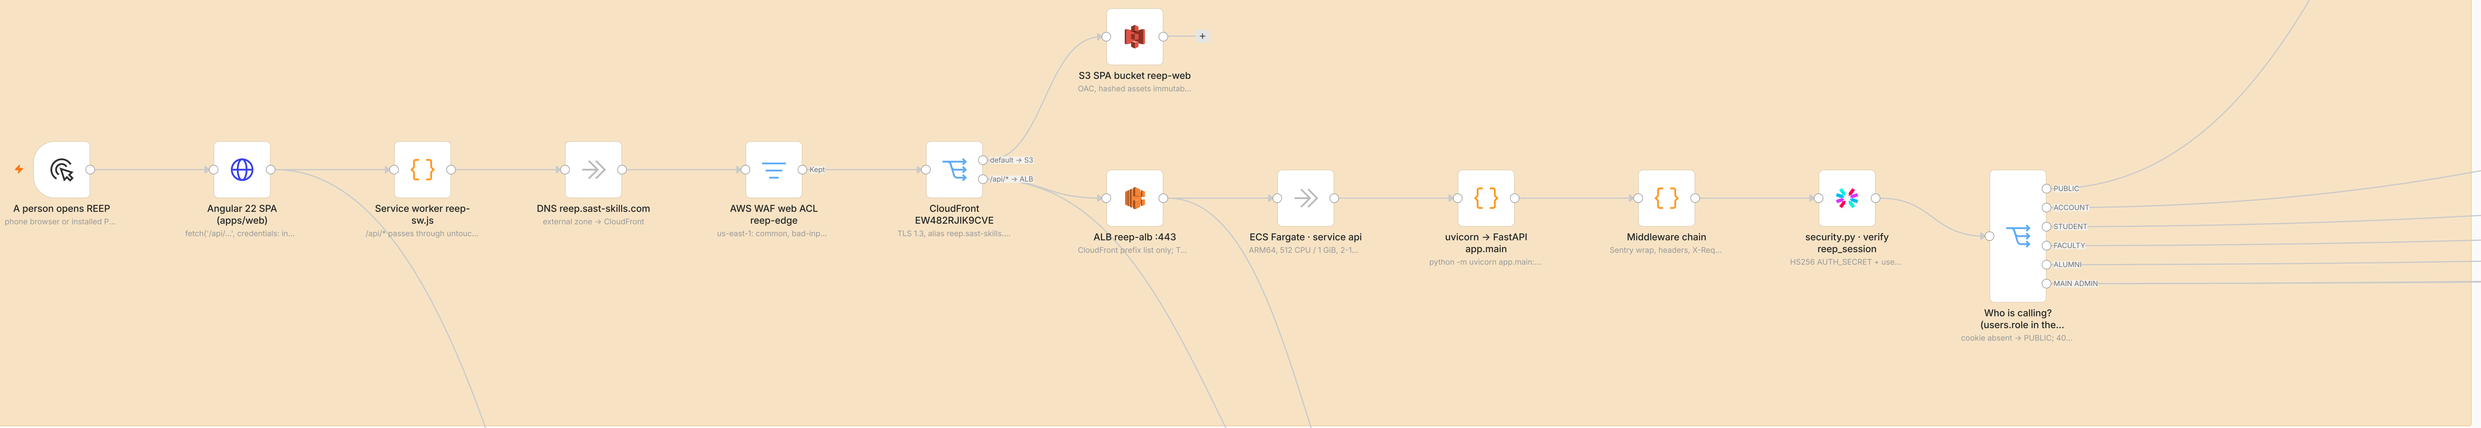

2 · The AWS estate behind the api task (ap-south-1 unless noted)

Every call to AWS APIs or the internet leaves the private subnets through the NAT instance (t4g.nano) – there are no VPC endpoints; RDS and EFS traffic stays inside the VPC. Stacks: `reep-core` (ap-south-1), `reep-edge-waf` (us-east-1), `reep-dr-vault` (ap-southeast-1), `reep-voice-platform` (ap-south-1). Every resource in reep-core, reep-edge-waf and reep-dr-vault is DeletionPolicy Retain; reep-voice-platform retains only its two S3 buckets and two DynamoDB tables.

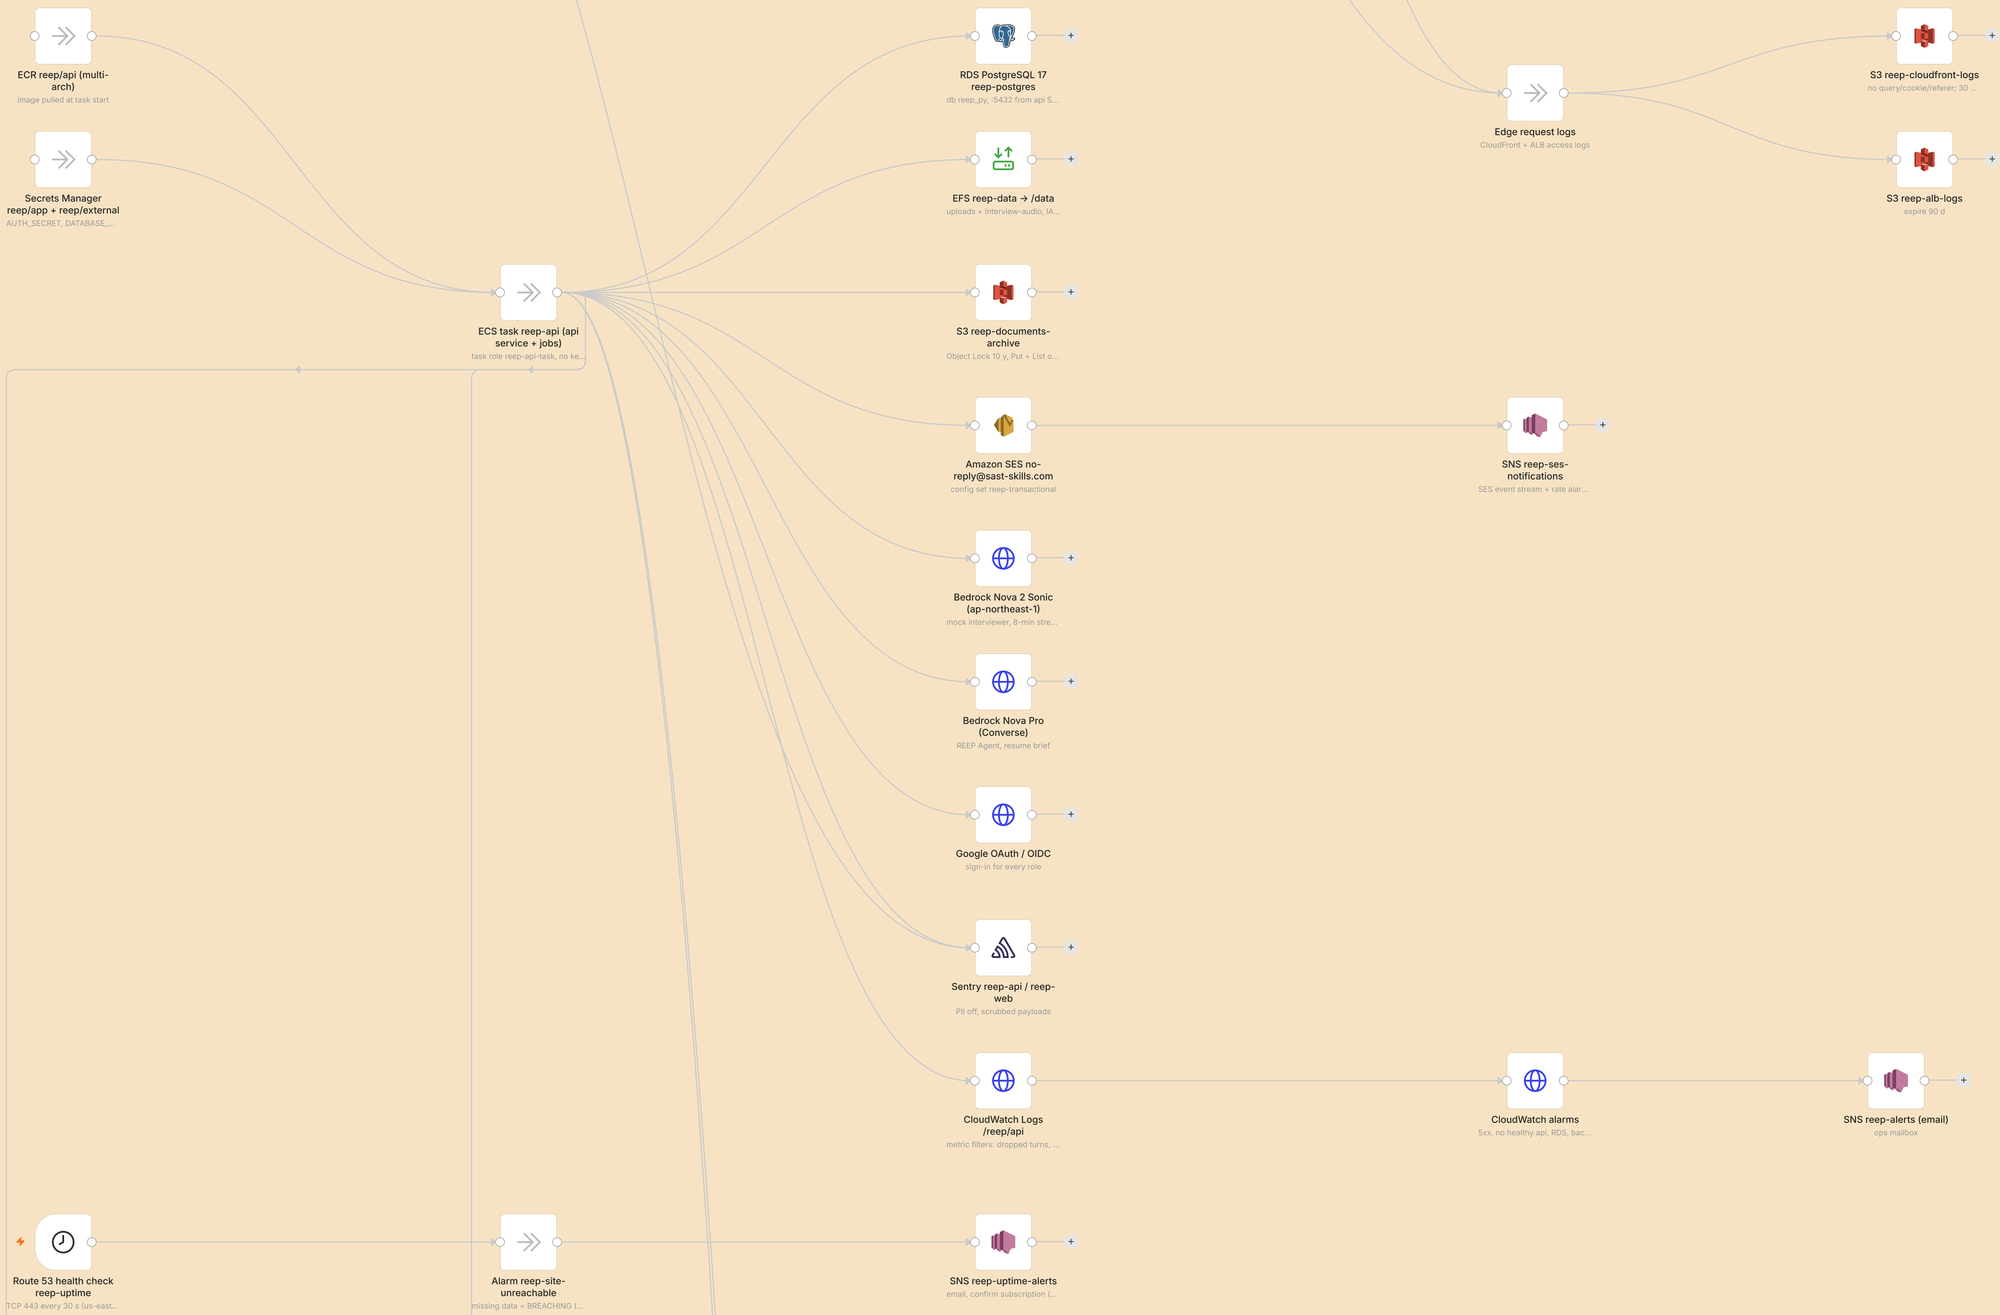

Request path, AWS and the data model · 3 of 4

3 · What runs with nobody watching (EventBridge Scheduler -> ECS RunTask on reep-api) · 4 · Backups and disaster recovery

Back to the map

3 · What runs with nobody watching (EventBridge Scheduler → ECS RunTask on reep-api)

Same image, roles and EFS mount as the api. Order is load-bearing: the ledger (23:30) and the dump (01:00) and the archive sweep (02:00) all run BEFORE retention (03:00), the one scheduled destructor – a copy taken after it never saw what it removed. Writers may PutObject and List, never Get or Delete.

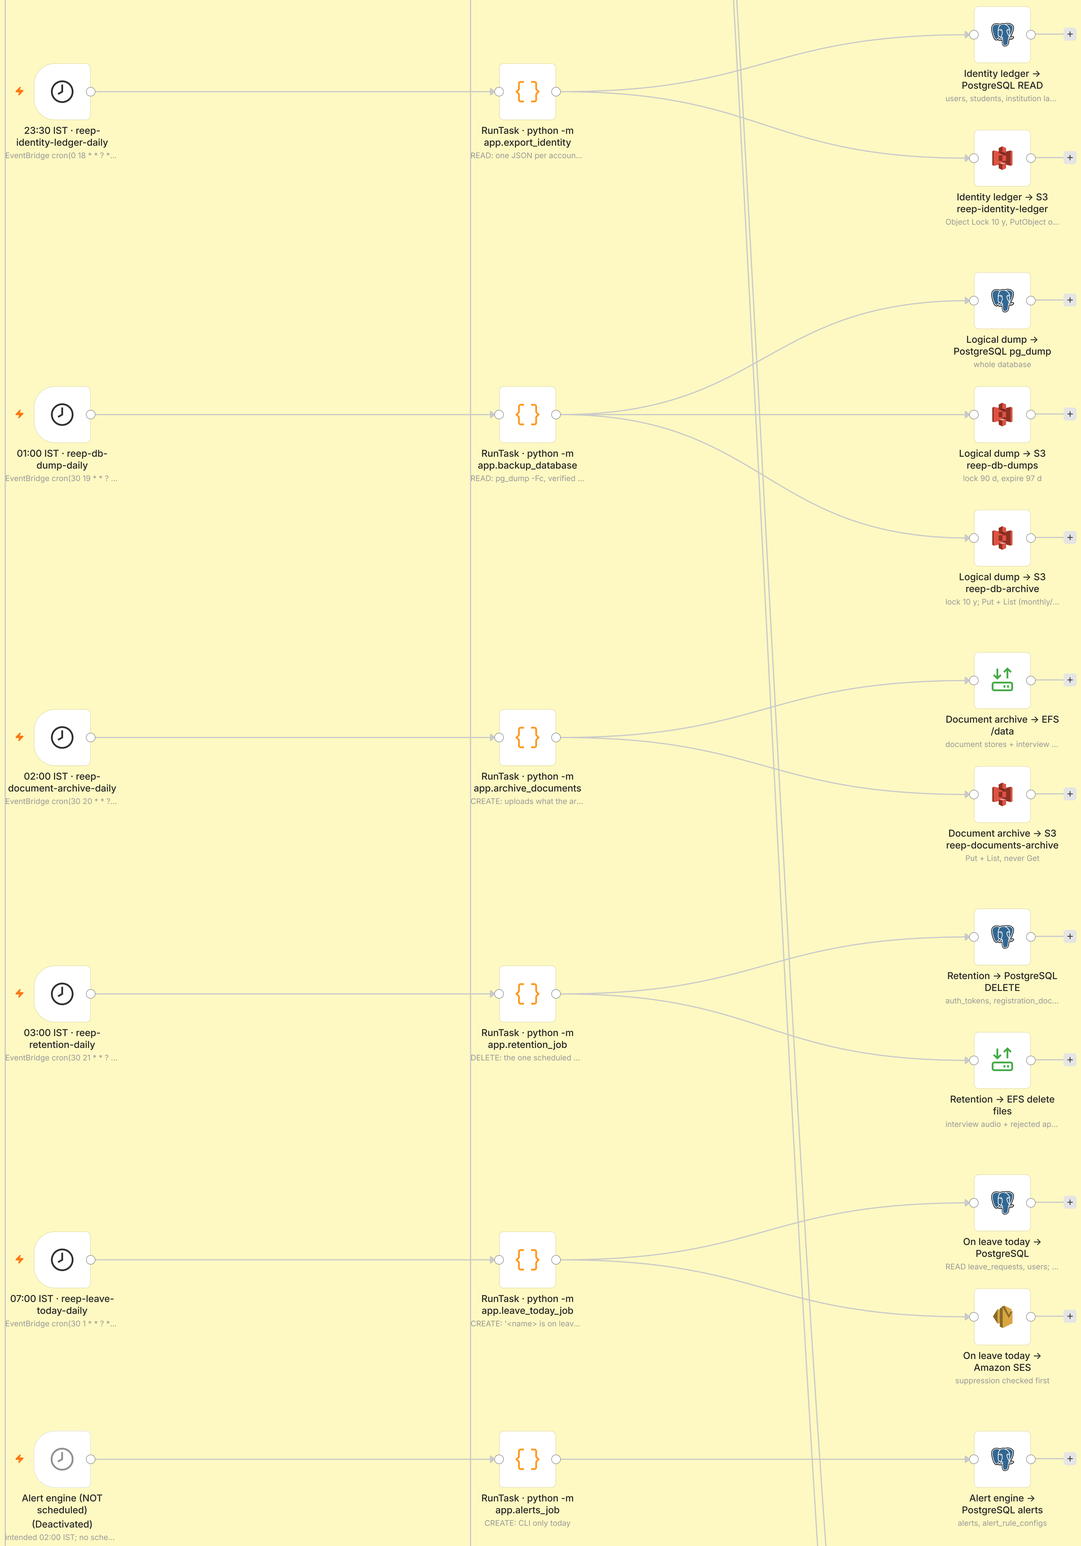

4 · Backups and disaster recovery

PHYSICAL copies (AWS Backup, 35 days = RDS's ceiling, plus a monthly 365-day archive of RDS only) and the LOGICAL ones above (identity ledger, pg_dump daily + monthly archive, documents archive) – the logical half is what survives an engine or vendor change.

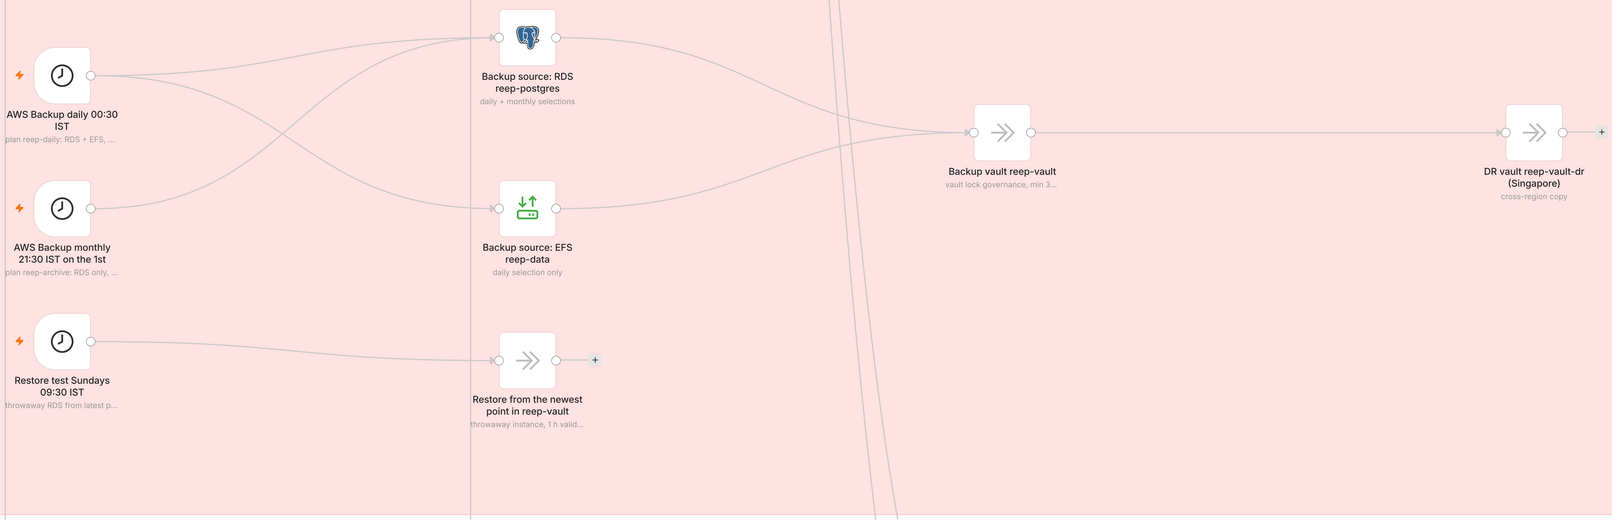

Request path, AWS and the data model · 4 of 4

5 · Voice platform (stack reep-voice-platform) · 6 · Shipping it (GitHub Actions; agents hold no AWS credentials) · 7 · The data model: every table in RDS, by domain

Back to the map

5 · Voice platform (stack reep-voice-platform)

Bulk candidate files land in S3; the Lambda validates each row and queues it per degree. **No queue consumer is deployed** – the admin bulk upload stores straight into Postgres by default. Calls run through `/api/platform/media-bridge` inside the api task (lane MAIN ADMIN and STUDENT), recordings go to S3, live state is projected to DynamoDB.

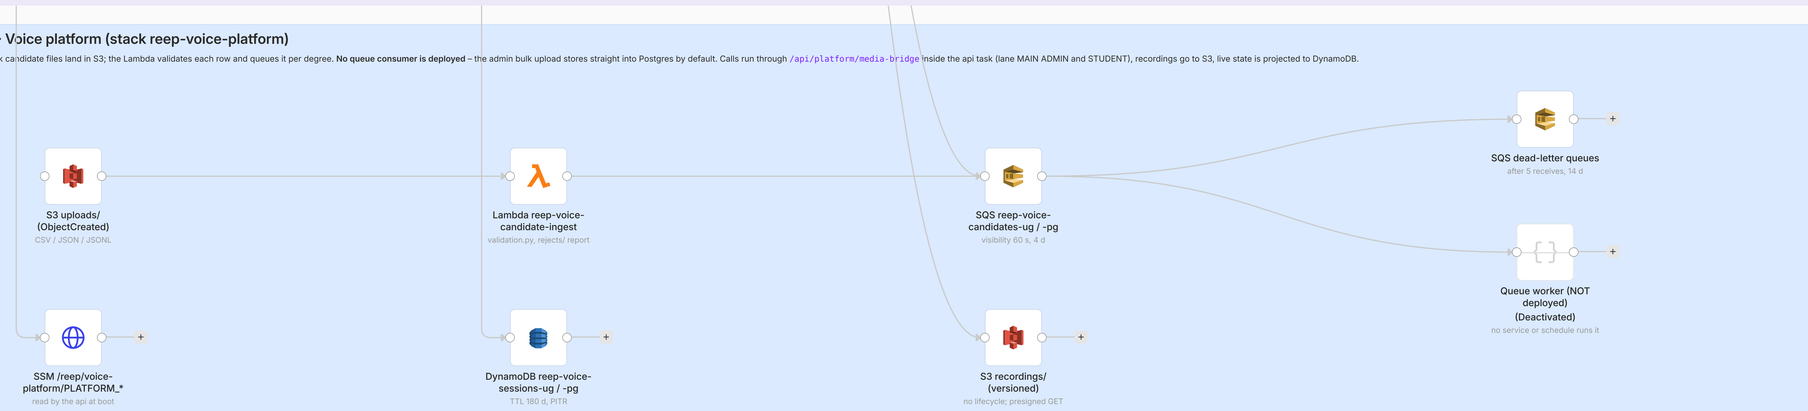

6 · Shipping it (GitHub Actions; agents hold no AWS credentials)

`ci.yml` runs the five checks the (not yet applied) ruleset in `.github/rulesets/main.json` will require. `deploy.yml` assumes `reep-github-deploy` by OIDC and runs two jobs in PARALLEL: api (push the multi-arch image, `alembic upgrade head` as a one-off task BEFORE rolling the service) and web (publish the SPA, invalidate CloudFront). `cdk-deploy.yml` and `ops-task.yml` are human-dispatched only; `agent-release.yml` dispatches deploy only when `vars.AGENT_AUTODEPLOY` is true AND `tools/ci/release_gate.py` allows it.

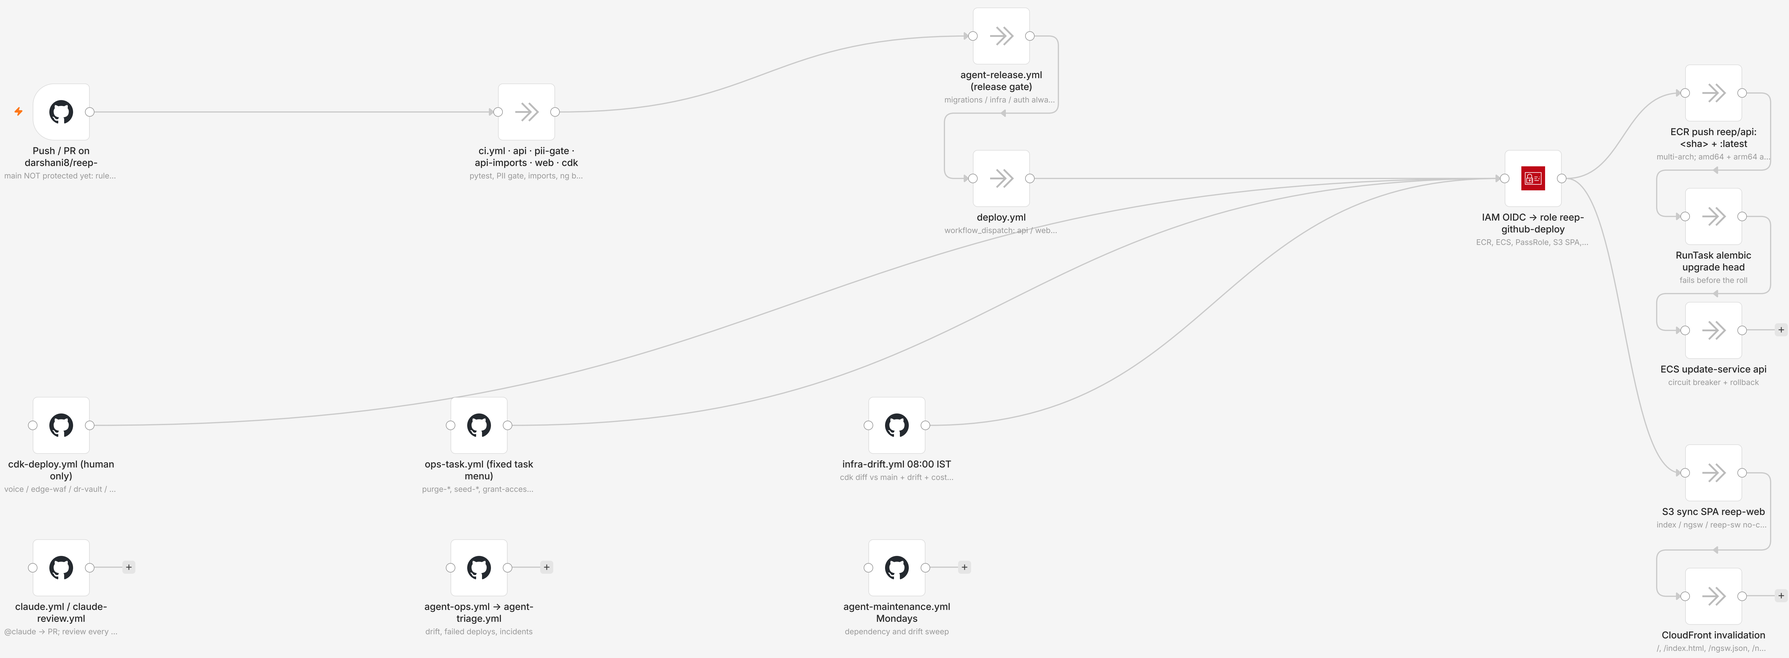

`ops-task.yml` is a FIXED menu (free text there would be RCE on the cluster): `seed-roster-dry-run`, `seed-roster`, `seed-kb`, `seed-catalogue-dry-run`, `seed-catalogue`, `grant-access`, `purge-people-dry-run`, `purge-people`, `purge-students-dry-run`, `purge-students`, `purge-colleges-dry-run`, `purge-colleges`. Each runs `python -m app.<module>` as a one-off Fargate task on the api image; a purge also demands its own typed sentence (`DELETE EVERY STUDENT` for purge-students).

7 · The data model: every table in RDS, by domain

112 tables (`app/models/` plus migration-only tables); all but `alembic_version` carry a written verdict in `purge_people.VERDICTS`, so a new table nobody classified aborts both destructors.

Domain	Tables
Academics & attendance (8)	`attendance_records`, `courses`, `enrollments`, `lab_sessions`, `schedule_items`, `semester_results`, `student_semester_history`, `subject_marks`
Documents & uploads (2)	`archived_documents`, `uploads`
Governance & audit (8)	`access_group_members`, `access_groups`, `capability_grants`, `export_events`, `feature_overrides`, `redesign_audit_events`, `redesign_tenant_memberships`, `redesign_tenants`
Identity & auth (4)	`auth_tokens`, `login_days`, `login_events`, `users`
Imports & analytics (5)	`alert_rule_configs`, `alerts`, `analytics_snapshots`, `import_rows`, `import_runs`
Institution spine (6)	`academic_courses`, `academic_specializations`, `cohorts`, `colleges`, `departments`, `stage_rules`
Interviews (9)	`interview_bank_questions`, `interview_cap_resets`, `interview_consents`, `interview_evaluations`, `interview_policies`, `interview_score_summaries`, `interview_sessions`, `interview_tracks`, `interview_turns`
Jobs & placement (5)	`job_applications`, `jobs`, `mock_attempts`, `placement_criteria`, `placement_offers`
Knowledge base & agent (11)	`agent_runs`, `assistant_feedback`, `conversations`, `knowledge_chunks`, `knowledge_documents`, `messages`, `redesign_embedding_models`, `redesign_knowledge_chunk_embeddings`, `redesign_knowledge_chunks`, `redesign_knowledge_document_versions`, `redesign_knowledge_namespaces`
Leave (5)	`academic_calendar`, `leave_attachments`, `leave_balances`, `leave_requests`, `staff_signatures`
Mail & notifications (1)	`mail_logs`
Mentoring & SWOC (10)	`mentor_assignments`, `mentor_notes`, `mentors`, `redesign_mentor_notebook_actions`, `redesign_mentor_notebook_attachments`, `redesign_mentor_notebook_entries`, `redesign_mentor_notebook_entry_revisions`, `staff_upskilling_certs`, `swoc_entries`, `swoc_entry_revisions`
Other (5)	`alembic_version`, `redesign_api_idempotency_keys`, `redesign_domain_jobs`, `redesign_outbox_events`, `students_orphaned_cohort_ids`
Programme (ledger/english/milestones) (6)	`english_baseline_sections`, `english_baselines`, `student_milestones`, `time_ledger_cells`, `time_ledger_days`, `time_sheet_entries`
Registration (4)	`email_verifications`, `registration_documents`, `registration_rules`, `registrations`
Skills/badges/certifications (10)	`approved_certifications`, `badge_course_map`, `badge_evidence`, `capability_assessments`, `certification_progress`, `certifications`, `skill_claims`, `skills`, `student_badges`, `student_skills`
Students & profile (7)	`academic_gaps`, `academic_qualifications`, `alumni_profiles`, `resume_profiles`, `resumes`, `student_profiles`, `students`
Voice platform (6)	`platform_call_sessions`, `platform_candidates`, `platform_questions`, `platform_recording_policies`, `platform_specializations`, `platform_time_limits`

PUBLIC - no session · 1 of 2

Identity & sign-in

Back to the map

PUBLIC - no session

9 features · 29 endpoints (features offering each operation: C 1 · R 3 · U 4 · A 5)

No session cookie. Applicants, the sign-in doors, onboarding, password reset and the load balancer's health probe.

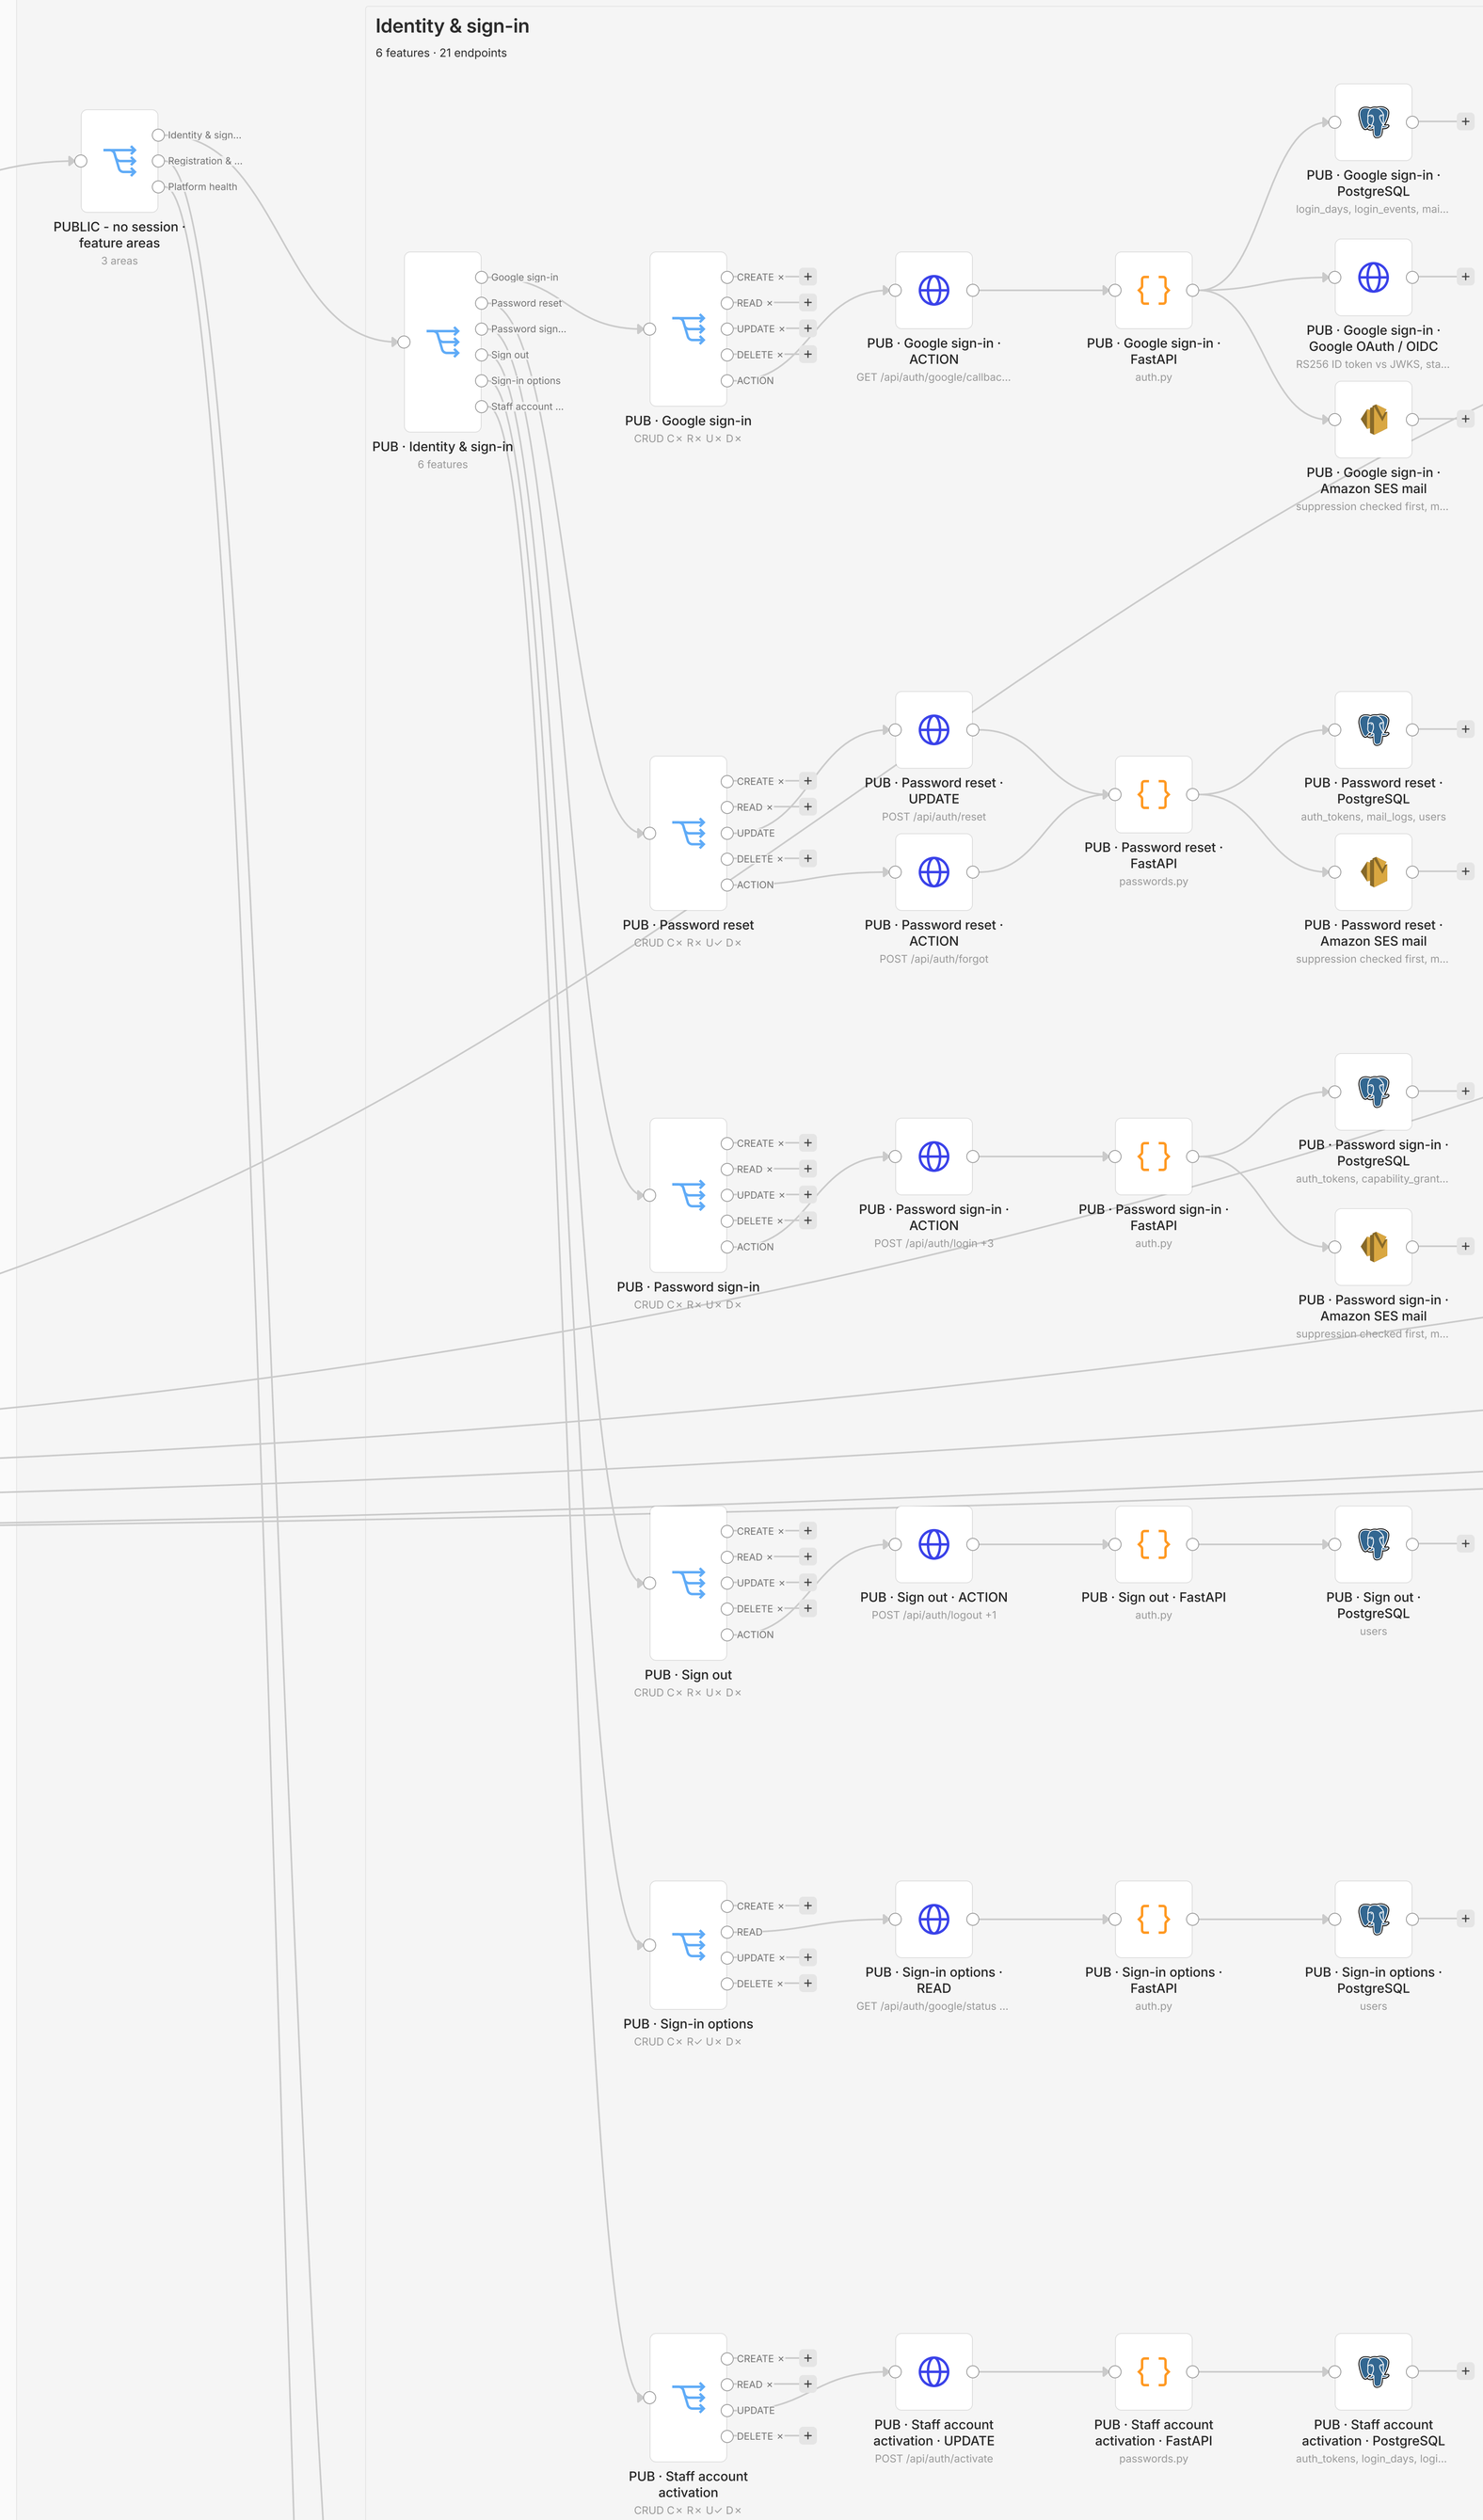

Google sign-in

C × · R × · U × · D × · A ✓ · 8 endpoints

Op	Method	Path	What it does
A	GET	`/api/auth/google/callback`	finish Google sign-in †
A	GET	`/api/auth/google/start`	start Google sign-in †
A	GET	`/api/auth/sso/google`	start Google sign-in
A	GET	`/api/auth/sso/google/callback`	finish Google sign-in †
A	GET	`/api/v1/auth/google/callback`	finish Google sign-in †
A	GET	`/api/v1/auth/google/start`	start Google sign-in †
A	GET	`/api/v1/auth/sso/google`	start Google sign-in †
A	GET	`/api/v1/auth/sso/google/callback`	finish Google sign-in †

Screens `/login`
Code `routers/auth.py`
Gate `none (public; refuses with /login?error=sso_config when G...` · `none (public; single-use state cookie + nonce, verified G...`
Tables `login_days` `login_events` `mail_logs` `mentors` `students` `users`
AWS / external Google OAuth / OIDC · Amazon SES mail
† no screen in this role's navigation calls it (API or typed URL only)

Password reset

C × · R × · U ✓ · D × · A ✓ · 2 endpoints

Op	Method	Path	What it does
U	POST	`/api/auth/reset`	reset password from link
A	POST	`/api/auth/forgot`	request password reset link

Screens `/reset` `/login`
Code `routers/passwords.py`
Gate `none (rate-limited per address and globally)` · `reset token (auth_tokens, PURPOSE_RESET); refuses a barre...`
Tables `auth_tokens` `mail_logs` `users`
AWS / external Amazon SES mail

Password sign-in

C × · R × · U × · D × · A ✓ · 4 endpoints

Op	Method	Path	What it does
A	POST	`/api/auth/login`	sign in with password
A	POST	`/api/auth/login/code`	verify emailed login code
A	POST	`/api/v1/auth/login`	sign in with password †
A	POST	`/api/v1/auth/login/code`	verify emailed login code †

Screens `/login`
Code `routers/auth.py`
Gate `none (public; password_door_open(db), per-account brute-f...` · `none (public; per-account code limiter, consume_user_code...`
Tables `auth_tokens` `capability_grants` `login_days` `login_events` `mail_logs` `mentors` `students` `users`
AWS / external Amazon SES mail
† no screen in this role's navigation calls it (API or typed URL only)

Sign out

C × · R × · U × · D × · A ✓ · 2 endpoints

Op	Method	Path	What it does
A	POST	`/api/auth/logout`	sign out †
A	POST	`/api/v1/auth/logout`	sign out †

Screens — none for this role (API only)
Code `routers/auth.py`
Gate `none (cookie read optionally; idempotent)`
Tables `users`
AWS / external —

Sign-in options

C × · R ✓ · U × · D × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/auth/google/status`	check sign-in options †
R	GET	`/api/auth/sso/status`	check sign-in options
R	GET	`/api/v1/auth/google/status`	check sign-in options †
R	GET	`/api/v1/auth/sso/status`	check sign-in options †

Screens `/login`
Code `routers/auth.py`
Gate `none (public, unauthenticated by design)`
Tables `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Staff account activation

C × · R × · U ✓ · D × · 1 endpoint

Op	Method	Path	What it does
U	POST	`/api/auth/activate`	set first password (staff link)

Screens `/activate`
Code `routers/passwords.py`
Gate `activation token (auth_tokens, PURPOSE_ACTIVATION); refus...`
Tables `auth_tokens` `login_days` `login_events` `users`
AWS / external —

PUBLIC - no session · 2 of 2

Registration & onboarding · Platform health

Back to the map

Registration & onboarding

2 features · 6 endpoints

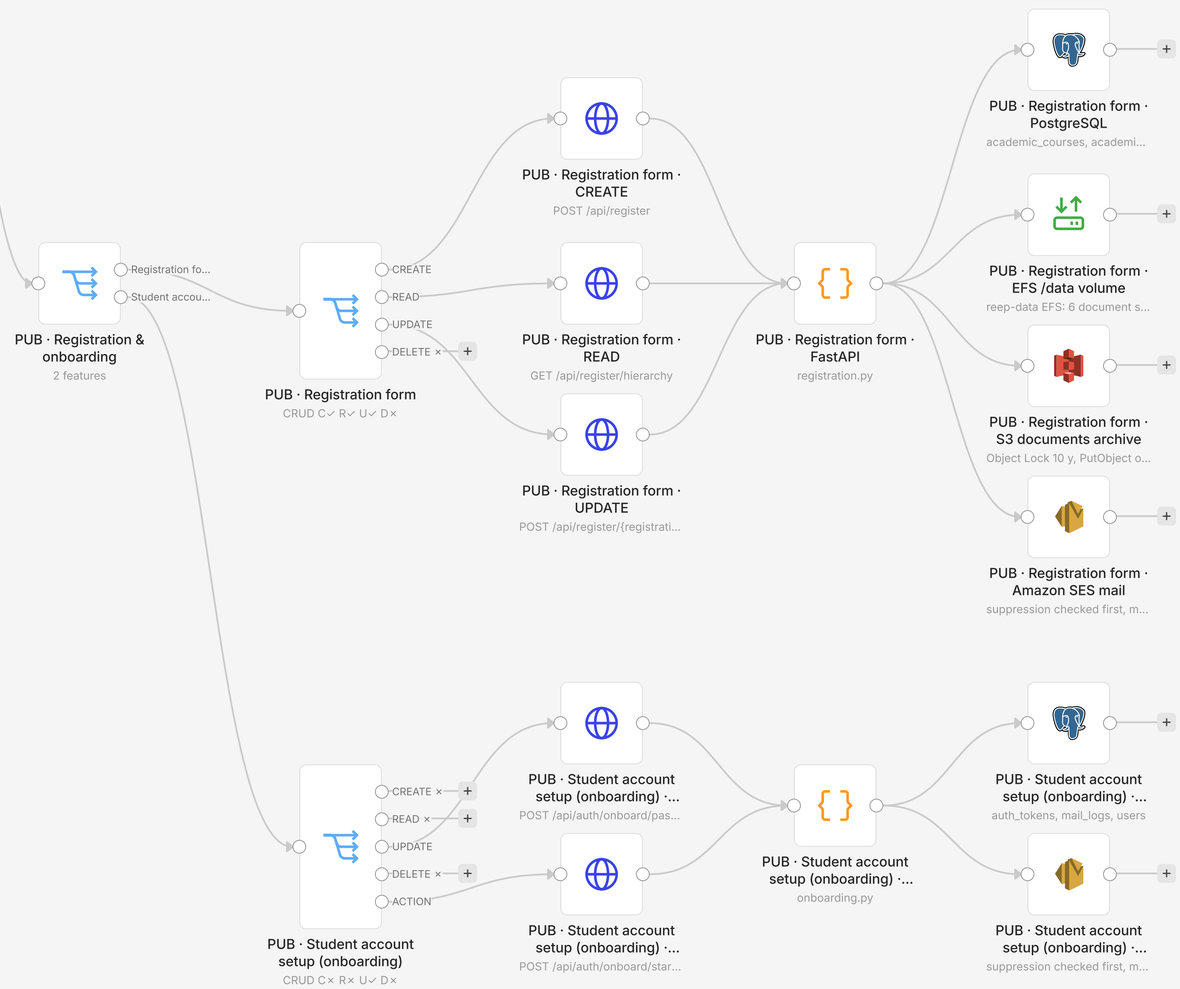

Registration form

C ✓ · R ✓ · U ✓ · D × · 3 endpoints

Op	Method	Path	What it does
C	POST	`/api/register`	submit application
R	GET	`/api/register/hierarchy`	list college hierarchy
U	POST	`/api/register/{registration_id}/documents/{kind}`	replace application document †

Screens `/register`
Code `routers/registration.py`
Gate `none (public) · none (public; application id as bearer, per-IP rate limit... · none (public; per-IP rate limit, duplicate guard)`
Tables `academic_courses` `academic_specializations` `archived_documents` `auth_tokens` `cohorts` `colleges` `departments` `mail_logs` `registration_documents` `registration_rules` `registrations` `student_profiles` `students` `uploads` `users`
AWS / external EFS /data volume · S3 documents archive · Amazon SES mail
† no screen in this role's navigation calls it (API or typed URL only)

Student account setup (onboarding)

C × · R × · U ✓ · D × · A ✓ · 3 endpoints

Op	Method	Path	What it does
U	POST	`/api/auth/onboard/password`	set first password (after code)
A	POST	`/api/auth/onboard/start`	confirm address, send code
A	POST	`/api/auth/onboard/verify`	verify emailed code

Screens `/onboard`
Code `routers/onboarding.py`
Gate `none (proof is the PURPOSE_ONBOARD setup-link token + mat... · none (proof is the PURPOSE_ONBOARD_SET ticket from step 2... · none (proof is the setup-link token + the emailed PURPOSE...`
Tables `auth_tokens` `mail_logs` `users`
AWS / external Amazon SES mail

Platform health

1 feature · 2 endpoints

Health probes

C × · R ✓ · U × · D × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/health`	liveness probe †
R	GET	`/ready`	readiness probe †

Screens — none for this role (API only)
Code `routers/health.py`
Gate `none (unauthenticated)`
Tables —
AWS / external —

EVERY SIGNED-IN ACCOUNT

Identity & sign-in · Mail & notifications

Back to the map

EVERY SIGNED-IN ACCOUNT

5 features · 13 endpoints (features offering each operation: R 1 · U 2 · D 1 · A 3)

`get_current_session` only – any role. The account itself: session, sign-out, password, linked Google, notification preferences.

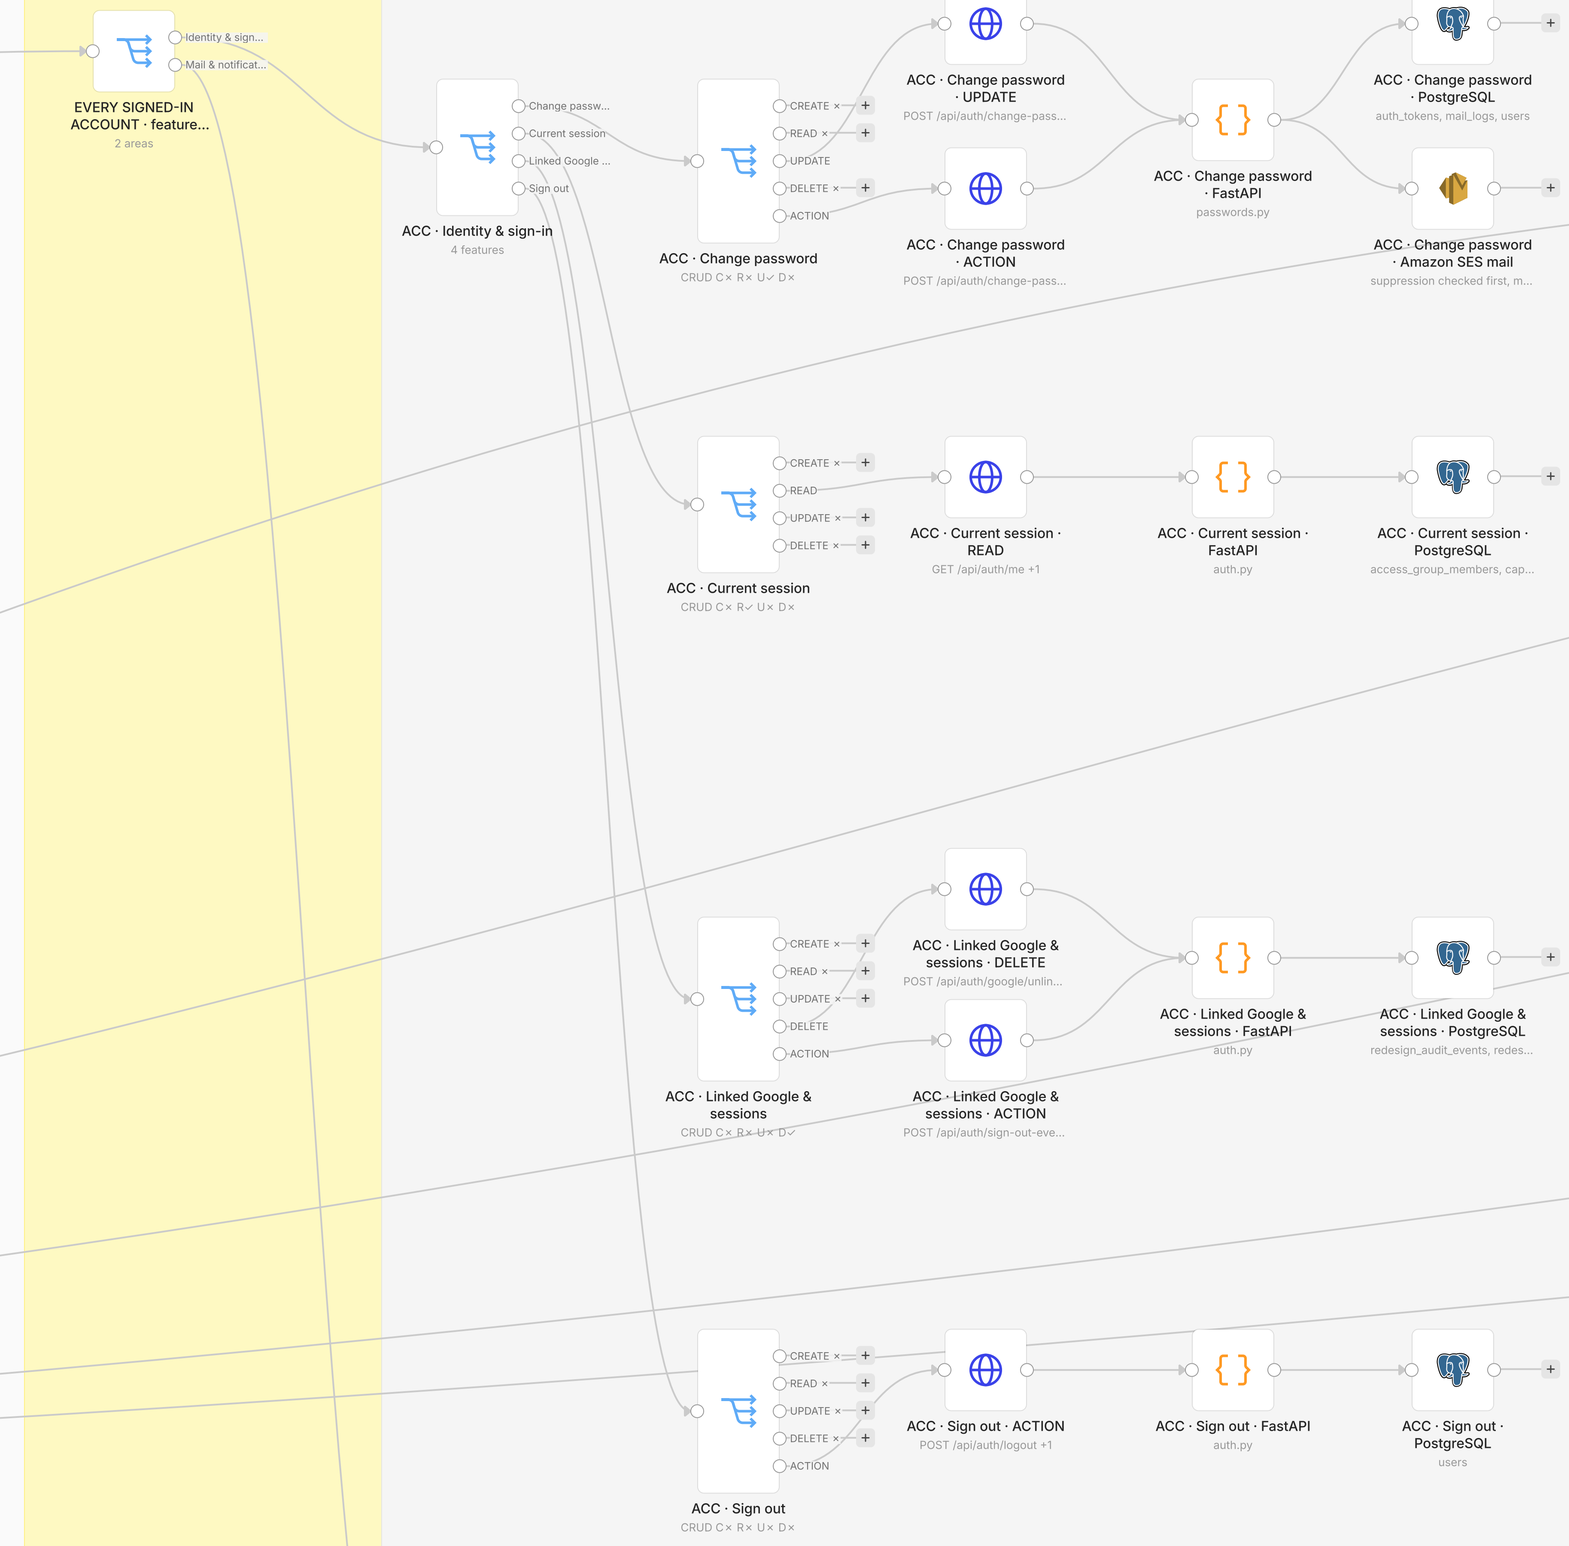

Identity & sign-in

4 features · 11 endpoints

Change password

C × · **R** × · **U** ✓ · **D** × · **A** ✓ · 3 endpoints

Op	Method	Path	What it does
U	POST	`/api/auth/change-password`	change my password
A	POST	`/api/auth/change-password/code`	email change-password code
A	POST	`/api/auth/forgot`	email me a setup link (no password yet)

Screens `/account/password` `/account`
Code `routers/passwords.py`
Gate `get_current_session` · `get_current_session + exactly one proof (emailed code or ...` · `none (rate-limited per address and globally)`
Tables `auth_tokens` `mail_logs` `users`
AWS / external Amazon SES mail

Current session

C × · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/auth/me`	read my session
R	GET	`/api/v1/auth/me`	read my session †

Screens `/account` `/account/password (app shell, every signed-in screen)`
Code `routers/auth.py`
Gate `get_current_session`
Tables `access_group_members` `capability_grants` `feature_overrides` `login_events` `mentors` `students` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Linked Google & sessions

C × · **R** × · **U** × · **D** ✓ · **A** ✓ · 4 endpoints

Op	Method	Path	What it does
D	POST	`/api/auth/google/unlink`	unlink Google sign-in
D	POST	`/api/v1/auth/google/unlink`	unlink Google sign-in †
A	POST	`/api/auth/sign-out-everywhere`	sign out everywhere
A	POST	`/api/v1/auth/sign-out-everywhere`	sign out everywhere †

Screens `/account`
Code `routers/auth.py`
Gate `get_current_session` · `get_current_session (refused 409 unless the account holds...`
Tables `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Sign out

C × · **R** × · **U** × · **D** × · **A** ✓ · 2 endpoints

Op	Method	Path	What it does
A	POST	`/api/auth/logout`	sign out
A	POST	`/api/v1/auth/logout`	sign out †

Screens `/account (app shell, every signed-in screen)`
Code `routers/auth.py`
Gate `none (cookie read optionally; idempotent)`
Tables `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Mail & notifications

1 feature · 2 endpoints

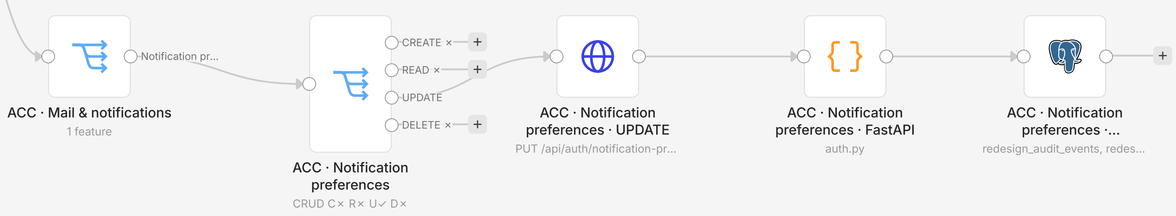

Notification preferences

C × · **R** × · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
U	PUT	`/api/auth/notification-prefs`	set notification preferences
U	PUT	`/api/v1/auth/notification-prefs`	set notification preferences †

Screens `/account`
Code `routers/auth.py`
Gate `get_current_session (unknown or unenforced keys refused 422)`
Tables `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

STUDENT · 1 of 7

Student records & roster

Back to the map

STUDENT

37 features · 95 endpoints (features offering each operation: C 15 · R 35 · U 10 · D 3 · A 3)

`_require_student` / `require_student` – users.role STUDENT, own rows only; most screens also pass a per-student feature switch.

Student records & roster

4 features · 11 endpoints

Academic records

C × · R ✓ · U × · D × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/academics`	view my academic history
R	GET	`/api/student/attendance`	view my attendance
R	GET	`/api/student/results`	view my semester results

Screens `/student/records` `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `academic_gaps` `academic_qualifications` `attendance_records` `semester_results` `subject_marks`
AWS / external —

My uploads

C ✓ · R ✓ · U × · D ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/uploads`	upload a document
R	GET	`/api/student/uploads`	list my uploads
R	GET	`/api/student/uploads/{upload_id}/file`	download my file
D	DELETE	`/api/student/uploads/{upload_id}`	delete my upload

Screens `/student/uploads` `/student/skilling` `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `archived_documents` `feature_overrides` `uploads`
AWS / external EFS /data volume · S3 documents archive

Placement profile

C × · R ✓ · U ✓ · D × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/profile`	view my profile
U	PUT	`/api/student/profile`	edit my profile

Screens `/student/profile` `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `academic_courses` `academic_specializations` `cohorts` `colleges` `departments` `mentors` `student_profiles` `students` `users`
AWS / external —

Student home

C × · R ✓ · U × · D × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/dashboard`	view my dashboard summary
R	GET	`/api/student/overview`	load my home page

Screens `/student/time-log` `/student/profile` `/student/resume` `/student` `/student/mentor-log`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `academic_gaps` `academic_qualifications` `attendance_records` `certification_progress` `courses` `enrollments` `interview_evaluations` `interview_score_summaries` `interview_sessions` `login_days` `mock_attempts` `placement_criteria` `resume_profiles` `semester_results` `skill_claims` `skills` `student_profiles` `student_skills` `students` `subject_marks` `swoc_entries` `users`
AWS / external —

STUDENT · 2 of 7

Programme (ledger, English, milestones)

Back to the map

Programme (ledger, English, milestones)

9 features · 18 endpoints

English Baseline

C ✓ · R ✓ · U × · D × · 3 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/english-baseline/start`	start English assessment
R	GET	`/api/student/english-baseline`	view English baseline
R	GET	`/api/student/english-baseline/report`	download English report PDF

Screens `/student/english`
Code `routers/student_programme.py`
Gate `_require_student` · `_require_student + require_feature(student.english)`
Tables `english_baseline_sections` `english_baselines` `feature_overrides` `students` `users`
AWS / external PDF render (in process)

Focus sessions (lab check-in)

C ✓ · R ✓ · U ✓ · D × · 3 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/checkin`	start focus session †
R	GET	`/api/student/focus`	list my focus sessions †
U	POST	`/api/student/checkout/{session_id}`	end focus session †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `courses` `lab_sessions`
AWS / external —

Login streak

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/streak`	view my login streak †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session only (no _require_student; keyed on s...`
Tables `login_days`
AWS / external —

My courses

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/courses`	list my courses

Screens `/student/courses`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `courses` `enrollments`
AWS / external —

My schedule

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/schedule`	list my upcoming schedule †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `schedule_items`
AWS / external —

Next actions

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/next-actions`	list my next actions †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `courses` `enrollments` `interview_evaluations` `interview_sessions` `resume_profiles` `skill_claims` `skills` `student_profiles` `student_skills` `swoc_entries`
AWS / external —

Programme stage cards

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/programme`	view programme stages

Screens `/student`
Code `routers/student_programme.py`
Gate `_require_student`
Tables `english_baseline_sections` `english_baselines` `student_milestones`
AWS / external —

Time Allocation Ledger

C ✓ · R ✓ · U ✓ · D × · 6 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/ledger`	view ledger day
R	GET	`/api/student/ledger/history`	list ledger history
R	GET	`/api/student/timesheet`	view weekly skilling hours
U/C	PUT	`/api/student/ledger`	start or save ledger day
U	POST	`/api/student/ledger/copy-yesterday`	copy yesterday's ledger
U	POST	`/api/student/ledger/submit`	submit ledger day

Screens `/student/time-log`
Code `routers/student.py` `routers/student_programme.py`
Gate `_require_student + require_feature(student.time_log)` · `get_current_session + _require_student (role STUDENT and ...`
Tables `feature_overrides` `students` `time_ledger_cells` `time_ledger_days` `time_sheet_entries`
AWS / external —

Time sheet (legacy, no screen)

C ✓ · R × · U × · D × · 1 endpoint

Op	Method	Path	What it does
C	POST	`/api/student/timesheet`	log activity minutes †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `time_sheet_entries`
AWS / external —

Skills, badges & certifications

5 features · 12 endpoints

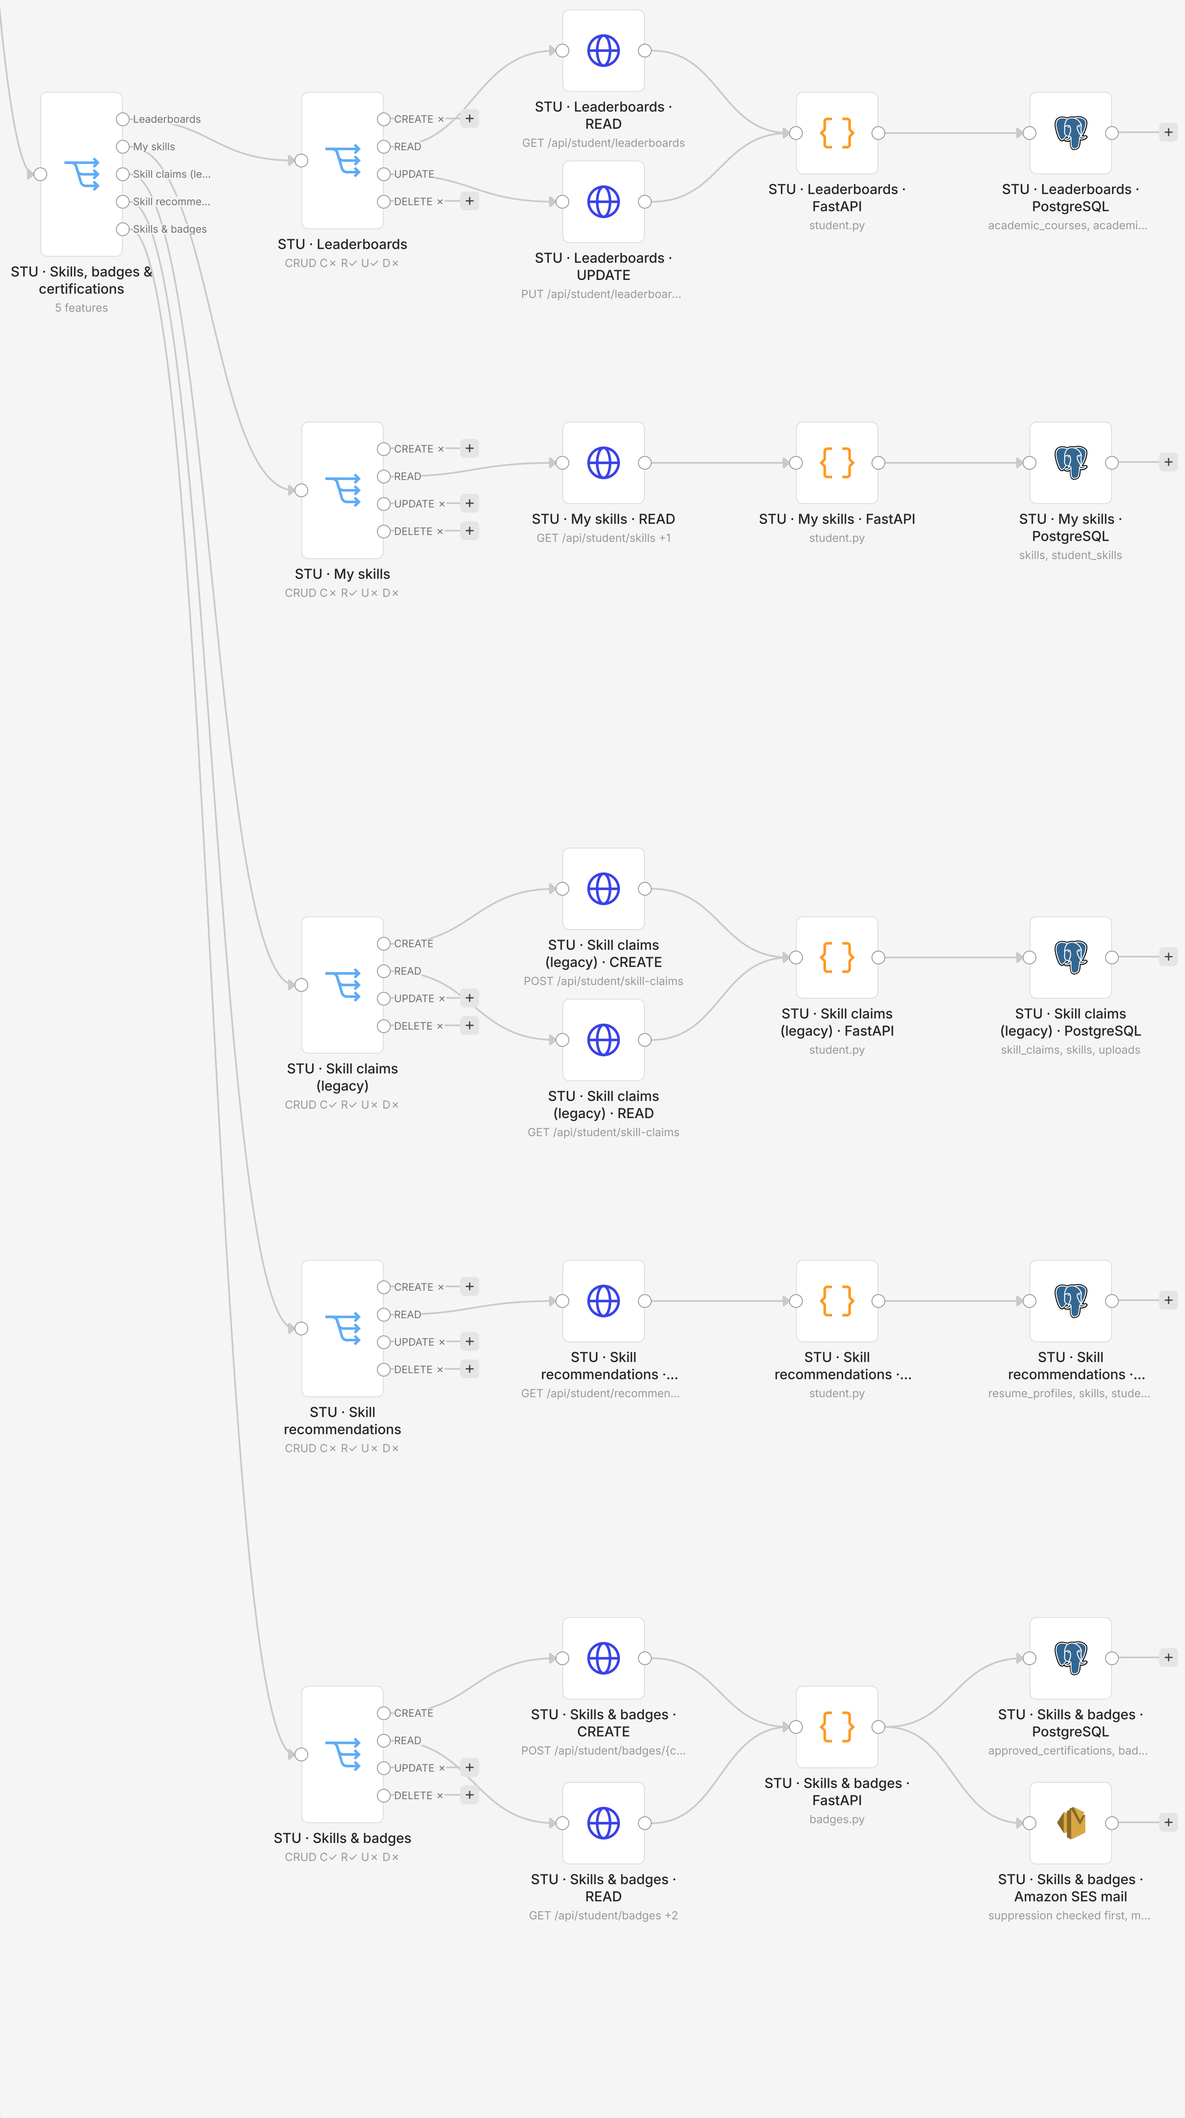

Leaderboards

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/leaderboards`	view batch leaderboard
U	PUT	`/api/student/leaderboard-visibility`	hide or show me

Screens `/student/leaderboards`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `academic_courses` `academic_specializations` `certification_progress` `cohorts` `departments` `feature_overrides` `interview_score_summaries` `login_days` `mock_attempts` `semester_results` `student_badges` `student_profiles` `students` `users`
AWS / external —

My skills

C × · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/skills`	list my skills
R	GET	`/api/student/skills/catalogue`	browse skill catalogue †

Screens `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `skills` `student_skills`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Skill claims (legacy)

C ✓ · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/skill-claims`	file a skill claim †
R	GET	`/api/student/skill-claims`	list my skill claims

Screens `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `skill_claims` `skills` `uploads`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Skill recommendations

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/recommendations`	list recommended skills †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `resume_profiles` `skills` `student_skills`
AWS / external —

Skills & badges

C ✓ · **R** ✓ · **U** × · **D** × · 5 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/badges/{code}/evidence`	submit badge claim
C	POST	`/api/student/badges/{code}/start`	start a badge †
R	GET	`/api/student/badges`	view my badge dashboard
R	GET	`/api/student/badges/leaderboards`	view badge leaderboards †
R	GET	`/api/student/growth`	view my capability growth †

Screens `/student/skilling`
Code `routers/badges.py`
Gate `_require_student + require_feature(student.leaderboards)` · `_require_student + require_feature(student.skilling)`
Tables `approved_certifications` `badge_course_map` `badge_evidence` `capability_assessments` `cohorts` `feature_overrides` `mail_logs` `mentors` `student_badges` `student_profiles` `students` `uploads` `users`
AWS / external Amazon SES mail
† no screen in this role's navigation calls it (API or typed URL only)

Interviews

4 features · 12 endpoints

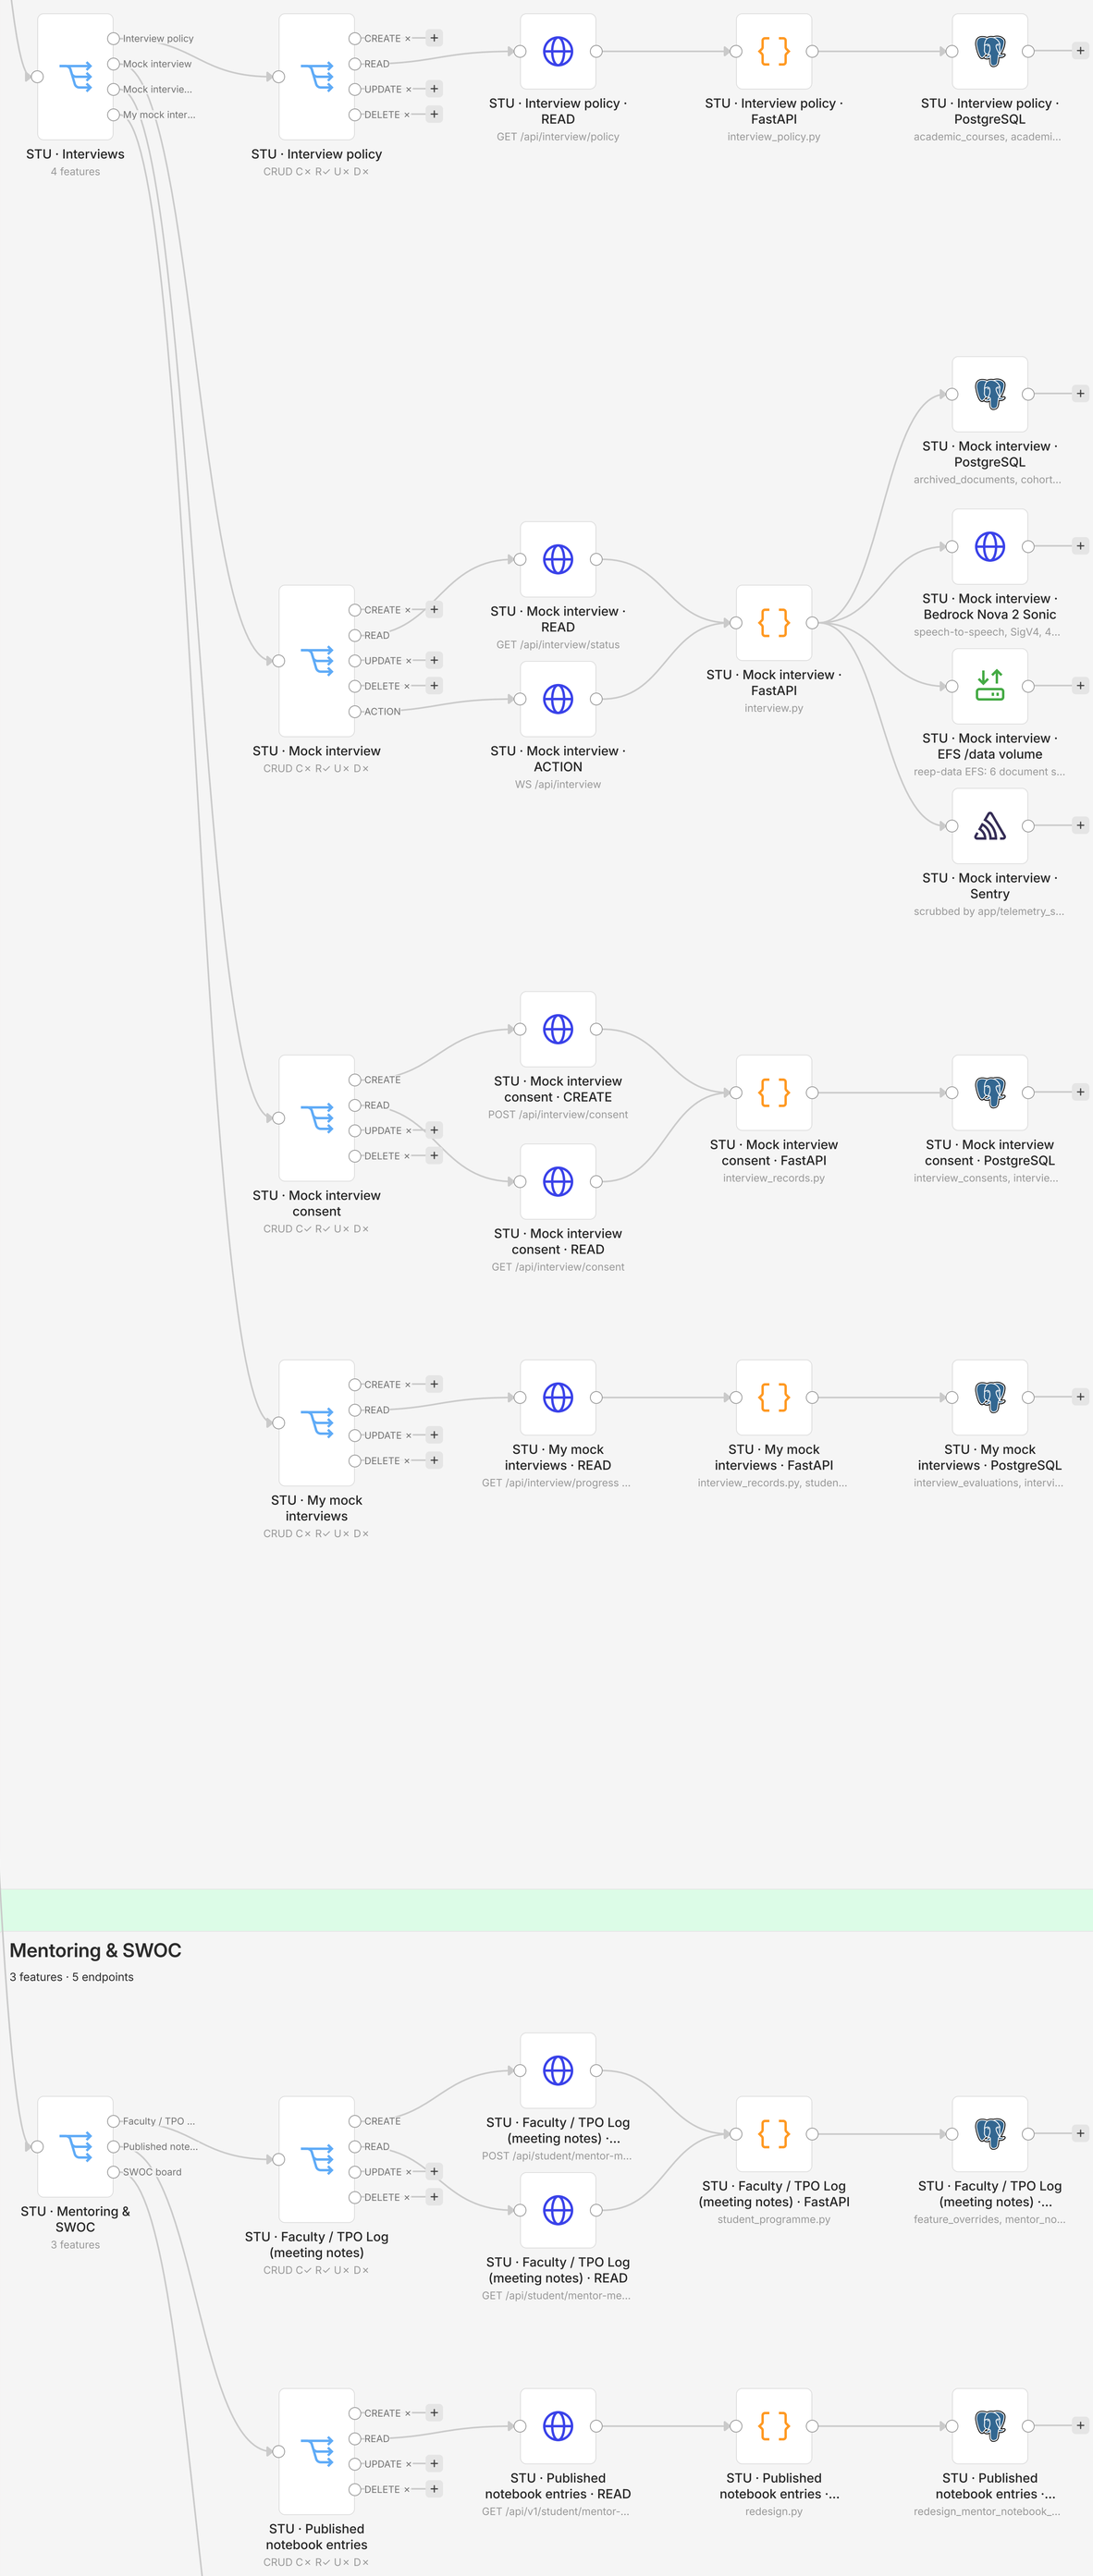

Interview policy

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/interview/policy`	view my interview policy

Screens `/student/assistant` (agent dock on every screen)
Code `routers/interview_policy.py`
Gate `session role == STUDENT and studentId present`
Tables `academic_courses` `academic_specializations` `cohorts` `departments` `interview_cap_resets` `interview_consents` `interview_policies` `interview_sessions` `interview_tracks` `students`
AWS / external —

Mock interview

C × · **R** ✓ · **U** × · **D** × · **A** ✓ · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/interview/status`	check interview availability
A	WS	`/api/interview`	run live mock interview

Screens `/student/assistant` (agent dock on every screen)
Code `routers/interview.py`
Gate `get_current_session; available only to role STUDENT or AD...` · `get_ws_session cookie + Origin check; role STUDENT or ADM...`
Tables `archived_documents` `cohorts` `conversations` `feature_overrides` `interview_bank_questions` `interview_cap_resets` `interview_consents` `interview_evaluations` `interview_policies` `interview_score_summaries` `interview_sessions` `interview_tracks` `interview_turns` `messages` `students`
AWS / external Bedrock Nova 2 Sonic · EFS /data volume · Sentry

Mock interview consent

C ✓ · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
C	POST	`/api/interview/consent`	acknowledge interview terms
R	GET	`/api/interview/consent`	read my interview consent

Screens `/student/assistant`
Code `routers/interview_records.py`
Gate `get_current_session (no role check)` · `get_current_session + role == STUDENT (403 otherwise); ve...`
Tables `interview_consents` `interview_policies` `students`
AWS / external —

My mock interviews

C × · **R** ✓ · **U** × · **D** × · 7 endpoints

Op	Method	Path	What it does
R	GET	`/api/interview/progress`	view my interview trend †
R	GET	`/api/interview/sessions`	list my interviews
R	GET	`/api/interview/sessions/{session_id}`	open my interview
R	GET	`/api/interview/sessions/{session_id}/report`	view my scorecard
R	GET	`/api/interview/sessions/{session_id}/transcript`	view my transcript
R	GET	`/api/interview/sessions/{session_id}/views`	see who viewed my interview †
R	GET	`/api/student/mocks`	list my mock attempts †

Screens `/student/interviews`
Code `routers/interview_records.py` `routers/student.py`
Gate `_own_student_id (403 unless role STUDENT; subject from se...` · `get_current_session + _require_student (role STUDENT and ...`
Tables `interview_evaluations` `interview_score_summaries` `interview_sessions` `interview_turns` `mock_attempts` `redesign_audit_events` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Mentoring & SWOC

3 features · 5 endpoints

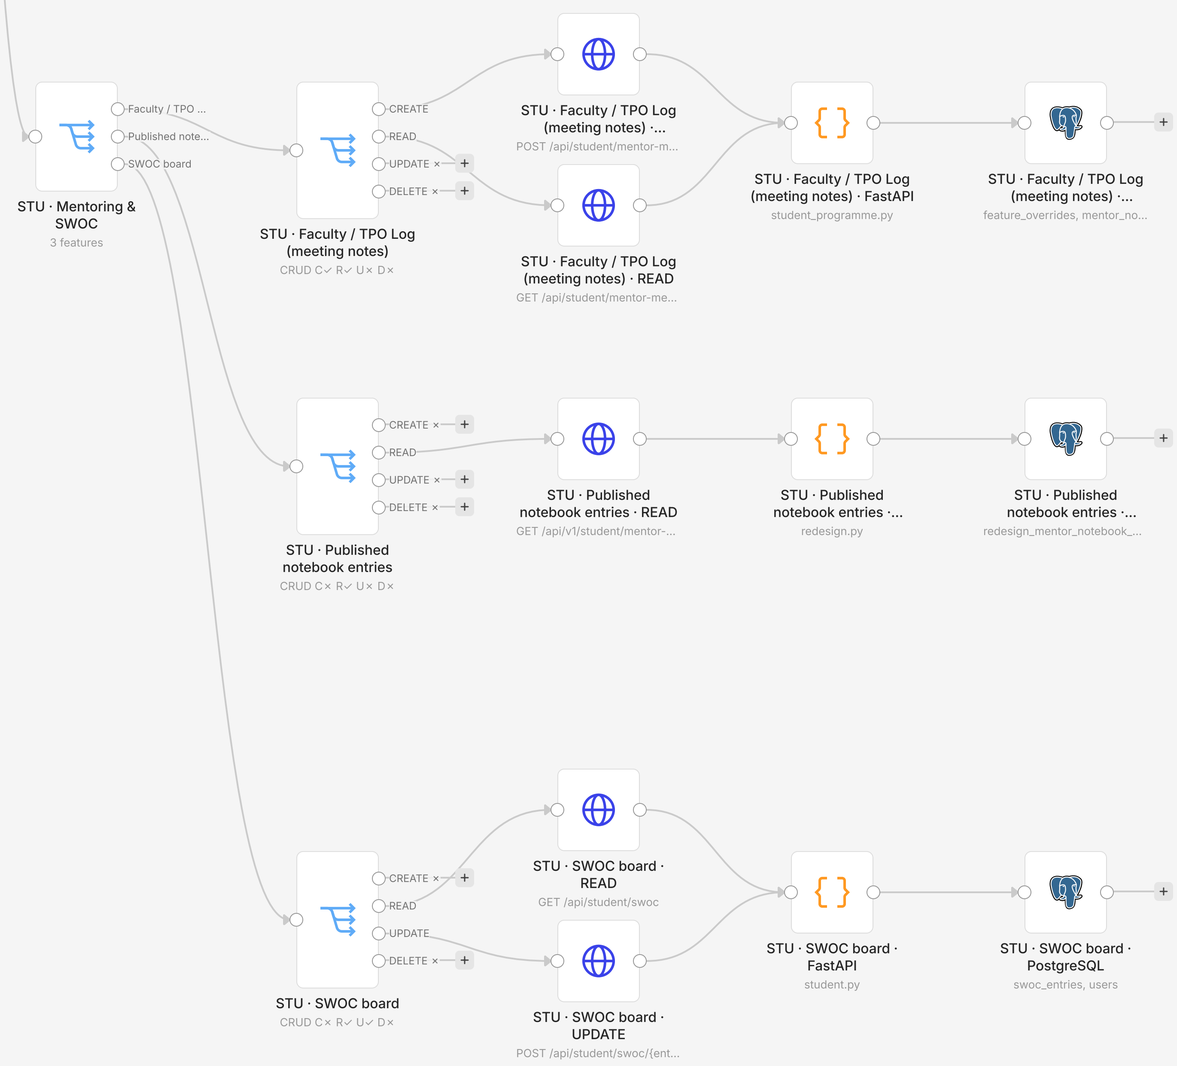

Faculty / TPO Log (meeting notes)

C ✓ · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/mentor-meetings/request`	request mentor meeting
R	GET	`/api/student/mentor-meetings`	list my mentor meetings

Screens `/student/mentor-log` `/student/resume`
Code `routers/student_programme.py`
Gate `_require_student + require_feature(student.mentor_log)`
Tables `feature_overrides` `mentor_notes` `mentors` `redesign_mentor_notebook_entries` `schedule_items` `students` `users`
AWS / external —

Published notebook entries

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/v1/student/mentor-notebook`	read published notes †

Screens — none for this role (API only)
Code `routers/redesign.py`
Gate `student_identity (role STUDENT + session studentId)`
Tables `redesign_mentor_notebook_entries`
AWS / external —

SWOC board

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/student/swoc`	view my SWOC board †
U	POST	`/api/student/swoc/{entry_id}/acknowledge`	acknowledge a SWOC line

Screens `/student/mentor-log`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `swoc_entries` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Leave

5 features · 13 endpoints

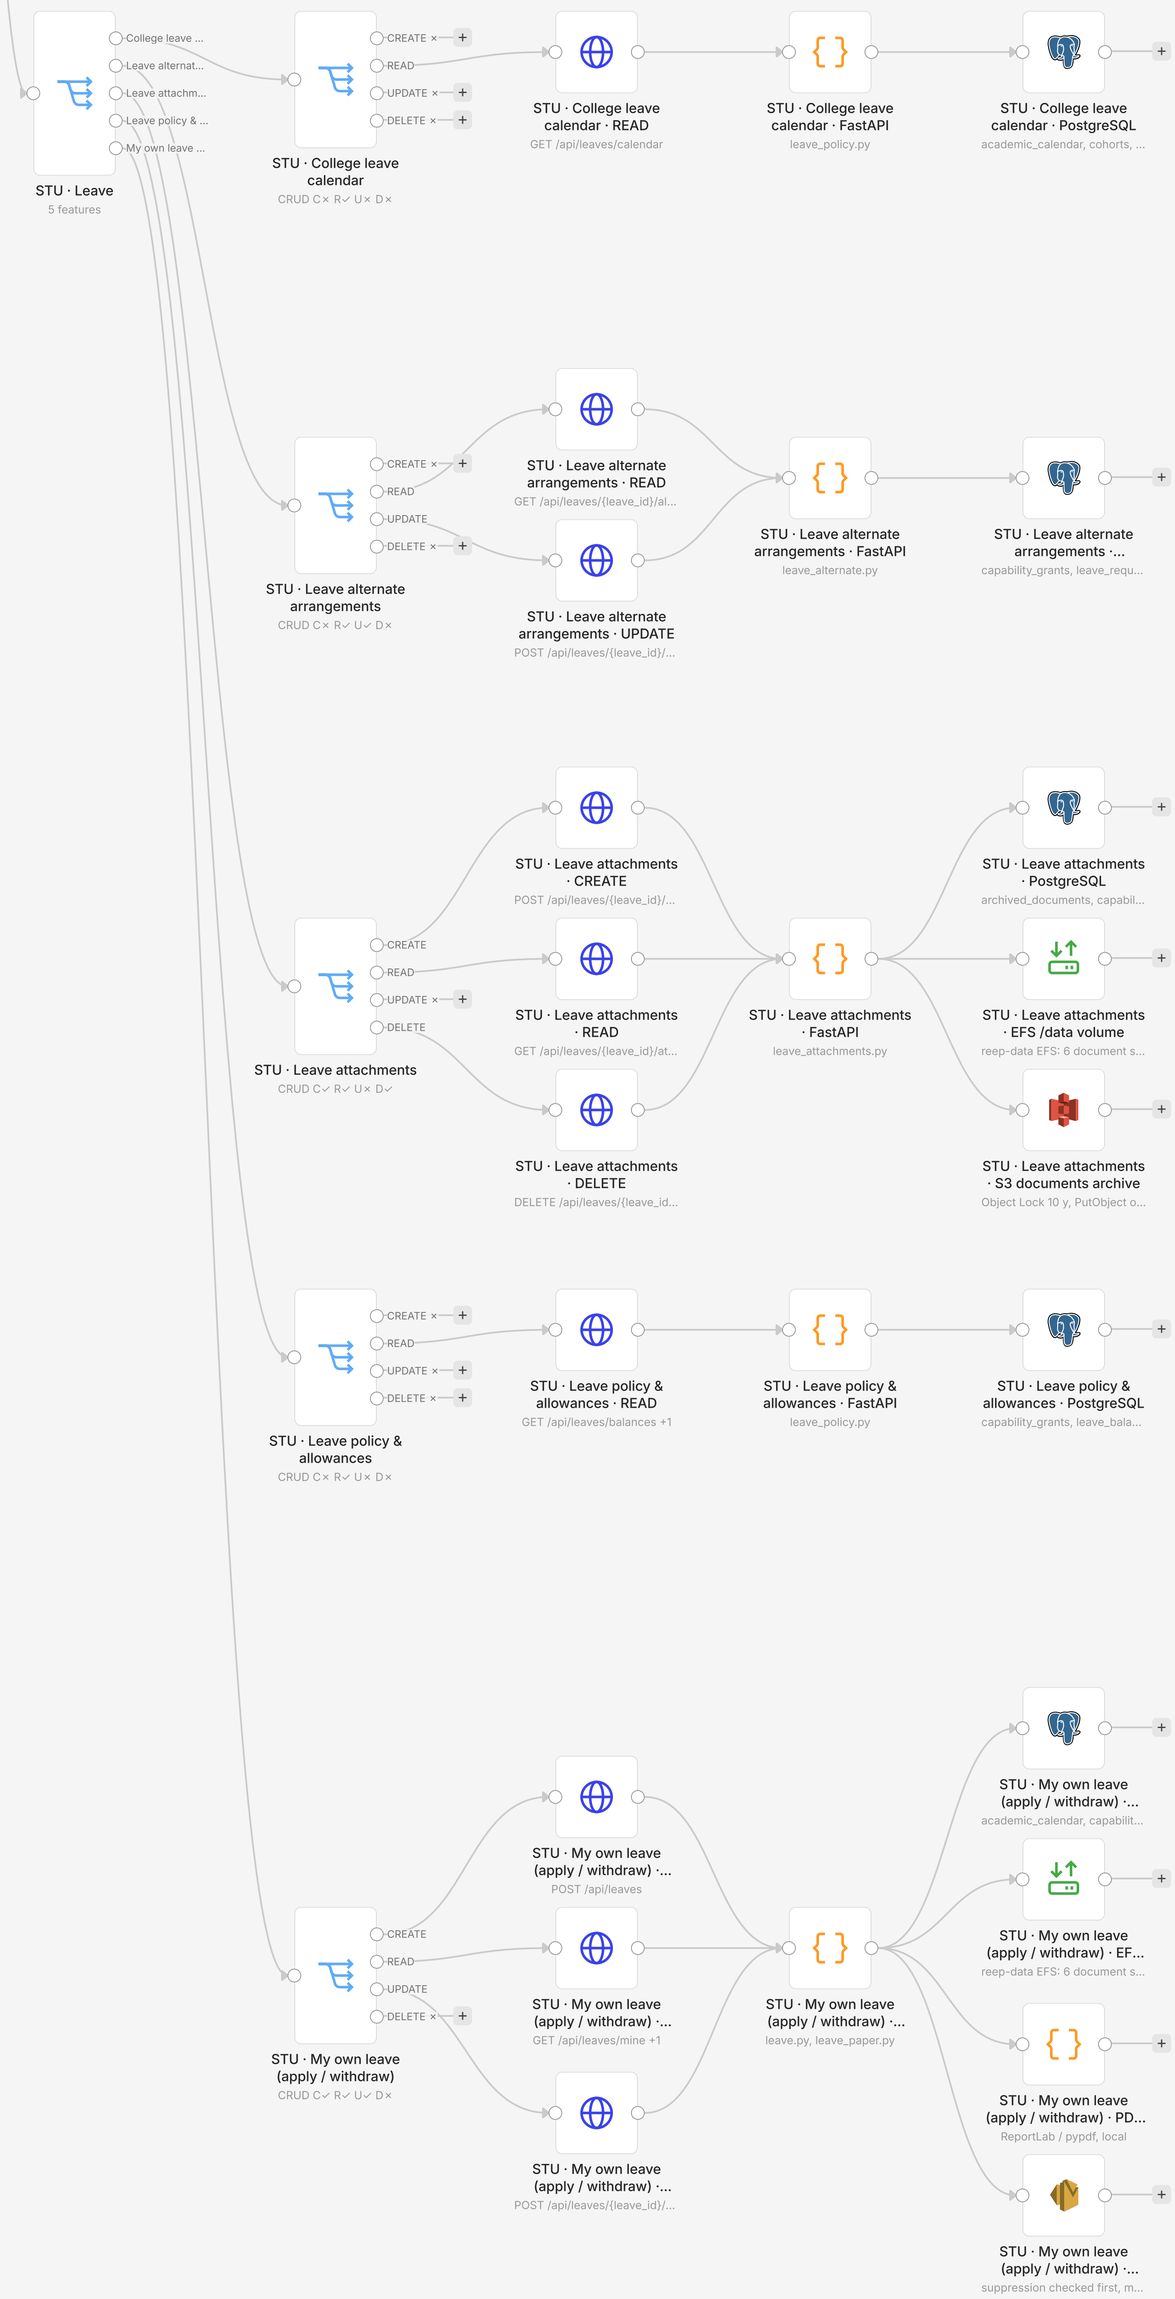

College leave calendar

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/leaves/calendar`	view my college calendar †

Screens — none for this role (API only)
Code `routers/leave_policy.py`
Gate `get_current_session (caller's own college only)`
Tables `academic_calendar` `cohorts` `departments` `students` `users`
AWS / external —

Leave alternate arrangements

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/leaves/{leave_id}/alternate`	view alternate table †
U	POST	`/api/leaves/{leave_id}/alternate/assign`	name covering colleague †

Screens — none for this role (API only)
Code `routers/leave_alternate.py`
Gate `get_current_session; applicant OR leave._assert_can_decid...` · `get_current_session; applicant only (requester_user_id ==...`
Tables `capability_grants` `leave_requests` `users`
AWS / external —

Leave attachments

C ✓ · **R** ✓ · **U** × · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/leaves/{leave_id}/attachments`	attach document to leave †
R	GET	`/api/leaves/{leave_id}/attachments`	list leave attachments †
R	GET	`/api/leaves/{leave_id}/attachments/{attachment_id}/file`	download leave attachment †
D	DELETE	`/api/leaves/{leave_id}/attachments/{attachment_id}`	remove leave attachment †

Screens — none for this role (API only)
Code `routers/leave_attachments.py`
Gate `get_current_session; applicant (requester_user_id == call...`
Tables `archived_documents` `capability_grants` `leave_attachments` `leave_requests` `users`
AWS / external EFS /data volume · S3 documents archive

Leave policy & allowances

C × · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/leaves/balances`	view my leave allowances †
R	GET	`/api/leaves/{leave_id}/balance`	view applicant's allowances †

Screens — none for this role (API only)
Code `routers/leave_policy.py`
Gate `get_current_session (own user id only)` · `requester themselves, else _assert_can_decide (require_me...`
Tables `capability_grants` `leave_balances` `leave_requests`
AWS / external —

My own leave (apply / withdraw)

C ✓ · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/leaves`	apply for leave †
R	GET	`/api/leaves/mine`	list my leave †
R	GET	`/api/leaves/{leave_id}/paper.pdf`	download leave PDF †
U	POST	`/api/leaves/{leave_id}/cancel`	withdraw my leave †

Screens — none for this role (API only)
Code `routers/leave.py` `routers/leave_paper.py`
Gate `get_current_session (+ leave_policy.submit_refusal balanc...` · `get_current_session (requester_user_id == caller)` · `get_current_session (requester_user_id == caller, else 404)` · `requester themselves, else _assert_can_decide (require_me...`
Tables `academic_calendar` `capability_grants` `leave_balances` `leave_requests` `mail_logs` `staff_signatures` `students` `users`
AWS / external EFS /data volume · PDF render (in process) · Amazon SES mail

Jobs & placement

4 features · 11 endpoints

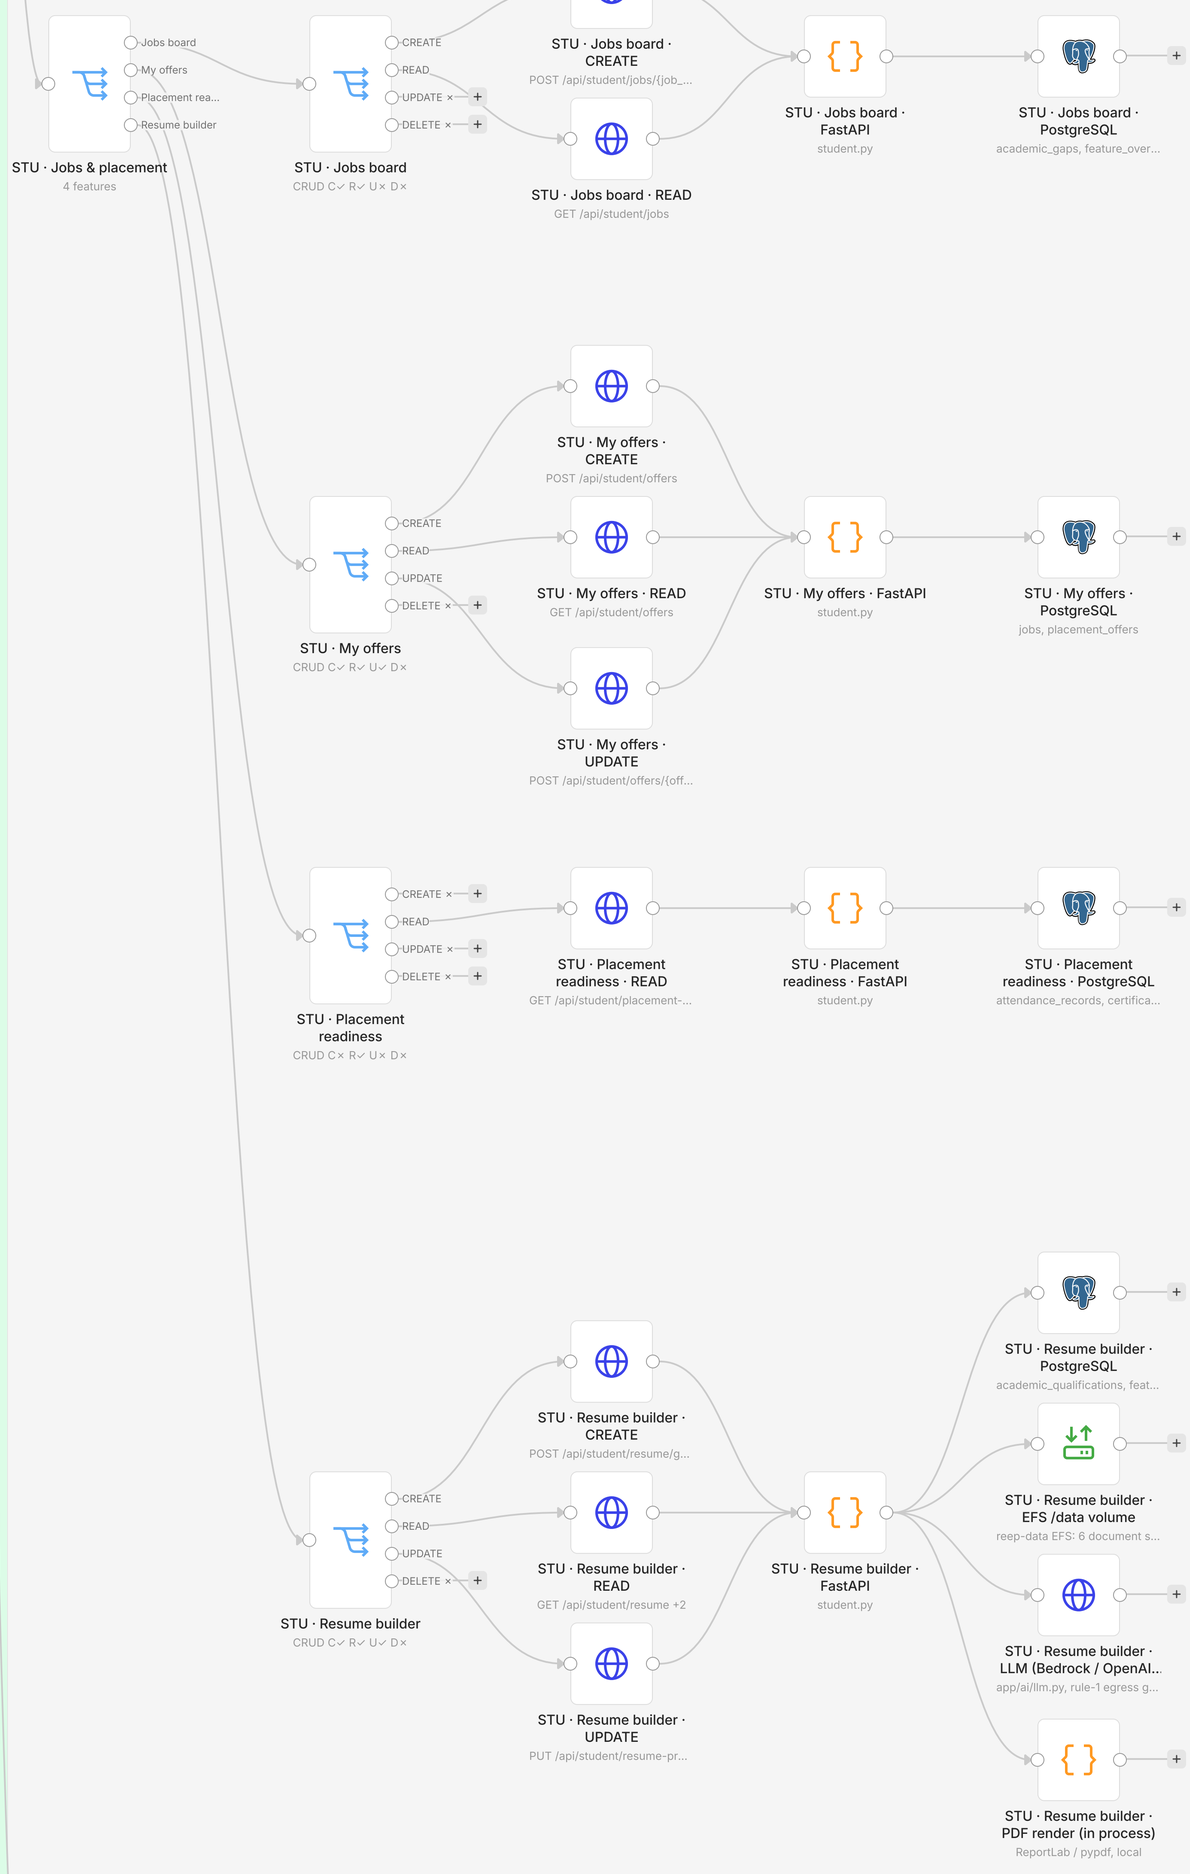

Jobs board

C ✓ · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/jobs/{job_id}/apply`	apply to a job
R	GET	`/api/student/jobs`	browse eligible jobs

Screens `/student/jobs` `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `academic_gaps` `feature_overrides` `job_applications` `jobs` `placement_criteria` `semester_results` `skills` `student_skills` `students`
AWS / external —

My offers

C ✓ · **R** ✓ · **U** ✓ · **D** × · 3 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/offers`	record an offer †
R	GET	`/api/student/offers`	list my offers †
U	POST	`/api/student/offers/{offer_id}/submit`	submit offer for approval †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `jobs` `placement_offers`
AWS / external —

Placement readiness

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/placement-readiness`	view my readiness score †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `attendance_records` `certification_progress` `cohorts` `interview_score_summaries` `placement_criteria` `resume_profiles` `semester_results` `student_profiles` `students`
AWS / external —

Resume builder

C ✓ · **R** ✓ · **U** ✓ · **D** × · 5 endpoints

Op	Method	Path	What it does
C	POST	`/api/student/resume/generate`	generate a resume
R	GET	`/api/student/resume`	list my resume versions
R	GET	`/api/student/resume-profile`	load resume builder state
R	GET	`/api/student/resume/{resume_id}/pdf`	download resume PDF
U	PUT	`/api/student/resume-profile`	save resume builder

Screens `/student/resume`
Code `routers/student.py`
Gate `get_current_session + _require_student (role STUDENT and ...`
Tables `academic_qualifications` `feature_overrides` `resume_profiles` `resumes` `semester_results` `skill_claims` `skills` `student_profiles` `student_skills` `uploads`
AWS / external EFS /data volume · LLM (Bedrock / OpenAI-compatible) · PDF render (in process)

REEP Agent

1 feature · 8 endpoints

REEP Agent

C ✓ · **R** ✓ · **U** × · **D** ✓ · **A** ✓ · 8 endpoints

Op	Method	Path	What it does
C	POST	`/api/agent/feedback`	rate an answer
R	GET	`/api/agent/history`	read my chat history
R	GET	`/api/agent/knowledge/search`	search knowledge base †
R	GET	`/api/agent/runs`	list my agent runs †
D	DELETE	`/api/agent/conversation`	clear my conversation
A	POST	`/api/agent/ask`	ask the agent
A	POST	`/api/agent/chat`	chat with assistant †
A	POST	`/api/agent/chat/stream`	stream assistant reply †

Screens `/student/agent (agent dock on every screen)` `/student/assistant`
Code `routers/agent.py`
Gate `_require_agent_access: require_capability(mentor.agent) f...` · `get_current_session (caller's own runs only)` · `get_current_session (caller's own thread only)` · `get_current_session + caller must own the agent run (404 ...` · `get_current_session + inline role == STUDENT` · capability `mentor.agent`
Tables `agent_runs` `assistant_feedback` `conversations` `feature_overrides` `knowledge_chunks` `knowledge_documents` `messages` `student_profiles` `students`
AWS / external Embeddings (pgvector KB) · LLM (Bedrock / OpenAI-compatible)
† no screen in this role's navigation calls it (API or typed URL only)

Voice platform

2 features · 5 endpoints

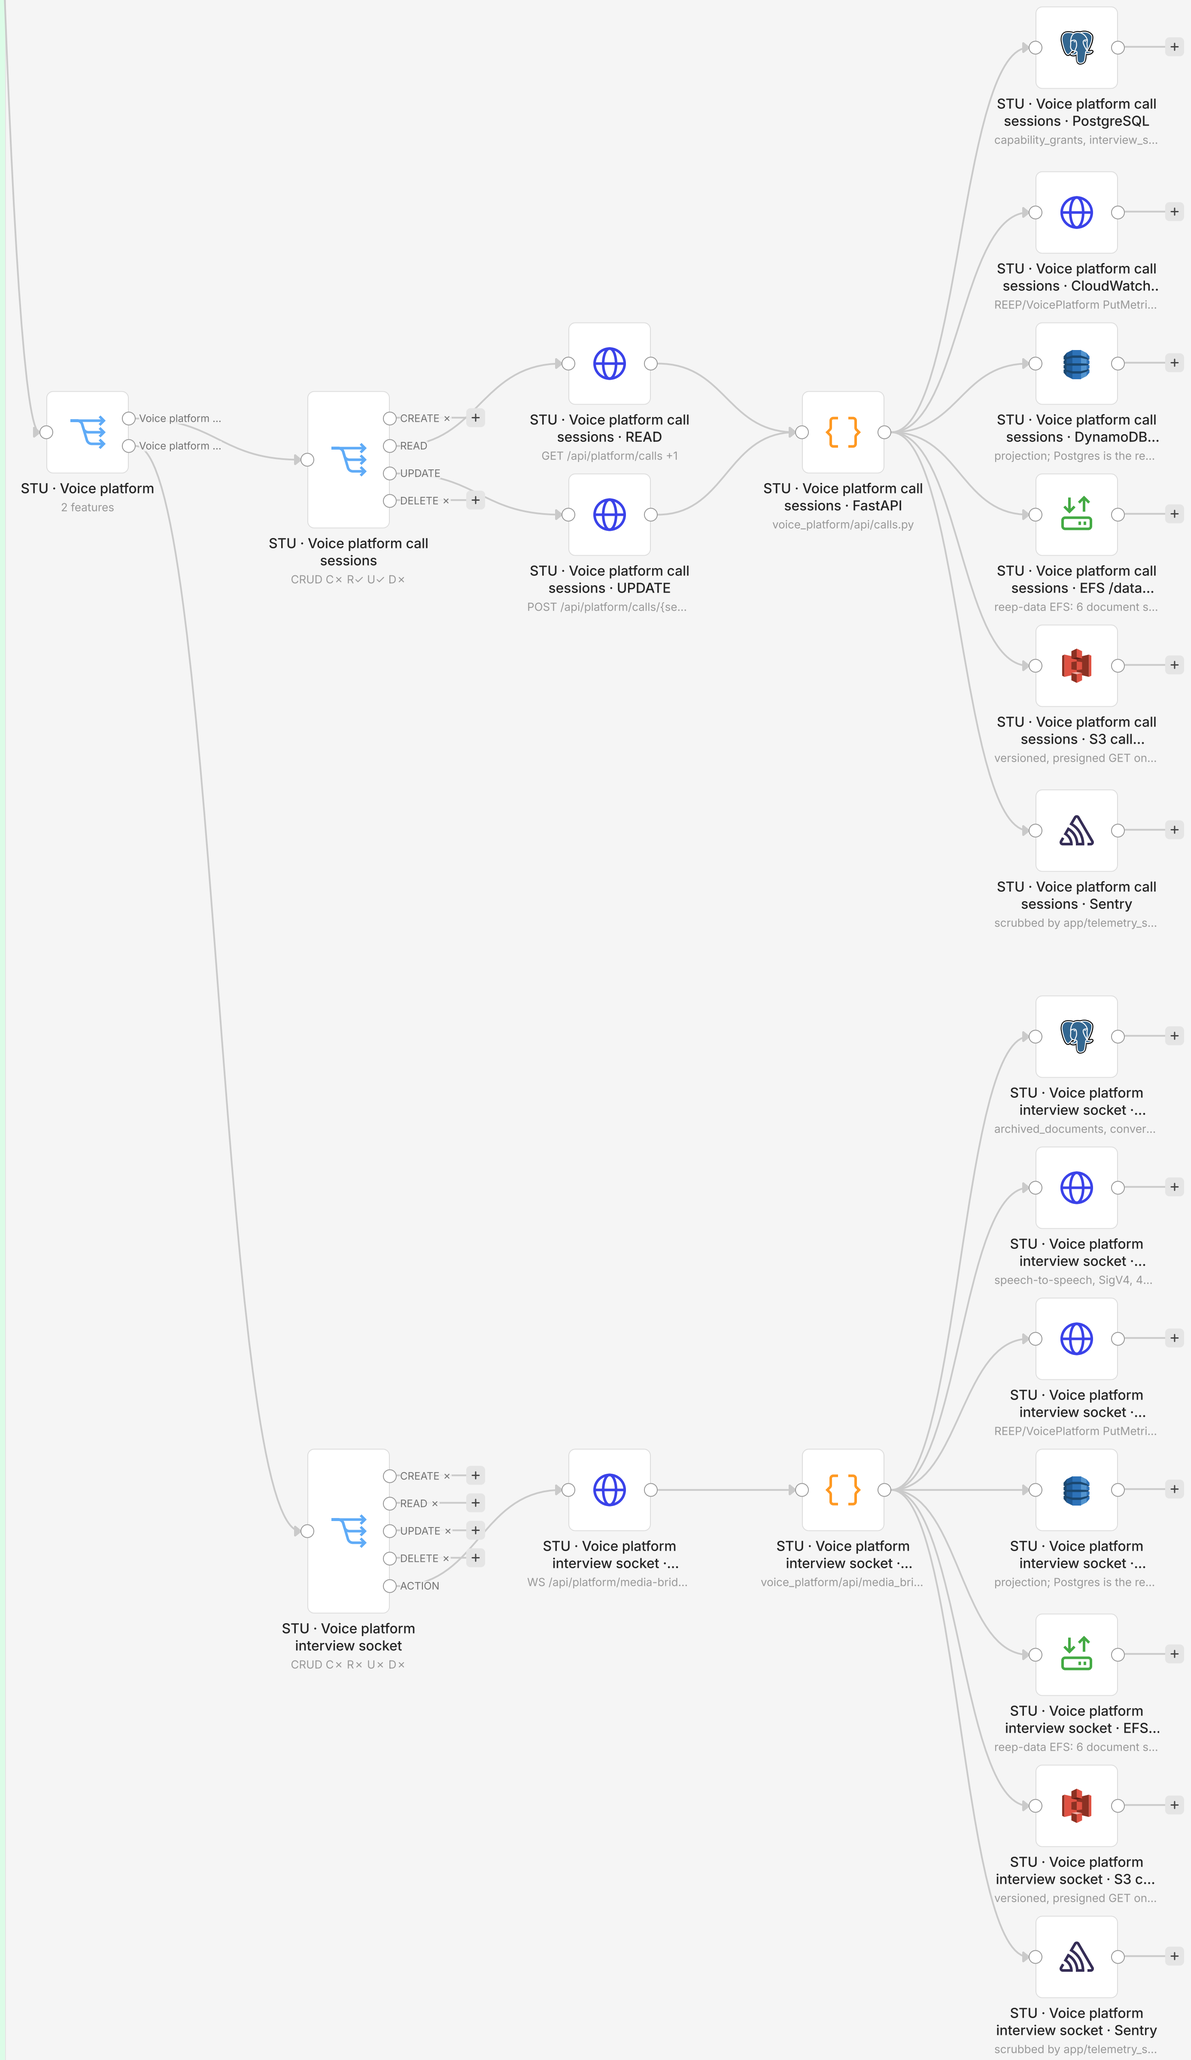

Voice platform call sessions

C × · **R** ✓ · **U** ✓ · **D** × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/platform/calls`	list call sessions †
R	GET	`/api/platform/calls/{session_id}`	view call detail †
U	POST	`/api/platform/calls/{session_id}/close`	close call, upload recording †

Screens — none for this role (API only)
Code `voice_platform/api/calls.py`
Gate `get_current_session (any signed-in session); role == ADMI... · get_current_session + _can_read (owner | role ADMIN | MEN... · get_current_session + owner (row.user_id == session.userI...` · capability `admin.interview_audio`
Tables `capability_grants` `interview_sessions` `interview_turns` `mentors` `platform_call_sessions` `platform_recording_policies` `students`
AWS / external CloudWatch metrics · DynamoDB voice sessions · EFS /data volume · S3 call recordings · Sentry

Voice platform interview socket

C × · **R** × · **U** × · **D** × · **A** ✓ · 2 endpoints

Op	Method	Path	What it does
A	WS	`/api/platform/media-bridge`	run platform mock interview †
A	WS	`/ws/media-bridge`	run platform mock interview †

Screens — none for this role (API only)
Code `voice_platform/api/media_bridge.py`
Gate `Origin == settings.web_origin + get_ws_session + role == ...`
Tables `archived_documents` `conversations` `interview_cap_resets` `interview_consents` `interview_evaluations` `interview_policies` `interview_score_summaries` `interview_sessions` `interview_turns` `messages` `platform_call_sessions` `platform_candidates` `platform_questions` `platform_recording_policies` `platform_specializations` `platform_time_limits`
AWS / external Bedrock Nova 2 Sonic · CloudWatch metrics · DynamoDB voice sessions · EFS /data volume · S3 call recordings · Sentry

FACULTY (role MENTOR) · 1 of 5

Programme (ledger, English, milestones) · Skills, badges & certifications

Back to the map

FACULTY (role MENTOR)

25 features · 75 endpoints (features offering each operation: C 9 · R 23 · U 10 · D 6 · A 1)

`require_mentor` (admits MENTOR and ADMIN) + rule 2 `_assert_can_access_student`: own mentee group only. Group functions (mentees, notebook, verifications) are DERIVED while they mentor somebody; console screens only by a Governance grant.

FACULTY (role MENTOR) · 2 of 5

Interviews · Mentoring & SWOC

Back to the map

Interviews

2 features · 7 endpoints

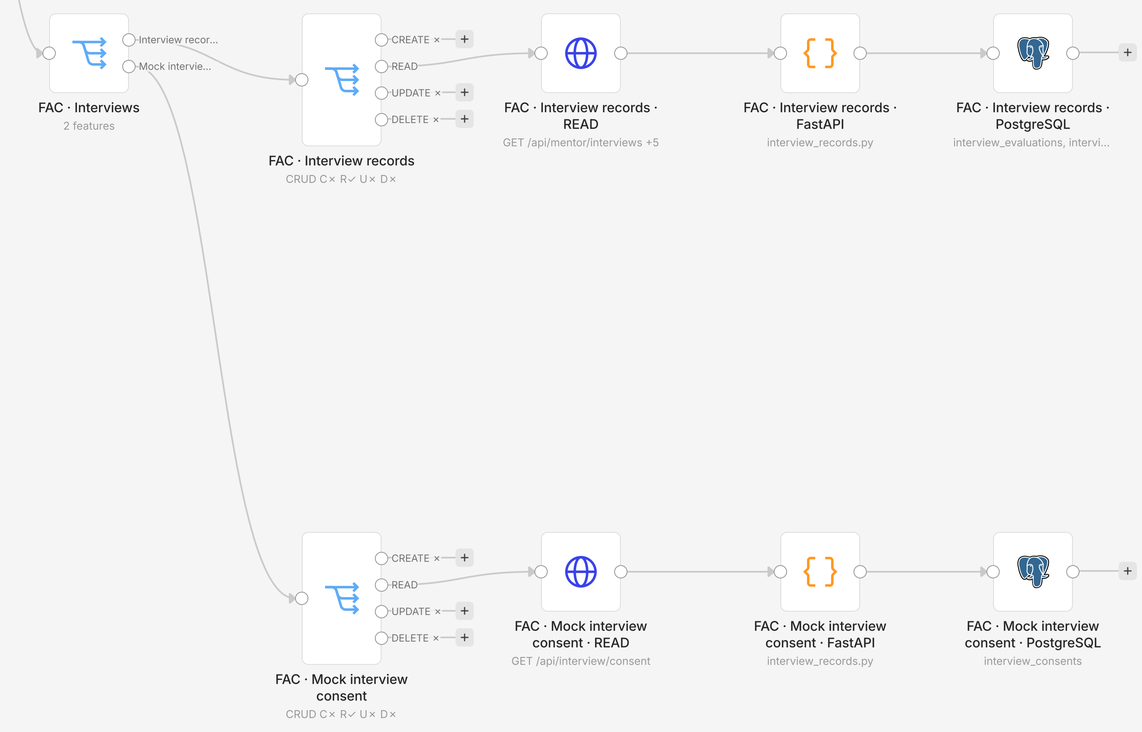

Interview records

C × · R ✓ · U × · D × · 6 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/interviews`	list all interviews †
R	GET	`/api/mentor/students/{student_id}/interviews`	list a student's interviews †
R	GET	`/api/mentor/students/{student_id}/interviews/progress`	view a student's interview trend †
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}`	open a student's interview †
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}/report`	view a student's scorecard †
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}/transcript`	view a student's transcript †

Screens — none for this role (API only)
Code `routers/interview_records.py`
Gate `_assert_can_access_student (require_staff + rule 2 mentor... · require_mentor; _records_query narrows a MENTOR to Studen...`
Tables `interview_evaluations` `interview_score_summaries` `interview_sessions` `interview_turns` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external —

Mock interview consent

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/interview/consent`	read my interview consent †

Screens — none for this role (API only)
Code `routers/interview_records.py`
Gate `get_current_session (no role check)`
Tables `interview_consents`
AWS / external —

Mentoring & SWOC

4 features · 15 endpoints

Focus log

C × · R ✓ · U ✓ · D × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/students/{student_id}/focus`	list student focus sessions †
U	POST	`/api/mentor/focus/{session_id}/confirm`	confirm focus session †

Screens — none for this role (API only)
Code `routers/mentor.py`
Gate `_assert_can_access_student (policies.assert_student_scope... · require_mentor + _assert_can_access_student`
Tables `lab_sessions` `students`
AWS / external —

Mentee list (notebook picker)

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/v1/mentor/mentees`	list my mentees

Screens `/mentor/notebook`
Code `routers/redesign.py`
Gate `require_staff`
Tables `redesign_tenant_memberships` `students` `users`
AWS / external —

Mentee Log

C ✓ · R ✓ · U × · D ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/mentor/students/{student_id}/notes`	add meeting note
R	GET	`/api/mentor/mentees`	list my mentees
R	GET	`/api/mentor/students/{student_id}/notes`	list meeting notes
D	DELETE	`/api/mentor/students/{student_id}/notes/{note_id}`	retract meeting note

Screens `/mentor/mentees`
Code `routers/mentor.py`
Gate `require_capability(mentor.mentees) · require_capability(mentor.mentees) + _assert_can_access_s... · capability mentor.mentees`
Tables `capability_grants` `mentor_notes` `students` `users`
AWS / external —

Mentor notebook

C ✓ · R ✓ · U ✓ · D ✓ · 8 endpoints

Op	Method	Path	What it does
C	POST	`/api/v1/mentor/notebook/entries/{entry_id}/attachments`	register entry attachment †
C	POST	`/api/v1/mentor/notebook/students/{student_id}/actions`	add follow-up action †
C	POST	`/api/v1/mentor/notebook/students/{student_id}/entries`	write notebook entry
R	GET	`/api/v1/mentor/notebook/students/{student_id}/actions`	list notebook actions †
R	GET	`/api/v1/mentor/notebook/students/{student_id}/entries`	list notebook entries
U	PATCH	`/api/v1/mentor/notebook/entries/{entry_id}`	edit notebook entry †
U	POST	`/api/v1/mentor/notebook/entries/{entry_id}/publish`	publish entry to student
D	POST	`/api/v1/mentor/notebook/entries/{entry_id}/archive`	remove notebook entry

Screens `/mentor/notebook`
Code `routers/redesign.py`
Gate `require_staff + require_capability(mentor.notebook) + ass... · capability mentor.notebook`
Tables `capability_grants` `redesign_api_idempotency_keys` `redesign_audit_events` `redesign_mentor_notebook_actions` `redesign_mentor_notebook_attachments` `redesign_mentor_notebook_entries` `redesign_mentor_notebook_entry_revisions` `redesign_outbox_events` `redesign_tenant_memberships` `students`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

FACULTY (role MENTOR) · 3 of 5

Leave

Back to the map

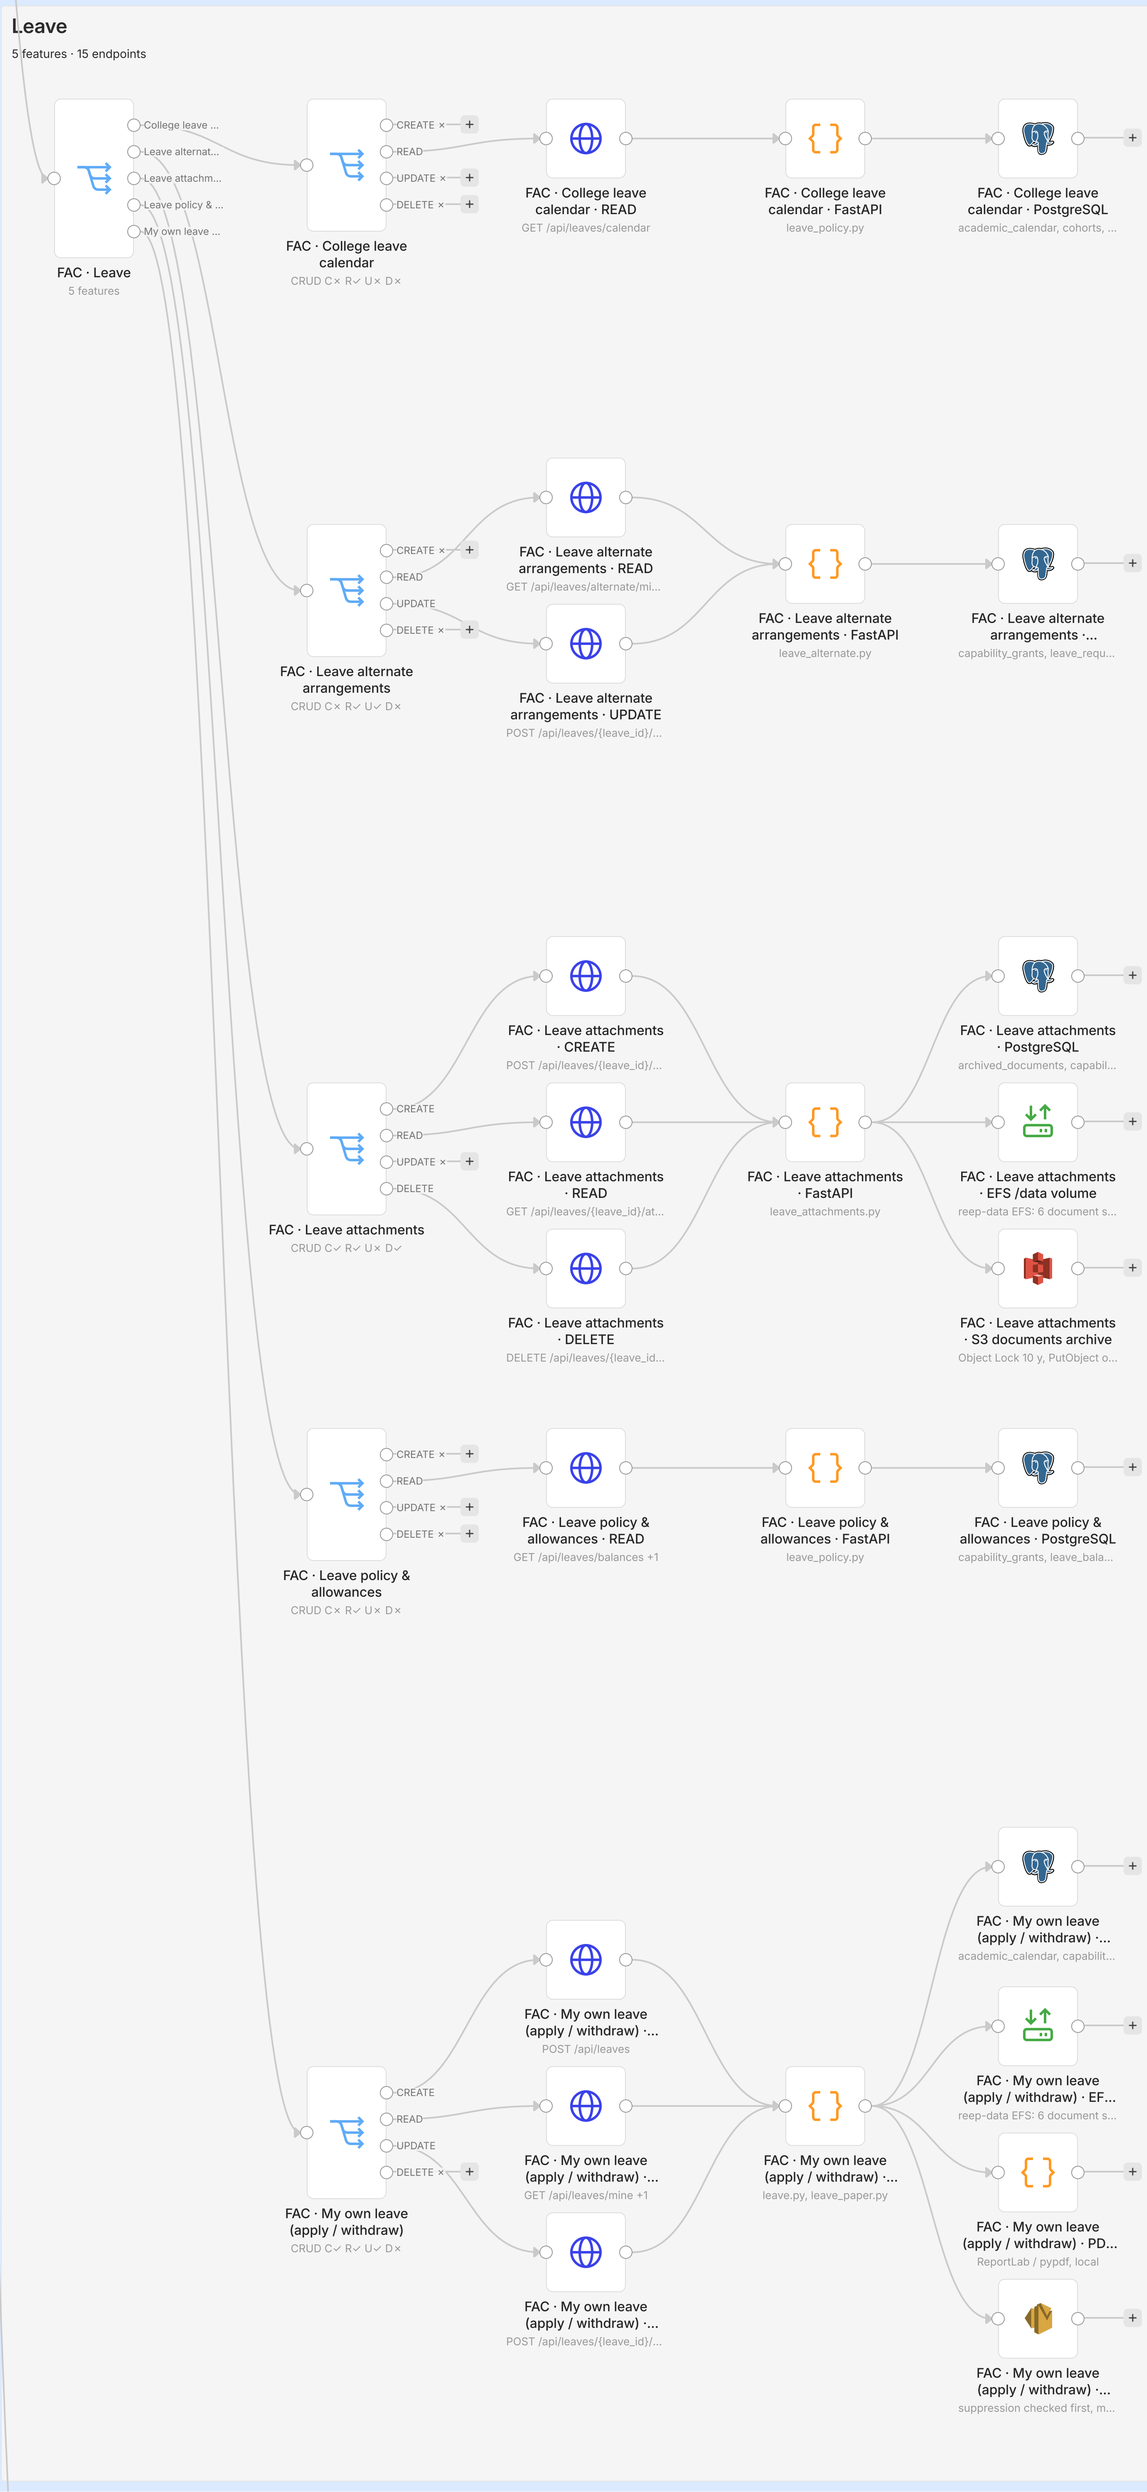

College leave calendar

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/leaves/calendar`	view my college calendar †

Screens — none for this role (API only)
Code `routers/leave_policy.py`
Gate `get_current_session (caller's own college only)`
Tables `academic_calendar` `cohorts` `departments` `students` `users`
AWS / external —

Leave alternate arrangements

C × · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/leaves/alternate/mine`	list requests naming me
R	GET	`/api/leaves/{leave_id}/alternate`	view alternate table †
U	POST	`/api/leaves/{leave_id}/alternate/accept`	accept covering classes
U	POST	`/api/leaves/{leave_id}/alternate/assign`	name covering colleague †

Screens `/mentor/leave`
Code `routers/leave_alternate.py`
Gate `get_current_session only (any signed-in account; only MEN...` · `get_current_session; applicant OR leave._assert_can_decid...` · `get_current_session; applicant only (requester_user_id ==...` · `get_current_session; caller must be the account named on ...`
Tables `capability_grants` `leave_requests` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Leave attachments

C ✓ · **R** ✓ · **U** × · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/leaves/{leave_id}/attachments`	attach document to leave
R	GET	`/api/leaves/{leave_id}/attachments`	list leave attachments
R	GET	`/api/leaves/{leave_id}/attachments/{attachment_id}/file`	download leave attachment
D	DELETE	`/api/leaves/{leave_id}/attachments/{attachment_id}`	remove leave attachment

Screens `/mentor/leave`
Code `routers/leave_attachments.py`
Gate `get_current_session; applicant (requester_user_id == call...`
Tables `archived_documents` `capability_grants` `leave_attachments` `leave_requests` `users`
AWS / external EFS /data volume · S3 documents archive

Leave policy & allowances

C × · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/leaves/balances`	view my leave allowances
R	GET	`/api/leaves/{leave_id}/balance`	view applicant's allowances †

Screens `/mentor/leave`
Code `routers/leave_policy.py`
Gate `get_current_session (own user id only)` · `requester themselves, else _assert_can_decide (require_me...`
Tables `capability_grants` `leave_balances` `leave_requests`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

My own leave (apply / withdraw)

C ✓ · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/leaves`	apply for leave
R	GET	`/api/leaves/mine`	list my leave
R	GET	`/api/leaves/{leave_id}/paper.pdf`	download leave PDF
U	POST	`/api/leaves/{leave_id}/cancel`	withdraw my leave

Screens `/mentor/leave`
Code `routers/leave.py` `routers/leave_paper.py`
Gate `get_current_session (+ leave_policy.submit_refusal balanc...` · `get_current_session (requester_user_id == caller)` · `get_current_session (requester_user_id == caller, else 404)` · `requester themselves, else _assert_can_decide (require_me...`
Tables `academic_calendar` `capability_grants` `leave_balances` `leave_requests` `mail_logs` `staff_signatures` `students` `users`
AWS / external EFS /data volume · PDF render (in process) · Amazon SES mail

FACULTY (role MENTOR) · 4 of 5

Staff self-service · REEP Agent · Imports & analytics · Voice platform

Back to the map

Staff self-service

2 features · 8 endpoints

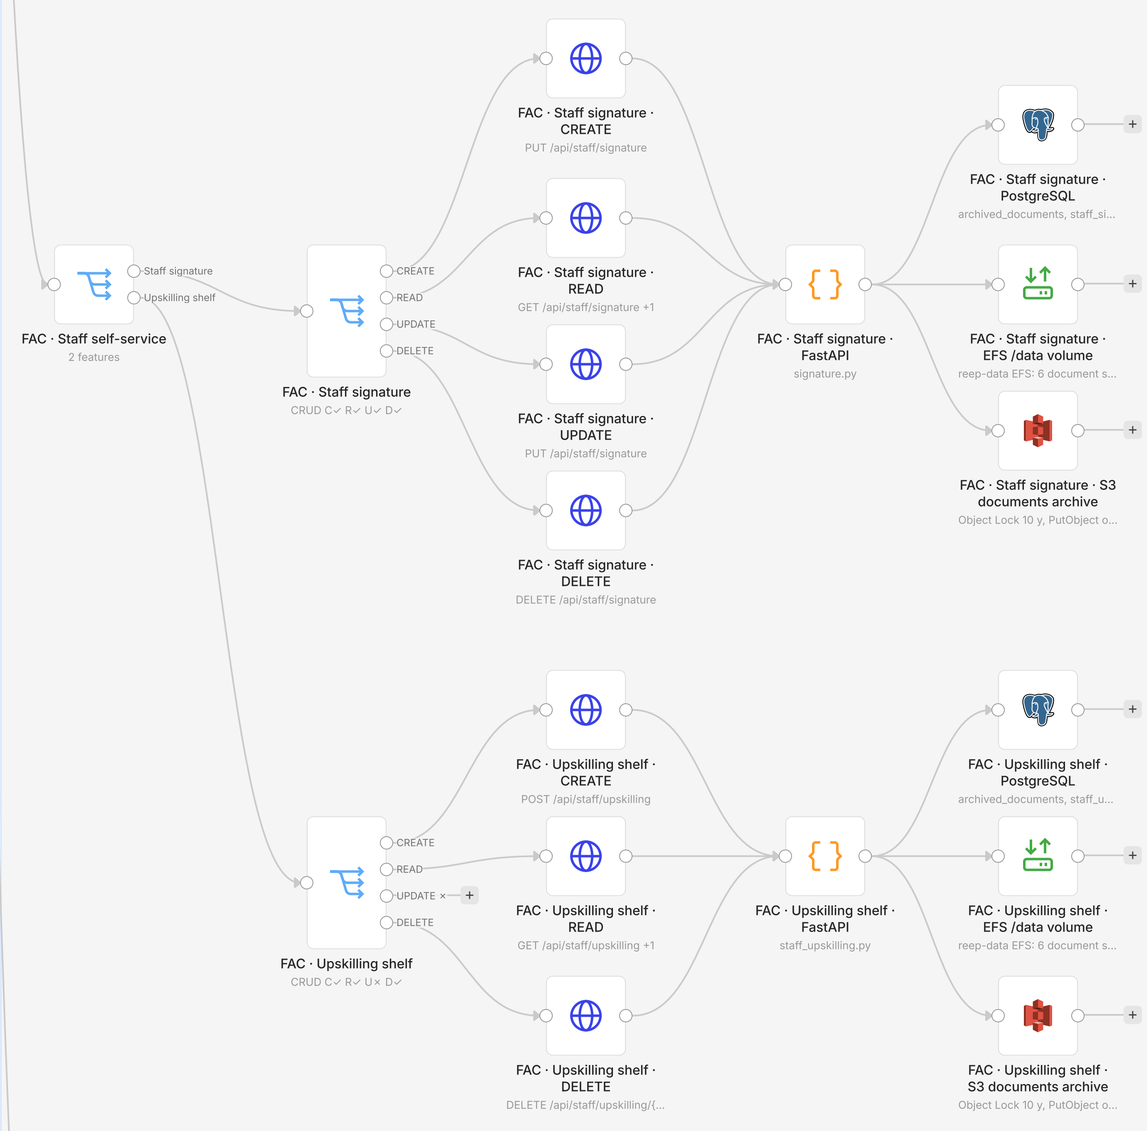

Staff signature

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/staff/signature`	check my signature
R	GET	`/api/staff/signature/image`	preview my signature
U/C	PUT	`/api/staff/signature`	upload or replace signature
D	DELETE	`/api/staff/signature`	remove my signature

Screens `/mentor/signature` `/account` `/mentor/leave`
Code `routers/signature.py`
Gate `require_mentor (role MENTOR or ADMIN); always the caller'...`
Tables `archived_documents` `staff_signatures`
AWS / external EFS /data volume · S3 documents archive

Upskilling shelf

C ✓ · **R** ✓ · **U** × · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/staff/upskilling`	upload my certificate
R	GET	`/api/staff/upskilling`	list my certificates
R	GET	`/api/staff/upskilling/{cert_id}/file`	download my certificate
D	DELETE	`/api/staff/upskilling/{cert_id}`	remove my certificate

Screens `/mentor/upskilling`
Code `routers/staff_upskilling.py`
Gate `require_capability(mentor.upskilling) + cert.user_id == s... · require_capability(mentor.upskilling) + per-user VolumeQuota · require_capability(mentor.upskilling), rows filtered to s...` · capability `mentor.upskilling`
Tables `archived_documents` `staff_upskilling_certs`
AWS / external EFS /data volume · S3 documents archive

REEP Agent

feature · 7 endpoints

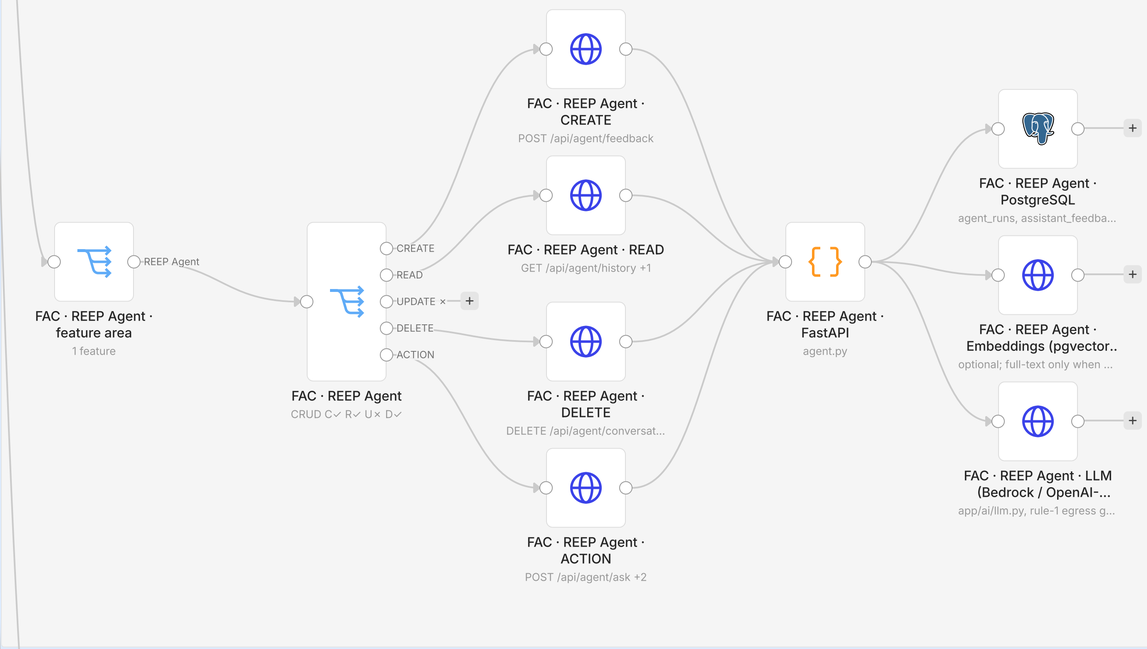

REEP Agent

C ✓ · **R** ✓ · **U** × · **D** ✓ · **A** ✓ · 7 endpoints

Op	Method	Path	What it does
C	POST	`/api/agent/feedback`	rate an answer
R	GET	`/api/agent/history`	read my chat history
R	GET	`/api/agent/runs`	list my agent runs †
D	DELETE	`/api/agent/conversation`	clear my conversation
A	POST	`/api/agent/ask`	ask the agent
A	POST	`/api/agent/chat`	chat with assistant †
A	POST	`/api/agent/chat/stream`	stream assistant reply †

Screens `/mentor/agent (agent dock on every screen)`
Code `routers/agent.py`
Gate `_require_agent_access: require_capability(mentor.agent) f... · get_current_session (caller's own runs only) · get_current_session (caller's own thread only) · get_current_session + caller must own the agent run (404 ...` · capability `mentor.agent`
Tables `agent_runs` `assistant_feedback` `conversations` `feature_overrides` `knowledge_chunks` `knowledge_documents` `messages` `student_profiles` `students`
AWS / external Embeddings (pgvector KB) · LLM (Bedrock / OpenAI-compatible)
† no screen in this role's navigation calls it (API or typed URL only)

Imports & analytics

1 feature · 2 endpoints

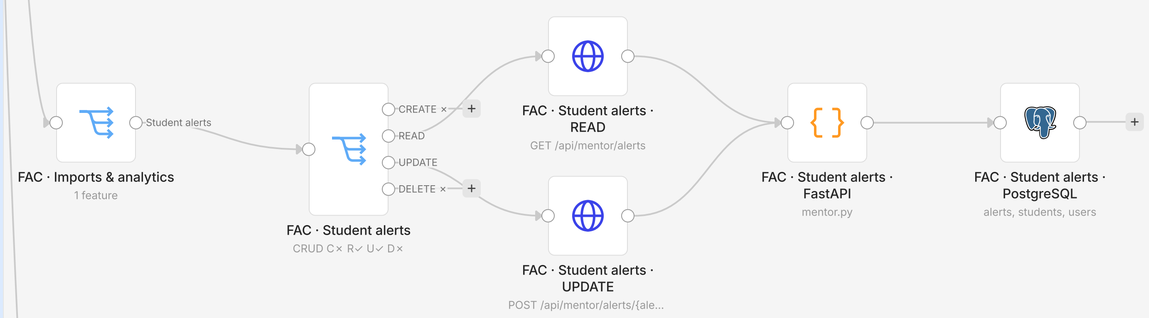

Student alerts

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/alerts`	list student alerts †
U	POST	`/api/mentor/alerts/{alert_id}/resolve`	resolve alert †

Screens — none for this role (API only)
Code `routers/mentor.py`
Gate `require_mentor · require_mentor + _assert_can_access_student`
Tables `alerts` `students` `users`
AWS / external —

Voice platform

1 feature · 2 endpoints

Voice platform call sessions

C × · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/platform/calls`	list call sessions †
R	GET	`/api/platform/calls/{session_id}`	view call detail †

Screens — none for this role (API only)
Code `voice_platform/api/calls.py`
Gate `get_current_session (any signed-in session); role == ADMI... · get_current_session + _can_read (owner | role ADMIN | MEN...` · capability `admin.interview_audio`
Tables `capability_grants` `interview_sessions` `mentors` `platform_call_sessions` `platform_recording_policies` `students`
AWS / external S3 call recordings

FACULTY (role MENTOR) · 5 of 5

Granted console screens (Governance)

Back to the map

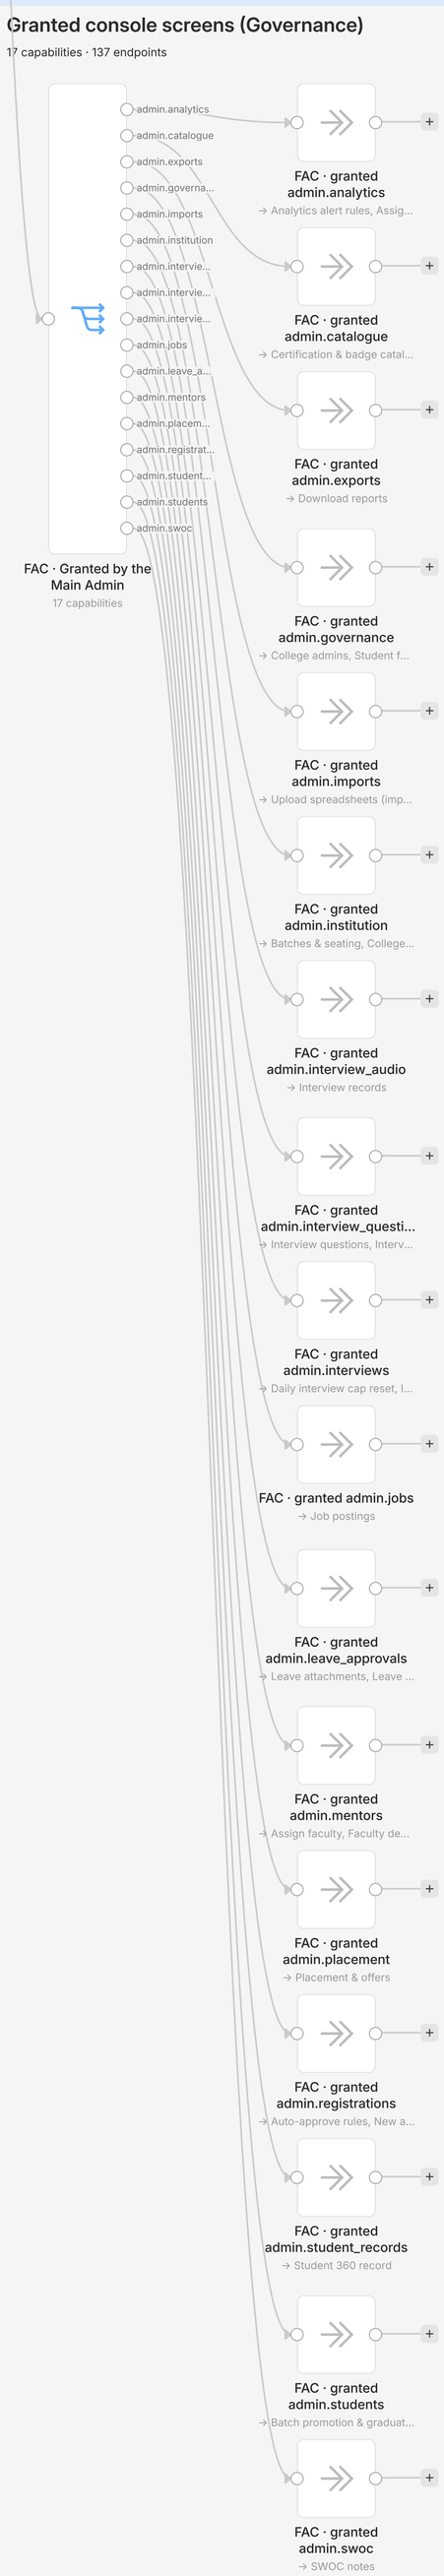

Console screens a faculty member reaches only by a Governance grant

The Main Admin grants an `admin.*` capability to a named faculty account in **Who can do what** (with a reason, an optional scope rung and an expiry; a deputy's PII grant waits for a second signature). The endpoints are exactly the Main Admin lane's – `require_capability` admits the holder – and rule 2 still narrows anything about one student to the holder's own mentees.

Capability	Main Admin features it opens	Faculty screen	C	R	U	D	Endpoints
`admin.analytics`	Analytics alert rules, Assign faculty, Batches & seating, Charts & numbers (analytics), Placement criteria	`/admin/analytics`	1	10	1	—	12
`admin.catalogue`	Certification & badge catalogue, Course catalogue & stage rules	`/admin/catalogue`	3	6	3	1	13
`admin.exports`	Download reports	`/admin/exports`	—	4	—	—	4
`admin.governance`	College admins, Student feature switches, Who can do what (Governance)	— (API only) · API only for a faculty deputy: both Governance screens are `roleGuard('ADMIN')`	4	9	3	3	19
`admin.imports`	Upload spreadsheets (imports)	`/admin/imports`	2	3	—	—	5
`admin.institution`	Batches & seating, College structure, Colleges	`/admin/setup` `/admin/colleges` `/admin/institution`	5	11	6	—	22
`admin.interview_audio`	Interview records	— (API only)	—	2	—	—	2
`admin.interview_questions`	Interview questions, Interview tracks	`/admin/interview-questions`	3	2	3	2	10
`admin.interviews`	Daily interview cap reset, Interview policy, Interview records	`/admin/interviews`	1	4	2	—	7
`admin.jobs`	Job postings	`/admin/jobs`	1	1	1	1	4
`admin.leave_approvals`	Leave attachments, Leave requests (approve)	`/admin/leave-approvals` · as a delegate: decide anybody's request and read its paper, alternates, allowance and attachments (their own request is in the lane above)	1	7	1	1	10
`admin.mentors`	Assign faculty, Faculty designation & department	`/admin/faculty` `/admin/faculty/new` `/admin/mentors` · the Faculty screen opens, but listing and adding faculty stay `require_admin`; the holder reaches designation & department and faculty assignment	—	2	2	—	4
`admin.placement`	Placement & offers	`/admin/placement`	—	1	—	—	1
`admin.registrations`	Auto-approve rules, New applications (review queue)	`/admin/registrations`	1	3	4	1	9
`admin.student_records`	Student 360 record	`/admin/students/:id`	—	1	—	—	1
`admin.students`	Batch promotion & graduation, Students & batches	`/admin/students`	—	2	6	1	9
`admin.swoc`	SWOC notes	`/admin/swoc`	1	2	1	1	5

ALUMNI · 1 of 2

Programme (ledger, English, milestones) · Interviews · Leave

Back to the map

ALUMNI

11 features · 28 endpoints (features offering each operation: C 4 · R 11 · U 3 · D 2 · A 1)

`require_alumni` – no Student or Mentor row, no staff scope.

ALUMNI · 2 of 2

Alumni · REEP Agent · Voice platform

Back to the map

Alumni

2 features · 4 endpoints

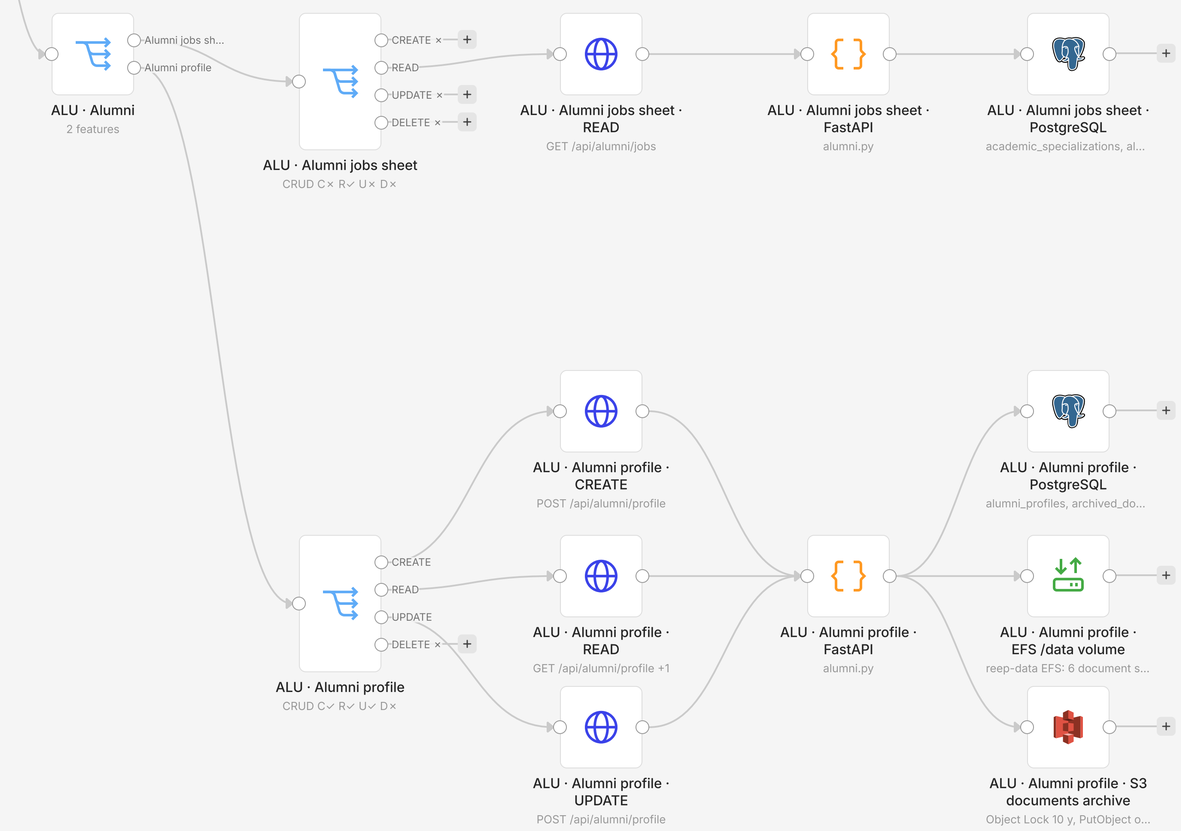

Alumni jobs sheet

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/alumni/jobs`	list open job postings

Screens `/alumni/jobs`
Code `routers/alumni.py`
Gate `require_alumni (role ALUMNI)`
Tables `academic_specializations` `alumni_profiles` `cohorts` `jobs` `students`
AWS / external —

Alumni profile

C ✓ · **R** ✓ · **U** ✓ · **D** × · 3 endpoints

Op	Method	Path	What it does
C/U	POST	`/api/alumni/profile`	create (first login) or edit profile
R	GET	`/api/alumni/profile`	read my alumni profile
R	GET	`/api/alumni/profile/resume`	download my resume

Screens `/alumni`
Code `routers/alumni.py`
Gate `require_alumni (role ALUMNI)`
Tables `alumni_profiles` `archived_documents`
AWS / external EFS /data volume · S3 documents archive

REEP Agent

1 feature · 7 endpoints

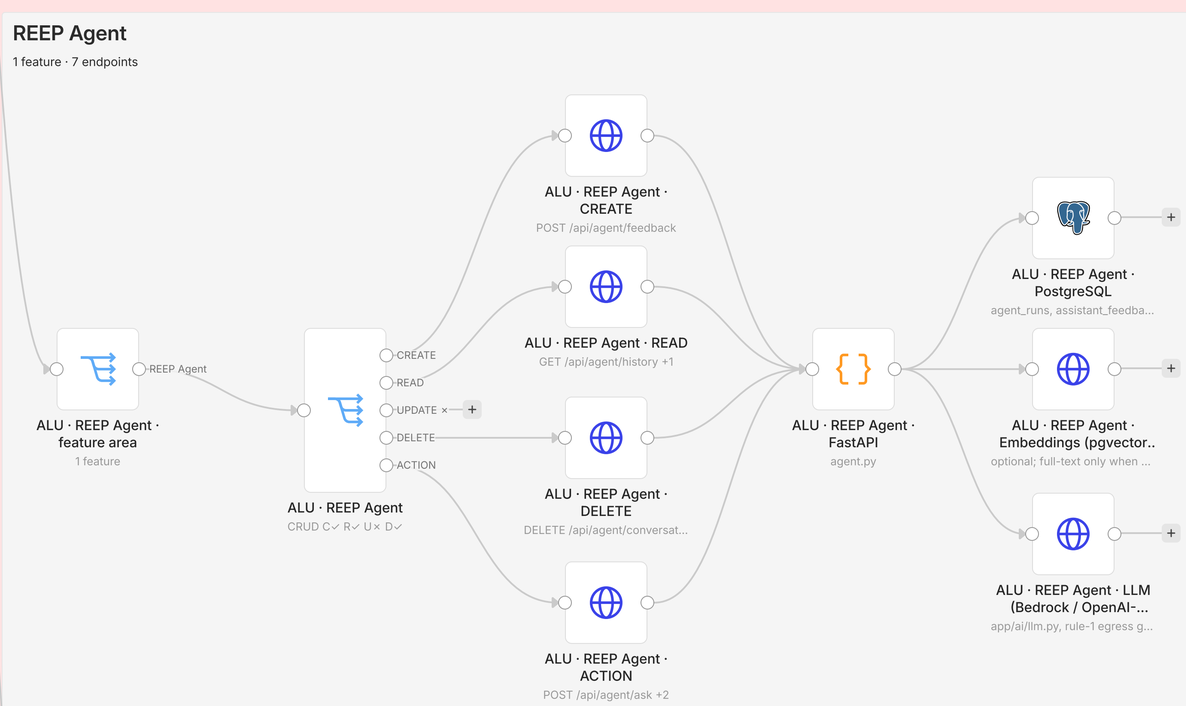

REEP Agent

C ✓ · **R** ✓ · **U** × · **D** ✓ · **A** ✓ · 7 endpoints

Op	Method	Path	What it does
C	POST	`/api/agent/feedback`	rate an answer
R	GET	`/api/agent/history`	read my chat history
R	GET	`/api/agent/runs`	list my agent runs †
D	DELETE	`/api/agent/conversation`	clear my conversation
A	POST	`/api/agent/ask`	ask the agent
A	POST	`/api/agent/chat`	chat with assistant †
A	POST	`/api/agent/chat/stream`	stream assistant reply †

Screens (agent dock on every screen)
Code `routers/agent.py`
Gate `_require_agent_access: require_capability(mentor.agent) f... · get_current_session (caller's own runs only) · get_current_session (caller's own thread only) · get_current_session + caller must own the agent run (404 ...` · capability `mentor.agent`
Tables `agent_runs` `assistant_feedback` `conversations` `feature_overrides` `knowledge_chunks` `knowledge_documents` `messages` `student_profiles` `students`
AWS / external Embeddings (pgvector KB) · LLM (Bedrock / OpenAI-compatible)
† no screen in this role's navigation calls it (API or typed URL only)

Voice platform

1 feature · 2 endpoints

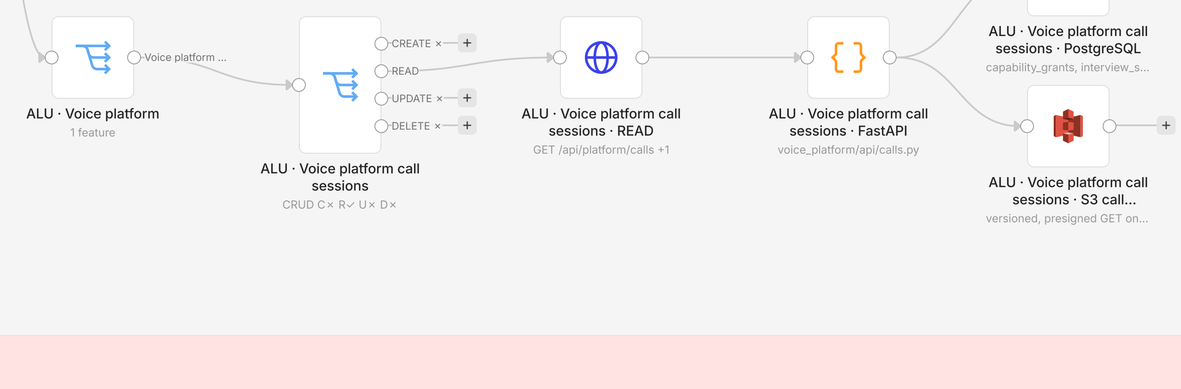

Voice platform call sessions

C × · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/platform/calls`	list call sessions †
R	GET	`/api/platform/calls/{session_id}`	view call detail †

Screens — none for this role (API only)
Code `voice_platform/api/calls.py`
Gate `get_current_session (any signed-in session); role == ADMI... · get_current_session + _can_read (owner | role ADMIN | MEN...` · capability `admin.interview_audio`
Tables `capability_grants` `interview_sessions` `mentors` `platform_call_sessions` `platform_recording_policies` `students`
AWS / external S3 call recordings

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 1 of 7

Identity & sign-in

Back to the map

MAIN ADMIN (role ADMIN, the placement office) (1 of 2)

36 features · 125 endpoints (features offering each operation: C 15 · R 31 · U 24 · D 11 · A 1)

`require_admin` (the one console gate) or `require_capability(admin.*)` held by baseline. Not a faculty member: mentor.mentees / notebook / verifications / upskilling are outside its baseline.

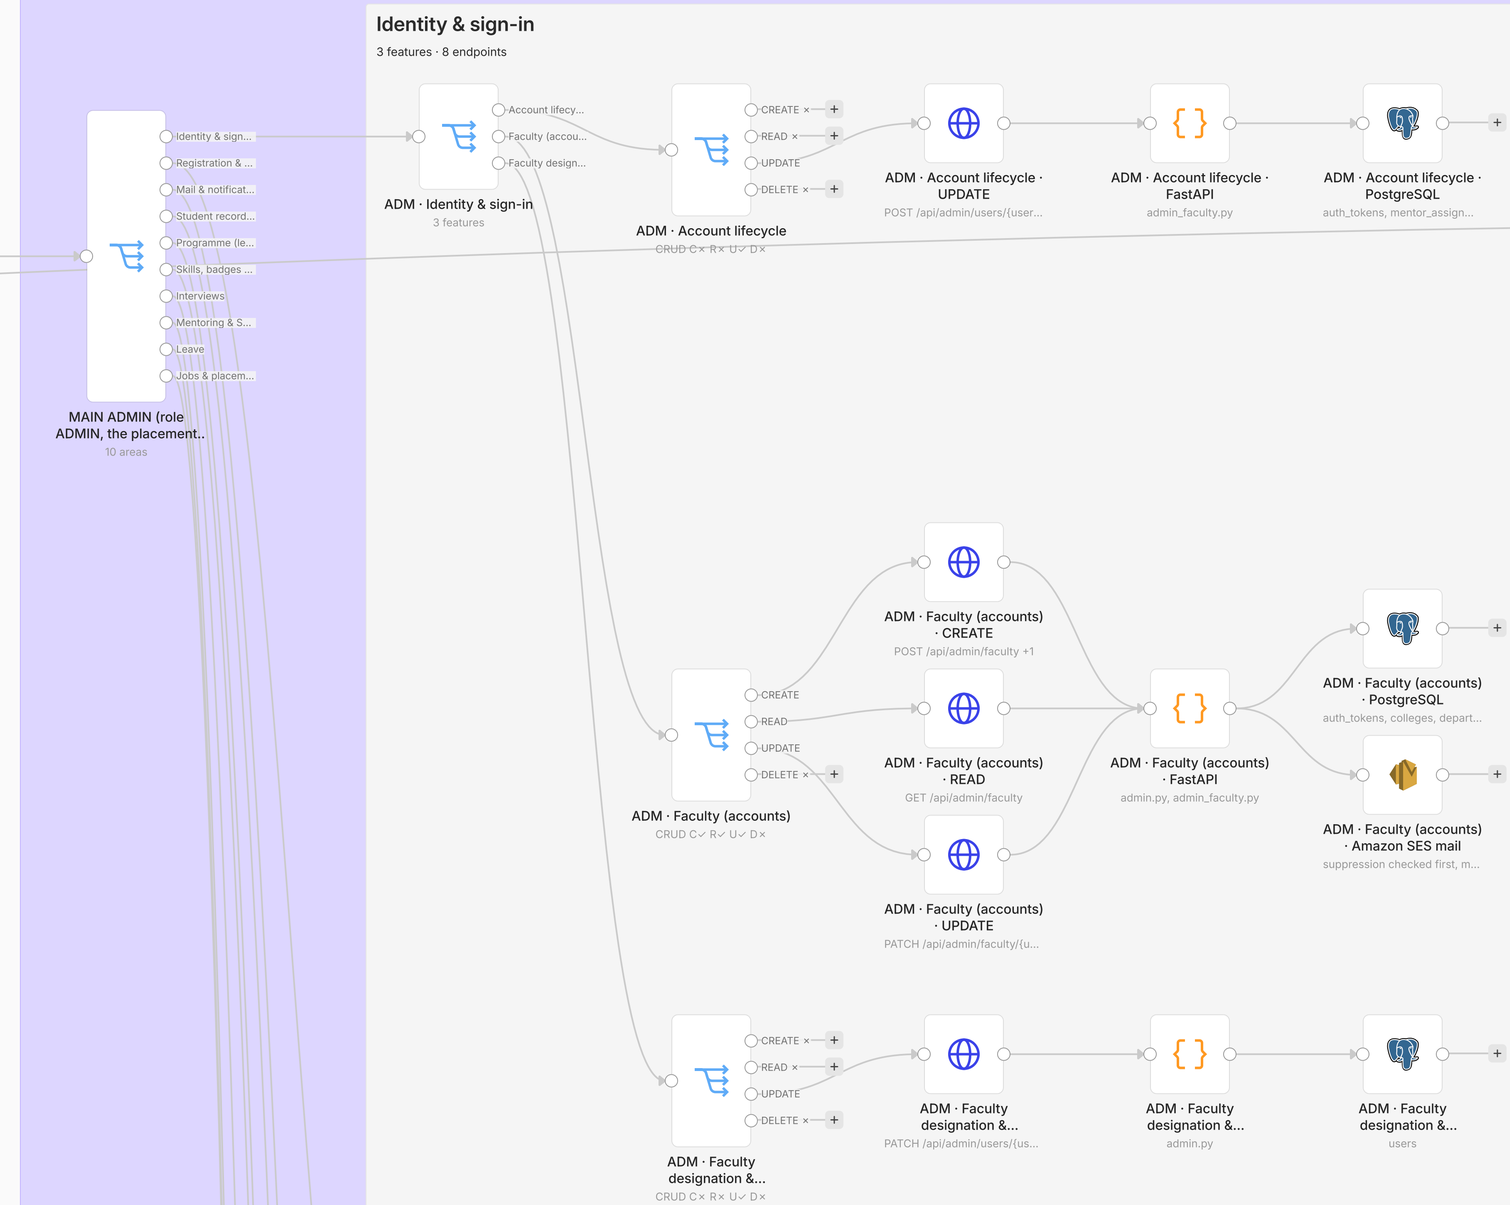

Identity & sign-in

3 features · 8 endpoints

Account lifecycle

C × · **R** × · **U** ✓ · **D** × · 3 endpoints

Op	Method	Path	What it does
U	POST	`/api/admin/users/{user_id}/disable`	disable account
U	POST	`/api/admin/users/{user_id}/enable`	re-enable account
U	POST	`/api/admin/users/{user_id}/sign-out-everywhere`	sign out every device

Screens `/admin/faculty` `/admin/students/:id`
Code `routers/admin_faculty.py`
Gate `require_admin`
Tables `auth_tokens` `mentor_assignments` `mentors` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external —

Faculty (accounts)

C ✓ · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/faculty`	add faculty member
C	POST	`/api/admin/users/{user_id}/activation-link`	mint activation link
R	GET	`/api/admin/faculty`	list faculty accounts
U	PATCH	`/api/admin/faculty/{user_id}`	edit faculty member

Screens `/admin/faculty/new` `/admin/faculty` `/admin/colleges`
Code `routers/admin.py` `routers/admin_faculty.py`
Gate `require_admin`
Tables `auth_tokens` `colleges` `departments` `mail_logs` `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external Amazon SES mail
Also remove, restore and delete a faculty account: see **Remove / delete people**

Faculty designation & department

C × · **R** × · **U** ✓ · **D** × · 1 endpoint

Op	Method	Path	What it does
U	PATCH	`/api/admin/users/{user_id}/institutional-identity`	set designation and department †

Screens — none for this role (API only)
Code `routers/admin.py`
Gate `require_capability(admin.mentors)` · capability `admin.mentors`
Tables `users`
AWS / external —

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 2 of 7

Registration & onboarding · Mail & notifications · Student records & roster

Back to the map

Registration & onboarding

2 features · 9 endpoints

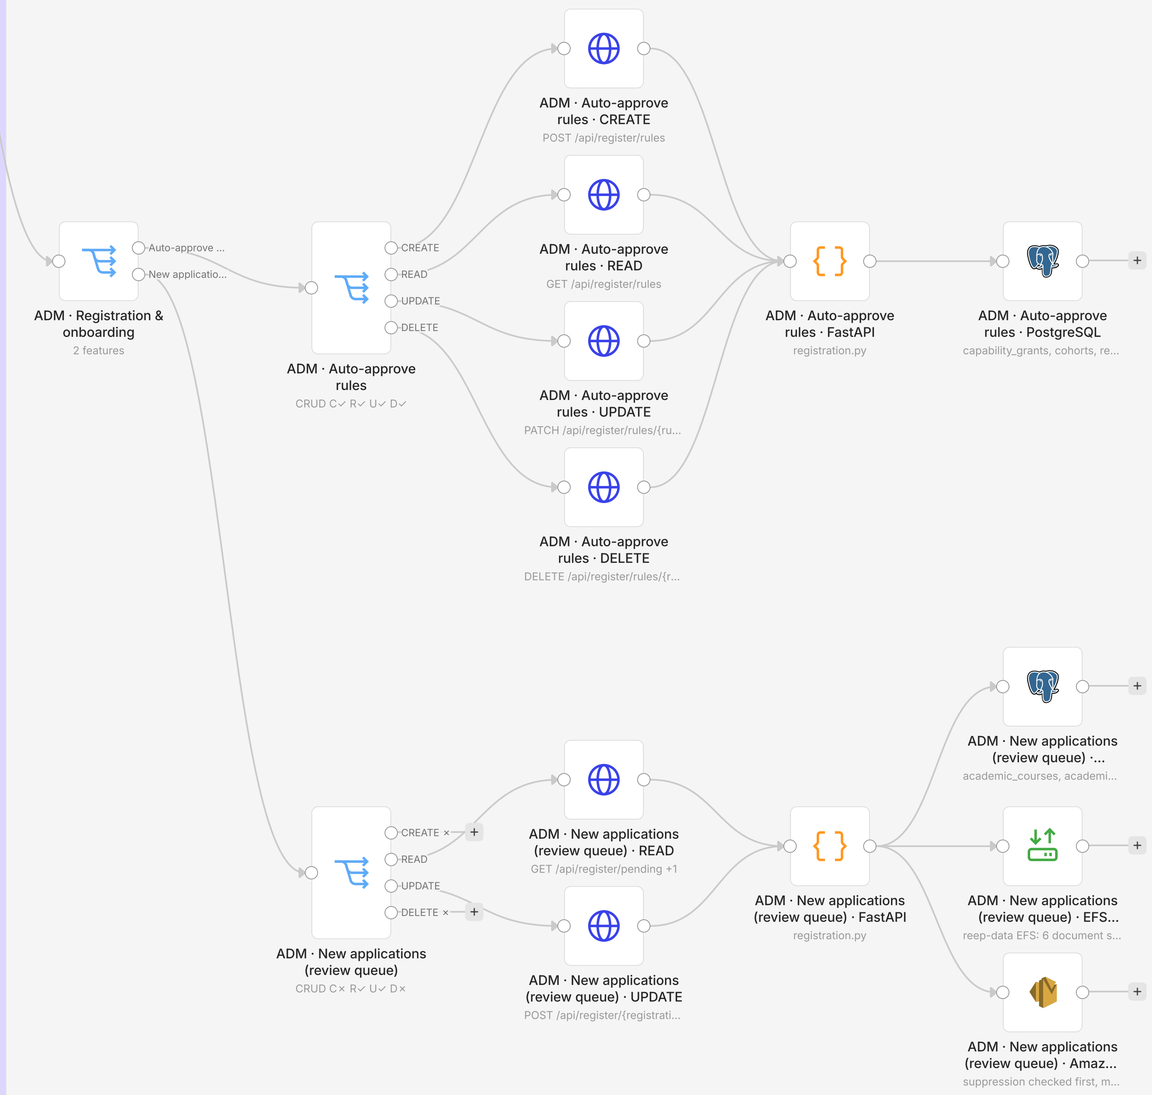

Auto-approve rules

C ✓ · R ✓ · U ✓ · D ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/register/rules`	create seating rule
R	GET	`/api/register/rules`	list seating rules
U	PATCH	`/api/register/rules/{rule_id}`	edit seating rule
D	DELETE	`/api/register/rules/{rule_id}`	delete seating rule

Screens `/admin/registrations`
Code `routers/registration.py`
Gate `require_capability(admin.registrations) + _assert_rule_re...` · `require_capability(admin.registrations) + scope_filter (X...` · capability `admin.registrations`
Tables `capability_grants` `cohorts` `redesign_audit_events` `redesign_outbox_events` `registration_rules` `registrations`
AWS / external —

New applications (review queue)

C × · R ✓ · U ✓ · D × · 5 endpoints

Op	Method	Path	What it does
R	GET	`/api/register/pending`	list applications
R	GET	`/api/register/{registration_id}/documents/{kind}/file`	download applicant document
U	POST	`/api/register/{registration_id}/decision`	approve or reject application
U	POST	`/api/register/{registration_id}/hold`	hold application
U	POST	`/api/register/{registration_id}/reopen`	reopen application

Screens `/admin/registrations` `/admin`
Code `routers/registration.py`
Gate `require_capability(admin.registrations) + _assert_reachab...` · `require_capability(admin.registrations) + scope_filter (X...` · capability `admin.registrations`
Tables `academic_courses` `academic_specializations` `archived_documents` `auth_tokens` `capability_grants` `cohorts` `colleges` `departments` `mail_logs` `redesign_audit_events` `redesign_outbox_events` `registration_documents` `registration_rules` `registrations` `student_profiles` `students` `uploads` `users`
AWS / external EFS /data volume · Amazon SES mail

Mail & notifications

1 feature · 3 endpoints

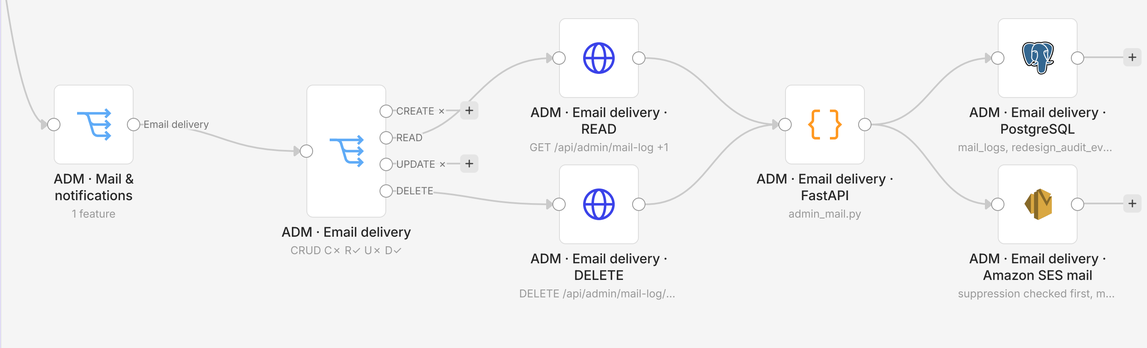

Email delivery

C × · R ✓ · U × · D ✓ · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/mail-log`	list sent mail log
R	GET	`/api/admin/mail-log/suppression`	check address suppression
D	DELETE	`/api/admin/mail-log/suppression`	lift SES suppression

Screens `/admin/mail`
Code `routers/admin_mail.py`
Gate `require_admin (via _office dependency)`
Tables `mail_logs` `redesign_audit_events` `redesign_outbox_events`
AWS / external Amazon SES mail

Student records & roster

3 features · 10 endpoints

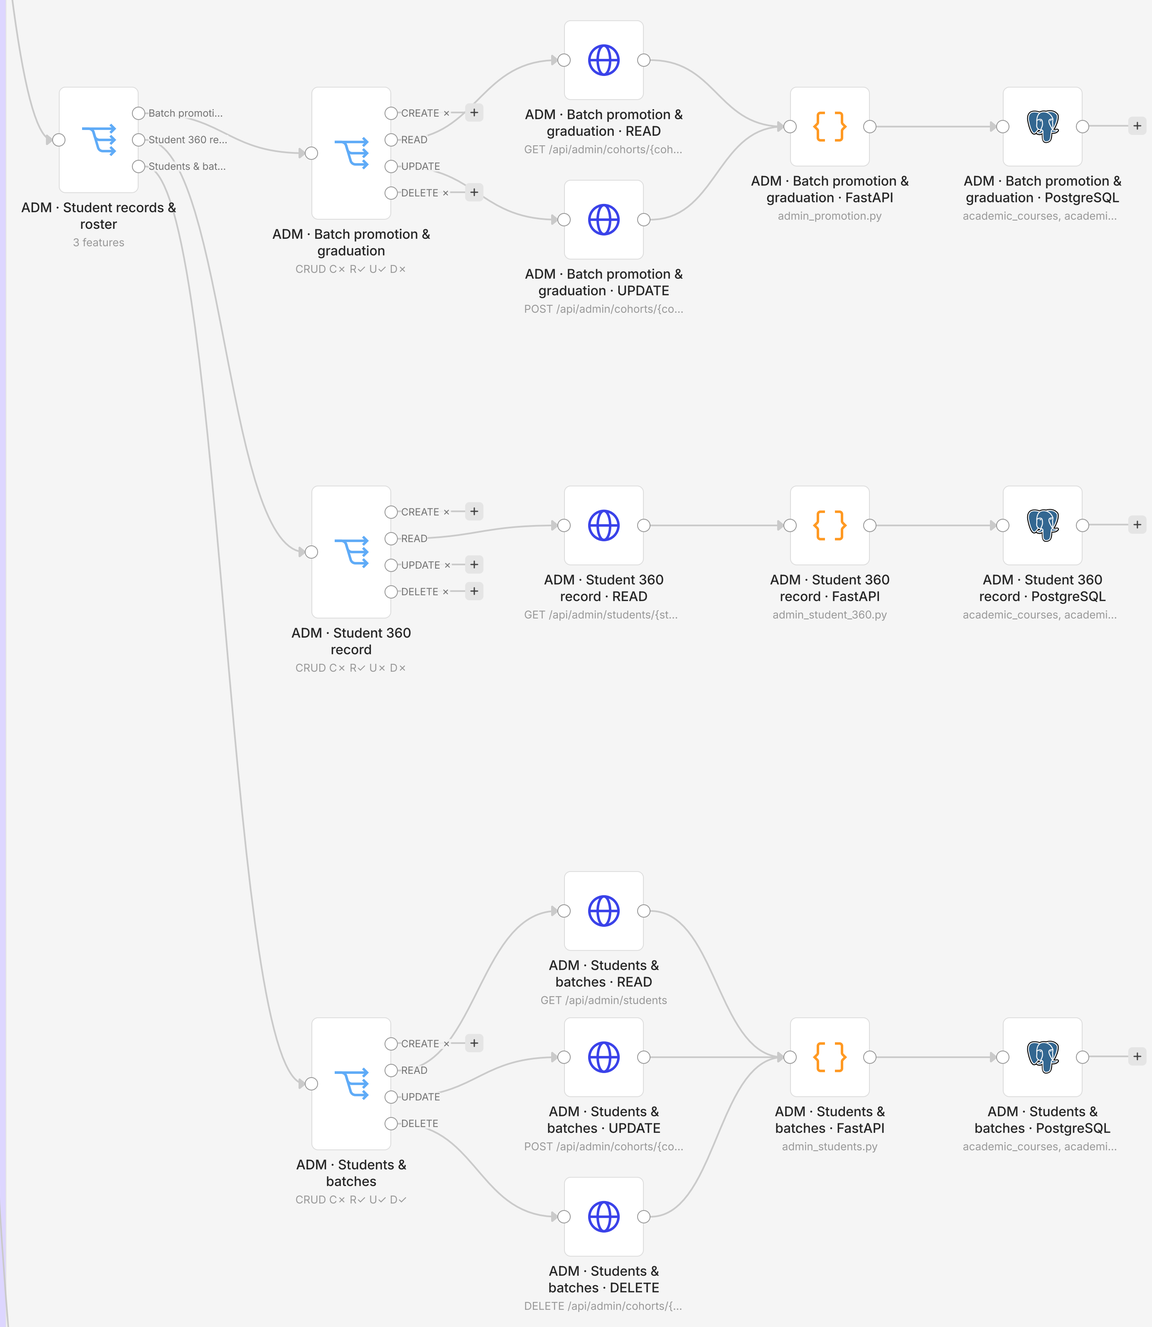

Batch promotion & graduation

C × · R ✓ · U ✓ · D × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/cohorts/{cohort_id}/promotion-history`	list batch semester history
U	POST	`/api/admin/cohorts/{cohort_id}/graduate`	graduate a batch
U	POST	`/api/admin/cohorts/{cohort_id}/promote`	promote a batch
U	POST	`/api/admin/cohorts/{cohort_id}/ungraduate`	reverse a graduation

Screens `/admin/students`
Code `routers/admin_promotion.py`
Gate `require_capability(admin.students) + _cohort_or_404 + ass...` · capability `admin.students`
Tables `academic_courses` `academic_specializations` `alumni_profiles` `capability_grants` `cohorts` `redesign_audit_events` `redesign_outbox_events` `semester_results` `stage_rules` `student_semester_history` `students` `users`
AWS / external —

Student 360 record

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/admin/students/{student_id}/360`	view full student record

Screens `/admin/students/:id`
Code `routers/admin_student_360.py`
Gate `require_capability(admin.student_records, target=ancestry...` · capability `admin.student_records`
Tables `academic_courses` `academic_specializations` `attendance_records` `badge_evidence` `certification_progress` `cohorts` `departments` `interview_evaluations` `interview_sessions` `login_events` `mentor_assignments` `mentors` `placement_criteria` `redesign_audit_events` `resume_profiles` `semester_results` `student_badges` `student_profiles` `student_semester_history` `students` `time_ledger_days` `uploads` `users`
AWS / external —

Students & batches

C × · R ✓ · U ✓ · D ✓ · 5 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/students`	list student roster
U	POST	`/api/admin/cohorts/{cohort_id}/students/bulk`	bulk update batch
U	POST	`/api/admin/students/bulk`	file students under department †
U	PATCH	`/api/admin/students/{student_id}`	edit one student
D	DELETE	`/api/admin/cohorts/{cohort_id}`	delete empty batch

Screens `/admin/students` `/admin/governance/features` `/admin/mentors` `/admin/students/:id`
Code `routers/admin_students.py`
Gate `require_capability(admin.students)` · `require_capability(admin.students) + assert_batch_within_...` · `require_capability(admin.students) + require_capability(a...` · `require_capability(admin.students) + scope_filter(admin.s...` · capability `admin.students`
Tables `academic_courses` `academic_specializations` `capability_grants` `cohorts` `departments` `mentor_assignments` `mentors` `redesign_audit_events` `redesign_outbox_events` `student_profiles` `students` `users`
AWS / external —
Also remove, restore and delete a student: see **Remove / delete people**; DELETE here is an EMPTY batch only
† no screen in this role's navigation calls it (API or typed URL only)

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 3 of 7

Programme (ledger, English, milestones) · Skills, badges & certifications

Back to the map

Programme (ledger, English, milestones)

1 feature · 1 endpoint

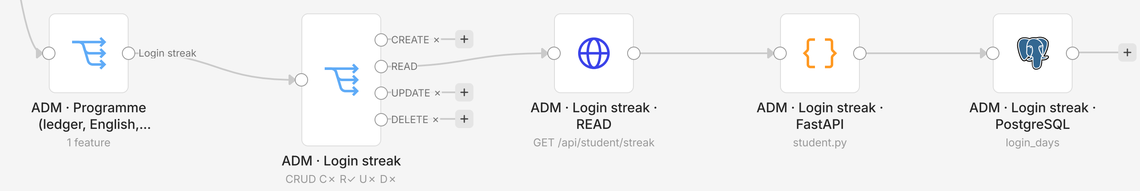

Login streak

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/student/streak`	view my login streak †

Screens — none for this role (API only)
Code `routers/student.py`
Gate `get_current_session only (no _require_student; keyed on s...`
Tables `login_days`
AWS / external —

Skills, badges & certifications

6 features · 18 endpoints

Badge awards

C ✓ · R × · U × · D ✓ · 2 endpoints

Op	Method	Path	What it does
C	POST	`/api/mentor/students/{student_id}/badges/{code}/award`	manually award badge †
D	POST	`/api/mentor/students/{student_id}/badges/{code}/revoke`	revoke earned badge †

Screens — none for this role (API only)
Code `routers/badge_verification.py`
Gate `_assert_can_access_student (require_staff); require_admin... · require_admin`
Tables `redesign_audit_events redesign_outbox_events student_badges students`
AWS / external —

Capability assessments

C ✓ · R × · U ✓ · D × · 1 endpoint

Op	Method	Path	What it does
C/U	POST	`/api/mentor/students/{student_id}/assessments`	record or correct scores †

Screens — none for this role (API only)
Code `routers/badge_verification.py`
Gate `_assert_can_access_student (require_staff)`
Tables `capability_assessments`
AWS / external —

Certification & badge catalogue

C ✓ · R ✓ · U ✓ · D × · 6 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/approved-certifications`	add approved certification
R	GET	`/api/admin/approved-certifications`	list approved certifications
R	GET	`/api/admin/badge-catalogue`	list badge catalogue
R	GET	`/api/admin/catalogue/badges`	list badges for course †
U	PATCH	`/api/admin/approved-certifications/{cert_id}`	edit approved certification
U	PUT	`/api/admin/catalogue/badges`	switch badge for course †

Screens `/admin/catalogue`
Code `routers/admin_catalogue.py routers/console.py`
Gate `require_capability(admin.catalogue) · require_capability(admin.catalogue) + _assert_certificati... · require_capability(admin.catalogue) + _course_within_reach · require_capability(admin.catalogue) + _resolve_certificat... · require_capability(admin.catalogue) + scope_filter(admin.... · capability admin.catalogue`
Tables `academic_courses approved_certifications badge_course_map badge_evidence colleges departments redesign_audit_events redesign_outbox_events`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Skill claims (legacy queue, no screen)

C × · R ✓ · U ✓ · D × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/skill-claims/pending`	list pending skill claims †
R	GET	`/api/mentor/skill-claims/reviewed`	list reviewed skill claims †
U	POST	`/api/mentor/skill-claims/{claim_id}/review`	review skill claim †

Screens — none for this role (API only)
Code `routers/mentor.py`
Gate `require_mentor · require_mentor + _assert_can_access_student`
Tables `skill_claims skills student_skills students uploads users`
AWS / external —

Skill Verifications: documents

C × · R ✓ · U ✓ · D × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/uploads/pending`	list documents to review †
R	GET	`/api/mentor/uploads/{upload_id}/file`	download student document
U	POST	`/api/mentor/uploads/{upload_id}/review`	verify or reject document †

Screens `/admin/students/:id`
Code `routers/mentor.py`
Gate `require_mentor · require_mentor + _assert_can_access_student`
Tables `badge_evidence students uploads users`
AWS / external EFS /data volume
† no screen in this role's navigation calls it (API or typed URL only)

Student badges & growth

C × · R ✓ · U × · D × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/students/{student_id}/badges`	view student badge board
R	GET	`/api/mentor/students/{student_id}/growth`	view student growth †
R	GET	`/api/mentor/students/{student_id}/skill-profile`	view consolidated skill profile †

Screens `/admin/students/:id`
Code `routers/badge_verification.py`
Gate `_assert_can_access_student (require_staff)`
Tables `approved_certifications badge_evidence capability_assessments student_badges students users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 4 of 7

Interviews

Back to the map

Daily interview cap reset

C ✓ · R × · U × · D × · 1 endpoint

Op	Method	Path	What it does
C	POST	`/api/admin/students/{student_id}/interview-cap/reset`	reset student's interview cap

Screens `/admin/students/:id`
Code `routers/interview_policy.py`
Gate `require_capability(admin.interviews, target=ancestry_of_s...` · capability `admin.interviews`
Tables `capability_grants` `interview_cap_resets` `interview_policies` `interview_sessions` `mentors` `redesign_audit_events` `redesign_outbox_events` `students`
AWS / external —

Interview policy

C × · R ✓ · U ✓ · D × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/interview-policies/{college_id}`	view college interview policy
U	PUT	`/api/admin/interview-policies/{college_id}`	set college interview policy
U	PUT	`/api/admin/interview-policies/{college_id}/{course_id}`	set course interview policy

Screens `/admin/interviews`
Code `routers/interview_policy.py`
Gate `require_capability(admin.interviews) + _assert_reach (col...` · `require_capability(admin.interviews) + _assert_reach (cou...` · capability `admin.interviews`
Tables `academic_courses` `capability_grants` `colleges` `departments` `interview_policies` `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external —

Interview questions

C ✓ · R ✓ · U ✓ · D ✓ · 6 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/interview-questions`	add a question
C	POST	`/api/admin/interview-questions/bulk`	bulk add questions
R	GET	`/api/admin/interview-questions`	list track questions
U	POST	`/api/admin/interview-questions/reorder`	reorder track questions
U	PATCH	`/api/admin/interview-questions/{question_id}`	edit a question
D	DELETE	`/api/admin/interview-questions/{question_id}`	delete a question

Screens `/admin/interview-questions`
Code `routers/interview_bank.py`
Gate `require_capability(admin.interview_questions) + _check_re...` · `require_capability(admin.interview_questions) + _check_tr...` · `require_capability(admin.interview_questions) + _require_...` · capability `admin.interview_questions`
Tables `capability_grants` `interview_bank_questions` `interview_tracks` `redesign_audit_events` `redesign_outbox_events`
AWS / external —

Interview records

C × · R ✓ · U × · D × · 11 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/interviews`	list interview records
R	GET	`/api/admin/interviews/export.csv`	export interview scores CSV
R	GET	`/api/admin/interviews/summary`	show interview KPIs
R	GET	`/api/mentor/interviews`	list all interviews †
R	POST	`/api/mentor/interviews/audio.zip`	download recordings as zip
R	GET	`/api/mentor/students/{student_id}/interviews`	list a student's interviews
R	GET	`/api/mentor/students/{student_id}/interviews/progress`	view a student's interview trend †
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}`	open a student's interview †
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}/audio`	play interview recording
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}/report`	view a student's scorecard
R	GET	`/api/mentor/students/{student_id}/interviews/{session_id}/transcript`	view a student's transcript

Screens `/admin/interviews` `/admin/exports` `/admin/students/:id`
Code `routers/interview_records.py`
Gate `_assert_can_access_student (require_staff + rule 2 mentor...` · `_require_developer ->` `require_capability(admin.interview_...` · `require_capability(admin.interviews) + scope_filter + car...` · `require_capability(admin.interviews) + scope_filter(admin...` · `require_mentor; _records_query narrows a MENTOR to Studen...` · capability `admin.interview_audio` `admin.interviews`
Tables `capability_grants` `export_events` `interview_evaluations` `interview_score_summaries` `interview_sessions` `interview_turns` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external EFS /data volume
† no screen in this role's navigation calls it (API or typed URL only)

Interview tracks

C ✓ · R ✓ · U ✓ · D ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/interview-questions/tracks`	add interview track
R	GET	`/api/admin/interview-questions/tracks`	list interview tracks
U	PATCH	`/api/admin/interview-questions/tracks/{track_id}`	edit interview track
D	DELETE	`/api/admin/interview-questions/tracks/{track_id}`	delete interview track

Screens `/admin/interview-questions` `/admin/catalogue` `/admin/institution` `/admin/setup`
Code `routers/admin_interview_tracks.py`
Gate `require_capability(admin.interview_questions) + _require_...` · `require_capability(admin.interview_questions) + scope_fil...` · capability `admin.interview_questions`
Tables `academic_courses` `academic_specializations` `colleges` `departments` `interview_bank_questions` `interview_sessions` `interview_tracks` `redesign_audit_events` `redesign_outbox_events`
AWS / external —

Mock interview

C × · R ✓ · U × · D × · A ✓ · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/interview/status`	check interview availability
A	WS	`/api/interview`	run live mock interview

Screens (agent dock on every screen)
Code `routers/interview.py`
Gate `get_current_session; available only to role STUDENT or AD...` · `get_ws_session cookie + Origin check; role STUDENT or ADM...`
Tables `archived_documents` `cohorts` `conversations` `feature_overrides` `interview_bank_questions` `interview_cap_resets` `interview_consents` `interview_evaluations` `interview_policies` `interview_score_summaries` `interview_sessions` `interview_tracks` `interview_turns` `messages` `students`
AWS / external Bedrock Nova 2 Sonic · EFS /data volume · Sentry

Mock interview consent

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/interview/consent`	read my interview consent †

Screens — none for this role (API only)
Code `routers/interview_records.py`
Gate `get_current_session (no role check)`
Tables `interview_consents`
AWS / external —

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 5 of 7

Mentoring & SWOC

Back to the map

Mentoring & SWOC

4 features · 12 endpoints

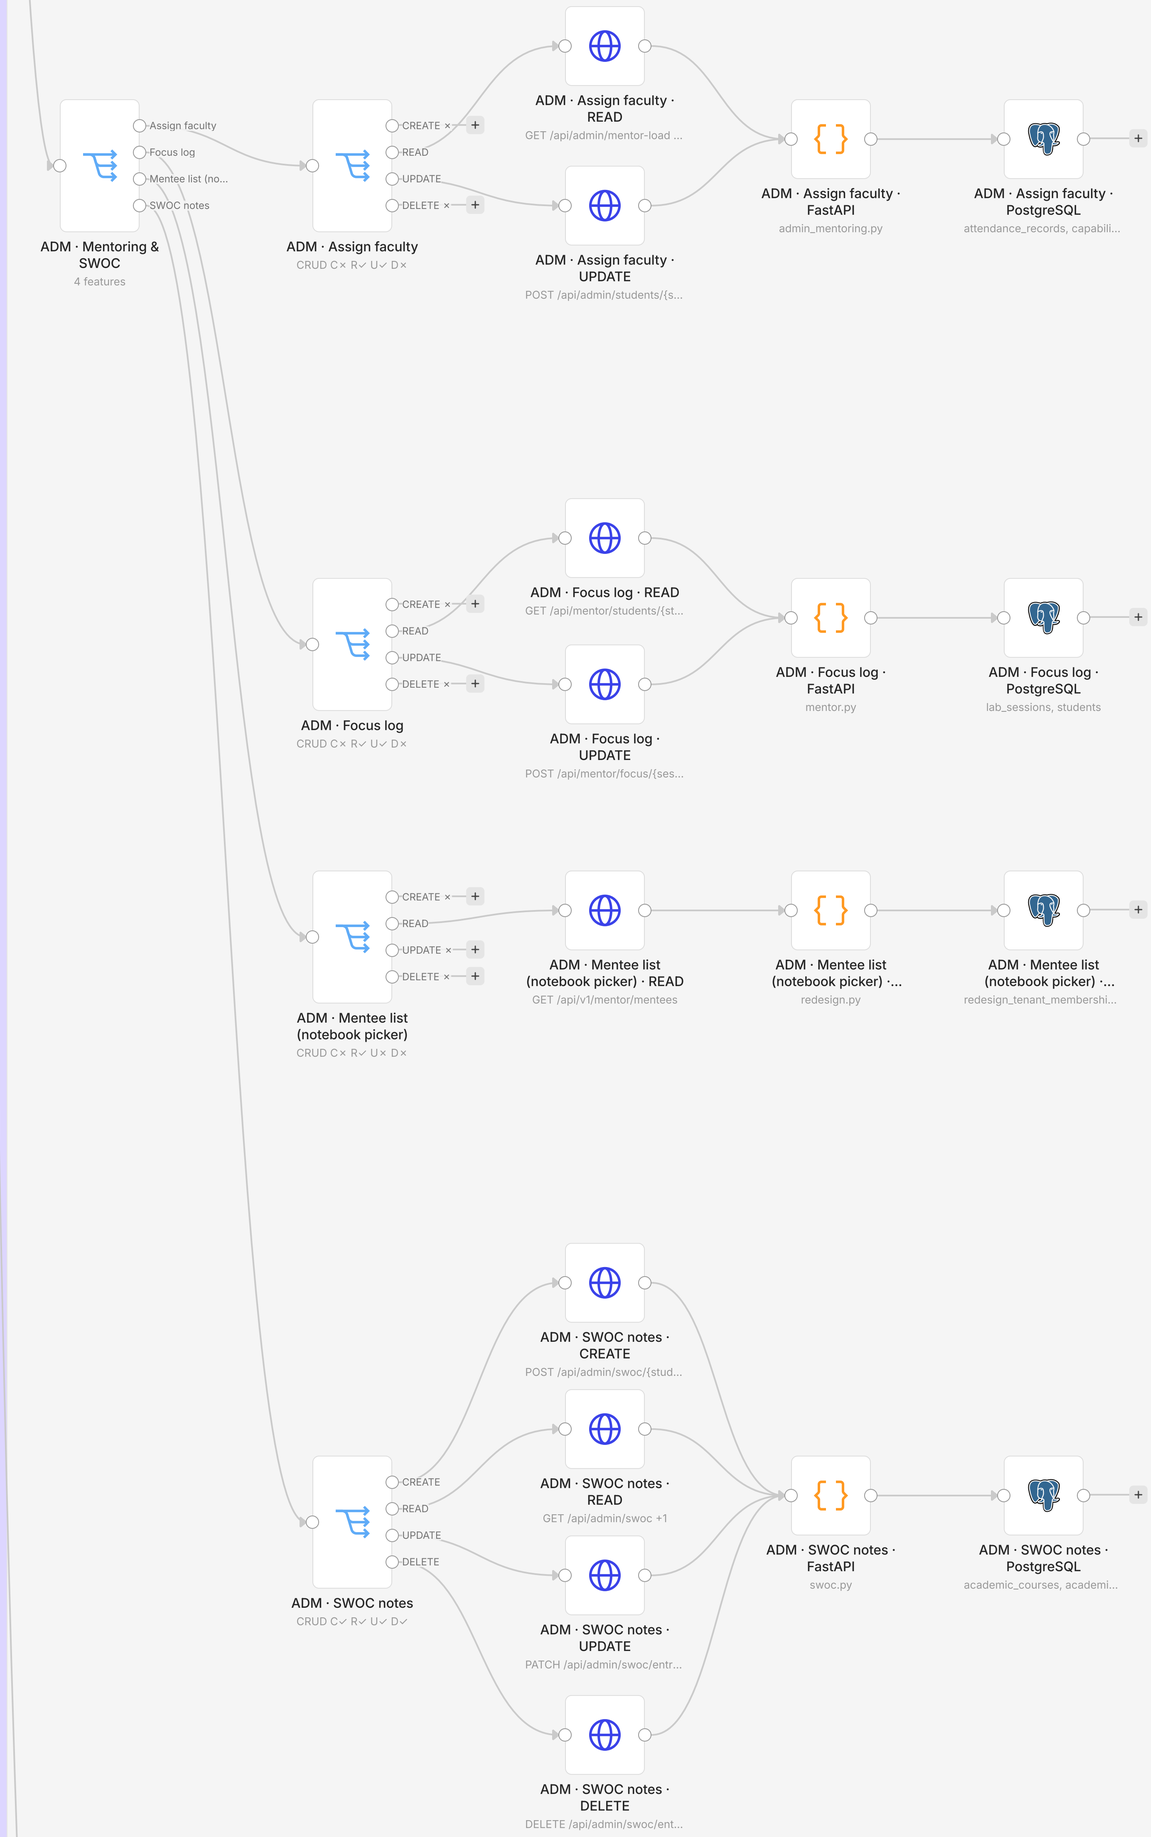

Assign faculty

C × · R ✓ · U ✓ · D × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/mentor-load`	view faculty mentee load
R	GET	`/api/admin/students/{student_id}/mentor-history`	view mentor history
R	GET	`/api/admin/unassigned-students`	list unassigned students
U	POST	`/api/admin/students/{student_id}/mentor`	assign or release faculty

Screens `/admin/mentors` `/admin/students` `/admin/faculty` `/admin/analytics` `/admin`
Code `routers/admin_mentoring.py`
Gate `require_capability(admin.analytics) + scope_filter` · `require_capability(admin.mentors) + require_capability(ad...` · `require_capability(admin.mentors) + scope_filter` · `require_capability(admin.mentors) bare + target=ancestry_...` · capability `admin.analytics` `admin.mentors`
Tables `attendance_records` `capability_grants` `cohorts` `colleges` `departments` `mentor_assignments` `mentors` `redesign_audit_events` `redesign_outbox_events` `student_skills` `students` `time_ledger_cells` `time_ledger_days` `users`
AWS / external —

Focus log

C × · R ✓ · U ✓ · D × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/students/{student_id}/focus`	list student focus sessions †
U	POST	`/api/mentor/focus/{session_id}/confirm`	confirm focus session †

Screens — none for this role (API only)
Code `routers/mentor.py`
Gate `_assert_can_access_student (policies.assert_student_scope...` · `require_mentor + _assert_can_access_student`
Tables `lab_sessions` `students`
AWS / external —

Mentee list (notebook picker)

C × · R ✓ · U × · D × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/v1/mentor/mentees`	list my mentees †

Screens — none for this role (API only)
Code `routers/redesign.py`
Gate `require_staff`
Tables `redesign_tenant_memberships` `students` `users`
AWS / external —

SWOC notes

C ✓ · R ✓ · U ✓ · D ✓ · 5 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/swoc/{student_id}`	add SWOC line
R	GET	`/api/admin/swoc`	list SWOC boards
R	GET	`/api/admin/swoc/{student_id}/history`	view SWOC edit history
U	PATCH	`/api/admin/swoc/entries/{entry_id}`	edit SWOC line
D	DELETE	`/api/admin/swoc/entries/{entry_id}`	delete SWOC line

Screens `/admin/swoc`
Code `routers/swoc.py`
Gate `require_capability(admin.swoc) + require_capability(admin...` · `require_capability(admin.swoc) + scope_filter(admin.swoc)` · capability `admin.swoc`
Tables `academic_courses` `academic_specializations` `capability_grants` `cohorts` `interview_sessions` `jobs` `mentors` `redesign_audit_events` `redesign_outbox_events` `student_skills` `students` `swoc_entries` `swoc_entry_revisions` `users`
AWS / external —

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 6 of 7

Leave

Back to the map

Leave

6 features · 26 endpoints

College leave calendar

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/leave-calendar/{college_id}`	list college calendar
R	GET	`/api/leaves/calendar`	view my college calendar †
U/C	PUT	`/api/admin/leave-calendar/{college_id}`	add or change calendar day
D	DELETE	`/api/admin/leave-calendar/{college_id}/{day_id}`	delete calendar day

Screens `/admin/leave-approvals`
Code `routers/leave_policy.py`
Gate `get_current_session (caller's own college only)` · `require_admin`
Tables `academic_calendar` `cohorts` `colleges` `departments` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Leave alternate arrangements

C × · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/leaves/alternate/mine`	list requests naming me †
R	GET	`/api/leaves/{leave_id}/alternate`	view alternate table
U	POST	`/api/leaves/{leave_id}/alternate/accept`	accept covering classes †
U	POST	`/api/leaves/{leave_id}/alternate/assign`	name covering colleague †

Screens `/admin/leave-approvals`
Code `routers/leave_alternate.py`
Gate `get_current_session only (any signed-in account; only MEN...` · `get_current_session; applicant OR leave._assert_can_decid...` · `get_current_session; applicant only (requester_user_id ==...` · `get_current_session; caller must be the account named on ...`
Tables `capability_grants` `leave_requests` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Leave attachments

C ✓ · **R** ✓ · **U** × · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/leaves/{leave_id}/attachments`	attach document to leave †
R	GET	`/api/leaves/{leave_id}/attachments`	list leave attachments
R	GET	`/api/leaves/{leave_id}/attachments/{attachment_id}/file`	download leave attachment
D	DELETE	`/api/leaves/{leave_id}/attachments/{attachment_id}`	remove leave attachment †

Screens `/admin/leave-approvals`
Code `routers/leave_attachments.py`
Gate `get_current_session; applicant (requester_user_id == call...`
Tables `archived_documents` `capability_grants` `leave_attachments` `leave_requests` `users`
AWS / external EFS /data volume · S3 documents archive
† no screen in this role's navigation calls it (API or typed URL only)

Leave policy & allowances

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 7 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/leave-balances/bulk`	set department allowances
R	GET	`/api/admin/leave-balances`	list leave allowances
R	GET	`/api/admin/leave-policy`	view leave policy sheet
R	GET	`/api/leaves/balances`	view my leave allowances †
R	GET	`/api/leaves/{leave_id}/balance`	view applicant's allowances
U	PUT	`/api/admin/leave-balances`	record one allowance
D	DELETE	`/api/admin/leave-balances/{balance_id}`	delete leave allowance

Screens `/admin/leave-approvals`
Code `routers/leave_policy.py`
Gate `get_current_session (own user id only)` · `requester themselves, else _assert_can_decide (require_me...` · `require_admin`
Tables `academic_calendar` `capability_grants` `cohorts` `colleges` `departments` `leave_balances` `leave_requests` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Leave requests (approve)

C × · **R** ✓ · **U** ✓ · **D** × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/leaves/history`	list decided leave
R	GET	`/api/leaves/pending`	list pending leave
U	POST	`/api/leaves/{leave_id}/decision`	approve or reject leave

Screens `/admin/leave-approvals` `/admin`
Code `routers/leave.py`
Gate `_require_leave_approver: require_mentor + require_capabil...` · capability `admin.leave_approvals`
Tables `capability_grants` `leave_requests` `mail_logs` `users`
AWS / external Amazon SES mail

My own leave (apply / withdraw)

C ✓ · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/leaves`	apply for leave †
R	GET	`/api/leaves/mine`	list my leave †
R	GET	`/api/leaves/{leave_id}/paper.pdf`	download leave PDF
U	POST	`/api/leaves/{leave_id}/cancel`	withdraw my leave †

Screens `/admin/leave-approvals`
Code `routers/leave.py` `routers/leave_paper.py`
Gate `get_current_session (+ leave_policy.submit_refusal balanc...` · `get_current_session (requester_user_id == caller)` · `get_current_session (requester_user_id == caller, else 404)` · `requester themselves, else _assert_can_decide (require_me...`
Tables `academic_calendar` `capability_grants` `leave_balances` `leave_requests` `mail_logs` `staff_signatures` `students` `users`
AWS / external EFS /data volume · PDF render (in process) · Amazon SES mail
† no screen in this role's navigation calls it (API or typed URL only)

MAIN ADMIN (role ADMIN, the placement office) (1 of 2) · 7 of 7

Jobs & placement

Back to the map

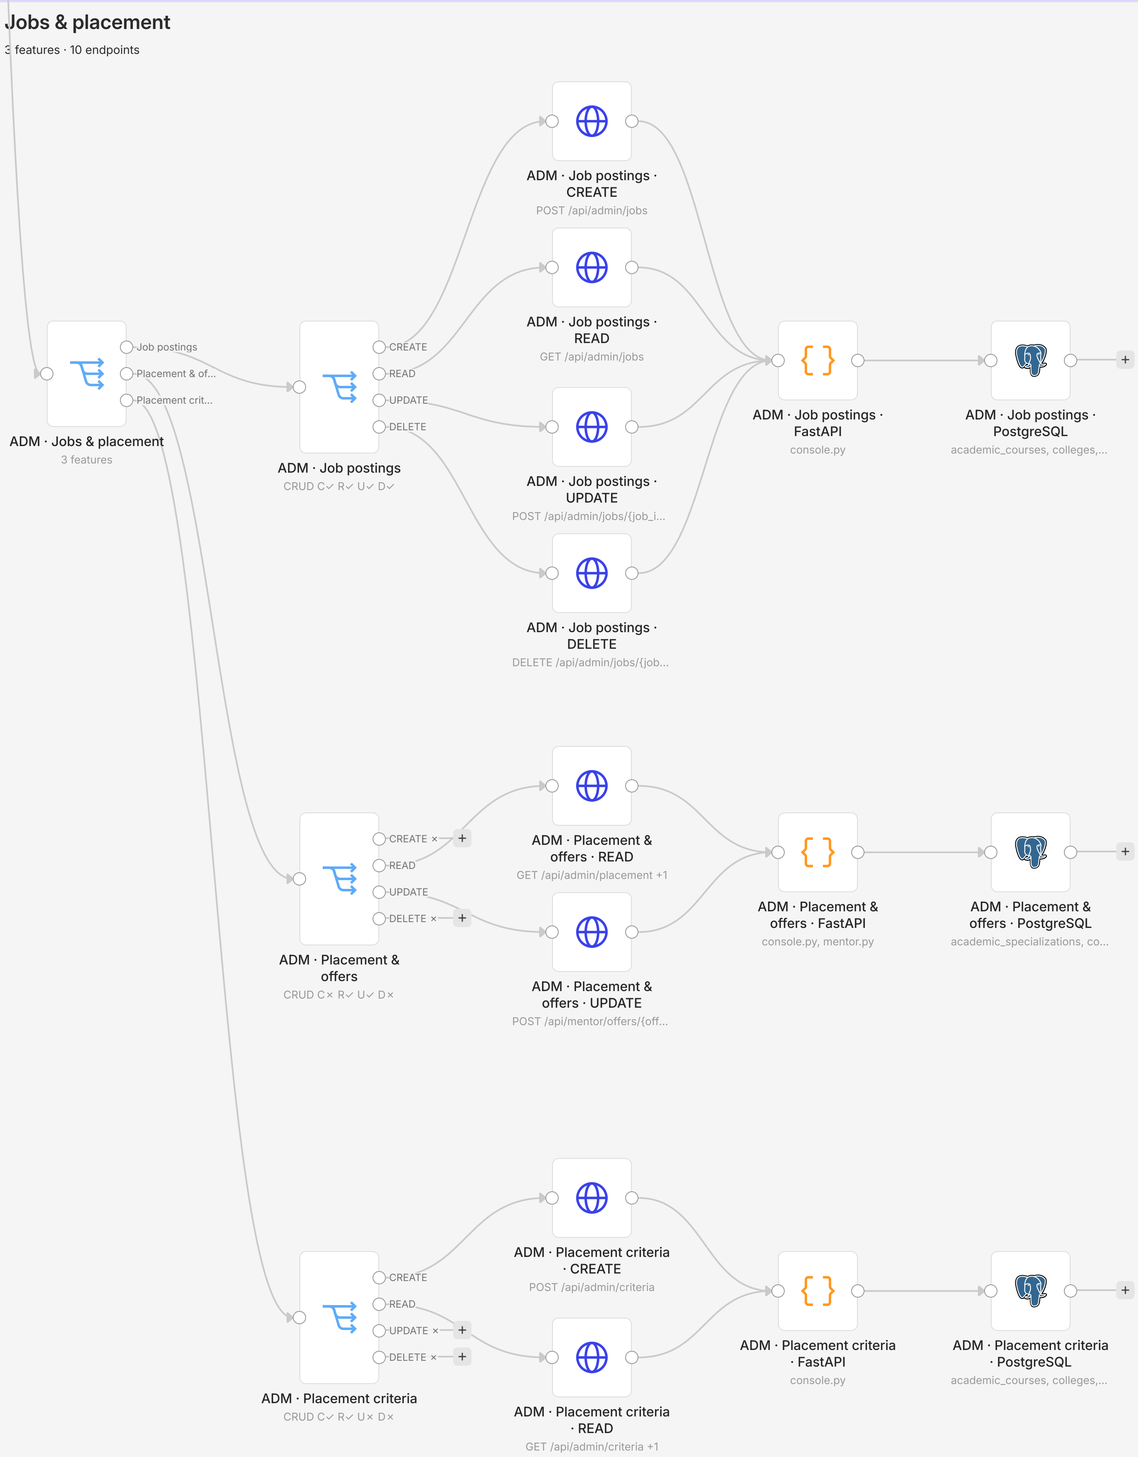

Job postings

C ✓ · R ✓ · U ✓ · D ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/jobs`	publish job posting
R	GET	`/api/admin/jobs`	list job postings
U	POST	`/api/admin/jobs/{job_id}/close`	close job posting
D	DELETE	`/api/admin/jobs/{job_id}`	remove job posting

Screens `/admin/jobs`
Code `routers/console.py`
Gate `require_capability(admin.jobs)` · `require_capability(admin.jobs) + scope_filter(admin.jobs)` · capability `admin.jobs`
Tables `academic_courses` `colleges` `job_applications` `jobs` `redesign_audit_events` `redesign_outbox_events`
AWS / external —

Placement & offers

C × · R ✓ · U ✓ · D × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/placement`	read placement funnel
R	GET	`/api/mentor/offers/pending`	list offers awaiting approval
U	POST	`/api/mentor/offers/{offer_id}/decision`	approve or reject offer

Screens `/admin/placement` `/admin`
Code `routers/console.py` `routers/mentor.py`
Gate `require_admin` · `require_capability(admin.placement)` `+ scope_filter(admin....` · capability `admin.placement`
Tables `academic_specializations` `cohorts` `job_applications` `placement_offers` `students` `users`
AWS / external —

Placement criteria

C ✓ · R ✓ · U × · D × · 3 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/criteria`	set placement criteria
R	GET	`/api/admin/criteria`	read placement criteria
R	GET	`/api/admin/criteria/history`	list criteria history

Screens `/admin/imports` `/admin/jobs` `/admin/analytics`
Code `routers/console.py`
Gate `require_capability(admin.analytics)` · `require_capability(admin.analytics) + scope_filter(admin....` · capability `admin.analytics`
Tables `academic_courses` `colleges` `departments` `placement_criteria` `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external —

MAIN ADMIN (role ADMIN, the placement office) (2 of 2) · 1 of 5

Staff self-service

Back to the map

MAIN ADMIN (role ADMIN, the placement office) (2 of 2)

26 features · 120 endpoints (features offering each operation: C 11 · R 25 · U 16 · D 11 · A 2)

`require_admin` (the one console gate) or `require_capability(admin.*)` held by baseline. Not a faculty member: mentor.mentees / notebook / verifications / upskilling are outside its baseline.

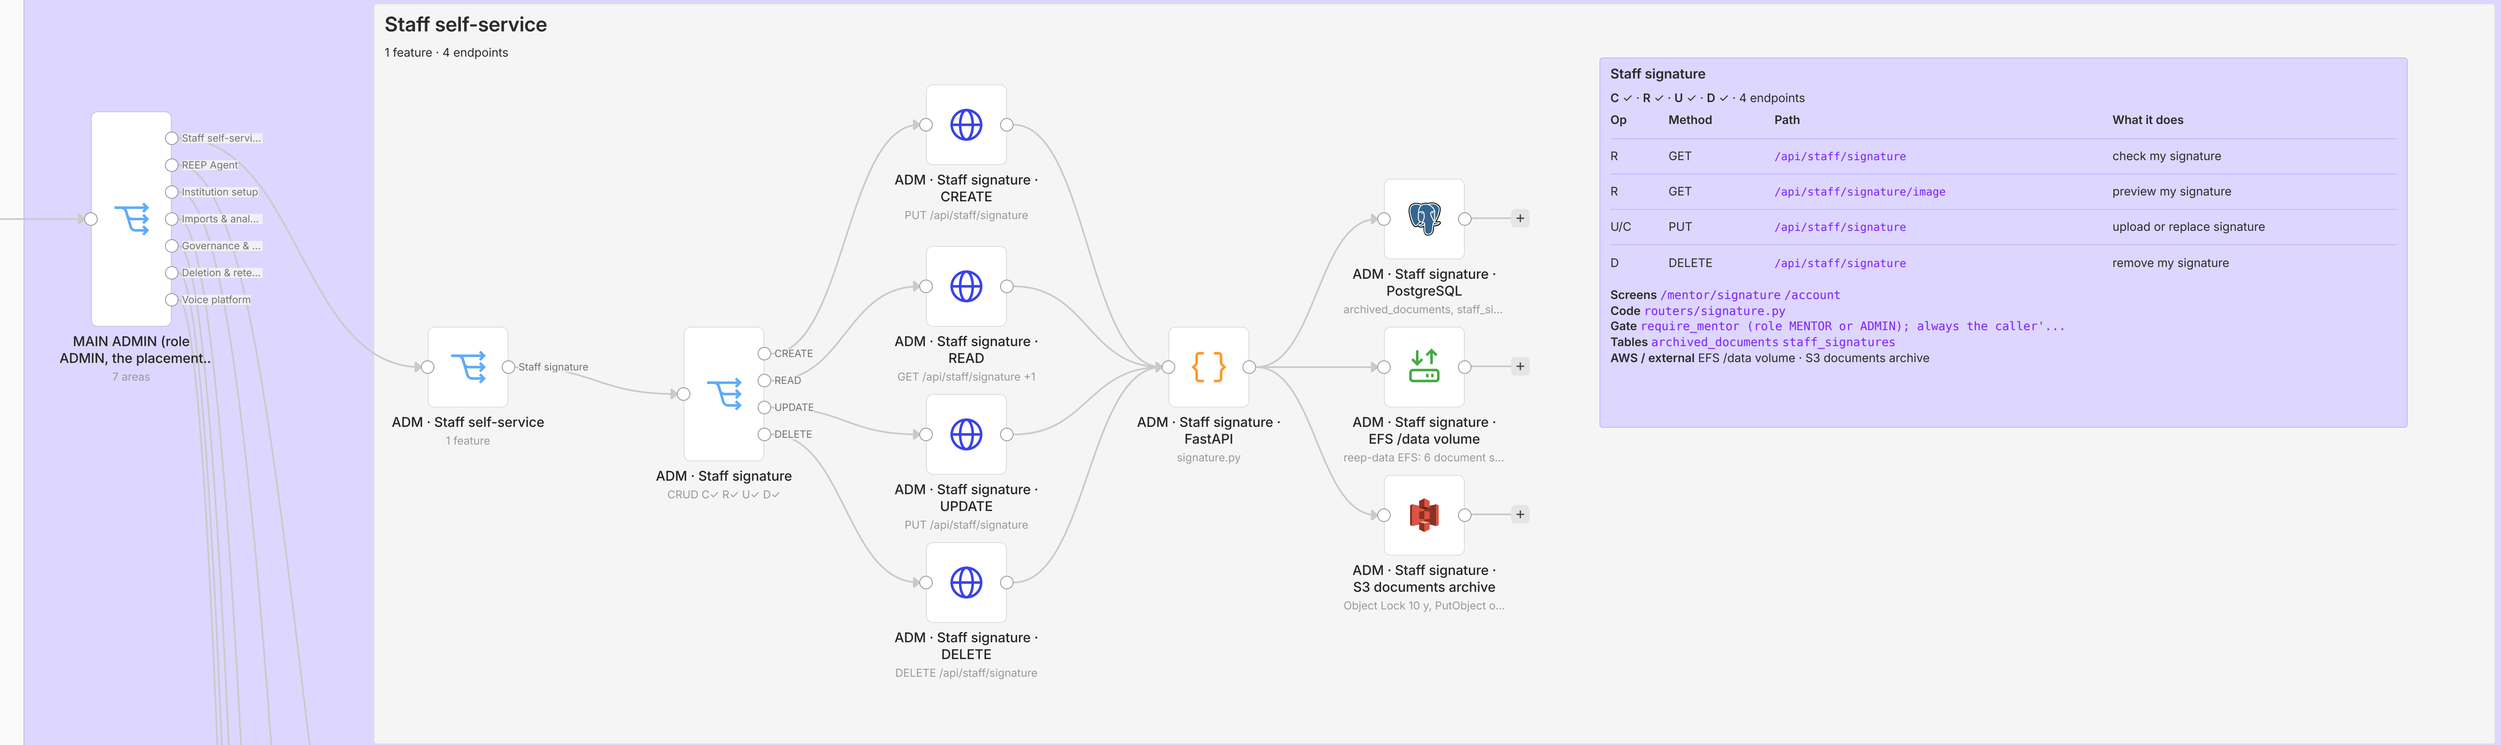

Staff signature

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/staff/signature`	check my signature
R	GET	`/api/staff/signature/image`	preview my signature
U/C	PUT	`/api/staff/signature`	upload or replace signature
D	DELETE	`/api/staff/signature`	remove my signature

Screens `/mentor/signature` `/account`
Code `routers/signature.py`
Gate `require_mentor (role MENTOR or ADMIN); always the caller'...`
Tables `archived_documents` `staff_signatures`
AWS / external EFS /data volume · S3 documents archive

MAIN ADMIN (role ADMIN, the placement office) (2 of 2) · 2 of 5

REEP Agent · Institution setup

Back to the map

REEP Agent

2 features · 8 endpoints

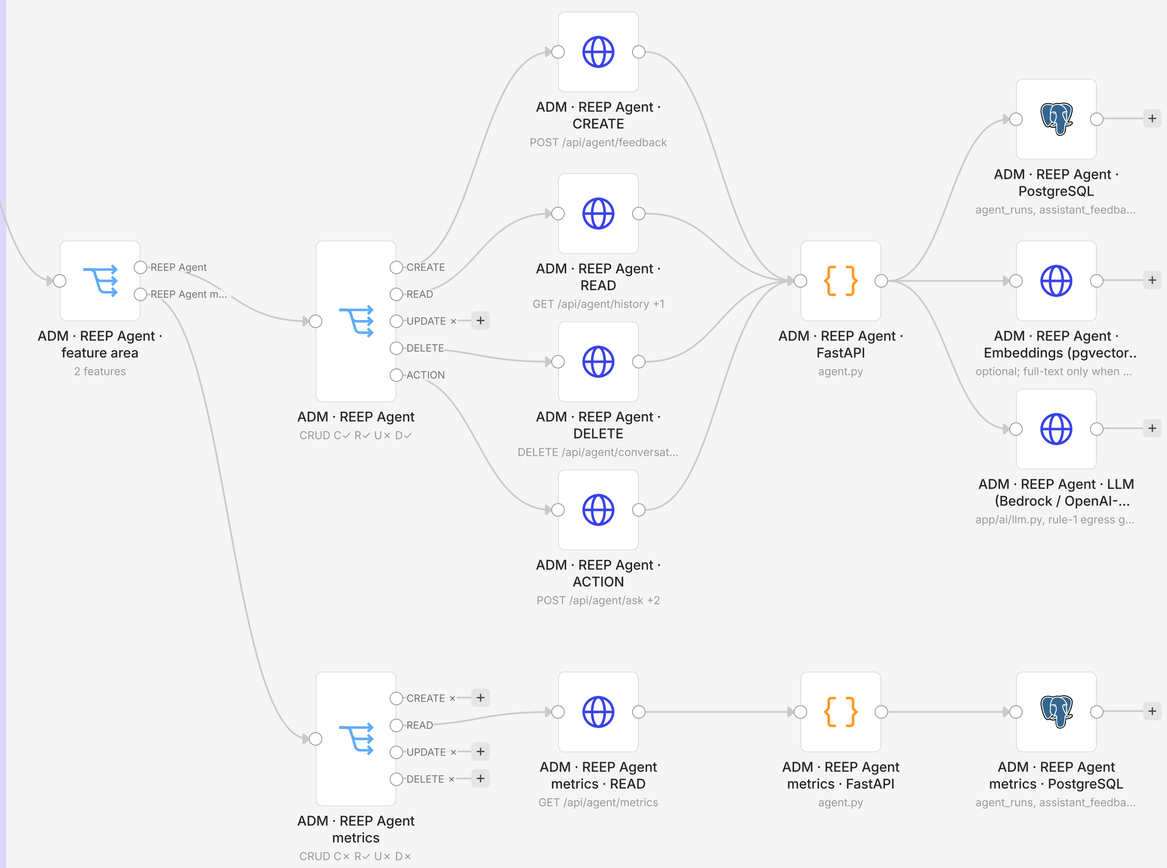

REEP Agent

C ✓ · **R** ✓ · **U** × · **D** ✓ · **A** ✓ · 7 endpoints

Op	Method	Path	What it does
C	POST	`/api/agent/feedback`	rate an answer
R	GET	`/api/agent/history`	read my chat history
R	GET	`/api/agent/runs`	list my agent runs †
D	DELETE	`/api/agent/conversation`	clear my conversation
A	POST	`/api/agent/ask`	ask the agent
A	POST	`/api/agent/chat`	chat with assistant †
A	POST	`/api/agent/chat/stream`	stream assistant reply †

Screens `/admin/agent (agent dock on every screen)`
Code `routers/agent.py`
Gate `_require_agent_access: require_capability(mentor.agent) f... · get_current_session (caller's own runs only) · get_current_session (caller's own thread only) · get_current_session + caller must own the agent run (404 ... ·` capability `mentor.agent`
Tables `agent_runs` `assistant_feedback` `conversations` `feature_overrides` `knowledge_chunks` `knowledge_documents` `messages` `student_profiles` `students`
AWS / external Embeddings (pgvector KB) · LLM (Bedrock / OpenAI-compatible)
† no screen in this role's navigation calls it (API or typed URL only)

REEP Agent metrics

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/agent/metrics`	view assistant metrics †

Screens — none for this role (API only)
Code `routers/agent.py`
Gate `get_current_session + inline role == ADMIN`
Tables `agent_runs` `assistant_feedback` `messages`
AWS / external —

Institution setup

4 features · 30 endpoints

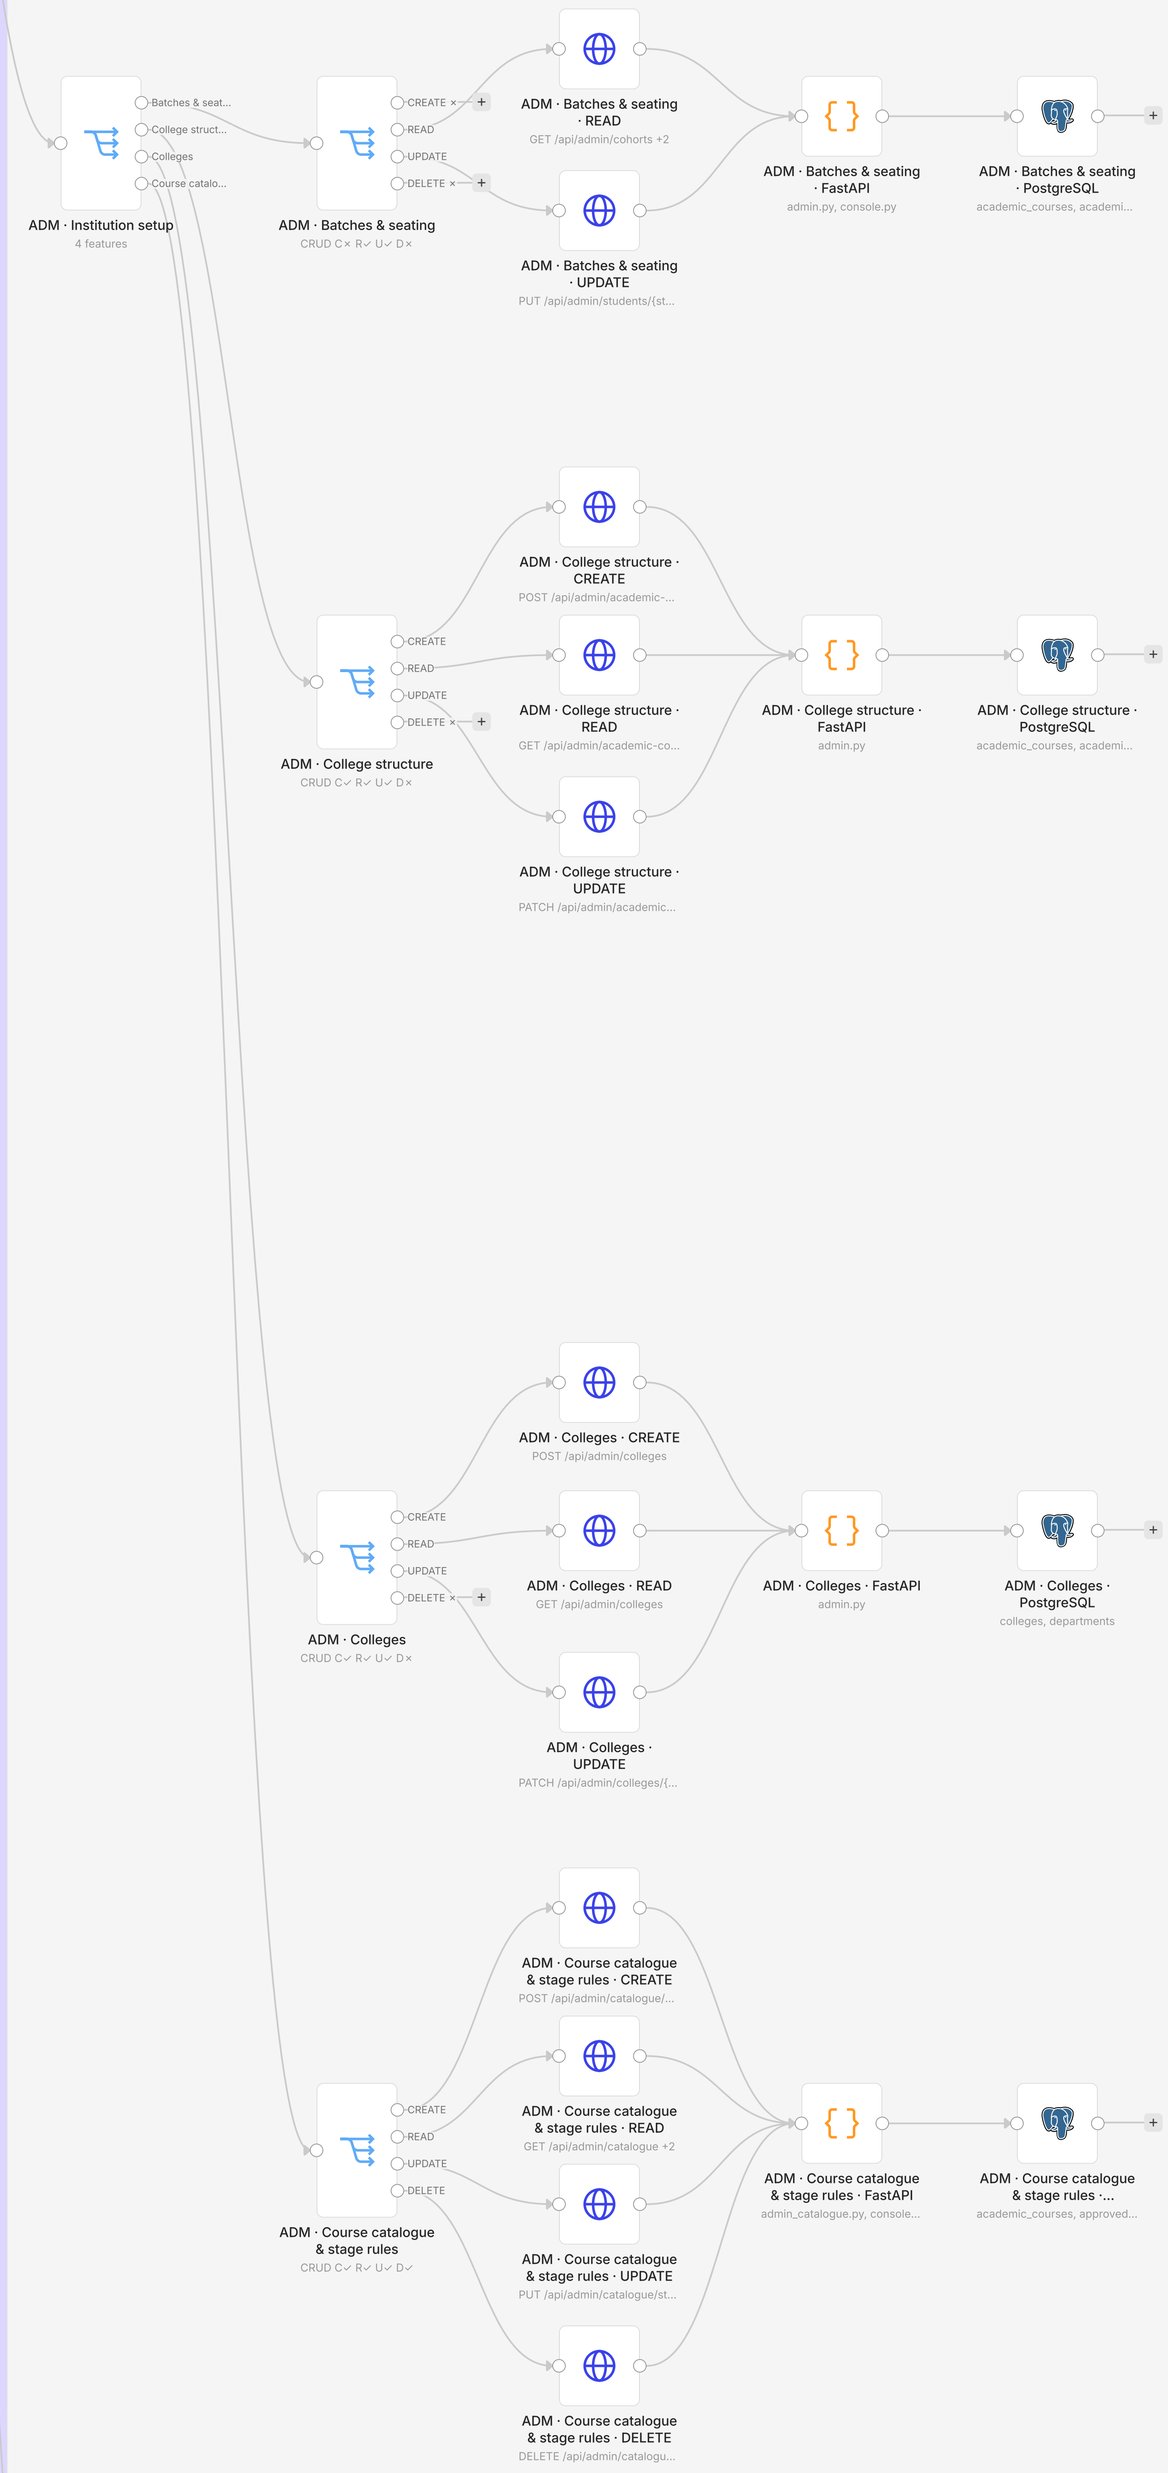

Batches & seating

C × · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/cohorts`	list batches
R	GET	`/api/admin/cohorts/{cohort_id}/students`	list students in batch
R	GET	`/api/admin/students/unseated`	list unseated students
U	PUT	`/api/admin/students/{student_id}/cohort`	seat or unseat student

Screens `/admin/analytics` `/admin/students/:id` `/admin/placement` `/admin/mentors` `/admin/interviews` `/admin/institution`
Code `routers/admin.py` `routers/console.py`
Gate `require_capability(admin.analytics)` · `require_capability(admin.institution)` · capability `admin.analytics` `admin.institution`
Tables `academic_courses` `academic_specializations` `cohorts` `students` `users`
AWS / external —

College structure

C ✓ · **R** ✓ · **U** ✓ · **D** × · 16 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/academic-courses/{course_id}/academic-specializations`	add specialization
C	POST	`/api/admin/colleges/{college_id}/departments`	add department
C	POST	`/api/admin/departments/{department_id}/academic-courses`	add course
C	POST	`/api/admin/departments/{department_id}/cohorts`	add batch
R	GET	`/api/admin/academic-courses/{course_id}/academic-specializations`	list course specializations
R	GET	`/api/admin/cohorts/incomplete`	list incomplete batches
R	GET	`/api/admin/cohorts/unassigned`	list unfiled batches
R	GET	`/api/admin/colleges/{college_id}/departments`	list college departments
R	GET	`/api/admin/departments`	list all departments
R	GET	`/api/admin/departments/{department_id}/academic-courses`	list department courses
R	GET	`/api/admin/departments/{department_id}/cohorts`	list department batches
R	GET	`/api/admin/hierarchy/levels`	read required hierarchy levels
U	PATCH	`/api/admin/academic-courses/{course_id}`	edit or archive course
U	PATCH	`/api/admin/academic-specializations/{specialization_id}`	edit or archive specialization †
U	PATCH	`/api/admin/cohorts/{cohort_id}`	edit batch
U	PATCH	`/api/admin/departments/{department_id}`	edit or archive department †

Screens `/admin/setup` `/admin/institution` `/admin/faculty/new` `/admin/faculty` `/admin/leave-approvals`
Code `routers/admin.py`
Gate `require_capability(admin.institution)` · capability `admin.institution`
Tables `academic_courses` `academic_specializations` `cohorts` `colleges` `departments` `students`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Colleges

C ✓ · **R** ✓ · **U** ✓ · **D** × · 3 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/colleges`	add college
R	GET	`/api/admin/colleges`	list colleges
U	PATCH	`/api/admin/colleges/{college_id}`	edit college

Screens `/admin/setup` `/admin/colleges` `/admin/institution` `/admin/faculty/new` `/admin/interviews`
Code `routers/admin.py`
Gate `require_capability(admin.institution)` · capability `admin.institution`
Tables `colleges` `departments`
AWS / external —
Also delete a college: see **Delete a college**

Course catalogue & stage rules

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 7 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/catalogue/copy`	copy catalogue to course
C	POST	`/api/admin/catalogue/subjects/import`	import subjects CSV
R	GET	`/api/admin/catalogue`	list courses and certifications
R	GET	`/api/admin/catalogue/courses`	list catalogue courses
R	GET	`/api/admin/catalogue/stage-rules`	list stage rules
U	PUT	`/api/admin/catalogue/stage-rules`	set stage rule
D	DELETE	`/api/admin/catalogue/stage-rules/{rule_id}`	delete stage rule

Screens `/admin/catalogue` `/admin/jobs`
Code `routers/admin_catalogue.py` `routers/console.py`
Gate `require_capability(admin.catalogue)` · `require_capability(admin.catalogue) + _course_within_reac...` · `require_capability(admin.catalogue) + _course_within_reach` · `require_capability(admin.catalogue) + scope_filter must b...` · `require_capability(admin.catalogue) + scope_filter(admin....` · capability `admin.catalogue`
Tables `academic_courses` `approved_certifications` `badge_course_map` `certifications` `colleges` `courses` `departments` `enrollments` `redesign_audit_events` `redesign_outbox_events` `stage_rules`
AWS / external —

MAIN ADMIN (role ADMIN, the placement office) (2 of 2) · 3 of 5

Imports & analytics

Back to the map

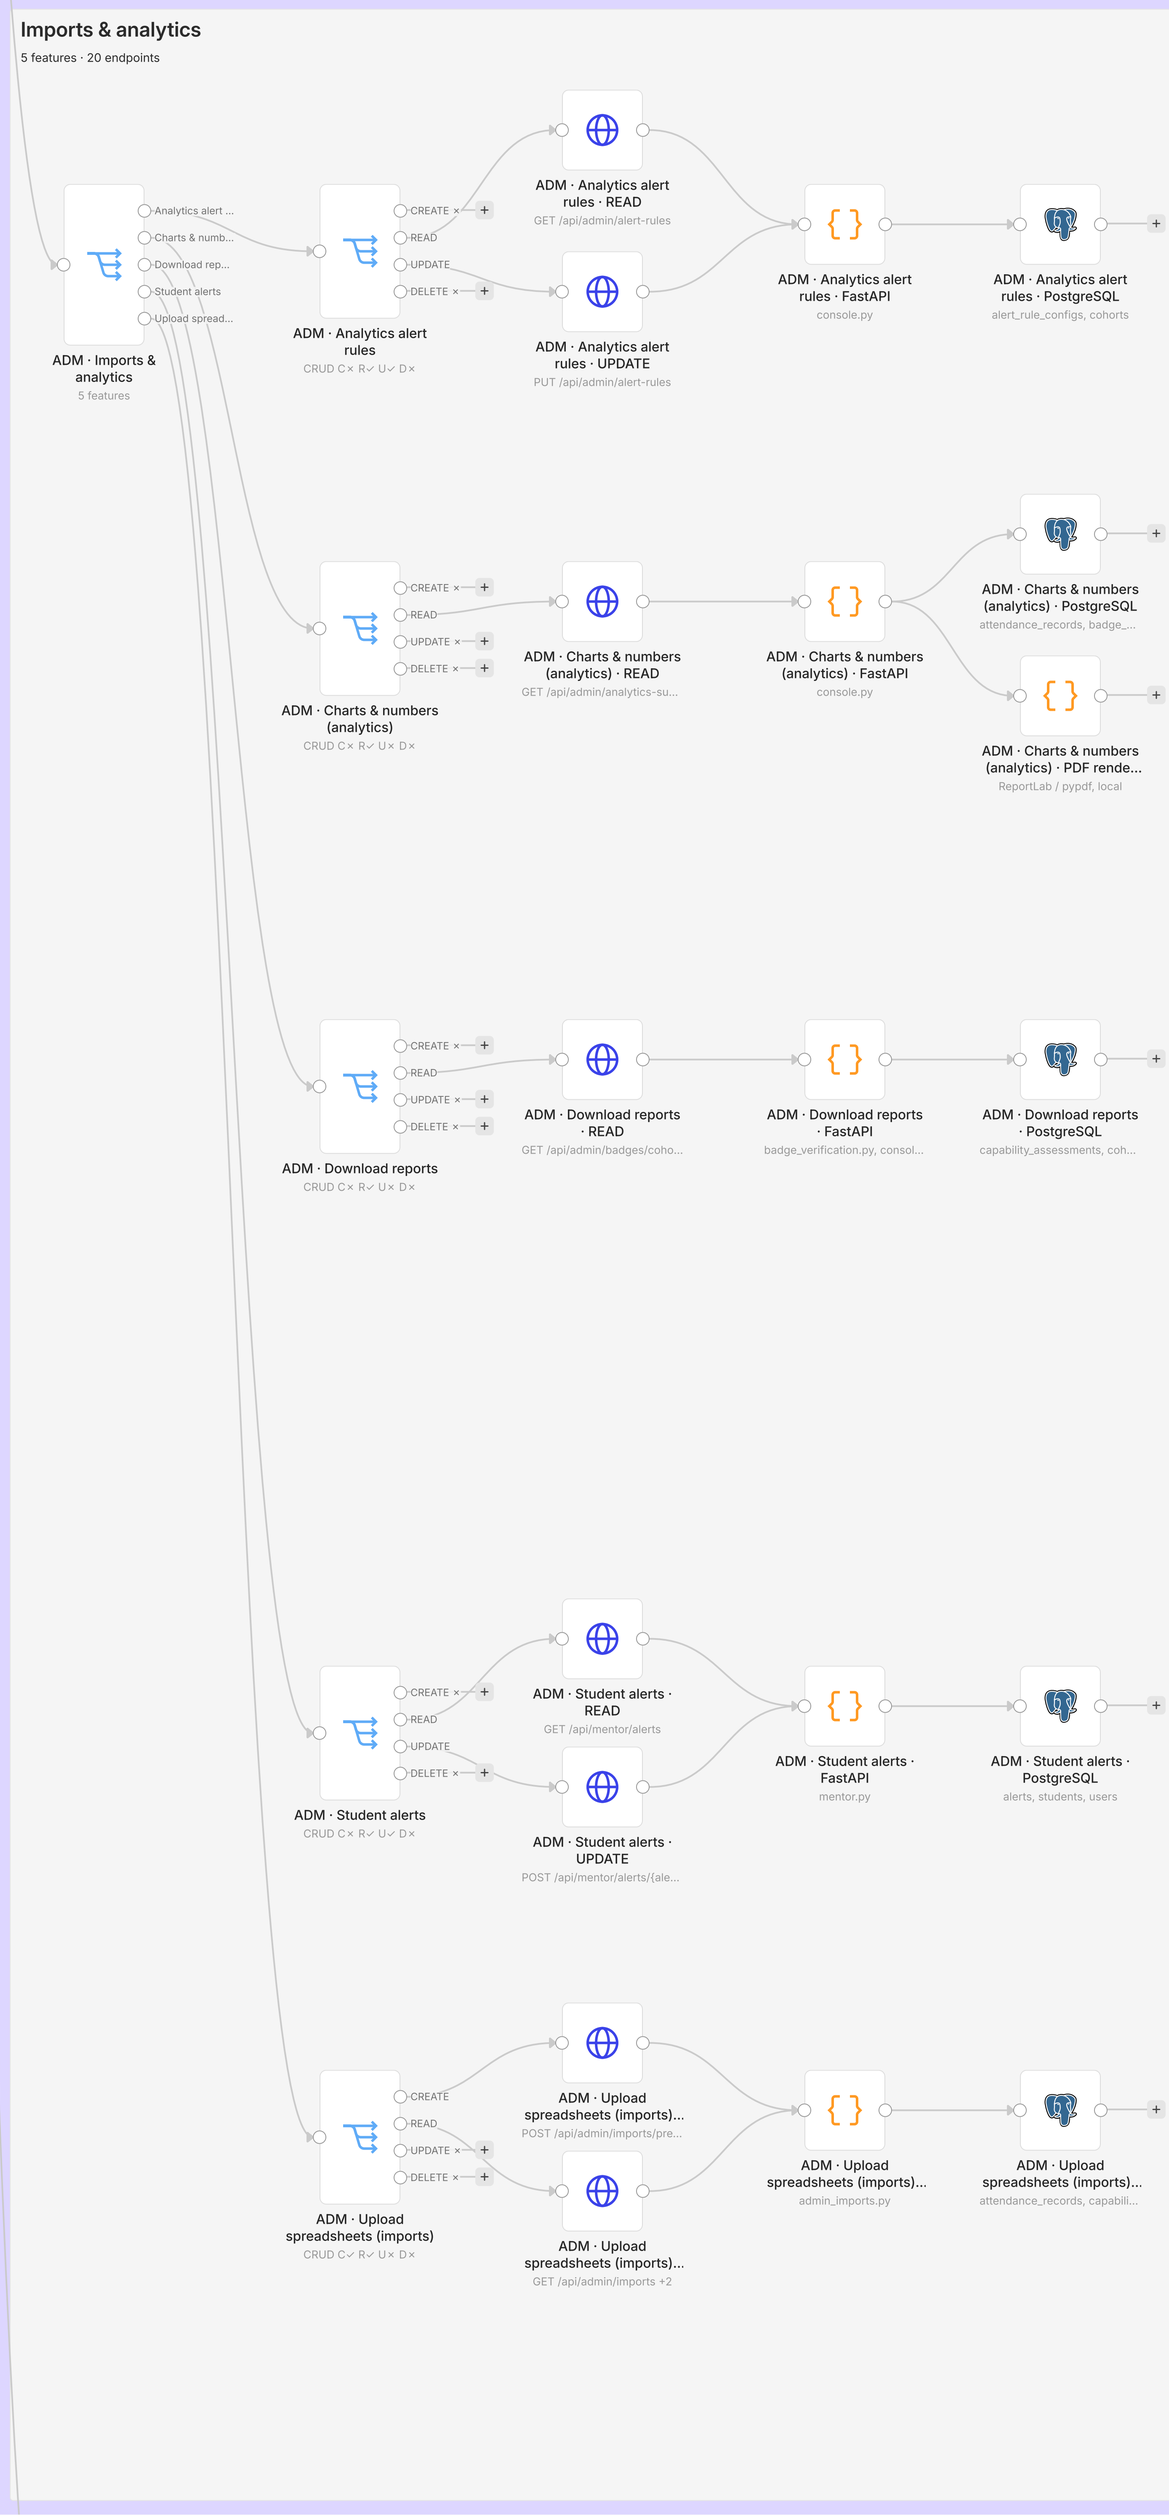

Analytics alert rules

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/alert-rules`	list alert thresholds
U	PUT	`/api/admin/alert-rules`	set alert threshold

Screens `/admin/analytics`
Code `routers/console.py`
Gate `require_capability(admin.analytics)` · capability `admin.analytics`
Tables `alert_rule_configs` `cohorts`
AWS / external —

Charts & numbers (analytics)

C × · **R** ✓ · **U** × · **D** × · 5 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/analytics-summary`	read analytics header counts
R	GET	`/api/admin/analytics/kpis`	read KPI strip
R	GET	`/api/admin/analytics/series`	read weekly trend lines
R	GET	`/api/admin/students/{student_id}/resume.pdf`	download student CV PDF
R	GET	`/api/admin/students/{student_id}/weekly`	read student six-week trend

Screens `/admin/analytics` `/admin/students/:id`
Code `routers/console.py`
Gate `require_capability(admin.analytics) + _assert_can_access_...` · `require_capability(admin.analytics) + scope_filter(admin....` · capability `admin.analytics`
Tables `attendance_records` `badge_evidence` `certification_progress` `placement_criteria` `placement_offers` `registrations` `resumes` `semester_results` `skills` `student_badges` `student_skills` `students` `time_ledger_cells` `time_ledger_days` `time_sheet_entries` `users`
AWS / external PDF render (in process)

Download reports

C × · **R** ✓ · **U** × · **D** × · 6 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/badges/cohort`	read cohort badge summary †
R	GET	`/api/admin/badges/export.csv`	download cohort skill CSV
R	GET	`/api/admin/exports/history`	list export receipts
R	GET	`/api/admin/exports/ledger.csv`	download ledger compliance CSV
R	GET	`/api/admin/exports/placement.csv`	download placement CSV
R	GET	`/api/admin/exports/students.csv`	download student-mentor map CSV

Screens `/admin/exports` `/admin/placement`
Code `routers/badge_verification.py` `routers/console.py`
Gate `require_admin` · `require_admin + scope_filter(admin.exports)` · `require_capability(admin.exports) + scope_filter(admin.ex...` · capability `admin.exports`
Tables `capability_assessments` `cohorts` `export_events` `mentors` `placement_offers` `redesign_audit_events` `redesign_outbox_events` `student_badges` `students` `time_ledger_cells` `time_ledger_days` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Student alerts

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/mentor/alerts`	list student alerts
U	POST	`/api/mentor/alerts/{alert_id}/resolve`	resolve alert †

Screens `/admin/analytics`
Code `routers/mentor.py`
Gate `require_mentor` · `require_mentor + _assert_can_access_student`
Tables `alerts` `students` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Upload spreadsheets (imports)

C ✓ · **R** ✓ · **U** × · **D** × · 5 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/imports/preview`	check import file
C	POST	`/api/admin/imports/{run_id}/apply`	import rows into records
R	GET	`/api/admin/imports`	list recent imports
R	GET	`/api/admin/imports/templates/{kind}.xlsx`	download import template
R	GET	`/api/admin/imports/{run_id}/errors.csv`	download error report

Screens `/admin/imports`
Code `routers/admin_imports.py`
Gate `require_capability(admin.imports)` · `require_capability(admin.imports) + require_capability(ad...` · `require_capability(admin.imports) + scope_filter` · capability `admin.imports`
Tables `attendance_records` `capability_grants` `cohorts` `courses` `export_events` `import_rows` `import_runs` `redesign_audit_events` `redesign_outbox_events` `semester_results` `students` `subject_marks` `users`
AWS / external —

MAIN ADMIN (role ADMIN, the placement office) (2 of 2) · 4 of 5

Governance & audit · Deletion & retention

Back to the map

Governance & audit

4 features · 22 endpoints

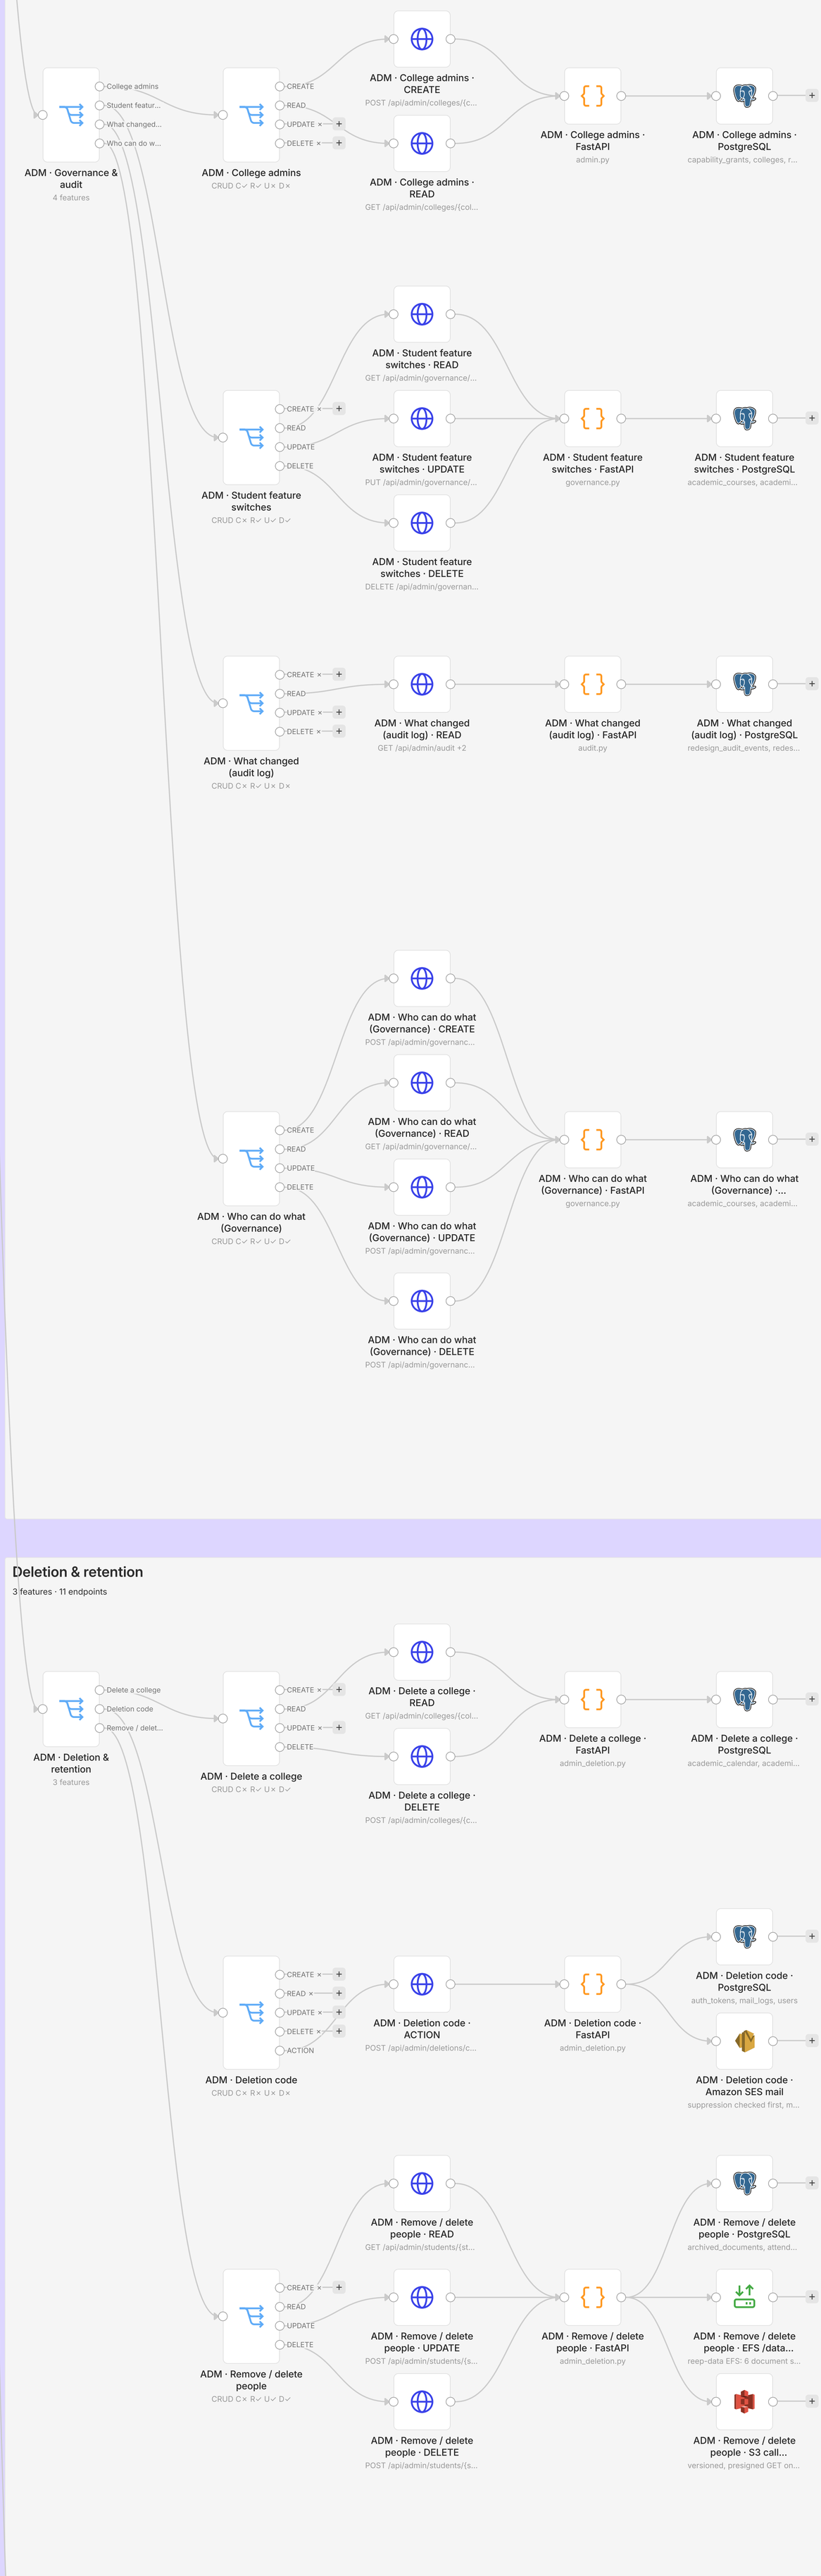

College admins

C ✓ · **R** ✓ · **U** × · **D** × · 2 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/colleges/{college_id}/admins`	appoint college admin
R	GET	`/api/admin/colleges/{college_id}/admins`	list college admins

Screens `/admin/colleges`
Code `routers/admin.py`
Gate `require_governance (require_staff + require_capability(ad...` · capability `admin.governance`
Tables `capability_grants` `colleges` `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external —

Student feature switches

C × · **R** ✓ · **U** ✓ · **D** ✓ · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/governance/features`	list feature switches
U	PUT	`/api/admin/governance/features`	set feature switch
D	DELETE	`/api/admin/governance/features/{override_id}`	clear feature switch

Screens `/admin/governance` `/admin/governance/features`
Code `routers/governance.py`
Gate `require_governance = policies.require_staff + require_cap...` · capability `admin.governance`
Tables `academic_courses` `academic_specializations` `cohorts` `colleges` `departments` `feature_overrides` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external —

What changed (audit log)

C × · **R** ✓ · **U** × · **D** × · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/audit`	list audit events
R	GET	`/api/admin/audit/export.csv`	export audit log CSV
R	GET	`/api/admin/audit/{event_id}`	open audit event

Screens `/admin/audit`
Code `routers/audit.py`
Gate `_gate -> require_admin`
Tables `redesign_audit_events` `redesign_outbox_events` `users`
AWS / external —

Who can do what (Governance)

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 14 endpoints

Op	Method	Path	What it does
C	POST	`/api/admin/governance/grants`	grant capability
C	POST	`/api/admin/governance/groups`	create access group
C	POST	`/api/admin/governance/groups/{group_id}/members`	add group members
R	GET	`/api/admin/governance/catalogue`	list capabilities and features
R	GET	`/api/admin/governance/effective/{user_id}`	show effective capabilities †
R	GET	`/api/admin/governance/grants`	list live grants
R	GET	`/api/admin/governance/groups`	list access groups
R	GET	`/api/admin/governance/hierarchy`	list scope targets
R	GET	`/api/admin/governance/review`	list grants to review
R	GET	`/api/admin/governance/staff`	list grantable staff
U	POST	`/api/admin/governance/grants/{grant_id}/approve`	approve pending grant
U	POST	`/api/admin/governance/grants/{grant_id}/extend`	extend grant
D	POST	`/api/admin/governance/grants/{grant_id}/revoke`	revoke grant
D	DELETE	`/api/admin/governance/groups/{group_id}/members/{user_id}`	remove group member

Screens `/admin/governance` `/admin/governance/features` `/admin`
Code `routers/governance.py`
Gate `require_governance = policies.require_staff + require_cap...` · capability `admin.governance`
Tables `academic_courses` `academic_specializations` `access_group_members` `access_groups` `capability_grants` `cohorts` `colleges` `departments` `redesign_audit_events` `redesign_outbox_events` `students` `users`
AWS / external —
† no screen in this role's navigation calls it (API or typed URL only)

Deletion & retention

3 features · 11 endpoints

Delete a college

C × · **R** ✓ · **U** × · **D** ✓ · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/colleges/{college_id}/delete-plan`	preview college deletion
D	POST	`/api/admin/colleges/{college_id}/delete`	delete college permanently

Screens `/admin/colleges`
Code `routers/admin_deletion.py`
Gate `require_admin` · `require_admin + emailed deletion code`
Tables `academic_calendar` `academic_courses` `academic_specializations` `alert_rule_configs` `auth_tokens` `badge_course_map` `cohorts` `colleges` `departments` `interview_policies` `interview_tracks` `jobs` `redesign_audit_events` `redesign_outbox_events` `registrations` `stage_rules` `students` `users`
AWS / external —

Deletion code

C × · **R** × · **U** × · **D** × · **A** ✓ · 1 endpoint

Op	Method	Path	What it does
A	POST	`/api/admin/deletions/code`	email deletion code

Screens `/admin/students` `/admin/faculty` `/admin/colleges`
Code `routers/admin_deletion.py`
Gate `require_admin (throttled 6/hour per admin)`
Tables `auth_tokens` `mail_logs` `users`
AWS / external Amazon SES mail

Remove / delete people

C × · **R** ✓ · **U** ✓ · **D** ✓ · 8 endpoints

Op	Method	Path	What it does
R	GET	`/api/admin/students/{student_id}/delete-plan`	preview student deletion
R	GET	`/api/admin/users/{user_id}/delete-plan`	preview account deletion
U	POST	`/api/admin/students/{student_id}/restore`	restore removed student
U	POST	`/api/admin/users/{user_id}/restore`	restore removed account
D	POST	`/api/admin/students/{student_id}/delete`	delete student permanently
D	POST	`/api/admin/students/{student_id}/remove`	remove student (soft)
D	POST	`/api/admin/users/{user_id}/delete`	delete account permanently
D	POST	`/api/admin/users/{user_id}/remove`	remove account (soft)

Screens `/admin/students` `/admin/faculty`
Code `routers/admin_deletion.py`
Gate `require_admin` · `require_admin + emailed deletion code`
Tables `archived_documents` `attendance_records` `auth_tokens` `badge_evidence` `capability_grants` `conversations` `interview_sessions` `leave_requests` `mail_logs` `mentor_assignments` `mentor_notes` `mentors` `platform_call_sessions` `redesign_audit_events` `redesign_mentor_notebook_entries` `redesign_outbox_events` `registrations` `resumes` `semester_results` `staff_signatures` `staff_upskilling_certs` `student_badges` `students` `swoc_entries` `uploads` `users`
AWS / external EFS /data volume · S3 call recordings

MAIN ADMIN (role ADMIN, the placement office) (2 of 2) · 5 of 5

Voice platform

Back to the map

Voice platform

7 features · 25 endpoints

Voice platform call sessions

C × · **R** ✓ · **U** ✓ · **D** × · 4 endpoints

Op	Method	Path	What it does
R	GET	`/api/platform/admin/calls`	list recent calls †
R	GET	`/api/platform/calls`	list call sessions †
R	GET	`/api/platform/calls/{session_id}`	view call detail †
U	POST	`/api/platform/calls/{session_id}/close`	close call, upload recording †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py` `voice_platform/api/calls.py`
Gate `get_current_session (any signed-in session); role == ADMI... · get_current_session + _can_read (owner | role ADMIN | MEN... · get_current_session + owner (row.user_id == session.userI... · require_admin (via the router's _admin dependency)` · capability `admin.interview_audio`
Tables `capability_grants` `interview_sessions` `interview_turns` `mentors` `platform_call_sessions` `platform_recording_policies` `students`
AWS / external CloudWatch metrics · DynamoDB voice sessions · EFS /data volume · S3 call recordings · Sentry

Voice platform candidates

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 6 endpoints

Op	Method	Path	What it does
C	POST	`/api/platform/admin/candidates`	add candidate †
C	POST	`/api/platform/admin/candidates/bulk`	bulk upload candidates †
R	GET	`/api/platform/admin/candidates`	list candidates †
U	PATCH	`/api/platform/admin/candidates/{candidate_id}`	edit candidate †
U	POST	`/api/platform/admin/candidates/{candidate_id}/link`	link candidate login †
D	DELETE	`/api/platform/admin/candidates/{candidate_id}`	delete candidate †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py`
Gate `require_admin (via the router's _admin dependency)`
Tables `platform_call_sessions` `platform_candidates` `platform_specializations` `users`
AWS / external CloudWatch metrics · SQS candidate queues

Voice platform question bank

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 4 endpoints

Op	Method	Path	What it does
C	POST	`/api/platform/admin/specializations/{spec_id}/questions`	add question †
R	GET	`/api/platform/admin/specializations/{spec_id}/questions`	list questions †
U	PATCH	`/api/platform/admin/questions/{question_id}`	edit question †
D	DELETE	`/api/platform/admin/questions/{question_id}`	delete question †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py`
Gate `require_admin (via the router's _admin dependency)`
Tables `platform_questions` `platform_specializations`
AWS / external CloudWatch metrics

Voice platform recording policies

C × · **R** ✓ · **U** ✓ · **D** × · 2 endpoints

Op	Method	Path	What it does
R	GET	`/api/platform/admin/recording-policies`	list recording policies †
U	PUT	`/api/platform/admin/recording-policies/{degree}`	set recording policy †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py`
Gate `require_admin (via the router's _admin dependency)`
Tables `platform_recording_policies`
AWS / external CloudWatch metrics

Voice platform specializations

C ✓ · **R** ✓ · **U** ✓ · **D** ✓ · 5 endpoints

Op	Method	Path	What it does
C	POST	`/api/platform/admin/specializations`	create specialization †
R	GET	`/api/platform/admin/specializations`	list specializations †
R	GET	`/api/platform/admin/specializations/{spec_id}`	view specialization †
U	PATCH	`/api/platform/admin/specializations/{spec_id}`	edit specialization †
D	DELETE	`/api/platform/admin/specializations/{spec_id}`	delete specialization †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py`
Gate `require_admin (via the router's _admin dependency)`
Tables `platform_questions` `platform_specializations` `platform_time_limits`
AWS / external CloudWatch metrics

Voice platform status

C × · **R** ✓ · **U** × · **D** × · 1 endpoint

Op	Method	Path	What it does
R	GET	`/api/platform/admin/status`	check platform configuration †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py`
Gate `require_admin (via the router's _admin dependency)`
Tables —
AWS / external —

Voice platform time limits

C × · **R** ✓ · **U** ✓ · **D** ✓ · 3 endpoints

Op	Method	Path	What it does
R	GET	`/api/platform/admin/time-limits`	list time limits †
U	PUT	`/api/platform/admin/time-limits`	set time limit †
D	DELETE	`/api/platform/admin/time-limits/{limit_id}`	delete time limit †

Screens — none for this role (API only)
Code `voice_platform/api/admin.py`
Gate `require_admin (via the router's _admin dependency)`
Tables `platform_specializations` `platform_time_limits`
AWS / external —