R is dope AF

Matthew Malishev[1]*
[1] *Department of Biology, Emory University, 1510 Clifton Road NE, Atlanta, GA, USA, 30322*

Contents

Date: 2018-12-19
R version: 3.5.0
*Corresponding author: matthew.malishev@gmail.com
This document can be found at https://github.com/darwinanddavis/SchistoIBM/tree/master/mac

R session info

```
params$session
```

```
R version 3.5.0 (2018-04-23)
Platform: x86_64-apple-darwin15.6.0 (64-bit)
Running under: OS X El Capitan 10.11.6

Matrix products: default
BLAS: /Library/Frameworks/R.framework/Versions/3.5/Resources/lib/libRblas.0.dylib
LAPACK: /Library/Frameworks/R.framework/Versions/3.5/Resources/lib/libRlapack.dylib

locale:
[1] en_US.UTF-8/en_US.UTF-8/en_US.UTF-8/C/en_US.UTF-8/en_US.UTF-8

attached base packages:
[1] stats     graphics  grDevices utils     datasets  methods   base

loaded via a namespace (and not attached):
 [1] compiler_3.5.0  backports_1.1.2 magrittr_1.5    rprojroot_1.3-2 tools_3.5.0     htmltools_0.3.6
 [7] pillar_1.2.3    tibble_1.4.2    yaml_2.2.0      Rcpp_0.12.19    stringi_1.2.3   rmarkdown_1.10
[13] knitr_1.20      stringr_1.3.1   digest_0.6.15   rlang_0.3.0.1   evaluate_0.10.1
```

Overview

This document showcases why `R` is **dope**.

You can write in-line `code`, equations like this $E = mc^2$, create links to your website.

Just like LateX, but *more versatile.*

Create quoted text

> Pump the bass in the trunk //
> It rattled like a baby hand //
> Except this toy cost 80 grand //
> And I'm crazy tan, from all the places that I've been //
> Just from writing words with a pen //

Define equations

$$t' = \frac{1}{\sqrt{1 - \frac{v^2}{c^2}}}$$

Accordingly, we write the eigenfunction of a spinless particle as the superposition of plane wave states of momentum (π) and energy (Ej) having amplitudes $a(\pi, Ej)$

$$\phi n(r,t) = \sum_{i,j} a(p_i, E_j) e^{\frac{i}{h}(p_i \cdot r - E_j t)}$$

where, for convenience, we have suppressed the eigenfunction indices in $\phi n(r,t)$ and $an(\pi, Ej)$. Using periodic boundary conditions, the normalization of $\phi n(r,t)$ in (1) yields

$$\frac{1}{V_o T_o h^4} \int \phi \cdot (r,t) \phi(r,t) d^3 r dt = \sum a \cdot (p_i, E_j) a(p_i, E_j) = 1$$

Embed images/gifs:

Create, alter, and imbed plots

(with associated code)

```
set.seed(12)
rr <- rnorm(500)
plot(rr,pch=20)
```

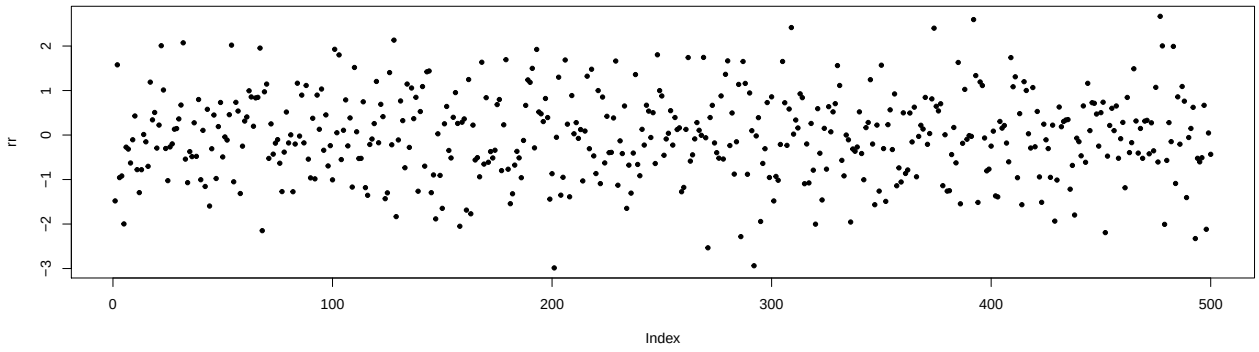


```
require(viridis)
set.seed(12)
rr <- rnorm(500)
plot(rr,las=1,bty="n",col=adjustcolor(magma(50),0.5),pch=20,cex=runif(10, 1, 5),
     main="Some randomly distributed data, \nbut plot better")
```

And tables

Table 1. Definitions of model parameters for individual hosts and **parasites**. Dimensions and units: -, dimensionless; cm, centimetres; J, Joules; L, length.

Parameter	Definition	Dimension(unit)
L	structural length	cm
ee	scaled reserve density	J (cm^3)
D	host development	—
RH	energy in reproduction buffer	J

Embed code from different languages

This is R code

```r
if(pck==1){
  p<-c("rJava", "RNetLogo"); remove.packages(p)
  # then install rJava and RNetLogo from source
  install.packages("rJava", repos = "https://cran.r-project.org/")
  install.packages("RNetLogo", repos = "https://cran.r-project.org/")
}
```

shell/bash

```bash
echo "Hello Bash!"
pwd # check working dir
git init # initialise git
```

Octave (and MATLAB from the RMatlab package).

RMatlab documentation.

```
b = [4; 9; 2] # Column vector
A = [ 3 4 5;
      1 3 1;
      3 5 9 ]
x = A \ b     # Solve the system Ax = b
```

HTML

```html
<!-- links-->
        <div class="footer">
            <a href="dd_feed.html"
            class="transition fade_in">
                Latest post
            </a>
                 
            <a href="dd_contact.html"
            class="transition fade_in">
                Contact
            </a>
                 
            <a href="dd_subscribe.html"
            class="transition fade_in">
                Subscribe
            </a>
        </div>
```

CSS

```
body {
  color: red;
}
```

Javascript to access `html` and `css`

```
$('.title').css('color', 'red')
```

Python

```
x = 'hello, python world!'
print(x.split(' '))
```

Here's a complete list of available languages

```
names(knitr::knit_engines$get())
```

```
 [1] "awk"       "bash"      "coffee"    "gawk"      "groovy"    "haskell"   "lein"      "mysql"
 [9] "node"      "octave"    "perl"      "psql"      "Rscript"   "ruby"      "sas"       "scala"
[17] "sed"       "sh"        "stata"     "zsh"       "highlight" "Rcpp"      "tikz"      "dot"
[25] "c"         "fortran"   "fortran95" "asy"       "cat"       "asis"      "stan"      "block"
[33] "block2"    "js"        "css"       "sql"       "go"        "python"    "julia"
```

All from `R`!

References

Shaw, A. K., & Couzin, I. D. (2013). Migration or residency? The evolution of movement behavior and information usage in seasonal environments. The American Naturalist, 181, 114–124.

Shelly, T. E. (1982). Comparative foraging behavior of light- versus shade- seeking adult damselflies in a lowland Neotropical forest (Odonata: Zygoptera). Physiological Zoology, 55, 335–343.

Sinervo, B., de Mendez-de-la-Cruz, F., Miles, D. B., Heulin, B., Bastiaans, E., Villagran-Santa Cruz, M., … Sites, J. W. (2010). Erosion of lizard diversity by climate change and altered thermal niches. Science, 328, 894–899.