

Payment Interface Developer's Guide

Merchant-Presented Payment API Specification

Document version: 1.4.3

Interface version: 2.0

Document Changes		
Date	Version	Description
2018-02-24	1.0	First draft
2018-06-01	1.0	Request URL is changed to https://gateway.wepayez.com/pay/gateway
2019-03-15	1.1	Integrate Alipay/WeChat Pay/Unionpay
2019-07-18	1.2	Add retrieve interface
2019-10-15	1.3	Update UI
2020-09-02	1.4	Add Online payment interface ,update all interfaces parameters
2020-09-16	1.4.2	Add Instapay bank payment
2020-12-18	1.4.3	Add QRPh

Catalog

1 Introduction.....	4
1.1 Abstract	4
1.2 Audience	4
2 Program Overview	5
2.1 Industry Background	5
2.2 Business realization process	5
3 Data format	7
3.1 Request data	7
3.2 XML data format	7
4 Digital Signature.....	8
4.1 Original string of signature	8
4.2 Method of signature	9
5 QR Code Payment.....	13
5.1 QR code pay	13
5.1.1 Business function	13
5.1.2 Interactive mode	13
5.1.3 Request Parameters	13
5.1.4 Response Parameters	15
5.2 Gcash/Grab Online Payment Interface	16
5.2.1 Request Parameters	16
5.2.2 Response Parameters	17
5.2.3 Online payment callback.....	18
5.3 Instapay Bank Payment	18
5.3.1 Instapay payment interface	18
5.3.2 Response parameter	19
5.3.3 Retrieve transaction result interface.....	19
5.3.4 Respose parameter	20
5.4 QR Ph	21
5.4.1 Instapay (QR Ph) payment interface	21
5.4.2 Response parameter	22
5.4.3 Retrieve transaction result interface.....	22
5.4.4 Response parameter	23
6 Notification interface.....	24
6.1 Notification request parameters.....	24
6.2 Response of notification	26
7 Retrieve transaction result interface	27
7.1 Business function	27
7.2 Request Parameters	27
7.3 Response parameter	28
8 Refund interface	29
8.1 Business function	29
8.2 Request parameters	30
8.3 Response parameters.....	31

9 Retrieve refund result interface	33
9.1 Request parameters	33
9.2 Response parameters	34
10 Close Order Interface	35
10.1 Business function	35
10.2 Request parameters	35
10.3 Response parameter	36
11 Notes	37

1 Introduction

1.1 Abstract

QR Payment is a payment method which means merchants integrate with the Third Party' s API and generate a QR Code to show customers for each transaction. Then customers use WeChat/Alipay/Unionpay to scan the QR Code generated by merchants to complete the payment.



QR Pay can be applied in both on-line and off-line payment scenes. Eg.off-line vending machine with screen, off-line cashier, on-line mall on PC and etc.

1.2 Audience

This document is provided to technical and business staff of merchants for reference

2 Program Overview

2.1 Industry Background

WeChat payment is a payment service function which is provided based on WeChat application, and meanwhile it provides the commercial tenants with such support functions as sales, marketing analysis and management of account. Customers could complete a payment by scanning QR code, being scanned payment QR code or other payment methods.

2.2 Business realization process

2.2.1 Business of QR code pay

Usage scenario:

The payer scans a QR Code shown by vendors in the following process.

Step (1): Merchants create a QR Code for their products correspondingly based on WeChat payment rules, as shown in Figure 2.1.

Step (2): The payer scans the QR Code with their WeChat to access the Merchants' product data and proceeds with the transaction, as shown in Figure 2.2. The Payer then makes their payment as instructed, as shown in Figure 2.3.



Figure 2.1 Payment QR Code

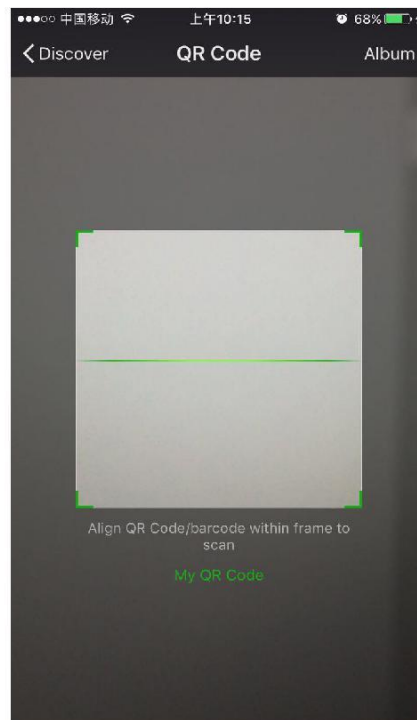


Figure 2.2 Scan QR Code on WeChat

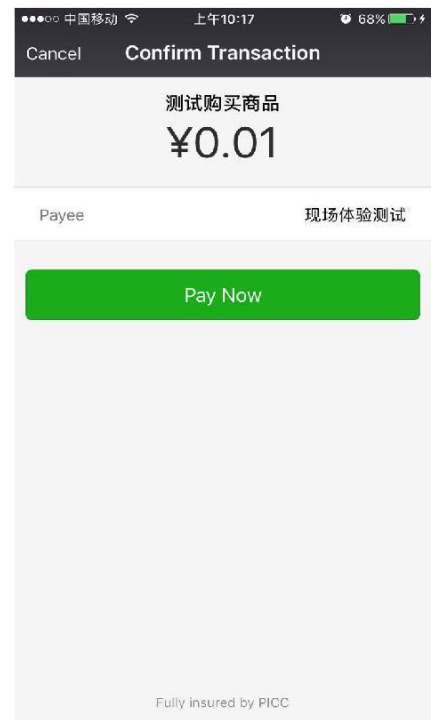


Figure 2.3 Confirm Payment

Step (3): The payer confirms their transaction and enters their payment password, as shown in Figure 2.4.

Step (4): The payer is prompted of a successful payment after completing their payment, as shown in Figure 2.5.

The merchant delivers the paid products to the payer after receiving a notification about the successful payment.

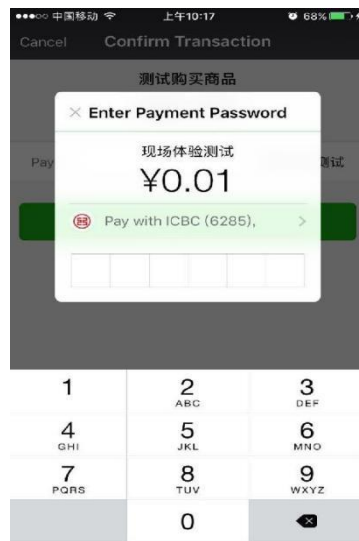



Figure 2.4 Enter Payment



Figure 2.5 Prompt after Successful

Time sequence of interface calls:

After the merchant generates an order, the QR code pay interface will be invoked to obtain code_url, and this URL will generate QR code, and after the user scans the QR code, the payment could be invoked.

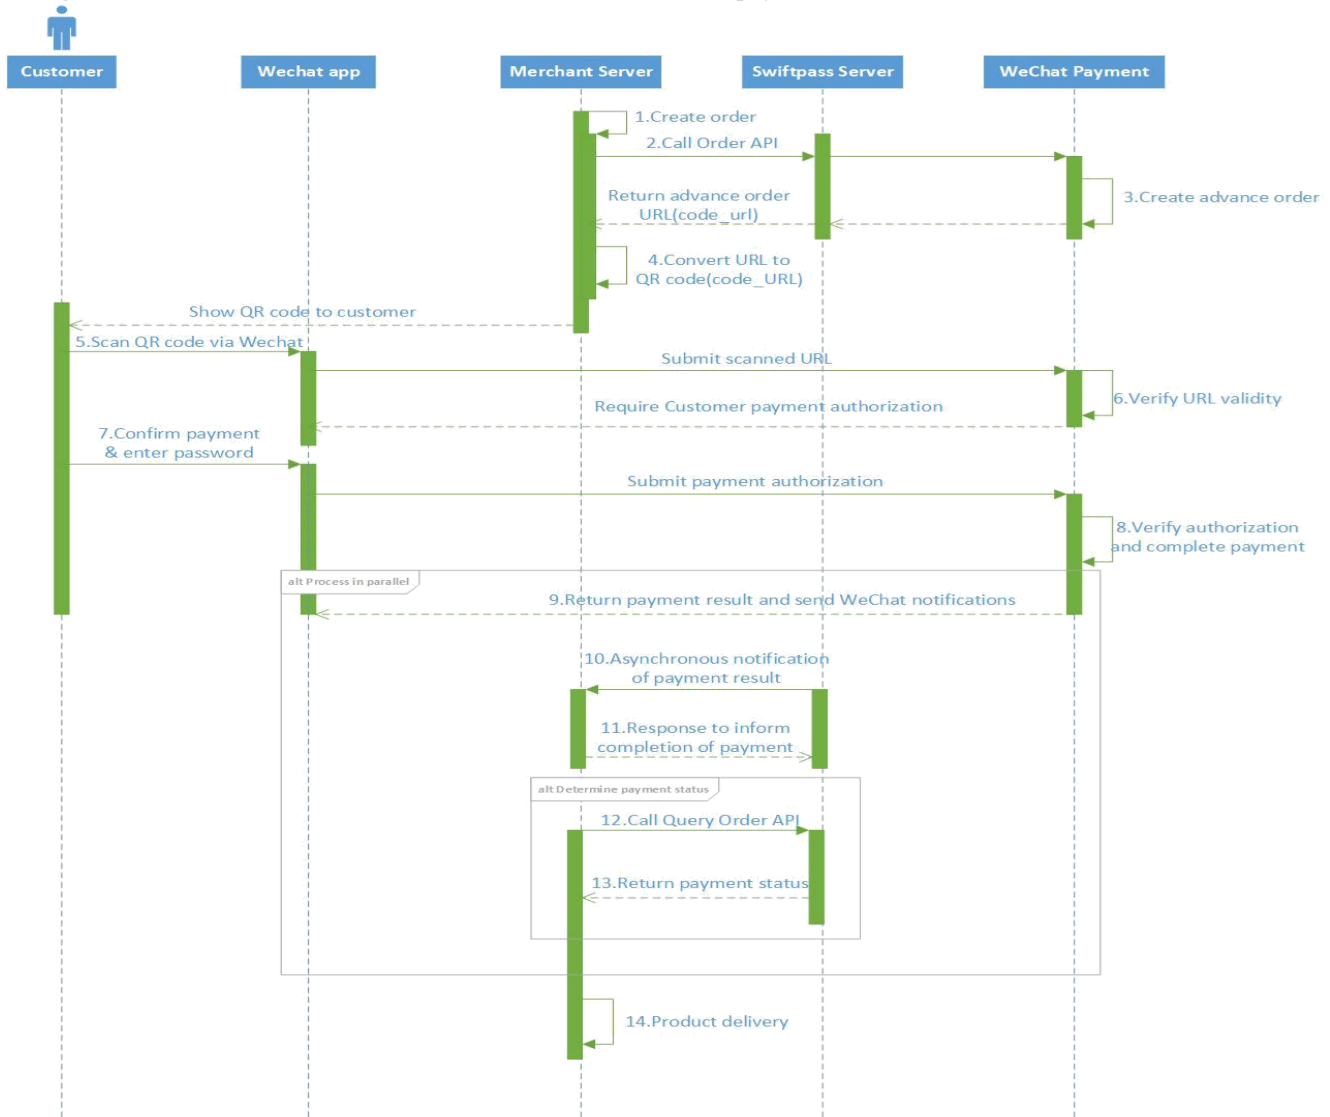

3 Data format

3.1 Request data

Used HTTPS POST protocol. To ensure security, transfer data must be signed.

```
<xml>
<service>pay.weixin.native </service>
<attach><![CDATA[att]]></attach>
<body><![CDATA[支付測試]]></body>
<device_info>1000</device_info>
<mch_id>10000100</mch_id>
<nonce_str>adf880d5c8986bd0deb6423c92c9d948</nonce_str>
<out_trade_no>1406046836</out_trade_no>
<mch_create_ip>127.0.0.1</mch_create_ip>
<total_fee>100</total_fee>
<sign><![CDATA[F53145E553092CE52E4CAA4D2B49A91C]]></sign>
</xml>
```

3.2 XML data format

Used Standard XML protocol. First-level node only. No nested nodes.

Protocol error return:

```
<xml>
<status>500</status>
<message><![CDATA[SYSERR]]></message>
</xml>
```

Successful response:

```
<xml>
<status>0</status>
<message><![CDATA[OK]]></message>
<appid><![CDATA[wX2421b1c4370ec43b]]></appid>
<mch_id><![CDATA[10000100]]></mch_id>
<device_info><![CDATA[1000]]></device_info>
<nonce_str><![CDATA[FvYSnPuFFPkAr77M]]></nonce_str>
<sign><![CDATA[63238039D6E43634297CF2A6EB5F3B72]]></sign>
<result_code>0</result_code>
<openid><![CDATA[oUpF8uN95-Ptaags6E_roPHg7AG0]]></openid>
<is_subscribe><![CDATA[Y]]></is_subscribe>
<trade_type><![CDATA[MICROPAY]]></trade_type>
<bank_type><![CDATA[CCB_CREDIT]]></bank_type>
```

```

<total_fee>100</total_fee>
<coupon_fee>0</coupon_fee>
<fee_type><![CDATA[CNY]]></fee_type>
<transaction_id><![CDATA[1008450740201407220000058756]]></transaction_id>
<out_trade_no><![CDATA[1406033828]]></out_trade_no>
<attach><![CDATA[att]]></attach>
<time_end><![CDATA[20140722160655]]></time_end>
</xml>

```

Normal error return:

```

<xml>
<status>0</status>
<message><![CDATA[OK]]></message>
<appid><![CDATA[wX2421b1c4370ec43b]]></appid>
<mch_id><![CDATA[10000100]]></mch_id>
<device_info><![CDATA[1000]]></device_info>
<nonce_str><![CDATA[sthBJ9QyUG6vkrjJ]]></nonce_str>
<sign><![CDATA[6277A96D7875D4FF23AA7B6A4C3046AB]]></sign>
<result_code>1</result_code>
<err_code><![CDATA[AUTHCODE_EXPIRE]]></err_code>
<err_code_des><![CDATA[二维码已过期，请刷新再试]]></err_code_des>
</xml>

```

4 Digital Signature

To ensure the authenticity and integrity of transmissible data, we need to verify the signed data after it being received.

There are two steps in digital signature.

1. Follow the rules to connect the original string that needs to be signed;
2. Calculate the result of signature according to specific algorithm and key.

Generally, the failed result will not be signed.

4.1 Original string of signature

The original string of signature will be assembled into character string according to the following modes no matter whether it is request or response:

1. Besides the sign field, all parameter fields will be **ranked in ascending order according to the ASCII** of the field name and then connected in the format of QueryString (i.e. key1=value1&key2=value2...), and the null value will not transfer and will not participate in formation of string of signature.

2. In the original string of signature, both the field name and field value will adopt original values and will not conduct URL Encode.

3. The response or notification information returned by platform might increase parameters due to upgrading, and this case should be allowed when the response signature is verified.

Example:

Calling an interface with following fields:

```
<xml>
<body><![CDATA[TestPay]]></body>
<mch_create_ip><![CDATA[127.0.0.1]]></mch_create_ip>
<mch_id><![CDATA[100500014415]]></mch_id>
<nonce_str><![CDATA[1409196838]]></nonce_str>
<notify_url><![CDATA[http://227.0.0.1:9001/javak/]]></notify_url>
<out_trade_no><![CDATA[141903606228]]></out_trade_no>
<service><![CDATA[pay.weixin.native.intl]]></service>
<sign><![CDATA[1AAD56668CDBBCD94AE6DF463064197A]]></sign>
<total_fee><![CDATA[100]]></total_fee>
</xml>
```

The signature field sequence:

```
body=TestPay&mch_create_ip=127.0.0.1&mch_id=100500014415&nonce_str=1409196838&notify_url=http://227.0.0.1:9001/javak/&out_trade_no=141903606228&service=pay.weixin.native.intl&total_fee=100
```

4.2 Method of signature

SHA256 / RSA signature are supported.

Signature is a kind of abstract generation algorithm, and if the content of communication keys of the merchant is added to the back of the original string of signature and then signature operation is made, then the abstract character string formed is the signature result. In order to facilitate the comparison, the signature result is uniformly converted to the uppercase letter.

Notes: the coded character set appointed when converting the character string into the byte stream at signing should be in accordance with parameter charset.

SHA256 signature calculation formula:

sign =SHA256(“The signature field sequence strings”&key=“signature key”). toUpperCase

Example:

There are XML afferent parameters:

```
<xml>
<body><![CDATA[TestPay]]></body>
<device_info><![CDATA[100]]></device_info>
<mch_create_ip><![CDATA[127.0.0.1]]></mch_create_ip>
<mch_id><![CDATA[127500000158]]></mch_id>
```

```

<nonce_str><![CDATA[2209193392]]></nonce_str>
<notify_url><![CDATA[http://zeming.dev.swiftpass.cn/pytest/notify_suc]]></notify_url>
<out_trade_no><![CDATA[127500000158112233001]]></out_trade_no>
<service><![CDATA[pay.weixin.native.intl]]></service>
<sign><![CDATA[A406815CA24BDD040A5011AF6BED8C0E40DD75994DFC476048B706EFFAC2633F]]></sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<total_fee><![CDATA[100]]></total_fee>
</xml>

```

Merchant signature key: 06af0776878e8fbdd45f2ac8a916573e

i:the first step of which is to connect the original string(string1) that needs signature according to certain rules:

```

body=TestPay&device_info=100&mch_create_ip=127.0.0.1&mch_id=127500000158&nonce_str=2209193392&notify_url=http://zeming.dev.swiftpass.cn/pytest/notify_suc&out_trade_no=127500000158112233001&service=pay.weixin.native.intl&sign_type=SHA256&total_fee=100&key=06af0776878e8fbdd45f2ac8a916573e

```

ii:the second step of which is to choose SHA256 and keys to calculate the result of signature(sign):

```

sign=SHA256(string1&key=06af0776878e8fbdd45f2ac8a916573e).toUpperCase=SHA256(body=TestPay&device_info=100&mch_create_ip=127.0.0.1&mch_id=127500000158&nonce_str=2209193392&notify_url=http://zeming.dev.swiftpass.cn/pytest/notify_suc&out_trade_no=127500000158112233001&service=pay.weixin.native.intl&sign_type=SHA256&total_fee=100&key=06af0776878e8fbdd45f2ac8a916573e).toUpperCase()="A406815CA24BDD040A5011AF6BED8C0E40DD75994DFC476048B706EFFAC2633F"

```

RSA signature calculation formula:

The RSA algorithm has always been the most widely used "asymmetric encryption algorithm". By adding the content of the RSA private key of the merchant communication after the original string is signed, the result string is the result of the RSA operation.

Note: The set of coded characters specified when converting a string to a byte stream at signature should match the parameter charset. The RSA key pair is generated by the merchant. You need to upload the public key to the merchant portal and download the SwiftPass public key for the response.

Sign = RSA (request parameter string, merchant RSA private key)

Description: The name of the platform signature algorithm: RSA_1_256, corresponding to the standard signature algorithm name: SHA256WithRSA, the length of the RSA key is required to be 2048.

sign =RSA(“The signature field sequence strings”&key=“**signature key**”). toUpperCase

Example:

There are XML afferent parameters:

```
<xml>
<out_trade_no><![CDATA[6057113230875088]]></out_trade_no>
<nonce_str><![CDATA[wNzpaDOsN17KI80yBQwINNhf0IeNqap]]></nonce_str>
<time_expire><![CDATA[]]></time_expire>
<mch_create_ip><![CDATA[127.0.0.1]]></mch_create_ip>
<sign_type><![CDATA[RSA_1_256]]></sign_type>
<total_fee><![CDATA[100]]></total_fee>
<notify_url><![CDATA[http://www.baidu.cn/notify.aspx]]></notify_url>
<body><![CDATA[Test pay]]></body>
<version><![CDATA[1.0]]></version>
<mch_id><![CDATA[102532336411]]></mch_id>
<time_start><![CDATA[]]></time_start>
<attach><![CDATA[Additional information]]></attach>
<service><![CDATA[pay.alipay.native]]></service>
<sign><![CDATA[SE008JDirOuW0uBy8d48SmdfG37PyGvhtqu8pDT00DpdNkgkLuegNsb6SaL/dEfzu035bwAVwiKSc9m9x
BKohGJEMtzRm3tLNnpQOBDpLlYNWQkr0JN3JAjy6wk1icSmfbjXgEvWCcx17MUe59NfI10JRR3MgFg/ySYq2cT4U/o6WJisx
tIbre0ZPM66WL815gAzosJW3Gwr+B8fkRyOckF4w64i0TM20xoSHGEa8w1ut0Fik5wvxyPHb/JcjhRyrBnb2LFZy5Rq3XzZL
W6FaK1gunWnjK5+4NiNuHDgm7CKZPp8BphA/qnJtAMGfexEZ8J4z9ktyyWdK8b8VWJ5ow==]]>
</sign>
</xml>
```

Merchant RSA Private key:

MIIEvQIBADANBgkqhkiG9w0BAQEFAASCBAkwggSjAgEAAoIBAQCfU8v4BUr81SKm/H0ahbdQZjEp08nMyk+XuYSatHwnU4//m47R+4G2YB4Z6PHsJi4+ScfJpQutFhKrFwTXZ6TDqLvaqZDDkjq5G271g+PmrzFp7f40/E9m0qjeL64Rjra0rZq123dvPW4vVomMRgRcoPOnOYWVp+M6T5PaFgE4M8dh41Mz57gVwOdd08F99Z92f3QgZtEjI+/EXvMenXxb/aRofNkt+Wdk2ELJ6MIP0d9

UU5v3WgLuuv5QnQYzj/RMr8GD+wrDYiNQJxsaTmE/OEJggsumhD4eYY5Y1Ry2EIN504cuJYVKU1wOSZgq9oJCynGR0aPuQWx58IHxEtAgMBAAECggEAHfEFd8qm2PTE21TAvec7F+TcgD84IUazOdZnURtx6YIOoZ5+LH/zVG6juYLJU/Oo5RPac+iMVS68u2JMCp7zm8Ft7B3JkrbuHLNHGuR6Q7PQuXN8PkDcOxqDmZ2kPjZl4PZvBZRE0abdug+tMatGzpGAuJzrWcB/N0oVIvrXp9PnOqfo/Y5nmpOFCImJppIS3AL1pftNtQZo9G15CPHDYtpUbXPtD2MjjW40LxKuProHSWUgo6LW9XSwnXfcuK+lbzLLOBh1WD9IV/+yCEUEb1N87yxxfhpQFaAhXj5W+B3YsMOZuK93+XMOpYmw8EpUDM0bOnvwbONSHUrV2RUAQKBgQDT0jlnNS1e7+tjPzFtOhGPjluCBPAEIEhAcnPgd80bEiuJxMLCnGaAvmnTrMu4Xo0e5fAP4F7R6UD+IU5fr3CAAu7CadQ49TW+SovAvciy9AZuSVVIwynu6QdYgFyPKe1LZYAEq5k+mB1Vh5q0RoxMNAA5pGYKg8+4MmmsJi7X7QKBgQDAunCOqIiH128bs/1VRIhDpzuRW5Qr/SRbO2saVg5RSHn0/nGT2OuxSTTkc8yrx7qd9SmAxX15kR238DhMOQOnRBomldmVtAJuJgrdQyt0wXfeQVQqshqCUAE/xhEbpSCdbPSZbKZZdp1V0y605vXIhxw+1qAvXLcxw46s3R92QQKBgQC1Q+eJywkVPDILHMwSSehwvThufkCYWYUbbcvDowpOe5AMoZidtNju7MNjg2rLHTsCx/kBzOr+7THNw14R7kTiEmg09c0+fu5rHXepGgtig+GJukaZPZ6/bMZJvGOLgOhHmomwG/jdwpGvtIGBCh6BW5JZcSiMt+ykIOoYfvDRuQKBgCgwOHxnBGFFORoLxE3dhpSk8LT05cbueIBVuZW6UC3+8PeK82AjIbLMUy04QHupoG6Dyu3BP/1r10jd3L94PBzLBLD7Gm4vJTqWODknYo5sMXS1JrnofcKjBv7nbHXZTx3EtJSxpVa0dpcA/HpsCuCP3AH2e1yk9sZ3wu61BYSBAoGACYM60j1CVRNSZxUNRgiwfWzS69qIleezPc7xQEganpVBI9SZcTNp1kpDKmQikXJ4Yb5XWn12HCY/sFeBW6Su3ruNqXvg1XiUPbH6A6nxd5B3QX0mS9+wDm60NysPLRdKbFF00mdP4CeyuGPdvDIMXP4dJdLhMUL4pcJLIOB7gBE=

i:the first step of which is to connect the original string(string1) that needs signature according to certain rules:

```
attach=Additionalinformation&body=Testpay&mch_create_ip=127.0.0.1&mch_id=102532336411&nonce_str=wNzpaD0sN17KI80yBQwINNhfM0IeNqapnotify_url=http://www.baidu.cn/notify.aspx&out_trade_no=6057113230875088&service=pay.alipay.native&sign_type=RSA_1_256&total_fee=100&version=1.0
```

ii:the second step of which is to choose RSA and keys to calculate the result of signature(sign):

```
sign=RSA(string1,MerchantRSAPrivatekey)==RSA(attach=Additionalinformation&body=Testpay&mch_create_ip=127.0.0.1&mch_id=102532336411&nonce_str=wNzpaD0sN17KI80yBQwINNhfM0IeNqapnotify_url=http://www.baidu.cn/notify.aspx&out_trade_no=6057113230875088&service=pay.alipay.native&sign_type=RSA_1_256&total_fee=100&version=1.0,MIIEvQIBADANBgkqhkiG9w0BAQEFAASCBKcwggSjAgEAAQIBAQCFu8v4BUr81SKm/H0ahbdQZjEP08nMyk+XuYSatHwnU4//m47R+4G2YB4Z6PHsJi4+ScfJpQutFhKrFwTXZ6TDqLvaqZDDkQj5G271g+PmrzFp7f40/E9mOqjeL64RJra0rZq123dvPW4vVomMRGRcoP0nOYWWp+M6T5PaFgE4M8dh41MZz57gVwOdd08F99Z92f3QgZtEjI+/EXvMenXxb/aRofNkt+Wdk2ELJ6MIP0d9UU5v3WgLuuv5QnQYzj/RMr8GD+wrDYiNQJxsaTmE/OEJggsumhD4eYY5Y1Ry2EIN504cuJYVKU1wOSZgq9oJCynGR0aPuQWx58IHxEtAgMBAAECggEAHfEFd8qm2PTE21TAvec7F+TcgD84IUazOdZnURtx6YIOoZ5+LH/zVG6juYLJU/Oo5RPac+iMVS68u2JMCp7zm8Ft7B3JkrbuHLNHGuR6Q7PQuXN8PkDcOxqDmZ2kPjZl4PZvBZRE0abdug+tMatGzpGAuJzrWcB/N0oVIvrXp9PnOqfo/Y5nmpOFCImJppIS3AL1pftNtQZo9G15CPHDYtpUbXPtD2MjjW40LxKuProHSWUgo6LW9XSwnXfcuK+lbzLLOBh1WD9IV/+yCEUEb1N87yxxfhpQFaAhXj5W+B3YsMOZuK93+XMOpYmw8EpUDM0bOnvwbONSHUrV2RUAQKBgQDT0jlnNS1e7+tjPzFtOhGPjluCBPAEIEhAcnPgd80bEiuJxMLCnGaAvmnTrMu4Xo0e5fAP4F7R6UD+IU5fr3CAAu7CadQ49TW+SovAvciy9AZuSVVIwynu6QdYgFyPKe1LZYAEq5k+mB1Vh5q0RoxMNAA5pGYKg8+4MmmsJi7X7QKBgQDAunCOqIiH128bs/1VRIhDpzuRW5Qr/SRbO2saVg5RSHn0/nGT2OuxSTTkc8yrx7qd9SmAxX15kR238DhMOQOnRBomldmVtAJuJgrdQyt0wXfeQVQqshqCUAE/xhEbpSCdbPSZbKZZdp1V0y605vXIhxw+1qAvXLcxw46s3R92QQKBgQC1Q+eJywkVPDILHMwSSehwvThufkCYWYUbbcvDowpOe5AMoZidtNju7MNjg2rLHTsCx/kBzOr+7THNw14R7kTiEmg09c0+fu5rHXepGgtig+GJukaZPZ6/bMZJvGOLgOhHmomwG/jdwpGvtIGBCh6BW5JZcSiMt+ykIOoYfvDRuQKBgCgwOHxnBGFFORoLxE3dhpSk8LT05cbueIBVuZW6UC3+8PeK82AjIbLMUy04QHupoG6Dyu3BP/1r10jd3L94PBzLBLD7Gm4vJTqWODknYo5sMXS1JrnofcKjBv7nbHXZTx3EtJSxpVa0dpcA/HpsCuCP3AH2e1yk9sZ3wu61BYSBAoGACYM60j1CVRNSZxUNRgiwfWzS69qIleezPc7xQEganpVBI9SZcTNp1kpDKmQikXJ4Yb5XWn12HCY/sFeBW6Su3ruNqXvg1XiUPbH6A6nxd5B3QX0mS9+wDm60NysPLRdKbFF00mdP4CeyuGPdvDIMXP4dJdLhMUL4pcJLIOB7gBE=")=SE008JDirOuW0uBy8d48SmdfG37PyGvhtqu8pDT00DpdNkgkLuegNsb6SaL/dEfzu035bwaVwiKSc9m9xBKohGJEMtzRm3tLNNpQ0BDpL1YNWQkr0JN3JAjy6wk1icSmfbjXgEvWCcx17MUe59Nf110JRR3MgFg/ySYq2cT4U/o6WJisxtIbre0ZPM66WL8
```

5 QR Code Payment

5.1 QR code pay

5.1.1 Business function

The QR code payment request needs to be initialized. The request is for generating QR code to make transactions of QR Code Pay.

5.1.2 Interactive mode

Request: Background request interaction mode

Return & Notification: Background request interaction mode + Background notifies interaction mode

5.1.3 Request Parameters

Request URL: <https://gateway.wepayez.com/pay/gateway>
POST request with content of XML

Parameter	Required	Type	Description
service	Yes	String(32)	WeChat: pay.weixin.native.intl Alipay: pay.alipay.native.intl UPI: pay.upi.native.intl Grab Offline: pay.grab.native Gcash Offline: pay.gcash.native
version	No	String(8)	Version number. default value : 2. 0
charset	No	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies an unique id assigned by platform.
out_trade_no	Yes	String(32)	The unique trade reference(merchant order id of 5-32 bits) in Merchants' system. Letter, number and underline are allowed. Case-sensitive
device_info	No	String(32)	Specifies a Terminal device id.

body	Yes	String(127)	Description of merchants' goods.
attach	No	String(127)	Merchant additional information.
total_fee	Yes	Int	Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
mch_create_ip	Yes	String(16)	Specifies the machine IP that calls the API.
notify_url	Yes	String(255)	Specifies the callback address for receiving platform payment notifications. Should be absolute path and ensure platform accessible. i.e. http://wap.tenpay.com/tenpay.asp
time_start	No	String(14)	Order created date. Format: yyyyMMddHHmmss. i.e.20091225091010. GMT+8 Beijing Time
time_expire	No	String(14)	Order timeout date. Format: yyyyMMddHHmmss. i.e.20091225091010. GMT+8 Beijing Time
op_user_id	No	String(32)	Specifies the Operator ID. This field shows mch_id by default.
goods_tag	No	String(32)	Specifies the label of goods, which is a parameter in the coupon feature for businesses.
product_id	No	String(32)	This ID contains the product ID as set by the merchant.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
limit_credit_pay	No	String(32)	Restrict consumer pay in credit card. "1": forbidden using credit card. "0" or null: permit using credit card.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.

Example

```

<xml>
<body><![CDATA[TestPay]]></body>
<device_info><![CDATA[100]]></device_info>
<mch_create_ip><![CDATA[127.0.0.1]]></mch_create_ip>
<mch_id><![CDATA[127500000158]]></mch_id>
<nonce_str><![CDATA[2209193392]]></nonce_str>
<notify_url><![CDATA[http://zeming.dev.swiftpass.cn/pytest/notify_suc]]></notify_url>
<out_trade_no><![CDATA[127500000158112233001]]></out_trade_no>
<service><![CDATA[pay.weixin.native.intl]]></service>
<sign><![CDATA[A406815CA24BDD040A5011AF6BED8C0E40DD75994DFC476048B706EFFAC2633F]]></sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<total_fee><![CDATA[100]]></total_fee>
</xml>

```

1.4 Response Parameters

Parameter	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2. 0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0”: success. Others value: fail.
			Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.
The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.
The following fields will returned when status and result_code both are “0”			
code_url	Yes	String(64)	This parameter should be used to create a QR Code that is displayed to the Payer later.
code_img_url	Yes	String(256)	This parameter should be the QR code image source URL created by code_url.
appid	No	String(18)	Wechat Appid (It will return this parameter in WeChat Pay)
uuid	No	String(33)	uuid

Example

```
<xml><appid><![CDATA[wxce926ea78004260e]]></appid>
<charset><![CDATA[UTF-8]]></charset>
<code_img_url><![CDATA[https://pay.wepayez.com/pay/qrcode?uuid=weixin%3A%2F%2Fwxpay%2Fbizpayurl%3Fpr%3D09JTnyQ&s=22c9171b1119685ce407e7a69b4656b2]]></code_img_url>
<code_url><![CDATA[weixin://wxpay/bizpayurl?pr=09JTnyQ]]></code_url>
<device_info><![CDATA[100]]></device_info>
<mch_id><![CDATA[127520000042]]></mch_id>
<nonce_str><![CDATA[2209196862]]></nonce_str>
<result_code><![CDATA[0]]></result_code>
<sign><![CDATA[0CDCA7D0E91F52DF16971F0C326AD47D]]></sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<status><![CDATA[0]]></status>
```

```
<uuid><![CDATA[1917fb1f70a4679721975591ed6a64fe8]]></uuid>
<version><![CDATA[2.0]]></version>

</xml>
```

5.2 Gcash/Grab Online Payment Interface

5.2.1 Request Parameters

Request URL: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Parameter	Required	Type	Description
service	Yes	String(32)	Gcash Online : pay.gcash.webpay GrabPay Online : pay.grab.webpay
version	No	String(8)	Version number. default value : 2. 0
charset	No	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
out_trade_no	Yes	String(32)	The unique trade reference (merchant order id of 5-32 bits) in merchant's system. Letter, number and underline are allowed.Case-sensitive
device_info	No	String(32)	Specifies a Terminal device id.
body	Yes	String(127)	Description of merchants' goods.
total_fee	Yes	Int	Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
mch_create_ip	Yes	String(16)	Specifies the machine IP that calls the API.
notify_url	Yes	String(255)	Specifies the callback address for receiving platform payment notifications. Should be absolute path and ensure platform accessible,i.e. http://wap.tenpay.com/tenpay.asp
time_start	No	String(14)	Order created date. Format: yyyyMMddHHmmss. i.e.20091225091010. GMT+8 Beijing Time
time_expire	No	String(14)	Order timeout date. Format: yyyyMMddHHmmss. i.e.20091225091010. GMT+8 Beijing Time
op_user_id	No	String(32)	Specifies the Operator ID. This field shows mch_id by default.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.
callback_url	Yes	String(512)	The URL of the front-end page redirection (including when the payment is successful and closed, it will jump to this address, the merchant needs to handle the logic by itself), an absolute path is required, and the format within 255 characters is such as: http://wap.tenpay.com/callback.asp Note: This address is only used as a jump to the front-end page, and the notification result of notify_url must be used as the final payment result.
attach	No	String(128)	Merchant additional information.

Example

```
<xml>
<body><![CDATA[TestPay]]></body>
<device_info><![CDATA[100]]></device_info>
```



```

<mch_create_ip><![CDATA[127.0.0.1]]></mch_create_ip>
<mch_id><![CDATA[127500000158]]></mch_id>
<nonce_str><![CDATA[2209196862]]></nonce_str>
<notify_url><![CDATA[http://zeming.dev.swiftpass.cn/pytest/notify_suc]]></notify_url>
<callback_url><![CDATA[https://www.baidu.com/]]></callback_url>
<out_trade_no><![CDATA[12750000015886001]]></out_trade_no>
<service><![CDATA[pay.gcash.webpay]]></service>
<sign><![CDATA[81806B7EFCFDB09EC31B990F43D5A751265F86C9B2959CEBD401192D3F5814CB]]>
</sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<total_fee><![CDATA[100]]></total_fee>
</xml>

```

5.2.2 Response Parameters

Parameter	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0” : success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.

The following fields will returned when status is “0”

result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.

The following fields will returned when status and result code both are “0”

appid	No	String(18)	Official account ID (WeChat return this parameter)
uuid	No	String(33)	Uuid
pay_url	Yes	String(1024)	(Online payment address)

Example

```

<xml><appid><![CDATA[217020000646016545274]]></appid>
<charset><![CDATA[UTF-8]]></charset>
<device_info><![CDATA[100]]></device_info>
<mch_id><![CDATA[800580000001]]></mch_id>
<nonce_str><![CDATA[2209196862]]></nonce_str>
<pay_url><![CDATA[https://payintl-
test.wepayez.com/pay/webpay?token_id=01a9a931cc2be0dcc35c1ceefa3865237&service=pay.gcash.webpay]]
></pay_url>
<result_code><![CDATA[0]]></result_code>
<sign><![CDATA[7E6256C4FB6C5D9AA65D02166C793840]]></sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<status><![CDATA[0]]></status>

```

```
<uuid><![CDATA[01a9a931cc2be0dcc35c1ceefa3865237]]></uuid>
<version><![CDATA[2.0]]></version>
</xml>
```

5.2.3 Online payment callback

The URL of the front-end page redirection (including when the payment is successful and closed, it will jump to this address, the merchant needs to handle the logic by itself), an absolute path is required, and the format within 255 characters is such as: <http://wap.tenpay.com/callback.asp> Note: This address is only used as a jump to the front-end page, and the notification result of notify_url must be used as the final payment result. The POST method calls back to this address, and will bring the callback parameters. For specific parameters, please see the table below.

Response parameter

Parameter	Required	Type	Description
result_code	Yes	String(16)	“0”: success. Others value: fail. the final payment result is subject to notification
out_trade_no	Yes	String(32)	The unique trade reference (merchant order id of 5-32 bits) in merchant’s system. Letter, number and underline are allowed. Case-sensitive
transaction_id	Yes	String(32)	Platform transaction id
err_code	No	String(32)	There is a value when result_code is 1 For specific error codes, please see the list of error codes at the end of the document
err_msg	No	String (128)	There is a value when result_code is 1 For specific error codes, please see the list of error codes at the end of the document

5.3 Instapay Bank Payment

5.3.1 Instapay payment interface

Request URL: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Parameter	Required	Type	Description
service	Yes	String(32)	Service : pay.instapay.native
version	No	String(8)	Version number. default value : 2.0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
out_trade_no	Yes	String(32)	The unique trade reference (merchant order id of 5-32 bits) in merchant’s system. Letter, number and underline are allowed. Case-sensitive
device_info	Yes	String(32)	Specifies a Terminal device id.
body	Yes	String(127)	Description of merchants’ goods.

attach	No	String(127)	Specifies merchant's data package, which is returned as it is.
total_fee	Yes	Int	Specifies the total amount. Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
mch_create_ip	Yes	String(16)	Specifies the machine IP that calls the API.
notify_url	Yes	String(255)	Specifies the callback address for receiving platform payment notifications. Should be absolute path and ensure platform accessible, i.e. http://wap.tenpay.com/tenpay.asp
op_user_id	No	String(32)	Specifies the Operator ID. This field shows mch_id by default.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.
expiration_date	No	String(14)	InstaPay order expiration time, the format is yyyyymmddhhmmss, such as 20091227091010 at 9:10 on December 27, 2009. The time zone is GMT+8 Beijing.

5.3.2 Response parameter

Parameter	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	"0": success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.

The following fields will returned when status is "0"

result_code	Yes	String(16)	"0": success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.

The following fields will returned when status and result_code both are "0"

invoice_id	Yes	String(16)	Instapay invoice number
appid	No	String(18)	Public account ID (WeChat returns this parameter)
uuid	No	String(33)	Uuid (WeChat returns this parameter)

5.3.3 Retrieve transaction result interface

Request URL: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Parameter	Required	Type	Description
service	Yes	String(32)	Service: pay.instepay.query
version	No	String(8)	Version number. default value : 2.0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
out_trade_no	No	String(32)	The internal order number of the merchant system (out_trade_no, transaction_id, invoice_id cannot be empty at the same time, the priority is transaction_id> out_trade_no>invoice_id)
transaction_id	No	String(32)	Platform transaction number (out_trade_no, transaction_id, invoice_id cannot be empty at the same time, priority is transaction_id> out_trade_no>invoice_id)
invoice_id	Yes	String(16)	Instapay invoice number
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.

5.3.4 Response parameter

Parameter	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value: UTF-8.
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0”: success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.

The following fields will returned when status is “0”

result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies an unique id assigned by platform
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.

The following fields are returned when the trade_state is SUCCESS

trade_type	Yes	String (32)	pay.instepay.native
trade_state_desc	No	String(32)	Transaction status description
appid	No	String	Service provider appid
sub_appid	No	String	Service provider sub-merchant appid
openid	No	String(128)	It is the only user identification under the current appid.
sub_openid	No	String(128)	The user id of the Payer provided by the WeChat system in OpenID format as unique tag on vendor's appid. Also it is unique to each appid instance.
is_subscribe	No	String(1)	Specifies whether the payer follows the associated official account or not, with “Y” meaning ‘follows’ and “N” meaning ‘not follows’.

sub_is_subscribe	No	String(1)	Specifies whether the payer follows the associated official account or not, with “Y” meaning ‘follows’ and “N” meaning ‘not follows’.
payment_inst	No	String(16)	Mainland Wallet: 'ALIPAYCN' Hong Kong Wallet: 'ALIPAYHK'
transaction_id	Yes	String(32)	platform order id
out_transaction_id	Yes	String(32)	order number provided by the third-party
out_trade_no	Yes	String(32)	Specifies an order number created by a merchant’s system, which is consistent with request.
total_fee	Yes	Int	Specifies the total amount. Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
coupon_fee	No	Int	Coupon amount. coupon_fee <= total_fee. total_fee - coupon_fee = cash pay amount
fee_type	No	String(8)	Complies with ISO 4217 standards.
attach	No	String(127)	Specifies merchant's data package, which is returned as it is.
bank_type	No	String(16)	String states bank_type
bank_billno	No	String(32)	Bank order number. Null for wechat payment.
time_end	Yes	String(14)	Specifies the transaction payment time in the format of yyyyMMddHHmmss, such as 20091225091010 for Dec 25, 2009 09:10:10. GMT+8 Beijing.
cash_fee	No	Int	Cash amount of order, The unit of the fee is the minimal unit of CNY.
cash_fee_type	No	String(16)	Currency type, Complies with ISO 4217 standards.CNY
rate	No	String(16)	Exchange rate between user payment currency and merchant’s settlement currency.
local_fee_type	No	String(8)	Merchant currency, E.g. HKD
local_total_fee	No	Int	Merchant currency
order_fee	Yes	Int	Order amount (price currency)
invoice_id	Yes	String(16)	Instapay invoice number

5.4 QR Ph

5.4.1 Instapay (QR Ph) payment interface

Request URL: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Parameter	Required	Type	Description
service	Yes	String(32)	Service : pay.instapay.native.v2
version	No	String(8)	Version number. default value : 2.0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256 RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies an unique id assigned by platform.
out_trade_no	Yes	String(32)	The unique trade reference (merchant order id of 5-32 bits) in merchant’s system. Letter, number and underline are allowed. Case-sensitive
device_info	No	String(32)	Specifies a Terminal device id.
body	Yes	String(127)	Description of merchants’ goods.
attach	No	String(127)	Merchant additional information
total_fee	Yes	Int	Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
mch_create_ip	Yes	String(16)	Specifies the machine IP that calls the API.
notify_url	Yes	String(255)	Specifies the callback address for receiving platform

			payment notifications. Should be absolute path and ensure platform accessible. i.e. http://wap.tenpay.com/tenpay.asp
goods_tag	No	String(32)	Specifies the label of goods, which is a parameter in the coupon feature for businesses.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.
expiration_date	No	String(14)	InstaPay Order timeout date. Format: yyyyMMddHHmmss. i.e.20091225091010. GMT+8 Beijing Time.

5.4.2 Response parameter

Parameter	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0”: success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.
The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.
The following fields will returned when status and result_code both are “0”			
code_img_url	Yes	String(128)	This parameter should be the QR code image source URL created by code_url.
code_url	Yes	String(512)	EMV code
uuid	No	String(33)	Uuid
expiration_date	Yes	String(14)	InstaPay Order timeout date. Format: yyyyMMddHHmmss. i.e.20091225091010. GMT+8 Beijing Time.
invoiceId	Yes	String(16)	Instapay invoice number, will use this number to query

5.4.3 Retrieve transaction result interface

Request URL: https://gateway.wepayez.com/pay/gateway

POST request with content of XML

Parameter	Required	Type	Description
service	Yes	String(32)	Service: pay.instapay.query
version	No	String(8)	Version number. default value : 2.0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256 RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.

out_trade_no	No	String(32)	The unique trade reference of merchant system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
transaction_id	No	String(32)	The unique trade reference of platform system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
invoice_id	Yes	String(16)	Instapay invoice number
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.

5.4.4 Response parameter

Parameter	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value:UTF-8
sign_type	Yes	String(16)	SHA256:'SHA256' RSA:'RSA 1 256'
status	Yes	String(16)	"0": success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.
The following fields will returned when status is "0"			
result_code	Yes	String(16)	"0": success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies an unique id assigned by platform
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.
The following fields will returned when status and result_code both are "0"			
trade_type	Yes	String (32)	pay.instapay.native.v2
trade_state_desc	No	String(32)	Transaction status description
appid	No	String	Service provider appid
transaction_id	Yes	String(32)	platform order id
out_transaction_id	Yes	String(32)	order number provided by the third-party
out_trade_no	Yes	String(32)	Specifies an order number created by a merchant's system, which is consistent with request.
total_fee	Yes	Int	Specifies the total amount. Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
fee_type	No	String(8)	Complies with ISO 4217 standards. .
attach	No	String(127)	Specifies merchant's data package, which is returned as it is.
time_end	Yes	String(14)	Specifies the transaction payment time in the format of yyyyMMddHHmmss, such as 20091225091010 for Dec 25, 2009 09:10:10. GMT+8 Beijing.
order_fee	Yes	Int	Order amount (price currency)
invoice_id	Yes	String(16)	Instapay invoice number

6 Notification interface

6.1 Notification request parameters

The notification URL is the parameter `notify_url` submitted in section 6.1. And after the payment is completed, platform will send related payment and user information to the URL. And the merchant needs to receive and dispose such information.

When interaction of the backstage notification is being made, if the response received by platform from the merchant is not pure character string “success” or if the response is given after 5 seconds, then it will be deemed as unsuccessful by platform, and platform will adopt certain strategies (the interval of notification: 0/15/15/30/180/1800/1800/1800/1800/3600 Unit: seconds) to intermittently re-initiate notification to do its best to improve the rate of success of notification, but the final success of notification will not be guaranteed.

Because there is the case where the backstage notification will be resent, the same notification might be sent to the merchant system many times. The merchant system must be able to process the repeated notification in a right way.

The method recommended by platform is to first examine the status of the corresponding business data upon receiving the notification to judge whether the notification has been disposed, and in case it hasn't been disposed, it will be disposed otherwise, and if it has been disposed, the pure character string success will be returned directly. Before status examination and disposal of business data are conducted, data lock should be adopted for concurrency control to avoid data chaos caused by repeated data interposition in the function.

Notices: After the backstage of the merchant has received the parameters of notification. It's required to verify `out_trade_no` and `total_fee` in notification received according to the order number and amount of order of their own business system. And the status of order in the database will only be allowed to update after the verification is consistent. (Notify in XML format)

The backstage notification will return by POST mode through `notify_url` which sent in payment request.

Parameter	Required	Type	Description
version	No	String(8)	Version number. default value : 2.0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0”: success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of <code>result_code</code> .
message	No	String(128)	Return message. Only return when the signature verification invalid.
The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(32)	Please refer to the section 4 ‘Digital Signature’.
The following fields will returned when status and result_code both are “0”			

openid	Yes	String(128)	It is the only user identification under the current appid.
trade_type	Yes	String(32)	pay.weixin.native.intl(Wechat) pay.alipay.native.intl (Alipay) pay.upi.native.intl (UPI) pay.grab.native(GrabPay) pay.gcash.native(Gcash) pay.instapay.native(Instapay Bank payment) pay.instapay.native.v2(QR Ph) pay.gcash.webpay(Gcash Online) pay.grab.webpay(Grab Online)
is_subscribe	Yes	String(1)	Specifies whether the payer follows the associated official account or not, with “Y” meaning ‘follows’ and “N” meaning ‘not follows’.
pay_result	Yes	Int	Payment result. “0”: success. Others fail.
pay_info	No	String(64)	Payment result information. Payment successful return null.
transaction_id	Yes	String(32)	Platform order number
out_transaction_id	Yes	String(34)	Order number provided by the third-party(ex:WeChat)
sub_is_subscribe	No	String(1)	Specifies whether the payer follows the associated official account or not, with “Y” meaning ‘follows’ and “N” meaning ‘not follows’.
sub_appid	No	String	Specifies an Official Account ID assigned by WeChat.
sub_openid	No	String(128)	The user id of the Payer provided by the WeChat system in OpenID format as unique tag on vendor’s appid. Also it is unique to each appid instance.
out_trade_no	Yes	String(32)	Specifies an order number created by a merchant’s system, which is consistent with request.
total_fee	Yes	Int	Specifies the total amount. Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
coupon_fee	No	Int	Coupon amount. coupon_fee <= total_fee. total_fee - coupon_fee = cash pay amount
fee_type	Yes	String(8)	Complies with ISO 4217 standards.
attach	No	String(127)	Specifies merchant's data package, which is returned as it is.
bank_type	Yes	String(16)	String states bank_type
time_end	Yes	String(14)	Specifies the transaction payment time in the format of yyyyMMddHHmmss, such as 20091225091010 for Dec 25, 2009 09:10:10.GMT+8 Beijing Time.
discount_detail	No	String (512)	Offer details, different payment types return different results, for example, UnionPay returns: [{"discountAmt":"98.00","discountNote":"Uplan discount"}, {"discountAmt":"5.00","discountNote":"Instant Discount"}]
unsettled_discount_fee	No	Int	The amount of the discount that does not participate in settlement, in cents
invoice_id	Yes	String(16)	Instapay invoice number (Only QR Ph will return this parameter)

Example

```
<xml>
<bank_type><![CDATA[CFT]]></bank_type>
<cash_fee><![CDATA[3117]]></cash_fee>
<cash_fee_type><![CDATA[CNY]]></cash_fee_type>
<charset><![CDATA[UTF-8]]></charset>
<device_info><![CDATA[SPAY_AND]]></device_info>
  <discount_detail><![CDATA[["discountAmt":"30.00","discountNote":"Uplan
discount"],["discountAmt":"10.00","discountNote":"Instant Discount"]]]>
  </discount_detail>
<fee_type><![CDATA[USD]]></fee_type>
<is_subscribe><![CDATA[Y]]></is_subscribe>
<local_fee_type><![CDATA[PHP]]></local_fee_type>
<local_total_fee><![CDATA[21850]]></local_total_fee>
<mch_id><![CDATA[102520000212]]></mch_id>
<nonce_str><![CDATA[1573186381348]]></nonce_str>
<openid><![CDATA[oH4im0mWBDXpepe81q04qiEnRq98]]></openid>
<order_fee><![CDATA[21850]]></order_fee>
<out_trade_no><![CDATA[10252000021270741546158683729]]></out_trade_no>
<out_transaction_id><![CDATA[4200000437201911083557508581]]></out_transaction_id>
<pay_result><![CDATA[0]]></pay_result>
<platform_rate><![CDATA[2040399.9184]]></platform_rate>
<rate><![CDATA[699040000]]></rate>
<result_code><![CDATA[0]]></result_code>
<sign><![CDATA[0FEC037A2D48654C0FC8AEA96F1C4B55]]></sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<status><![CDATA[0]]></status>
<time_end><![CDATA[20191108121300]]></time_end>
<total_fee><![CDATA[446]]></total_fee>
<trade_type><![CDATA[pay.weixin.native.intl]]></trade_type>
<transaction_id><![CDATA[102520000212201911081086849655]]></transaction_id>
  <unsettled_discount_fee><![CDATA[3000]]></unsettled_discount_fee>
<version><![CDATA[2.0]]></version>
</xml>
```

6.2 Response of notification

Platform server will send notification, then post send XML data flow, the notify_url of the merchant will receive the result of notification, with the method of reception being as written in demo (for example, callback method in php, notify.aspx file in c#, TestPayResultServlet method in java), and after the merchant conducts business disposal, the feedback of result of disposal needs to be given in the form of pure character string, with its content being as follows:

Returned results	Description
success	The disposal is successful, and after swiftpass system receives this result, no ongoing notification will be made.

fail or other character	The disposal fails, and if swiftpass receives this result or doesn't receive any result, then the system will resend the notification through the mechanism of supplementing order (for detail please see section 6.1).
-------------------------	---

7 Retrieve transaction result interface

7.1 Business function

Retrieve transaction result information with platform order number or merchant order number.

7.2 Request Parameters

Request URL: <https://gateway.wepayez.com/pay/gateway>
POST request with content of XML

Field Name	Required	Type	Description
service	Yes	String(32)	Value : unified.trade.query
version	No	String(8)	Version number. default value : 2. 0
charset	No	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies an unique id assigned by platform.
out_trade_no	No	String(32)	The unique trade reference of merchant system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
transaction_id	No	String(32)	The unique trade reference of platform system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.

7.3 Response parameter

Data return in real time with XML format

Field Name	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0” : success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of trade_state.
message	No	String(128)	Return message. Only return when the signature verification is invalid.
The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies an official account id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.
The following fields will returned when trade_state is “SUCCESS”			
trade_type	Yes	String(32)	pay.weixin.native.intl(Wechat) pay.alipay.native.intl (Alipay) pay.upi.native.intl (UPI) pay.grab.native(GrabPay) pay.gcash.native(Gcash) pay.instapay.native(Instapay Bank Payment) pay.instapay.native.v2(QR Ph) pay.gcash.webpay(Gcash Online) pay.grab.webpay(Grab Online)
trade_state_desc	No	String(32)	Transaction status description
appid	No	String	Specifies an official account ID of institution assigned by WeChat.
sub_appid	No	String	Specifies an official account ID of merchant assigned by WeChat.
openid	No	String(128)	It is the only user identification under the current appid.
sub_openid	No	String(128)	The user id of the Payer provided by the WeChat system in OpenID format as unique tag on vendor’s appid. Also it is unique to each appid instance.
is_subscribe	No	String(1)	Specifies whether the payer follows the associated official account or not, with “Y” meaning ‘follows’ and “N” meaning ‘not follows’.
sub_is_subscribe	No	String(1)	Specifies whether the payer follows the associated official account or not, with “Y” meaning ‘follows’ and “N” meaning ‘not follows’.
payment_inst	No	String(16)	Mainland Wallet: 'ALIPAYCN' Hong Kong Wallet: 'ALIPAYHK'
transaction_id	Yes	String(32)	platform order id
out_transaction_id	Yes	String(32)	order number provided by the third-party
out_trade_no	Yes	String(32)	Specifies an order number created by a merchant’s system, which is consistent with request.

total_fee	Yes	Int	Specifies the total amount. Integral number is allowed only. The unit of the fee is the minimal unit of the local currency.
coupon_fee	No	Int	Coupon amount. coupon_fee <= total_fee. total_fee - coupon_fee = cash pay amount
fee_type	No	String(8)	Complies with ISO 4217 standards.
attach	No	String(127)	Specifies merchant's data package, which is returned as it is.
bank_type	No	String(16)	String states bank_type
bank_billno	No	String(32)	Bank order number. Null for wechat payment.
time_end	Yes	String(14)	Specifies the transaction payment time in the format of yyyyMMddHHmmss, such as 20091225091010 for Dec 25, 2009 09:10:10. GMT+8 Beijing.
cash_fee	Yes	Int	Cash amount of order, The unit of the fee is the minimal unit of CNY.
cash_fee_type	No	String(16)	Currency type, Complies with ISO 4217 standards.CNY
rate	Yes	String(16)	Exchange rate between user payment currency and merchant's settlement currency.
local_fee_type	No	String(8)	Merchant currency, E.g. HKD
local_total_fee	No	Int	Merchant currency
order_fee	Yes	Int	Order fee(Merchant currency)
discount_detail	No	String (512)	Discount details, different payment types return different results, such as UnionPay return: [{"discountAmt":"98.00","discountNote":"Uplan discount"}, {"discountAmt":"5.00","discountNote":"Instant Discount"}]
unsettled_discount_fee	No	Int	The discount amount not involved in settlement ,unit is cent
cost_amount	No	Int	The actual payment amount of the consumer (channel currency), unit is cent
voucher_no	No	Int	Qr code voucher Number

8 Refund interface

8.1 Business function

If the merchant initiate refund in respect of an order that has been successfully paid, then the result of the operation will be synchronously returned in the same dialogue.

I. Refund mode

Currently, the fund of the refund will follow the same route back to customers' account.

Notes: Generally the amount will be refunded to the bank account within 1 to 3 working days after the refund is initiated.

The different parts of refund of a same order need to be set with the same order number and the different out_refund_no. After a refund that fails is resubmitted, the original out_refund_no will be adopted. The total sum of refund couldn't surpass the amount actually paid by users (the amount of the cash coupon couldn't be refunded).

II. Restrictions of refund

When operating the refund, the merchant should pay attention to the restrictions of refund to avoid the request of refund that will not be successful, and the main restrictions of refund are as follows:

In platform system, only if the accumulative amount of refund doesn't surpass the total sum of payment for the transacted order, then the same order could be refunded for several times, and the refund application form number (there are such parameters in the refund interface) rather than the transaction order number shall be solely used to confirm one time of refund. The refund application form number is to be generated by the merchant, and so the merchant has to guarantee the uniqueness of the refund application form. In the process of refund, the merchant needs to pay special attention that only when the refund is confirmed to fail, then could another refund be re-initiated.

Currently most banks support full refund and partial refund, but there are a few banks that don't support full refund or partial refund or don't support refund. In such case the merchant could negotiate with the buyer to refund to the WeChat balance account.

Currently only refund interface without key is provided, and in case the merchant needs refund interface with key, please contact the business person.

8.2 Request parameters

Request URL: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Field Name	Required	Type	Description
service	Yes	String(32)	Value : unified.trade.refund
version	No	String(8)	Version number. default value : 2. 0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
out_trade_no	No	String(32)	The unique trade reference of merchant system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
transaction_id	No	String(32)	The unique trade reference of platform system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
out_refund_no	Yes	String(32)	Specifies the internal refund number, which is unique in the system. A single transaction can be processed as multiple partial refunds, with the total sum of the partial refunds being equal to the original one. If the refund is not successful. The recall function should be used with same refund number to avoid duplication of refunds.
total_fee	Yes	Int	The total amount of the transaction. The unit of the fee is the minimal unit of the local currency.
refund_fee	Yes	Int	Refund amount. The unit of the fee is the minimal unit of the local currency. Partial refund can be supported.
op_user_id	Yes	String(32)	Specifies the Operator ID. This field shows mch_id by default.
refund_channel	No	String(16)	Value: ORIGINAL. The money will refund back to where it came from.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.

sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.
------	-----	-------------	--

Example
<pre> <xml> <charset><![CDATA[UTF-8]]></charset> <mch_id><![CDATA[116580000002]]></mch_id> <nonce_str><![CDATA[IoYSGn9G2Lr8THa1h2zdBPM9w4lNf-MN]]></nonce_str> <op_user_id><![CDATA[116580000002]]></op_user_id> <out_refund_no><![CDATA[116580000002133601000045]]></out_refund_no> <refund_fee><![CDATA[000000000100]]></refund_fee> <service><![CDATA[unified.trade.refund]]></service> <sign_type><![CDATA[SHA256]]></sign_type> <total_fee><![CDATA[000000000100]]></total_fee> <transaction_id><![CDATA[116580000002201911072087163426]]></transaction_id> <version><![CDATA[2]]></version> <sign><![CDATA[D3B4C37CA76B05D714CC79473372F997]]></sign> </xml> </pre>

8.3 Response parameters

Data return in real time with XML format

Field Name	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2. 0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0”: success. Others value: fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.
The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description

sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.
The following fields will be returned when status and result_code both are "0"			
transaction_id	Yes	String(32)	The unique trade reference of platform system.
out_trade_no	Yes	String(32)	The unique trade reference of merchant system.
out_refund_no	Yes	String(32)	Specifies the internal refund number, which is unique in the merchant system.
refund_id	Yes	String(32)	Specifies the internal refund number, which is unique in the platform system.
refund_channel	Yes	String(16)	Value: ORIGINAL. The money will refund back to where it came from.

refund_fee	Yes	Int	Refund amount. The unit of the fee is the minimal unit of the local Currency. Partial refund can be supported.
coupon_refund_fee	No	Int	Coupon refund amount. coupon_refund_fee <= refund_fee. refund_fee - coupon_refund_fee = cash refund amount
total_fee	No	Int	Order channel amount
fee_type	No	String(8)	Channel Currency
order_fee	No	Int	Order fee
local_total_fee	No	Int	Merchant currency E.g HKD
local_fee_type	No	String(8)	Merchant currency
out_transaction_id	No	String(32)	(Alipay/WeChat/unionPay/etc)
trade_type	No	String(32)	pay.weixin.native.intl(Wechat) pay.alipay.native.intl (Alipay) pay.upi.native.intl (UPI) pay.grab.native(GrabPay) pay.gcash.native(Gcash) pay.gcash.webpay(Gcash Online) pay.grab.webpay(Grab Online)

Example

```
<xml>
<charset><![CDATA[UTF-8]]></charset>
<fee_type><![CDATA[PHP]]></fee_type>
<local_fee_type><![CDATA[PHP]]></local_fee_type>
<local_total_fee><![CDATA[100]]></local_total_fee>
<mch_id><![CDATA[116580000002]]></mch_id>
<nonce_str><![CDATA[IoYSGn9G2Lr8THa1h2zdBPM9w4lNf-MN]]></nonce_str>
<order_fee><![CDATA[100]]></order_fee>
<out_refund_no><![CDATA[116580000002133601000045]]></out_refund_no>
<out_trade_no><![CDATA[116580000002132825000045]]></out_trade_no>
<out_transaction_id><![CDATA[2019110722001495210581660169]]></out_transaction_id>
<refund_channel><![CDATA[ORIGINAL]]></refund_channel>
<refund_fee><![CDATA[100]]></refund_fee>
```



```

<refund_id><![CDATA[11658000002201911072087163866]]></refund_id>
<result_code><![CDATA[0]]></result_code>
<sign><![CDATA[51BE40E21C2834D0FF682FAD05A22E9D]]></sign>
<sign_type><![CDATA[SHA256]]></sign_type>
<status><![CDATA[0]]></status>
<total_fee><![CDATA[100]]></total_fee>
<trade_type><![CDATA[pay.alipay.native.intl]]></trade_type>
<transaction_id><![CDATA[11658000002201911072087163426]]></transaction_id>
<version><![CDATA[2.0]]></version>
</xml>

```

9 Retrieve refund result interface

9.1 Request parameters

Request: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Field Name	Required	Type	Description
service	Yes	String(32)	Value :unified.trade.refundquery
version	No	String(8)	Version number. default value : 2. 0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies a unique id assigned by platform.
out_trade_no	No	String(32)	The unique trade reference of merchant system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
transaction_id	No	String(32)	The unique trade reference of platform system. out_trade_no and transaction_id at least one required. transaction_id priority when both be filled.
out_refund_no	No	String(32)	Specifies the internal refund number, which is unique in the merchant system.
refund_id	No	String(32)	Specifies the internal refund number, which is unique in the platform system. out_refund_no and refund_id at least one required. refund_id priority when both be filled.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 'Digital Signature'.

9.2 Response parameters

Field Name	Required	Type	Description
version	Yes	String(8)	Version number. default value : 2. 0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	Yes	String(16)	“0” : success. Others value : fail. Specifies communicating label (not transaction label). The status of a transaction is determined by the value of result_code.
message	No	String(128)	Return message. Only return when the signature verification invalid.
The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Specifies a unique id assigned by platform.
device_info	No	String(32)	Specifies a Terminal device id.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String(128)	Error information description
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.
The following fields will returned when status & result_code both are “0”			
transaction_id	Yes	String(32)	The unique trade reference of platform system.
out_trade_no	Yes	String(32)	The unique trade reference of merchant system.
refund_count	Yes	Int	Specifies recorded refund counts.
out_refund_no_\$n	Yes	String(32)	Specifies the internal refund number, which is unique in the merchant system.
refund_id_\$n	Yes	String(32)	Specifies the internal refund number, which is unique in the platform system.
refund_channel_\$n	Yes	String(16)	Value: ORIGINAL. The money will refund back to where it came from.
refund_fee_\$n	Yes	Int	Refund amount. The unit of the fee is the minimal unit of the currency. Partial refund can be supported.
coupon_refund_fee_\$n	No	Int	Coupon refund amount. coupon_refund_fee <= refund_fee. refund_fee - coupon_refund_fee = cash refund amount

cash_fee	Yes	Int	Cash amount of order. The unit of the fee is the minimal unit of the currency
cash_fee_type	No	String(16)	Currency type, Complies with ISO 4217 standards, CNY
total_fee	No	Int	Order fee(Channel currency)
out_transaction_id	No	String(32)	The third party orderid
Rate	Yes	String(16)	Exchange rate between user payment currency and merchants settlement currency
refund_time_\$n	No	String(14)	Format : yyyyMMddHHmmss
refund_status_\$n	Yes	String(16)	Refund Status: SUCCESS: Refunded successfully. FAIL: Refund failed. PROCESSING: Refund is pending. NOTSURE: Require the Vendor to call the Submit Refund API again with the original refund number. CHANGE: Refund can't be processed as the Payer's bank card is either revoked or blocked. As a consequence, the refund will be transferred to the merchant's cash account. In this case, the refund must be processed offline via the help of the merchant's customer.

\$n is the record number. It can be 0~(\$ refund_count -1). Example: There are 2 records of refund_count. The first record number should be "0" and the second one should be "1".

10 Close Order Interface

10.1 Business function

If the payment of order of the merchant fails, then it ' s required to generate a new order number to re-initiate payment, and the original order number needs to be invoked for closing to avoid repeated payment. After an order is placed in the system, if the payment of users is time out, the system will exit and no longer accept the payment to avoid ongoing payment of users, and please invoke close order interface.

10.2 Request parameters

Request url: <https://gateway.wepayez.com/pay/gateway>

POST request with content of XML

Field Name	Required	Type	Description
Normal Parameters			
service	Yes	String(32)	Value : unified.trade.close
version	No	String(8)	Version number. default value : 2. 0
charset	No	String(8)	Value : UTF-8
sign_type	No	String(16)	SHA256 : SHA256; RSA : RSA_1_256
mch_id	Yes	String(32)	Merchant ID, Specifies an unique id assigned by platform.
out_trade_no	Yes	String(32)	The unique trade reference of merchant system.
transaction_id	No	String(32)	Platform transaction number, at least one of out_trade_no and transaction_id is required, and transaction_id takes precedence when both exist.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.

Example

```
<xml>  
<service><![CDATA[unified.trade.close]]></service>  
<mch_id>124540000124</mch_id>  
<out_trade_no><![CDATA[b0842dc63ae3bd33ab841067618a0bf3]]></out_trade_no>  
<nonce_str><![CDATA[5dc395e12fce9]]></nonce_str>  
<sign><![CDATA[52E550CFE0D2A3EBEB2D4F99D9785EEC]]></sign>  
</xml>
```

10.3 Response parameter

version	Yes	String(8)	Version number. default value : 2.0
charset	Yes	String(8)	Value : UTF-8
sign_type	Yes	String(16)	SHA256 : SHA256; RSA : RSA_1_256
status	No	String(16)	“0”: success. Others value: fail.
message	No	String (128)	Return message. Only return when the signature verification invalid.
sign	Yes	String(344)	Please refer to the section 4 ‘Digital Signature’.

The following fields will returned when status is “0”			
result_code	Yes	String(16)	“0”: success. Others value: fail.
mch_id	Yes	String(32)	Specifies a unique id assigned by platform.
nonce_str	Yes	String(32)	Included in platform payment API protocols to ensure unpredictability for signatures. 32 characters or fewer.
err_code	No	String(32)	Reference error code
err_msg	No	String (128)	Error information description

11 Notes

- The unit of any related amount is the minimal unit of the currency, and decimals are not allowed.
- notify_url means that platform server directly initiates request from back end to merchant 's server, and when disposing, the merchant could not examine the user 's cookie or session; the merchant 's updating of DB and other goods delivery procedure needs to be made after notify_url is completed to ensure that to supplement order after order fails will be successful.
- notify_url means that it might have repeated notification and the merchant needs to do away with the repeated ones to avoid repeated goods delivery.
- notify_url means the receive notification, and if the merchant disposes successfully or if the examined order has been disposed, then the successful disposal mark, the pure character string success needs to be returned, and the character string success is not case sensitive; if we don 't receive the returned success, then our server will keep sending notification to you until three hours later; if it 's assumed that all orders don 't return success, then the load of notification of our server will be increase, and the worst case is that the notification normally sent to the merchants might delay; besides, we will urge you to perfect, and if you don 't improve for a long time period, then the R&D or operation and maintenance technology staff will adopt control measures over the payment interface opened by your company. For the parameters sent in requesting interface in the document, if the one required to fill is given a yes, then it has to be sent (in case of lack, an error will be alarmed), and if the one required to fill is given a no, then it will be optional to be sent.
- For the returned parameters, if the one required to fill is given a yes, then it has to be returned, and if the one required to fill is given a no, then it will be optional to be returned. Because of upgrading or configuration or other cases, the actually returned parameters might not be totally consistent with those in the document, and the actually received parameters shall prevail.
- Other notes
 - The problem of capital and small letter of parameters
Please pay attention to the problem of capital and small letter required in the document, such as “after SHA256 signature, the character of the character string needs to be converted to uppercase” .
 - The problem of format of parameters
All introduced parameters are of the type of character string, and please pay attention to the specific requirements in different places of the document.
 - The problem of time stamp
Please use Linux time stamp, and note that its format is character string.
 - The problem of order number payment made by the same merchant
- If the payment of order of the merchant fails, then it 's required to generate a new order number to re-initiate payment, and the original order number needs to be invoked for closing to avoid repeated payment; After an order is placed in the system, if the payment of users is time out, the system will exit and no longer accept the payment to avoid ongoing payment of users, and please invoke the close order interface.

Notes: after an order is generated, to immediately invoke the close order interface will not be allowed, because the shortest invocation interval is 5 mins.

8. Interface integration reference info

Merchant Presented						
	Payment	Retrieve	Notification	Refund	Refund Retrieve	Close
Wechat	Yes	Yes	Yes	Yes	Yes	Yes
Alipay	Yes	Yes	Yes	Yes	No	Yes
Union Pay	Yes	Yes	Yes	Yes	No	No
Gcash Offline	Yes	Yes	No	Yes	No	Yes
Gcash Online	Yes	Yes	Yes	Yes	No	No
Grab Offline	Yes	Yes	Yes	Yes	No	Yes
Grab Online	Yes	Yes	Yes	Yes	No	No
Instapay Bank	Yes	Yes	Yes	No	No	No
Instapay QR	Yes	Yes	Yes	No	No	No