





How should we approach object detection?

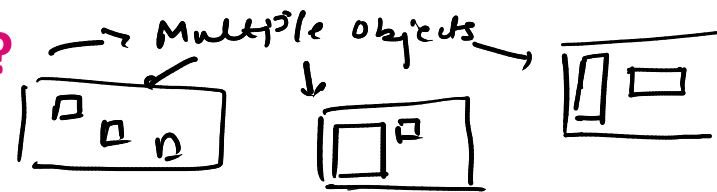

Multiple objects regression

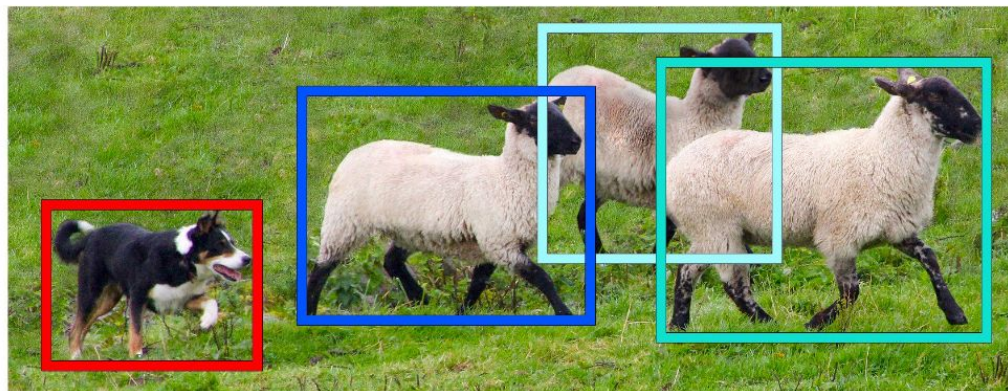

$100x \rightarrow 1000x$

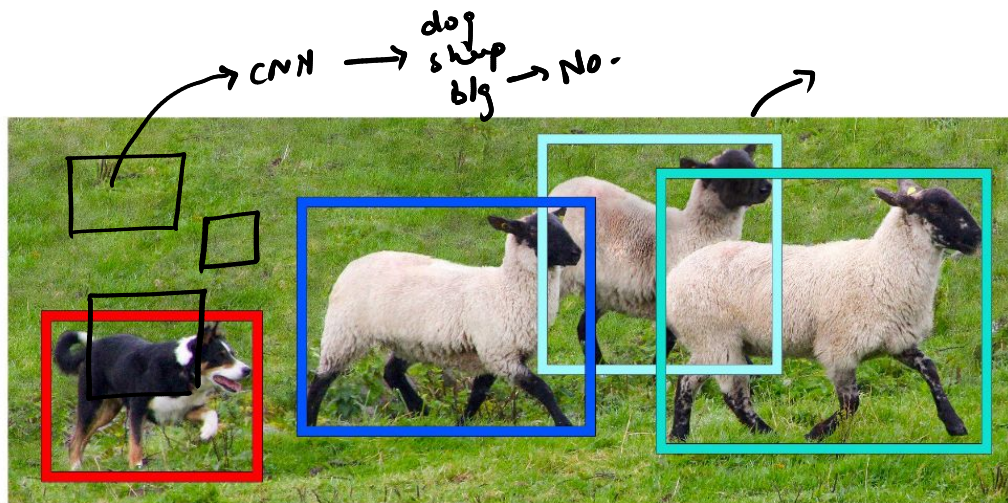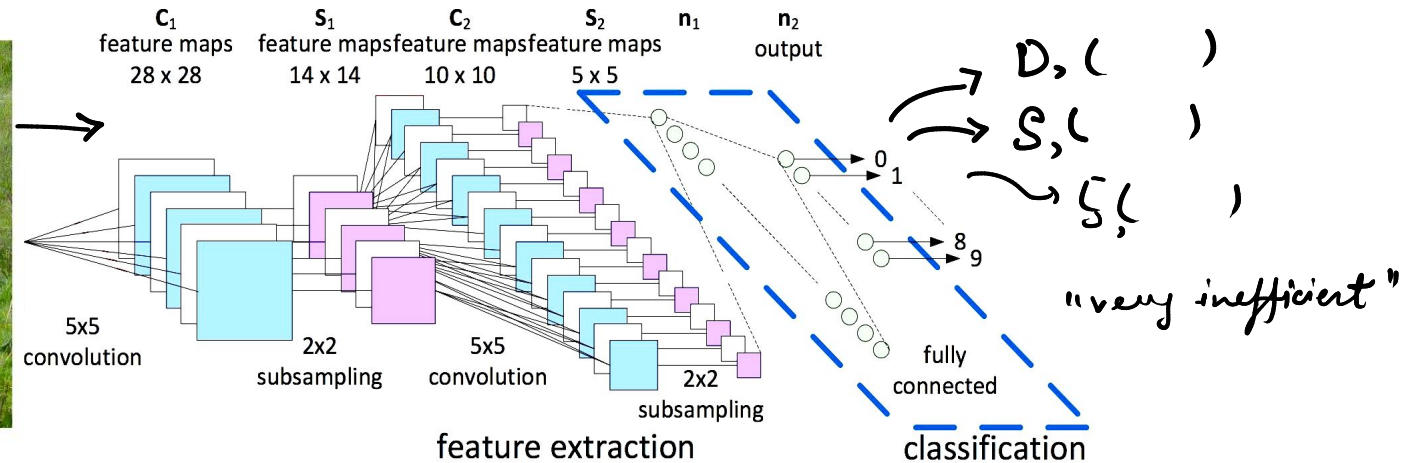

Sliding window algorithm

- Select multiple crops
 - Apply CNNs to each cropped patch!
 - This approach is computationally expensive.
- Question: How should we select crop regions?
 - different locations
 - different sizes (scales)
 - different aspect ratio

Image: https://github.com/chrieke/InstanceSegmentation_Sentinel2